

17 March 2026

ASX ANNOUNCEMENT



PC GOLD

PC Gold hits multiple thick, high-grade zones at Spring Hill, growing resource potential ahead of June MRE.

HIGHLIGHTS

Resource Definition Drilling

- 26 holes completed across the Hong Kong–Macau system beneath and along strike of the planned open pit. Significant intercepts include:
 - **9.0 m @ 3.26 g/t Au** from 338 m (SDH25-029)
 - **13.4 m @ 2.86 g/t Au** from 187.6 m (SDH25-021)
 - **10.2 m @ 1.61 g/t Au** from 385 m (SDH25-025)
 - **14.0 m @ 3.55 g/t Au** from 313 m (SDH25-019A – previously reported)
- Step-out drilling extends the Macau Zone ~140 m down-dip beyond the current MRE envelope.
- All new data will be incorporated into the updated MRE by Cube Consulting.

Macau Link Zone Discovery

- Continued success from the newly defined structure connecting the Hong Kong and Macau lodes.
- **6m @ 3.54 g/t Au** from 217m within 12m @ 1.99 g/t Au, with additional mineralisation including 10m @ 0.93 g/t Au from 198m (SDH26-001).

Metallurgical Program and Pre-Feasibility Work

- Two dedicated metallurgical drillholes completed, including **22 m @ 3.37 g/t Au** in 25MET01, to provide composites for process design.
- Pre-feasibility metallurgical testwork underway with Bureau Veritas and JT Metallurgical Services, targeting comminution and grind size optimisation and gravity recovery and CIL leach performance for a proposed 3 Mtpa flowsheet.

Next Steps and Near-Term Catalysts

- Two diamond rigs currently defining Macau Link Zone extensions on 50 × 50 m sections.
- RC rig scheduled to return in April 2026 to complete Macau Extension infill, Phase 2 Lasagne Lode drilling, and testing of the Northern Target.
- Results from drilling and metallurgical work will underpin both the June 2026 MRE update and the Spring Hill Pre-Feasibility Study targeted for completion late CY 2026.

Executive Commentary

Executive Chair, Mr Ashley Pattison, commented:

“Since mid-2025, our drilling campaign has completed more than 22,000 metres of diamond and RC drilling. The success of our step-out exploration programs in late 2025 and into 2026 has well exceeded our expectations and we are excited by the discovery of the high-grade link zone outside the inferred portion of the Macau and Hong Kong lodes.”



PC GOLD

“These results demonstrate that Spring Hill’s high-grade core extends well beyond the current resource footprint. With multiple rigs turning and metallurgical testwork advancing, we are firmly on track to deliver a resource update that reflects the project’s true scale and quality.”

PC Gold Limited (ASX: PC2) (“PC Gold” or “the Company”) reports further strong resource definition and discovery drilling results from its 100 %-owned Spring Hill Gold Project, Northern Territory (Spring Hill).

These results confirm high-grade gold mineralisation extending beyond existing resource wireframes and support the June 2026 Mineral Resource Estimate (MRE) update.

Spring Hill sits within a fully permitted mining lease in the Pine Creek province, a district hosting deposits of over 20 Moz Au . These new results continue to deliver material grade uplift relative to the current 821koz MRE and reinforce the potential for a larger, higher-grade inventory as work advances toward feasibility.

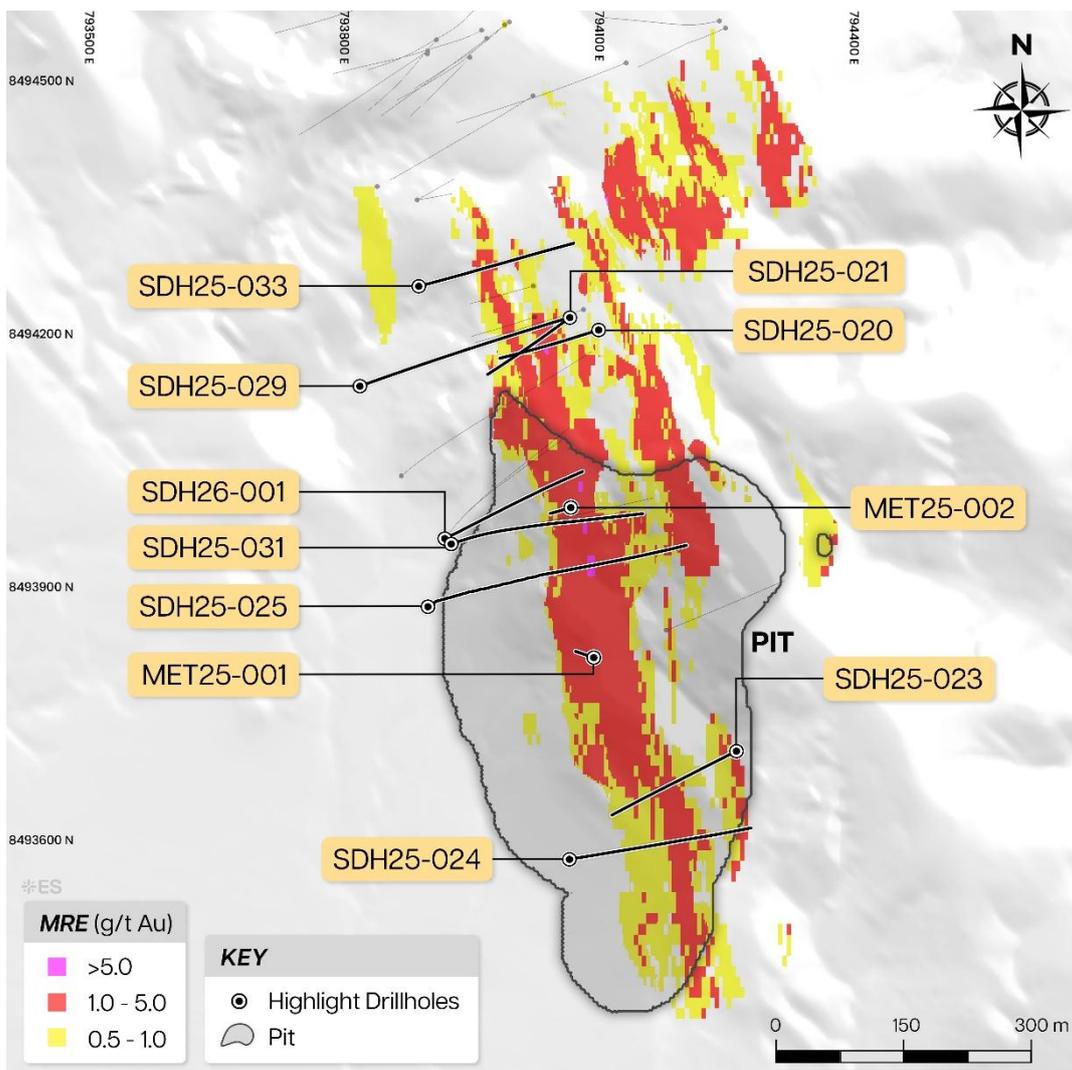


Figure 1 – Hole Plan overlaid on recent lidar survey



PC GOLD

This announcement includes results recently received from an additional 11 drill holes completed at Spring Hill, the majority of which were drilled within the current MRE boundary. Assays from seven holes drilled into the Main Zone South extension are still pending and will be reported as they are received.

Resource Definition Drilling Completed

The resource definition program commenced in November 2025, primarily focused on the Macau and Hong Kong lodes, targeting mineralisation immediately beneath the planned open pit and within elevated grade zones of inferred material.

This program is now complete with all results to be incorporated into an updated Mineral Resource Estimate by the Company's consultants, CUBE Consulting.

The most encouraging outcome from the program was the delivery of high-grade results both within the current wireframes and outside those wireframes, in many cases significantly exceeding the grades in the existing block model.

This was particularly evident in the Macau zone, which has now been extended down dip by approximately 140m following drilling in holes SDH25-029 and SDH25-019A. Both holes intersected high-grade mineralisation outside the current MRE, as previously reported on 22 January 2026.

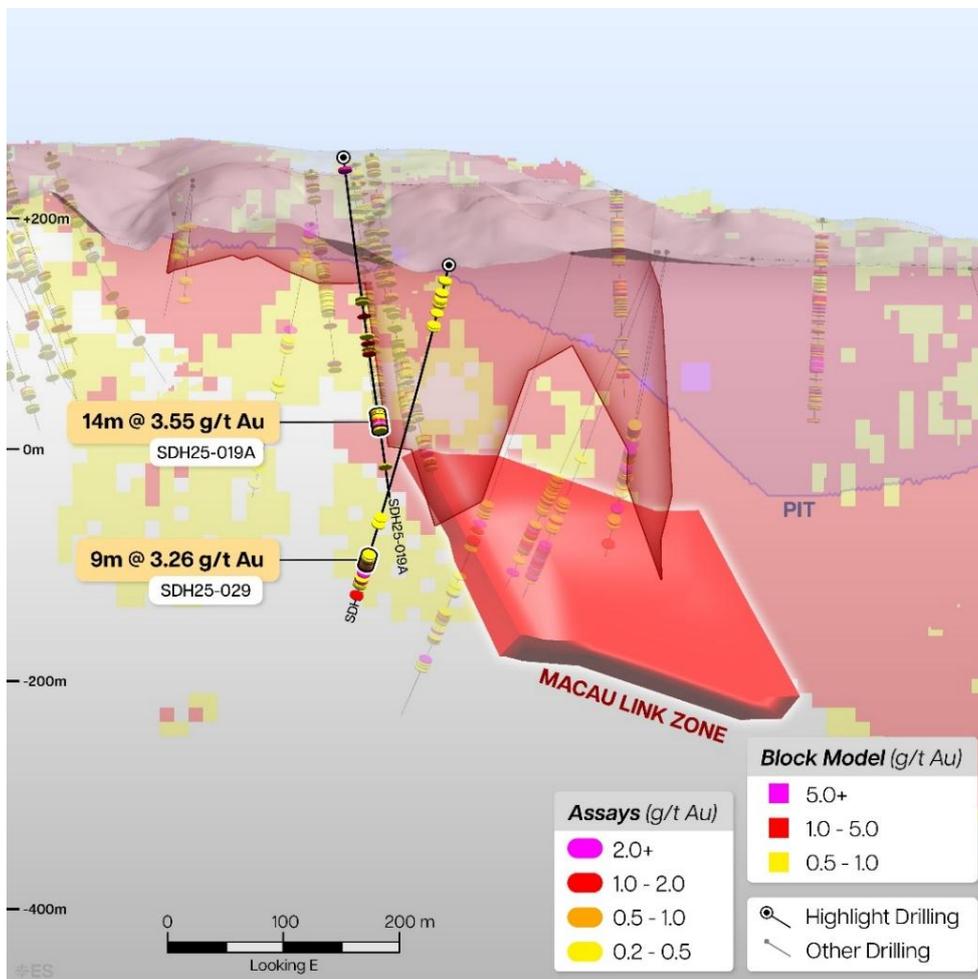


Figure 2 – SDH25-019a and SDH25-029 show material intercepts outside current MRE



PC GOLD

In addition to the High-Grade results reported above, hole SHD25-024 hit a ~100m zone of mineralisation at 0.80 g/t Au in the southern Hong Kong Zone from 207.8mdh.

Macau Link Zone Emerging as a New High-Grade Core

The results of hole SDH26-001 were also returned for the Macau Link zone that hit **6m @ 3.54 g/t au from 217mdh within 12m @ 1.99 g/t Au along with 10m at 0.93 g/t Au from 198mdh**. This was the last hole in the initial program that now contains 10 holes within this exciting new target.

Diamond drilling is currently focused on the Macau Link Zone following the completion of the initial eight holes in the Main Zone South target, as reported on 3 March 2026. Two rigs are drilling a further eight holes into the Macau Link Zone, with one section shown below. This program is designed to infill the Macau Link Zone to a 50 x 50m drill density over 225m of strike and across the dip of +300m.

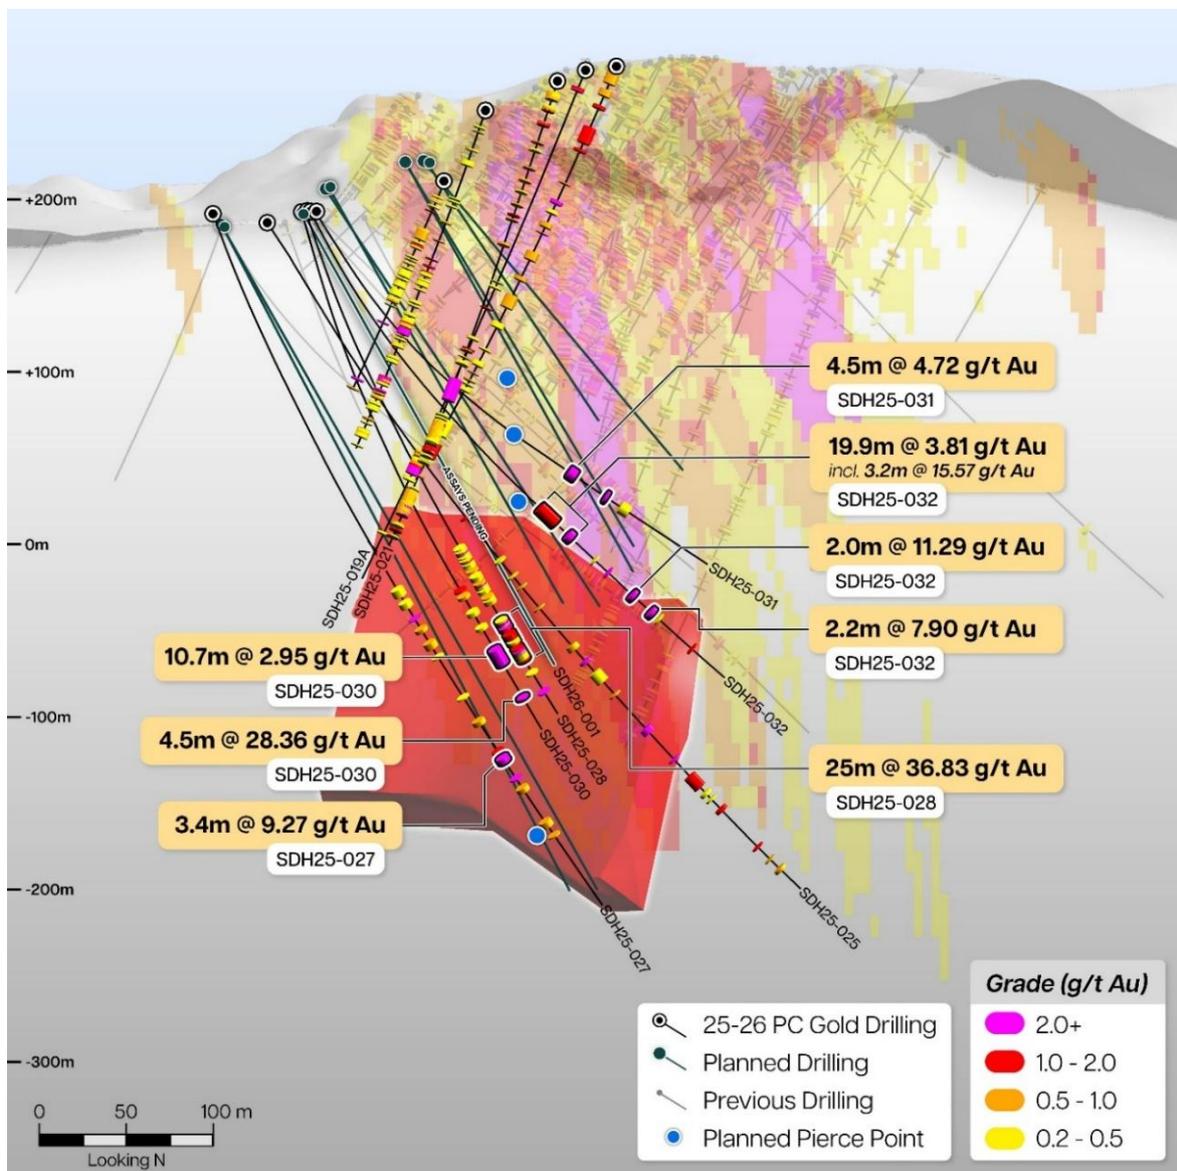


Figure 3 – The Macau Link zone interpretation shown in 3D holes currently being drilled shown by blue dots.

For personal use only



PC GOLD

The first hole of the follow up program, **SDH26-002**, is now complete. The hole targeted the down dip extension of the interpreted Macau Link Zone and is currently being processed on site before being sent for priority assay.

This new discovery could materially improve head grades and early mine scheduling potential in future feasibility work.

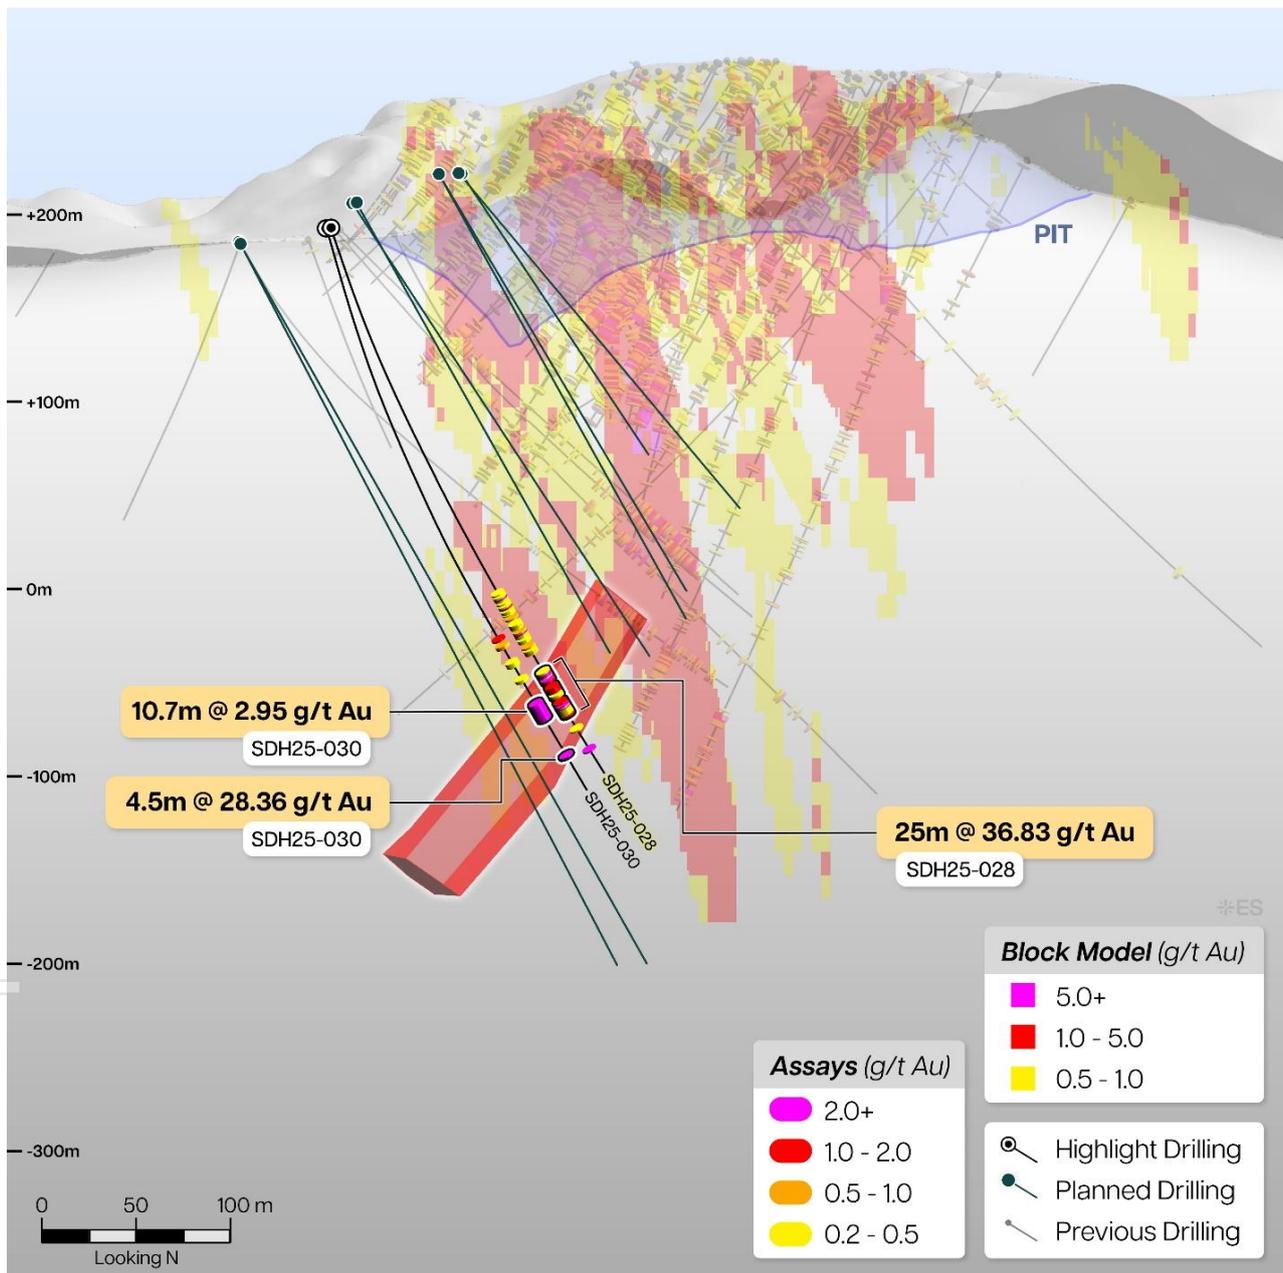


Figure 4 – Cross section of the Macau Link zone with proposed holes.



PC GOLD

Metallurgical Test work Program

Pre-feasibility metallurgical testing is underway with Bureau Veritas and JT Metallurgical Services. Historical metallurgical testwork showed up to 96 % overall gold recovery with strong gravity response (>50 %), supporting a simple CIL + gravity flowsheet

PC Gold has completed two new drill holes for ongoing metallurgical test work as part of the plant pre-feasibility study work for the proposed 3Mtpa processing facility at the Spring Hill.

Assay results from the metallurgical drilling include MET25-001 that returned **22m @ 3.37 g/t Au from 111m** from a zone of 1.0g/t Au mineralisation within the current MRE block model.

Samples from these holes will be used to generate representative master and variability composites to support the metallurgical test work program and process design for the proposed processing flowsheet.

Assay results and associated drill logs have now been received, and composite selection is currently being undertaken in collaboration with the geological team to ensure that all ore-hosted lithologies are appropriately represented in the testwork program.

The initial phase of the program will focus on the determination of key comminution parameters, including indices required to inform crushing and milling circuit design and to evaluate optimal grind size versus gold recovery through the proposed gravity and carbon-in-leach (CIL) processing circuits.

Subsequent stages of the program will include mineralogical and metallurgical characterisation, gravity recovery testing and cyanide leach evaluations, together with rheological assessments to evaluate slurry characteristics relevant to downstream processing and tailings handling.

The overall testwork program has been designed to generate metallurgical data at a level appropriate to support engineering studies associated with the Spring Hill pre-feasibility study.

Assays and Ongoing Drilling Activities

The Company remains focused on unlocking the full potential of Spring Hill through targeted drilling and strategic testing of new zones.

Two diamond drill rigs remain active on site post the Christmas period shut down with the RC rig expected back on site in early April 2026 following an extended wet season across far north Australia.

Upon returning to site, the RC rig will complete infill drilling on the Macau Extension, commence Phase 2 of the Lasagne Lode infill program and then move north to the Northern Target.

With the June 2026 MRE update in progress and two rigs expanding the high-grade Macau Link Zone, PC Gold is entering a major growth phase at Spring Hill—unlocking one of Australia’s most compelling near-term gold development opportunities

- END -

This release is authorised by the Board of Directors of PC Gold Limited.

For further information visit our website at pcgold.com.au or contact:

Ashley Pattison
Executive Chairman
T: +61 8 6313 3996
E: admin@pcgold.com.au

Investor Relations
Paul Berson
T: +61 (0) 421 647 445
E: paul@corporatetorytime.com

About PC Gold

PC Gold Limited is a gold exploration and development company focused on unlocking the full potential of its flagship Spring Hill Gold Project in the Northern Territory. With a Mineral Resource Estimate prepared in 2024 and reported in accordance with the JORC Code of 25.6Mt @ 1.0g/t Au, a strong balance sheet, and a highly experienced team, PC Gold is executing a clear strategy to transition Spring Hill toward production.

The Spring Hill Project is a virgin gold system hosting mineralisation within granted mining leases, with environmental approvals already in place to commence open-pit mining. This positions PC Gold to move swiftly through development milestones.

The Company is advancing Spring Hill through a dual-stream strategy:

- Infill drilling to upgrade Resource confidence and support conversion to Reserves.
- Aggressive extensional exploration to grow the global Spring Hill Resource inventory.

All modifying factors required for future development — including mining, metallurgy, infrastructure, and permitting — are being progressed in parallel, to ensure a streamlined path toward feasibility and production.

A breakdown of the Spring Hill Mineral Resource Estimate by category and various Cut Off Grades (COG) is as follows:

COG	Indicated			Inferred			Total		
	Tonnes (Mt)	Au g/t	Oz Au ('000)	Tonnes (Mt)	Au g/t	Oz Au ('000)	Tonnes (Mt)	Au g/t	Oz Au ('000)
0	21.1	0.7	505	22.3	0.7	503	43.4	0.7	1,008
0.3	17.6	0.9	483	19.2	0.8	482	36.8	0.8	966
0.5	13.0	1.0	424	12.6	1.0	397	25.6	1.0	821
0.7	8.6	1.2	341	7.3	1.3	295	15.9	1.2	636

Notes:

1. Figures may not add up due to rounding.
2. All Mineral Resources are classified as Indicated and Inferred.
3. All Mineral Resources have been depleted by surface trial mining and Underground Adits.
4. Grade Capping has been applied to high grade outliers. Each domain has been capped based on their unique geology and grade distribution.
5. No minimum mining SMU parameters applied to the Mineral Resources.
6. The average bulk density is assigned based on average mean values by weathering type: oxide = 2.57 g/cm³; transition = 2.69 g/cm³; Fresh = 2.77 g/cm³.
7. The Mineral Resource was estimated in accordance with the JORC Code.

For personal use only



PC GOLD

Competent Person's Statement

Information in this announcement that relates to exploration results is based on and fairly represents work undertaken by Mr Peter Harris, a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr. Harris has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a 'Competent Person' as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' ("JORC Code"). Mr. Harris is an employee of PC Gold Ltd. Mr. Harris consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

Past Exploration Results and Mineral Resource estimates reported in this announcement were first reported by the Company in accordance with ASX Listing Rules 5.7 and 5.8 in its Prospectus lodged with ASIC and dated 13 August 2025 (as amended by the Supplementary Prospectus lodged with ASIC and dated 10 September 2025) (the **Prospectus**). The Company confirms that it is not aware of any new information or data that materially affects the information included in the Prospectus and that in the case of the Mineral Resource estimates, that all material assumptions and technical parameters underpinning the estimates in the Prospectus continue to apply and have not materially changed. The Company confirms that the form and content in which the Competent Person's findings are presented here have not been materially modified from the Prospectus. Refer to the Prospectus for further information.

Disclaimer

This release may include forward-looking statements. These statements are based on PC Gold management's expectations and beliefs concerning future events as of the time of the release of this announcement. Forward-looking statements are necessarily subject to risks, uncertainties and other factors, some of which are outside the control of PC Gold, which could cause actual results to differ materially from such statements. PC Gold makes no undertaking to subsequently update or revise the forward looking or aspirational statements made in this release to reflect events or circumstances after the date of this release, except as required by applicable laws and the ASX Listing Rules.



PC GOLD

APPENDIX 1 – DIAMOND DRILLING HOLE DETAILS

Hole No.	Grid Co-ordinates		Survey Data				Intersections					Sample Type
	MGSA94 Grid Easting	MGSA94 Grid Northing	RL (m)	Azimuth (°)	Dip (°)	Depth (m)	From (m)	To (m)	Interval (m)	Grade (g/t Au)		
SDH25-020	794098.8	8494204.7	255.2	253	-66.6	270.6	1	11.2	10.2	0.6	DIA	
							15	19	4	0.68	DIA	
							25	27	2	1.54	DIA	
							39	49	10.1	1.28	DIA	
							53.7	54.5	0.8	2.25	DIA	
							73	75.3	2.3	0.59	DIA	
							86	88	2	2.71	DIA	
							92	94.1	2.1	0.34	DIA	
							100	103	3	0.73	DIA	
							119	119.6	0.6	3.08	DIA	
							123	124	1	0.43	DIA	
							135	137.3	2.3	0.66	DIA	
							147	154.1	7.1	0.92	DIA	
							165	168	3	0.42	DIA	
							182	183	1	0.35	DIA	
							190	192.9	2.9	0.44	DIA	
							202.1	203	0.9	0.75	DIA	
							207.3	209.5	2.3	0.37	DIA	
							212	222	10	0.31	DIA	
							220	221	1	0.51	DIA	
							229	239	10.1	0.52	DIA	
							244	253.6	9.6	1.6	DIA	
							265	266	1	0.6	DIA	
SDH25-021	794064.8	8494219.4	246.7	234.6	-50.3	294.7	7	11.9	4.9	0.57	DIA	
							17	19	2	0.94	DIA	
							26	28	2	1.67	DIA	
							38.5	39	0.5	0.8	DIA	
							43	44	1	0.5	DIA	
							54.4	55	0.6	0.62	DIA	
							62	63	1	0.63	DIA	
							69	69.9	0.9	0.53	DIA	
							77.2	78	0.8	0.56	DIA	
							83.7	84.4	0.7	1.01	DIA	
							86.8	87.3	0.5	0.64	DIA	
							101.7	103	1.3	0.63	DIA	
							169	169.6	0.6	0.61	DIA	
							176	178	2	0.54	DIA	
							187.6	201	13.4	2.86	DIA	
							215	226	11	0.6	DIA	
							231	234	3	1.16	DIA	
							259	275	16	0.67	DIA	
							280	281	1	0.6	DIA	
284	285	1	1.55	DIA								
288	289	1	0.52	DIA								
SDH25-023	794263.9	8493694.9	158.8	242.6	-55.6	290	137	149	12	0.83	DIA	
							188	189	1	0.76	DIA	
							194	195	1	0.51	DIA	
							199	206	7	0.54	DIA	
							210	223.1	13.1	0.69	DIA	
							238	244	6	1.38	DIA	
							258	261	3	0.69	DIA	

Notes:

- (i) Results are based on ore grade 500g photon assay for Au.
- (ii) Intersections are from diamond core drilling with half-core samples or from RC drilling with 1m representative samples.
- (iii) Core sample intervals were constrained by geology, alteration or structural boundaries, intervals varied between a minimum of 0.2 metres to a maximum of 1.2 metres.
- (iv) Mean grades have been calculated on a 0.3g/t Au lower cut-off grade with no upper cut-off grade applied, and maximum internal waste of 3.0 metres.
- (v) All intersections are downhole intervals, and reflect approximate true widths.
- (vi) All downhole deviations have been verified by downhole camera and or downhole gyro
- (vii) Collar coordinates surveyed by PCGOLD using Garmin GPS.
- (viii) The Company maintains a QA/QC program in compliance with the requirements of JORC 2012.
- (ix) The assay laboratories responsible for the assays was Intertek Pty Ltd, Perth, WA.

For personal use only



PC GOLD

Hole No.	Grid Co-ordinates		Survey Data				Intersections					
	MGA94 Grid Easting	MGA94 Grid Northing	RL (m)	Azimuth (°)	Dip (°)	Depth (m)	From (m)	To (m)	Interval (m)	Grade (g/t Au)	Sample Type	
SDH25-024	794064.3	8493576.7	156.7	80	-59.5	445.1		172	173	1	0.64	DIA
								175	176.1	1.1	0.36	DIA
								189	197	8	0.51	DIA
								202	203	1	0.44	DIA
								207.8	212	4.2	0.93	DIA
								217	240.5	23.5	0.71	DIA
								246	278.7	32.7	0.81	DIA
								284.3	323	38.7	0.79	DIA
							incl	319	319.7	0.7	6.89	DIA
								327	328	1	0.59	DIA
								332	333	1	2.54	DIA
								347	348	1	0.98	DIA
								444	445.1	1.1	0.74	DIA
							SDH25-025	793897.7	8493876.4	164.5	79	-49
	240	241.6	1.6	0.48	DIA							
	252	253	1	0.45	DIA							
	260	261	1	0.6	DIA							
	276	277	1	0.62	DIA							
	305	308.4	3.4	0.76	DIA							
	317	318.7	1.7	2.13	DIA							
	326	333.3	7.3	0.46	DIA							
	343	344	1	0.78	DIA							
	347.9	378	30.1	0.92	DIA							
incl	370	373.5	3.5	2.9	DIA							
	385	395.2	10.2	1.61	DIA							
incl	394.3	395.2	0.9	8.12	DIA							
	408	417	9	1.22	DIA							
	421	423	2	0.52	DIA							
	426	427	1	0.4	DIA							
	434	436	2	1.65	DIA							
	441	441	1	1	DIA							
	465.1	466	0.9	1.07	DIA							
	475.4	476	0.6	0.85	DIA							
	483	485	2	0.76	DIA							
SDH25-029	793817.6	8494138.1	159.498	71	-52	396.6		29	31	2	0.84	DIA
								36	39	3	0.4	DIA
								40.9	42	1.1	0.82	DIA
								286	286.2	0.6	0.51	DIA
								332	333	1	0.81	DIA
								338	347	9	3.26	DIA
								355	356	1	2.44	DIA
								363	365	2	2.87	DIA
								368.6	369.8	1.2	0.45	DIA
								383	384	1	1.53	DIA
SDH25-031	793925.2	8493950.8	170.81	83	-40	310.6		213.5	231	17.5	1.69	DIA
								214	218.9	4.9	4.61	DIA
							incl	239.5	244	4.5	4.72	DIA
								239.5	241	1.5	12.66	DIA
								250	251	1	0.31	DIA
								254.9	256	1.1	1.61	DIA

Notes:

- (i) Results are based on ore grade 500g photon assay for Au.
- (ii) Intersections are from diamond core drilling with half-core samples or from RC drilling with 1m representative samples.
- (iii) Core sample intervals were constrained by geology, alteration or structural boundaries, intervals varied between a minimum of 0.2 metres to a maximum of 1.2 metres.
- (iv) Mean grades have been calculated on a 0.3g/t Au lower cut-off grade with no upper cut-off grade applied, and maximum internal waste of 3.0 metres.
- (v) All intersections are downhole intervals, and reflect approximate true widths.
- (vi) All downhole deviations have been verified by downhole camera and or downhole gyro
- (vii) Collar coordinates surveyed by PCGOLD using Garmin GPS.
- (viii) The Company maintains a QA/QC program in compliance with the requirements of JORC 2012.
- (ix) The assay laboratories responsible for the assays was Intertek Pty Ltd, Perth, WA.

For personal use only



PC GOLD

Hole No.	Grid Co-ordinates		Survey Data				Intersections					
	MGA94 Grid Easting	MGA94 Grid Northing	RL (m)	Azimuth (°)	Dip (°)	Depth (m)	From (m)	To (m)	Interval (m)	Grade (g/t Au)	Sample Type	
SDH25-033	793833	8494282	202	98	-53	313		1.7	2	0.3	4.76	DIA
								10	11.6	1.6	2.13	DIA
								39.6	40	0.4	0.78	DIA
								113.7	114.1	0.4	2.54	DIA
								127	128	1	0.47	DIA
								130.9	131.5	0.6	2.94	DIA
								216	217	1	0.41	DIA
								219	220	1	0.91	DIA
								223	229	6	0.43	DIA
SDH26-001	793918	8493961	171	62	-58	310		147	148	1	1.64	DIA
								193	193.2	0.2	0.56	DIA
								198	208	10	0.93	DIA
								211.5	223.5	12	1.99	DIA
							incl	217	223	6	3.54	DIA
								229	230	1	0.55	DIA
								233	234	1	0.4	DIA
								239	240	1	1.21	DIA
								247	252	5	0.6	DIA
								257	258	1	0.46	DIA
								267	269	2	0.57	DIA
								273.9	275.4	1.5	1.3	DIA
								284.2	285	0.8	0.81	DIA
								290	297.6	7.6	1.89	DIA
								306	306.6	0.6	2.44	DIA
SDH26-002	793877	8493938	164	65	-60	Drilling						
MET25_001	794093	8493816	199	255	-81	181		0	2	2	0.45	DIA
								14	16	2	1.38	DIA
								21	41	20	0.67	DIA
								45	47	2	3.2	DIA
								55	58	3	0.72	DIA
								62	84	22	1.02	DIA
								88.3	91	2.7	1.25	DIA
								96	99	3	0.8	DIA
								103	104	1	0.43	DIA
								111	133.7	22.7	3.37	DIA
								139	140	1	0.49	DIA
								151	152	1	2.05	DIA
								156	159	3	0.48	DIA
								175.1	176	0.9	1.29	DIA
MET25_002	794066	8493994	224	290	-78	180.8		0	15	15	0.73	DIA
								24	39.2	15.2	0.6	DIA
								43	64	21	0.97	DIA
								78	97	19	0.95	DIA
								107	108	1	1.38	DIA
								141	142	1	0.44	DIA
								154	155	1	0.45	DIA
								161	163.9	2.8	5.84	DIA

Notes:

- (i) Results are based on ore grade 500g photon assay for Au.
- (ii) Intersections are from diamond core drilling with half-core samples or from RC drilling with 1m representative samples.
- (iii) Core sample intervals were constrained by geology, alteration or structural boundaries, intervals varied between a minimum of 0.2 metres to a maximum of 1.2 metres.
- (iv) Mean grades have been calculated on a 0.3g/t Au lower cut-off grade with no upper cut-off grade applied, and maximum internal waste of 3.0 metres.
- (v) All intersections are downhole intervals, and reflect approximate true widths.
- (vi) All downhole deviations have been verified by downhole camera and or downhole gyro
- (vii) Collar coordinates surveyed by PCGOLD using Garmin GPS.
- (viii) The Company maintains a QA/QC program in compliance with the requirements of JORC 2012.
- (ix) The assay laboratories responsible for the assays was Intertek Pty Ltd, Perth, WA.

For personal use only



Appendix 2: JORC Code, 2012 Table 1

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling measures taken to ensure sample representivity. Aspects of the determination of mineralisation that are Material to the Public Report. 	<ul style="list-style-type: none"> Diamond drill core of HQ-3 size (61.1mm diameter) was collected from both the reported intervals as part of the Lasagne Zone evaluation drilling at Spring Hill. The core is oriented based on the driller's mark from the down-hole orientation tool, and the bottom of core line marked along with the down-hole direction, recoveries measured, and logged in detail for lithology, mineralisation, and structure. The sample intervals are marked with sample numbers and photographed. Core is processed in an automated core cutting facility on site at Spring Hill. Cut sheets are provided to the core cutting operator listing the required sample intervals, and their corresponding numbers and instructions for CRMs, blanks, and duplicates, if any. Diamond core will be sawn in half, and one half of the core was used for assaying. The remaining half is retained in the core trays. Samples are taken generally on 1 m intervals, since the sheeted vein systems at Spring Hill contain numerous millimetre- to decimetre- thickness veins on which sampling of individual veins is impractical. Shorter sample intervals are taken at defined contacts of lithological units where relevant. Following cutting, the half core intervals are placed in pre-numbered calico bags The half core is dried and crushed at the Intertek sample preparation facility in Darwin, using jaw crushers, with the entire sample crushed to nominal - 2 mm. The crushed product is then split, and 500g placed into a jar to be freighted to Intertek Perth for Photon assay, which has a lower detection limit of 0.02grams per tonne Au.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit, or other type, whether core is oriented and if so, by what method, etc). 	<p>Drill Type and details used at Spring Hill (2025 and 2026)</p> <ul style="list-style-type: none"> Drilling at Spring Hill in 2025 and 2026 has been a combination of reverse circulation drilling (RC) and diamond core drilling, all of which has been HQ-3, using the services of two core drilling contractors and one RC contractor. RC drilling was completed using a 5 3/4 inch drop centre hammer. Some Diamond drill holes for resource purposes will be drilled from RC pre-collars, followed by HQ3 coring. <p>Wherever possible oriented core was collected, using state of the art downhole devices. Single shot surveys were run at generally 30 m intervals, presently a down-hole north- seeking gyro is being used to monitor hole direction & adjust drill parameters accordingly.</p>
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> For RC drilling sample recovery and condition are visually assessed and recorded in the drill log. For diamond drilling drilled metres and recovered metres are recorded by the drill crew but later checked by company person el. Any discrepancies noted were followed up with the drillers. Zones of core loss are recorded in the geological log and are assumed to have no gold. In general core recoveries for mineralised intervals are close to 100%. Preferential sample loss effecting grade has not generally been obvious with either RC or DD drilling at Spring Hill.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been 	<ul style="list-style-type: none"> All RC chips and diamond core has been geologically logged.



For personal use only

Criteria	JORC Code explanation	Commentary
	<p><i>geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <ul style="list-style-type: none"> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> Geological logging typically detailed lithology, veining, alteration, sulphides, and weathering. Alpha and beta angles of structures like bedding, contacts and veining are recorded when core can be orientated. Logging was to an industry standard and of sufficient detail to support the resource model. Drill core is photographed wet and dry for more detailed geotechnical logging. Logging was quantitative and consist of diagnostics of the rocks and minerals and degree of the rocks weathering. Recording of the observed characteristics was made into electronic devices. 100% of the drill holes are logged. Logging of all 1 m RC chip samples was carried out by the geologist onto handwritten logs and entered into the geological database, along with assay data, surveyed collar position and any down-hole survey information (usually for DD only).
<p>Sub-sampling techniques and sample preparation</p>	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality, and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> RC samples are collected at 1 m intervals straight from the rig-mounted cyclone and riffle splitter. Quality control procedures for RC drilling included the insertion of certified reference materials and blanks at a rate of 1 every 30 samples. Field duplicates were collected straight from the rig cyclone at a rate of 1 every 40 samples. Sampling of diamond core is generally on 1m intervals and is selective based of observed indicators of mineralisation. Diamond core is sawn in half with one half sent off for analysis. Quality control procedures for diamond drilling included the insertion of certified reference materials and blanks at a rate of 1 every 20 or 40 samples. Given the coarse nature of gold at Spring Hill, “duplicate” quarter core assays would be statistically meaningless, and reliance has been placed on obtaining large sample sizes for representativity. Since 2025, all drill samples have been assayed for Au using 500g aliquots and Photon assays, which is current state of the art for coarse grained gold mineralisation of the type encountered at Spring Hill.
<p>Quality of assay data and laboratory tests</p>	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> 	<ul style="list-style-type: none"> All half- core samples are submitted to Intertek Darwin for sample preparation of 500g of -2mm aliquots for Photon assay of each interval with a lower limit of detection of 0.02g/tAu. The Photon method of gold assay is considered current state of the art for assay of gold at economic grades. Quality control procedures are outlined in the sections above in this table.



For personal use only

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Validation of significant intersections is done with alternative company personnel checking recorded intervals and grades, which will be checked again by the independent Resource estimation team during their assessment Data verification for surveying, sample collection and assaying are considered to be industry standard practice based on historical reports reviewed covering the sampling procedures by previous operators. The primary returned assay result was used for reporting of all intersections in the mineral resource estimation, no averaging with field duplicates or laboratory repeats was undertaken so as not to introduce volume bias.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> The coordinate reference system used for the project area is GDA94 / MGA zone 52. The GDA coordinate system has been used for interpretation of the resource model. Drill hole locations were set out using a handheld GPS. After completion of the drillholes all collars were surveyed using a differential GPS (DGPS), generally to an accuracy of ± 0.1 m in X, Y, and Z directions. All historic holes that have been locatable have also been picked up using DGPS instruments. Accurate drill rig alignment was achieved using both visual compass orientations and a gyro alignment system. During and after completion of the drillhole, all holes were down-hole surveyed using a north-seeking gyro tool, or in earlier a magnetic single shot camera at 12 m or 30 m intervals. A Spring Hill surface DTM was provided by Spring Hill for validation with RLs of the collar pick-ups and agree closely to the DTM. Where there are minor discrepancies, this is the result of more recent earth works. A recent Lidar survey is being processed and will be used to update the DTM.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Drilling data spacing: Infill drill data spacing was appropriate for the resource classification. The majority of drilling over the resource area is a nominal 25 m x 25 m pattern, with closer spaced infill drilling in specific areas. This spacing is considered adequate to determine the geological and grade continuity for reporting of Mineral Resources. The data spacing may not be adequate to establish the continuity of the gold occurrences observed in this report. The sample intervals will be reported separately, as well as composited over any continuous intervals of grade over 0.3g/t Au with no more than 3m of included <0.3g/t intervals.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, 	<ul style="list-style-type: none"> Drilling is orientated generally normal to the dip and plunge of the major mineralisation bodies. Different orientations were selected to target different portions of the mineralisation. At this time, it is not clear if sampling bias is introduced by the



PC GOLD

Criteria	JORC Code explanation	Commentary
	<p><i>considering the deposit type.</i></p> <ul style="list-style-type: none"><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	orientation of these mineralised structures.
Sample security	<ul style="list-style-type: none"><i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none">Samples are collected during the day and securely locked at the core farm overnight. From the core farm samples are delivered by senior company personnel directly to the Laboratory in Darwin for processing.
Audits or reviews	<ul style="list-style-type: none"><i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none">No relevant external audits of sampling techniques and data are known to have been implemented, but various internal reviews are recorded in project literature. These have not been analysed for this review.



Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<p>Mineral tenement and land tenure status</p>	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The mineral lease (ML23812) was renewed to TM Gold Pty Ltd on 23rd January 2025, having replaced the many smaller titles. ML23812 covers an area of 1,035 Ha, which includes the Spring Hill Project. The overlying exploration title has recently been consolidated by the renewal of EL33234 of 11 blocks (36.57 km²) to TM Gold Pty Ltd on 24th February 2025 for two years. PC Gold has a 100% interest in both tenements. Leases are both granted and are in good standing. The Spring Hill Project is subject to: <ul style="list-style-type: none"> a 5% NSR royalty payable to RIVI Opportunity Fund, which includes an option for the Company to buy-back 2% of the NSR; a cash royalty of \$14.00 per ounce of gold extracted from the Tenements where gold is sold for amounts over \$1,500 per ounce to Franco-Nevada and Carthew; and a royalty imposed under the Mineral Royalties Act 2024 (NT) based on an ad valorem scheme.
<p>Exploration done by other parties</p>	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Gold was first worked at Spring Hill in 1880, during the first phase of serious gold mining activity that followed on from the discovery of coarse gold near Yam Creek in 1870 during the construction of the Overland Telegraph Line. At Spring Hill, numerous alluvial, eluvial and hard rock workings were in operation, mainly by Chinese miners. The extensive surface workings suggest that significant amounts of gold were extracted. About 20,000 oz of gold production was recorded between 1880 and 1905, and the area was worked intermittently until 1966. The major hard rock workings were on the Main (or Western) Lode where oxidised ore was mined in a shaft to a depth of up to 109 m, but there was also widespread eluvial and alluvial work on the steep slopes and narrow, high-energy gullies that drain the range. From 1933 to 1938, the Spring Hill Gold Mining Company drove an adit from the east side of Spring Hill with the portal 120 m below the surface exposure of the Main Lode. In 1949, Northern Territory Prospecting and Development Co. extended the adit to 427 m, reached the Main Lode, and carried out a little development work. Another company, Spring Hill Gold NL later carried out some stoping on the East Lode, but production was limited by a lack of water to process ore through the battery near the adit portal. Total gold produced from the Main Adit East Lode stopes was 20.2 kg gold at an average ore grade of 18.6 g/t Au. From 1985 to September 1988 Territory Resources NL held the key leases over the major mined areas. The Main Adit was reopened, mapped and sampled where possible. Ross Mining NL acquired the project from Territory Resources in 1988, and soon after formed an exploration joint venture with Billiton Australia (at the time, the metals division of The Shell Company of Australia Limited), who

For personal use only



PC GOLD

For personal use only

Criteria	JORC Code explanation	Commentary
		<p>carried out a major programme of work as operators from November 1988 until it withdrew from the Spring Hill Joint Venture in March 1992.</p> <ul style="list-style-type: none"> • In 1989-91, Billiton installed a 25m line spaced grid over the tenements that was used for geological mapping, soil sampling and a ground magnetic survey, followed by costeans, reverse circulation and diamond drilling, as well as some metallurgical testwork, petrology, a TEM survey, structural mapping and mineralisation modelling. This resulted in encouragement, with a 300 m extension to the Hong Kong Vein System recognised on the west side of the Property by 1990. • In the north part of the deposit, as far as 11900N, soil results produced discrete geochemical anomalies over veining of the Lasagne vein system, between 10400N and 11900N. The Lasagne system is largely within Gerowie Tuff, with a variety of vein styles including saddle reefs, bedding parallel, and tension gash styles, dominantly on the west limb of the main anticline. The tension gash style is parallel to the orientation of the Hong Kong System. While veining is strongly developed, the grades returned at Lasagne were low, with the best result being 0.47 g/t Au. It was noted that the veins are quartz- rich and have a lower sulphide content than those that carry gold further south in the vein systems in Mount Bonnie Formation. • The 1989-91 drilling program proceeded in five phases: <ul style="list-style-type: none"> ○ In June 1989, 25 RC holes were drilled for 2,428 m at targets from earlier grid soil BLEG sampling. In October 1989, an additional 26 RC holes for 2,600 m were drilled, focusing on optioned leases to assist with exercise decisions, as well as infill at "Strawberry Pastry" (later renamed Macau?), Hong Kong, and a southern extension of Hong Kong at the time called "Toothpaste". ○ Diamond drilling in 1990 of 608 m in holes SHDH001 to SHDH007 at Hong Kong and the main anticline. The best intersection was in SHDH001 at Hong Kong, where 30 m at 1.82 g/t Au was intersected between 67 m and 96 m. ○ Drilling of RC holes SHRC052 to SHRC067 hit individual intersections of significance at Main Lode, Middle Lode and Hong Kong, while four holes drilled at Lasagne were unsuccessful. ○ In 1991, drilling of RC holes SHRC068 to SHRC078 (863 m), then later a second program drilled SHRC079 to SHRC087(688m). ○ Diamond drilling in 1991 consisted of four holes, SHDH008 to SHDH010 (775 m), which were extensions of SHRC077, SHRC072, and SHRC078 respectively; and the 50 m vertical HQ hole, RM001, to obtain samples for metallurgical test work from the main lens of the Hong Kong sheeted vein system. • Billiton completed a column leaching test on the presumably oxidised crushed core from hole RM001, which produced a recovery of 73% of Au over 83 days, with 50% recovery in the first 6 days. • Billiton also reinterpreted the resource distribution and re-estimated the resource based upon their exploration.



PC GOLD

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> • In May 1991, Billiton were able to purchase 100% of the Union Reefs Project (MLN1109) and appear to have withdrawn from their other joint ventures with Pegasus at Mount Todd and with Ross Mining at Spring Hill after this success at Union Reefs. • In March 1992, Ross Mining NL reached agreement to purchase Shell's 50% in Spring Hill and finalised the agreement on 3rd August 1992. Ross Mining then proceeded to explore the Spring Hill Project in their own right. In the remainder of 1992, Ross Mining compiled the Billiton data and produced an updated Mineral Resource estimate on the Hong Kong Sheeted Vein Resource (Indicated and Inferred resources of 3.4 Mt at 1.5 g/t Au for 158 k Oz Au, not constrained by pit optimisation shells). • Ross Mining conducted an active exploration program on the Spring Hill titles during 1993 and 1994. The first phase of this was detailed field checking, including mapping and sampling of selected portions of the project area based on the previous results to develop a detailed proposal for field work, accompanied by drilling of 13 RC holes, SHRC089 to SHRC101 for 1,287m in October 1993 to follow up early findings (Melville, 1994). • This resulted in Ross elevating the exploration intensity at Spring Hill in 1994, (Sheldon, Scrimgeour and Edwards, 1994). This work identified extensions to the Hong Kong Vein System, and new mineralised zones at Steve's Gully, Vein Heaven, and Zbonsky Trend, confirmed with RC drilling. Diamond drilling also extended the dimensions of the mineralised envelope along strike and to depth. The Hong Kong Zone was extended by 250 m to the north and 225 m to the south. • Following this program, the project moved to pre-feasibility studies in 1995, including water quality monitoring, environmental monitoring, metallurgical testwork, resource/ reserve estimations, scoping studies, and rehabilitation. • In the mid- 1990s Ross Mining was acquired by Placer Dome. All titles were surrendered on 12th March 2001. • During 2003, the subsequent owner of the Project, Tennant Creek Gold (NT) Pty Ltd, commissioned McDonald Speijers to undertake a first pass economic assessment of the mineralisation and to create a preliminary pit design for the Hong Kong, Main, Middle and East Zones. • In 2007 Western Desert Resources Limited (WDR) acquired the project from Tennant Creek Gold (NT) Pty Ltd. • In mid-2011 WDR Gold entered into a joint venture agreement with TM Gold Pty Ltd (a subsidiary of Thor Mining PLC) for a 25% share in the project. TM Gold subsequently purchased 100% of the project. Thor Mining completed DD drilling, metallurgical testwork, a high-resolution aeromagnetic survey and screen fire assay testwork. • Thor commenced a divestment process to private equity firm, PC Gold Pty Ltd in late 2015. • PC Gold has since conducted significant brown field exploration drilling and provided new significant

For personal use only



For personal use only

Criteria	JORC Code explanation	Commentary
		intersections which have been used for updating the mineral resources to the presently quoted quantities in the PC2 IPO Prospectus.
Geology	<ul style="list-style-type: none"> • <i>Deposit type, geological setting, and style of mineralisation.</i> 	<ul style="list-style-type: none"> • The Spring Hill Project is in the Central Domain of the Pine Creek Orogen (PCO), most recently described in detail by Ahmad and Munson (2013). The stratigraphy at Spring Hill falls within the South Alligator Group and Finnis River Group of the Cosmo Supergroup, in greenschist facies metamorphosed sediments, which are isoclinally folded along north- west trending axes in an embayment with lobes of the Cullen Batholith to the north- east and south- west. The main anticline at Spring Hill plunges at a moderate angle to the southeast. • Spring Hill also falls within the Pine Creek Shear Zone, a north-west / south- east trending strike- slip fault system that follows the same embayment between the Cullen Batholith lobes and appears to have been reactivated multiple times during and after granite emplacement. The Pine Creek Shear Zone is most likely a major control on gold mineralisation. The bulk of discovered mineralisation at Spring Hill has been deposited in structures in the Mount Bonnie Formation of the South Alligator Group. • These structural events controlling the distribution of gold mineralisation in and near the Pine Creek Shear Zone deposits most commonly follows a pattern of association with fold structures, in particular anticlines, in ferruginous quartz vein zones with a variety of structural controls. Spring Hill is one of the group of deposits in and around the Pine Creek Shear Zone that share similar characteristics.
Drill hole Information	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> • Tabulation of recent drillholes is contained in the supplementary data accompanying the IPO report. The data for holes relevant to this release are described withing the tables contained in this release. • For the sake of completeness, the following background information is provided in relation to the drill holes. • Easting, Northing and RL of the drill hole collars are in the coordinates of MGA94 Zone 52. • Dip is the inclination of the hole from the horizontal. For example, a vertically down drilled hole from the surface is -90°. Azimuth is reported in magnetic degrees as the direction toward which the hole is drilled. • Down hole length of the hole is the distance from the surface to the end of the hole, as measured along the drill trace. Depth is the distance down the hole as measured along the drill trace. Intersection width is the downhole distance of an intersection as measured along the drill trace. • Drill hole length is the distance from the surface to the end of the hole, as measured along the drill trace. • Detailed information in relation to the historic drill holes included in the June 2024 model are not included in this report. It is the opinion of the Competent Person that the exclusion of the historic drilling information does not detract from the understanding of this report.



For personal use only

Criteria	JORC Code explanation	Commentary
Data aggregation methods	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> Detailed information in relation to data aggregation methods is not relevant as no quantitative exploration results are being reported in this report. The information is not material in the context of this report, and its exclusion does not detract from the understanding of this report PH This needs to be updated. Metal equivalent values are not used.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> Most of the drill holes contained within the drilling database that are material to the June 2024 model (as reported in the IPO Prospectus) were drilled at right angle to the mineralisation at the Spring Hill deposit. The majority of holes were drilled at -60° angle to the local grid easting providing intersections normal to the mineralisation.
Diagrams	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> Maps and sections are included in the body of this report as deemed appropriate by the Competent Person.
Balanced reporting	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> All results above 0.5 g/t Au lower cut-off or 1 g/t Au have been reported in previous public releases by PC Gold, particularly the recent IPO Prospectus of PC2.
Other substantive exploration data	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential</i> 	<ul style="list-style-type: none"> No other exploration data is considered meaningful or material in the context of this report and its exclusion does not detract from the understanding of this report.



PC GOLD

Criteria	JORC Code explanation	Commentary
	<i>deleterious or contaminating substances.</i>	
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	<ul style="list-style-type: none">• Mineralisation is still open in the down-the-plunge and along strike directions which will be further studied and explored by drilling.• Appropriate plans and an outline of ongoing works are included in the body of this report.