



24 August 2026

ASX ANNOUNCEMENT

PC GOLD

Every Zone Delivers: High-Grade Gold Drives Spring Hill Upside

HIGHLIGHTS

- High-grade infill drilling continues to outperform local model expectations, strengthening the potential for grade uplift in the next Spring Hill Mineral Resource Estimate (MRE) in Q4 2026.

Link Zone

- High-grade infill results **confirm the Link Zone as Spring Hill's standout growth domain** with drilling on the Link Zone ongoing since the MRE cut-off date of 25 April 2026.
- **2.0m @ 8.0 g/t Au** from 189.0m in MS-007 (234% above the locally modelled intercept of 2.4m @ 2.39g/t Au)
- **2.97m @ 6.13 g/t Au** from 149.61m in MS-002 (80% above the locally modelled intercept of 3.0m @ 3.41 g/t Au)
- **3.0m @ 4.86 g/t Au** from 298.0m in SDH26-010a (54% above the locally modelled intercept of 1.0m @ 3.15 g/t Au)
- **Eight additional holes have now been completed targeting the Link Zone** – assays pending. Two rigs continue to drill Link Zone along strike and infill drilling the modelled domain.
- Link-style mineralisation **confirmed in both the upper and lower portions of the current MRE**, reinforcing the continuity and scale of this high-grade structure at depth.
- 50m x 50m infill drilling continuing across the northern Link Zone, targeting a structure where nearby holes 22HK007 and SDH25-027 have already returned grades well above model due to limited drill density. **Link Zone remains open along strike and at depth.**
- **Specific gravity testwork on 426 Link Zone samples is assessing potential under-reporting of density and further tonnage upside.**

Main Zone South Results

- **8.3m @ 6.98 g/t Au** from 353m (MS-026)
- **4.5m @ 4.5 g/t Au** from 131.8m and **3.0m @ 7.5 g/t Au** from 144m (MS-030)
- **8.2m @ 1.34 g/t Au** from 140.9m and **10.0m @ 1.53 g/t Au** from 249m (MS-019)

Hong Kong Results

- **4.2m @ 1.7 g/t Au** from 121m and **27.6m @ 1.25 g/t Au** from 147.4m (MS-007)
- **10.4m @ 3.53 g/t Au** from 142.2m and **26.1m @ 1.62 g/t Au** from 183.0m, including **5.7m @ 3.12 g/t Au** from 185.0m (MS-002)
- **30.5m @ 1.70 g/t Au** from 173.0m, including **7.00m @ 2.94 g/t Au** from 189m, and **37.00m @ 1.10 g/t Au** from 209.0m (MS-005)
- **13.8m @ 1.59 g/t Au** from 335.2m and **22.9m @ 0.79 g/t Au** from 309.1m (SDH26-010a)
- Broad mineralised zones continue to host materially higher-grade internal intervals than the overall MRE grade. The like for like comparison against local block grades versus interval grades further supports the MRE under reporting the localised grades.

Executive Commentary

Executive Chairman Ashley Pattison commented:

"These results are a strong endorsement of our infill strategy at Spring Hill. Drilling in all three Zones has returned grades well above local model expectations while confirming the continuity and scale of the mineralised system. The drilling is aiming to convert previously Inferred Resources to Indicated Resources and to additionally define mineralisation within gaps that haven't been tested within the optimised pit shell.

The Link Zone intercepts of 2.0m @ 8.0 g/t Au in MS-007, 3.0m @ 4.86 g/t Au in SDH26-010a and 2.97m @ 6.13 g/t Au in MS-002 are particularly encouraging and improve our confidence in an important part of the resource. The Hong Kong intersections also contain multiple higher-grade internal zones that have the potential to enhance the overall resource grade profile.

With four rigs active across resource enhancement, extension and exploration drilling, and eight further holes completed in the Macau-Hong Kong area, we continue to enhance the scale of the Spring Hill deposit whilst focusing on higher grade domains.

We look forward to being able to provide further exploration results as the program progresses with initial RC drilling results to the north of the MRE, targeting Macau Extension and Eastern Zone expected imminently."

PC Gold Ltd (ASX: PC2) ("PC Gold" or "the Company") is pleased to report assay results from five additional diamond drill holes completed as part of the ongoing resource enhancement program at the Spring Hill Gold Project.

Five holes - SDH26-010a, MS-002, MS-005, MS-007 and MS-030 - returned significant intercepts from the Link Zone, Hong Kong lode and Main Zone South. The program is designed to test areas of elevated grade within the existing MRE, improve geological confidence and support potential grade and classification uplift in the next resource update.

In the Link Zone, **SDH26-010a returned 3.0m @ 4.86 g/t Au from 298.0m**, compared with a locally modelled intercept of **1.0m @ 3.15 g/t Au**. **MS-002 returned 2.97m @ 6.13 g/t Au from 149.61m**, compared with a modelled **3.0m @ 3.41 g/t Au**. **MS-007 returned 2m @ 8.0 g/t Au from 189m**, compared with a modelled **2.4m @ 2.49 g/t Au**.

Within the Hong Kong lode, MS-002, MS-005 and MS-007 returned broad mineralised zones containing multiple higher-grade internal intervals. Eight additional holes have been completed in the Macau-Hong Kong area beneath the northern pit boundary and will further inform the resource model and ongoing open pit evaluation.



PC GOLD

In the Main Zone South, MS-030 returned **4.5m @ 4.5 g/t Au** from 131.8m and **3.0m @ 7.5 g/t Au** from 144m, with both intercepts well above the modelled grades also. MS-026 also returned **8.3m @ 6.98 g/t Au**.

Two diamond rigs continue resource enhancement drilling, while a third diamond rig and an RC rig are targeting potential extensions beyond the current MRE, including the Macau Extension and Eastern Zone.

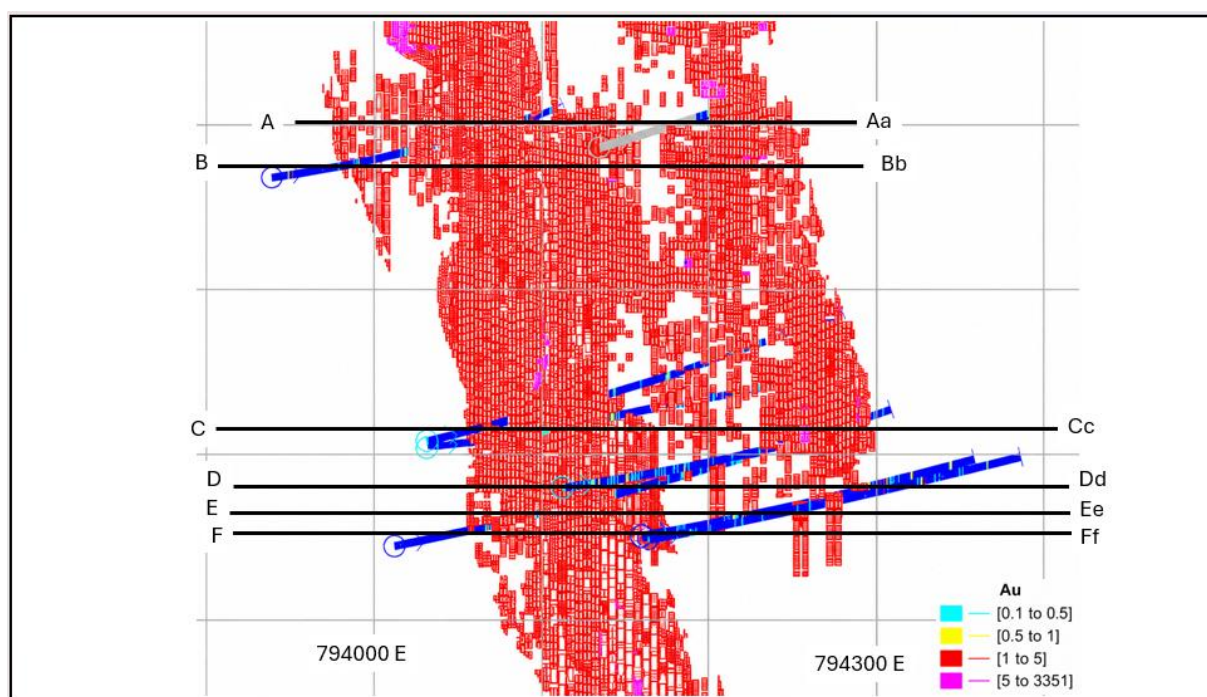


Figure 1: July 2026 MRE lock model showing location of recent drillholes discussed in this release, all holes were drilled as part of an infill and definition program, block model is filtered to show only blocks above 1 g/t.



PC GOLD

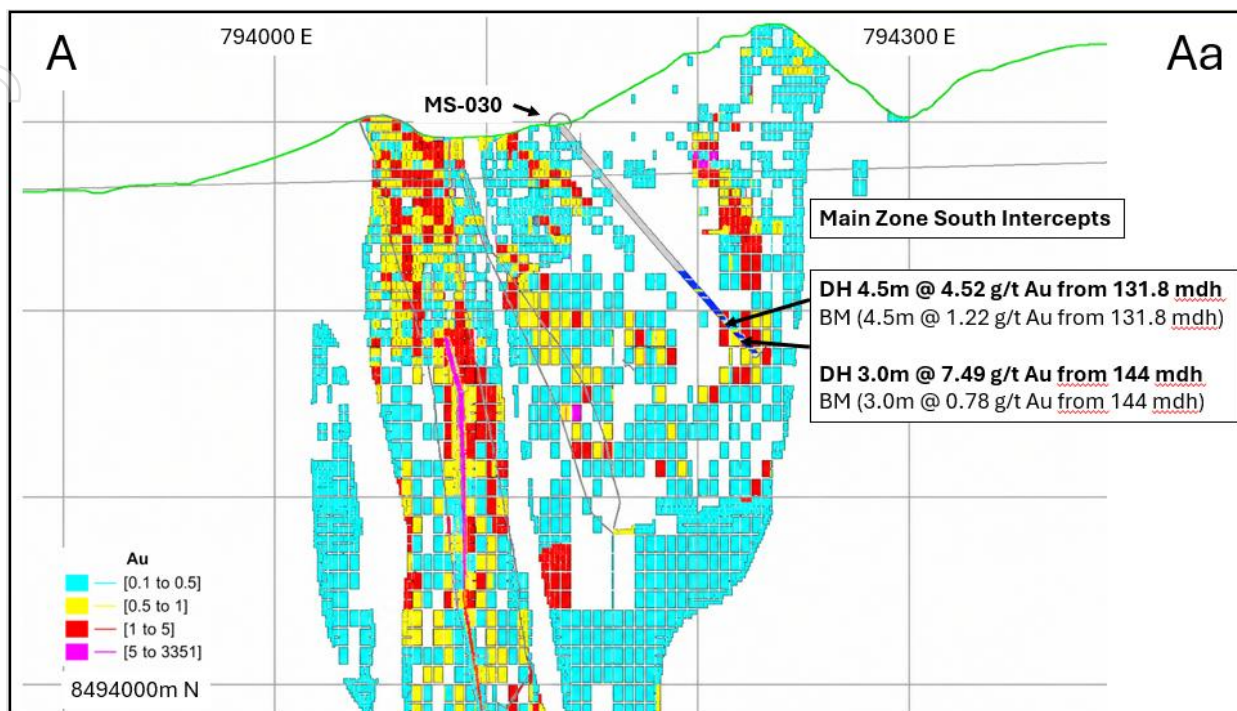


Figure 2: MS-030 partial hole assayed, high-grade hits in the Main Zone South

The above section was drilled to test up dip Main Zone and intersected high grade intervals of **4.5m @ 4.5 g/t Au** from 131.8m and **3.0m @ 7.49 g/t Au** from 144m. Future drilling on Main Load South is awaiting assay results to confirm the plunge of the mineralised lode.

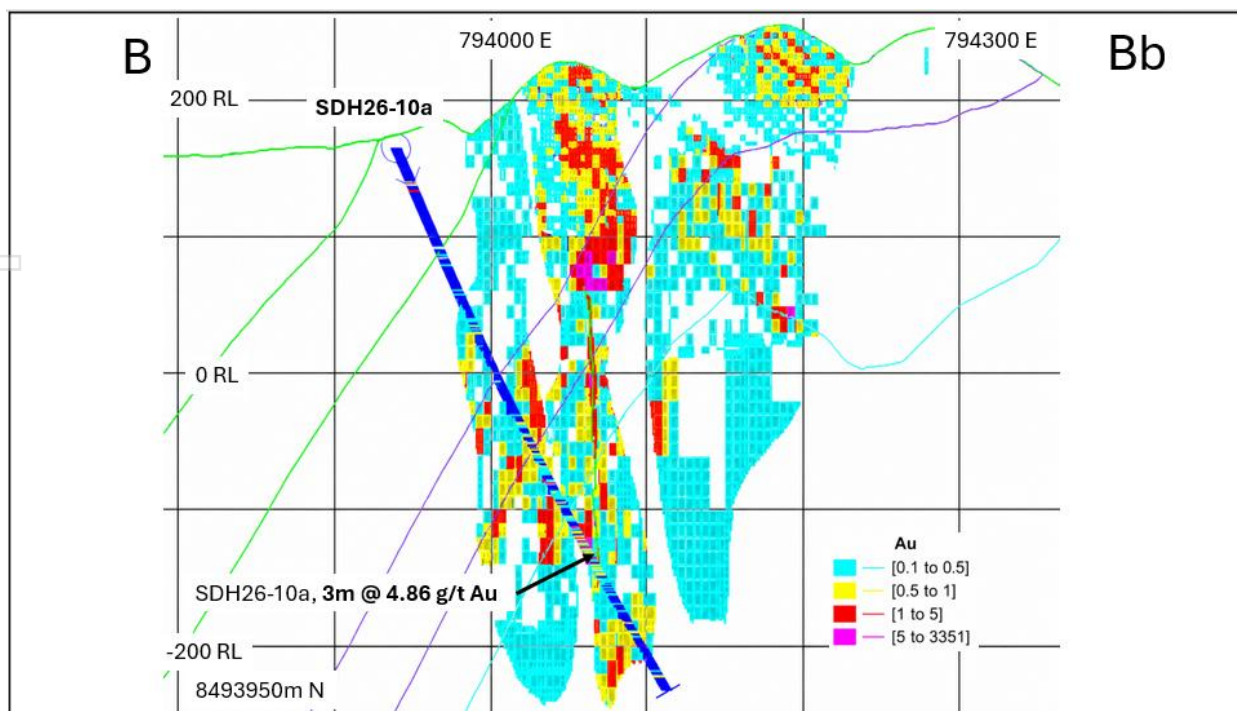


Figure 3: SDH26-10a intersecting Hong-Kong and the Link structure

SDH26-10a intersected Link Style Hematitic veining and altered sulphides ~ 15m before predicted, returning a higher than estimated 3.0m @ 4.86 g/t Au from 298.0m, compared with a locally modelled intercept of 1.0m @ 3.15 g/t Au.

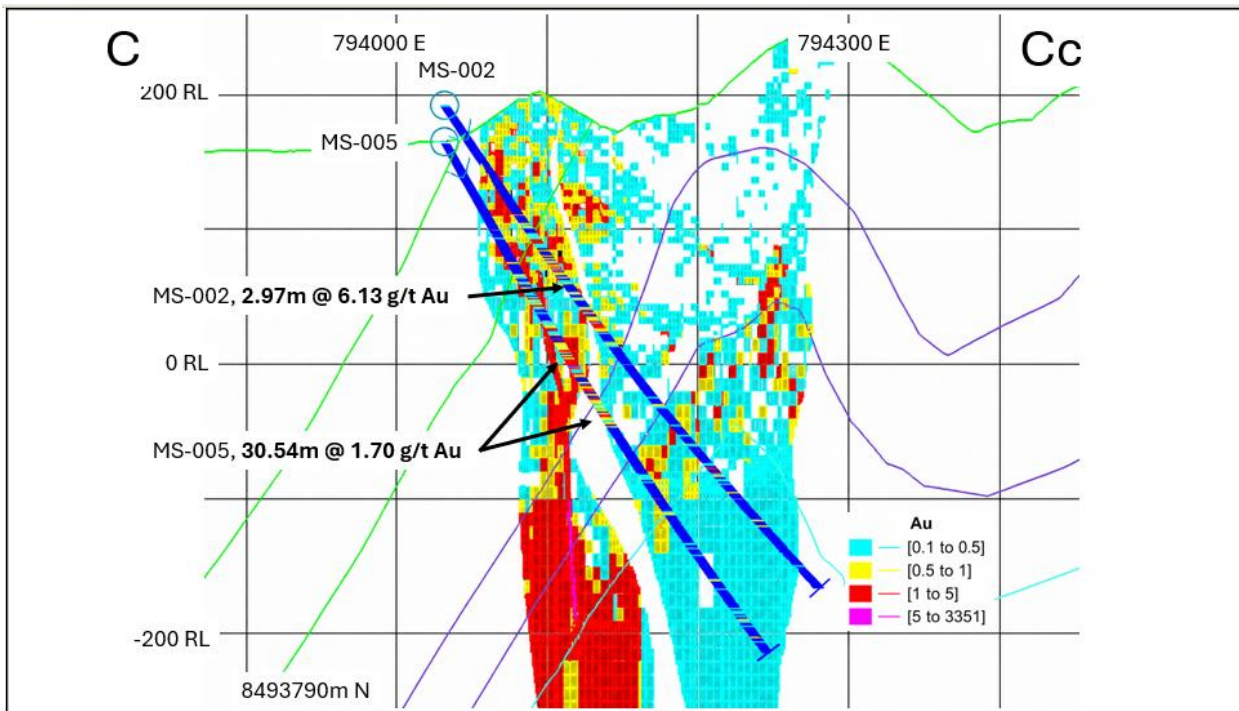


Figure 4: MS-002 and MS-005 with the July MRE model update and bedding planes 8493790 mN MS-008 with the July MRE model update and bedding planes 8493800mE

MS-002 and MS-005 were designed to intersect both the Link Structure and test for deeper mineralisation related to the Main Lode South Extension. MS-002 intersected the link structure within meters of predicted location and the hole returned 2.97m @ 6.13 g/t Au from 149.61m, compared with a modelled 3.0m @ 3.41 g/t Au.



PC GOLD

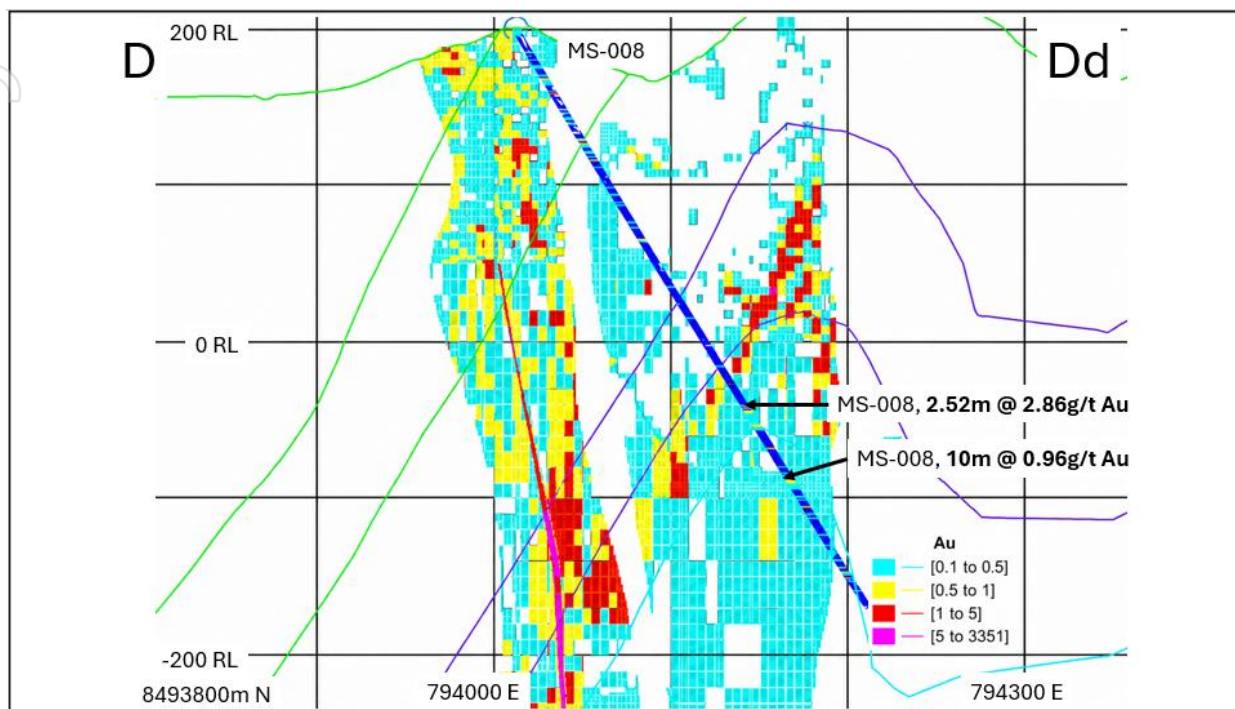


Figure 5: MS-008 with the July MRE model update showing upgraded drillhole intersections

Figure 5 depicts two intercepts beneath the Main Load South where the July MRE model shows grades less than 0.5 g/t Au.

Figure 6 below shows an outstanding section that was drilled to infill Hong Kong and test along strike Main Zone south targets that is in the inferred portion of the MRE.

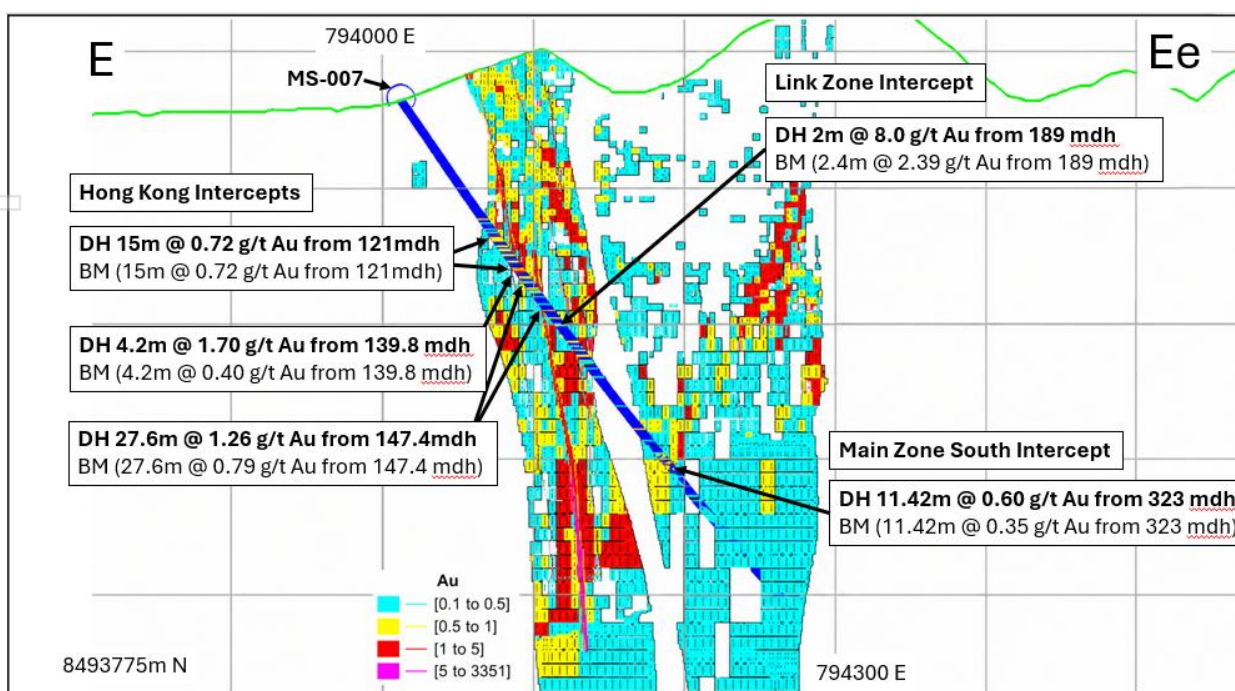


Figure 6: MS-007 with the July MRE model update showing upgraded drillhole intersections



PC GOLD

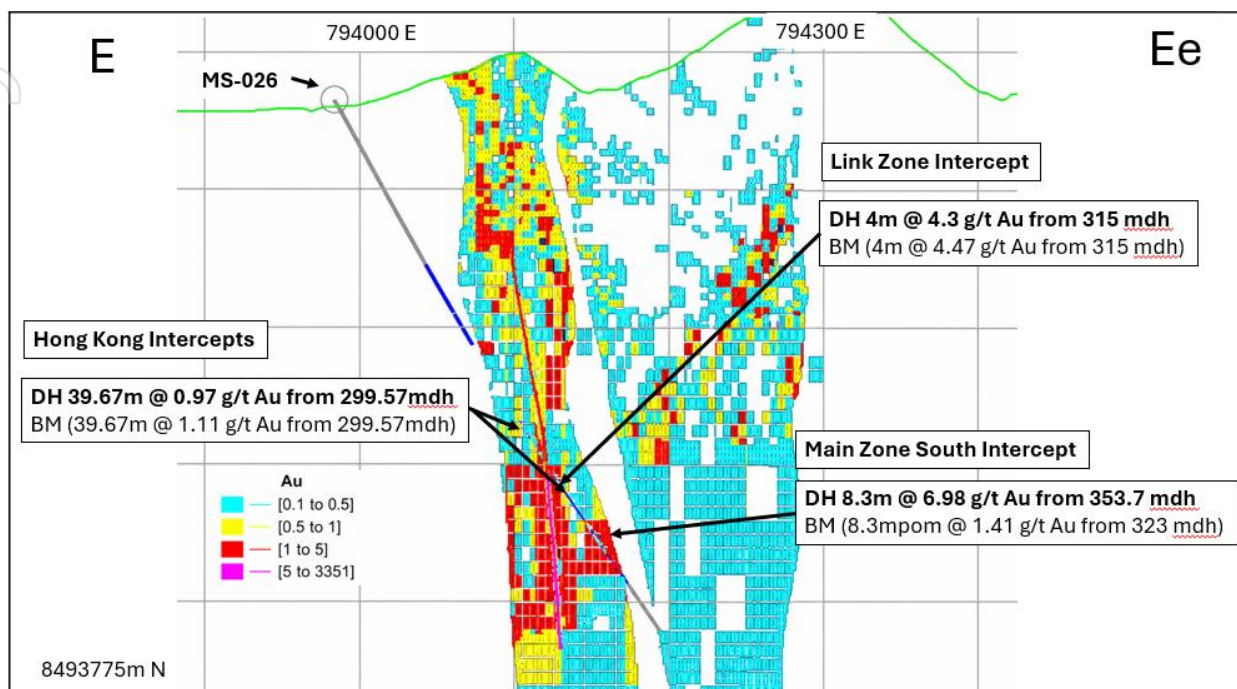


Figure 7: MS-026 with the July MRE model update 8493775mE

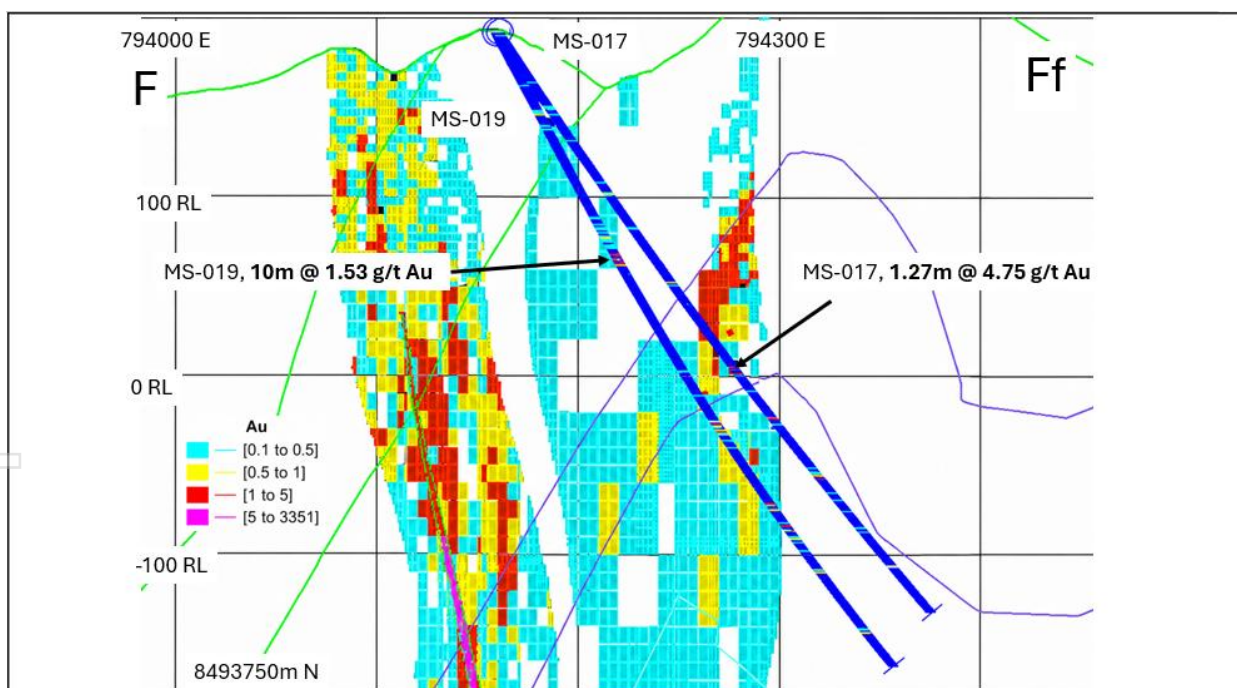


Figure 8: MS-017 and MS-019 with the July MRE model update and bedding planes 8493750mE

The above section was drilled to test beneath the Main Load South Extension, it intersected 1.27m @ 4.75 g/t beneath the plunging shoot.

Several steps will be undertaken prior to the next resource update that are expected to enhance the MRE grade and tonnes:

-
- 794000
- 794300
- 22HK007
5.00m @ 6.20g/t Au
- Planned Hole, BM indicated
2m @ 2.43 g/t Au
- SDH25-027
1.00m @ 30.32g/t Au
- Section 8494125 m N

2. Specific Gravity testwork is being conducted on the intercepts relating to the Link Zone. This is a discrete domain with dominant hematite and maghemite, it is probable that the specific gravity is being under reported. A total of 426 link zone samples have been submitted to Intertek for specific gravity testwork.
3. Ongoing review of the modelling technique has resulted in additional High-Grade domains being identified in the MRE, such as the Eastern Lode. A review of the modelling technique used onsite will be conducted to ensure high-grade domains are correctly domained.

Next Steps

- Continue infill drilling with two diamond rigs to support resource confidence, grade enhancement and potential conversion to Reserves.
- Receive and report pending results from additional Link Zone infill drilling.
- Continue diamond and RC drilling across extensions to the MRE, the Macau Extension and the Eastern Zone, while defining additional near-surface higher-grade targets.
- Incorporate new drilling into Cube's ongoing resource model, with the updated MRE targeted for late 2026.

- END -

This release is authorised by the Board of Directors of PC Gold Limited.

For further information visit our website at pcgold.com.au or contact:

Ashley Pattison

Executive Chairman

E: admin@pcgold.com.au

Paul Berson - Investor Relations

Investor Relations

E: paul@corporatestorytime.com

T: +61 (0) 421 647 445

About PC Gold

PC Gold Limited is a gold exploration and development company focused on unlocking the full potential of its flagship Spring Hill Gold Project in the Northern Territory. With a Mineral Resource Estimate reported in accordance with the JORC Code of 43.6Mt @ 1.1g/t Au for 1.5Moz Au, a strong balance sheet, and a highly experienced team, PC Gold is executing a clear strategy to transition Spring Hill toward production.

The Spring Hill Project is a substantial gold system hosting mineralisation within granted mining leases, with environmental approvals already in place to commence open-pit mining and underground refurbishment. This positions PC Gold to move swiftly through development milestones.

The Company is advancing Spring Hill through a multi-faceted strategy:

- Infill drilling to upgrade Resource confidence and support conversion to Reserves.
- Aggressive extensional exploration to grow the global Spring Hill Resource inventory.
- Underground refurbishment, development, drilling and bulk sampling. Providing a drill platform to directly target high grade underground mineralisation.
- Rapid progression towards completing a PFS to outline the development plan and financial metrics.

All modifying factors required for future development — including mining, metallurgy, infrastructure, and permitting — are being progressed in parallel, to ensure a streamlined path toward feasibility and production.

A breakdown of the Spring Hill Mineral Resource Estimate by category and various cut-off grades (COG) is as follows:

COG	Indicated			Inferred			Total		
	Tonnes (Mt)	Au g/t	Oz Au ('000)	Tonnes (Mt)	Au g/t	Oz Au ('000)	Tonnes (Mt)	Au g/t	Oz Au ('000)
0	120.9	0.4	1,509	88.8	0.3	938	209.7	0.4	2,446
0.3	47.3	0.8	1,234	28.6	0.7	681	75.9	0.8	1,915
0.4	35.6	0.9	1,114	19.1	0.9	573	55.6	0.9	1,687
0.5	28.8	1.1	1,003	14.7	1.1	510	43.6	1.1	1,513
0.6	22.6	1.2	892	11.4	1.2	451	34.0	1.2	1,343
0.7	17.6	1.4	789	9.2	1.4	404	26.8	1.4	1,194
1	9.3	1.9	568	5.1	1.8	295	14.4	1.9	863

Notes:

1. Figures may not add up due to rounding.
2. All Mineral Resources are classified as Indicated and Inferred.
3. All Mineral Resources have been depleted by surface trial mining and Underground Adits.
4. Grade Capping has been applied to Link Zone at 45g/t Au and spatially limiting grade threshold to 25g/t Au at 25m for Pass 1 and 10g/t Au at 25m for pass 2
5. No minimum mining SMU parameters applied to the Mineral Resources.
6. The average bulk density is assigned based on average mean values by weathering type: oxide = 2.53 g/cm³; transition = 2.62 g/cm³; Fresh = 2.81 g/cm³.
7. The Mineral Resource was estimated in accordance with the JORC Code.

Competent Person's Statement

Information in this announcement that relates to exploration results is based on and fairly represents work undertaken by Mr Peter Harris, a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr. Harris has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a 'Competent Person' as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' ("JORC Code"). Mr. Harris is an employee of PC Gold Ltd. Mr Harris consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

The information in this report that relates to estimation and reporting of Mineral Resources is based on, and fairly represents, information compiled by Mr. Brian Fitzpatrick of Cube Consulting. Mr. Fitzpatrick is a member of the Australasian Institute of Mining and Metallurgy (MAusIMM CP) and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person (CP) as defined in the 2012 Edition of the 'Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr. Brian Fitzpatrick is a full-time employee of Cube and is the Competent Person (CP) responsible for the resource estimation and completion of JORC (2012) Table 1, Sections 3. Mr. Fitzpatrick visited the Spring Hill Project from 11 to 13 March 2026 and has inspected the diamond drill core available and assessed the available mineralised outcrop exposures. In addition, Mr. Fitzpatrick has completed a data validation and a compilation and review of all available documentation from the NT GEMIS website. Information relating to the July 2025 MRE for Spring Hill was previously announced on 21 July 2026.

Disclaimer

This release may include forward-looking statements. These statements are based on PC Gold management's expectations and beliefs concerning future events as of the time of the release of this announcement. Forward-looking statements are necessarily subject to risks, uncertainties and other factors, some of which are outside the control of PC Gold, which could cause actual results to differ materially from such statements. PC Gold makes no undertaking to subsequently update or revise the forward looking or aspirational statements made in this release to reflect events or circumstances after the date of this release, except as required by applicable laws and the ASX Listing Rules.



PC GOLD

APPENDIX 1 – DIAMOND DRILLING – DETAILED HOLE DETAILS

Hole No.	Grid Co-ordinates		Survey Data				Intersections					
	MGA94 Grid Easting	MGA94 Grid Northing	RL (m)	Azimuth (°)	Dip (°)	Depth (m)		From (m)	To (m)	Interval (m)	Grade (g/t Au)	Sample Type
SDH26-10a	793939.0	8493954.0	165.0	60.0	-63.0	447.5		27.0	28.0	1.0	1.28	DIA
								34.0	35.5	1.5	1.34	DIA
								142.0	143.8	1.8	1.69	DIA
								147.5	149.3	1.9	1.11	DIA
								217.7	222.1	4.4	0.92	DIA
								233.0	235.0	2.0	0.99	DIA
								239.2	241.3	2.1	1.93	DIA
								243.5	248.0	4.5	0.71	DIA
								271.6	272.1	0.6	1.04	DIA
								288.8	289.2	0.5	1.20	DIA
								298.0	301.0	3.0	4.86	DIA
								309.1	332.0	22.9	0.79	DIA
								335.2	349.0	13.8	1.59	DIA
							incl	339.2	339.8	0.6	15.81	DIA
								396.0	397.0	1.0	0.58	DIA
								434.0	435.0	1.0	0.56	DIA
MS-002	794031.6	8493790.0	192.7	62.0	-53.0	457.9		99.0	99.5	0.5	4.51	DIA
								106.2	108.0	1.8	0.78	DIA
								122.0	125.0	3.0	0.78	DIA
								134.8	152.6	17.8	0.75	DIA
							incl	142.2	152.6	10.4	3.53	DIA
								183.0	190.7	7.7	2.44	DIA
								183.0	209.1	26.1	1.62	DIA
							incl	185.0	190.7	5.7	3.12	DIA
								218.0	219.3	1.3	0.62	DIA
								274.8	276.0	1.2	0.80	DIA
								332.5	333.3	0.8	1.13	DIA
								336.0	337.0	1.0	1.02	DIA
								342.0	344.4	2.4	2.10	DIA
								352.0	352.5	0.5	0.98	DIA
								361.0	362.0	1.0	0.50	DIA
								395.0	396.0	1.0	0.88	DIA
MS-005	794031.6	8493789.8	165.5	63.0	-59.0	450.7		104.0	105.0	1.0	0.70	DIA
								122.2	123.1	0.9	1.23	DIA
								130.0	131.0	1.0	0.46	DIA
								135.0	142.0	7.0	0.67	DIA
								153.0	166.0	13.0	0.81	DIA
								169.0	170.0	1.0	1.08	DIA
								173.0	203.5	30.5	1.70	DIA
							incl	189.0	196.0	7.0	2.94	DIA
								209.0	246.0	37.0	1.10	DIA
								290.0	293.0	3.0	0.47	DIA
								323.7	325.0	1.3	1.25	DIA
								362.0	362.8	0.8	1.33	DIA
								383.1	384.0	0.9	0.73	DIA
								446.0	447.0	1.0	0.33	DIA



PC GOLD

Hole No.	Grid Co-ordinates		Survey Data				Intersections					
	MGA94 Grid Easting	MGA94 Grid Northing	RL (m)	Azimuth (°)	Dip (°)	Depth (m)		From (m)	To (m)	Interval (m)	Grade (g/t Au)	Sample Type
MS-007	794012.35	8493730.5	164.0	65	-55	450.0		69.0	88.5	19.48	1.15	DIA
								92.7	93.0	0.35	4.78	DIA
								99.0	100.0	1.00	0.38	DIA
								105.0	107.0	2.00	1.74	DIA
								121.0	136.0	15.00	0.73	DIA
								139.8	144.0	4.20	1.70	DIA
								147.4	175.0	27.63	1.26	DIA
								189.0	191.0	2.00	7.96	DIA
								194.0	195.0	1.00	0.48	DIA
								196.5	199.0	1.55	0.98	DIA
								217.0	218.0	1.00	0.92	DIA
								220.0	221.1	1.07	1.97	DIA
								231.0	234.0	3.00	0.62	DIA
								232.0	234.0	2.00	0.40	DIA
								235.1	240.1	5.05	0.49	DIA
								250.0	251.0	1.00	2.40	DIA
								252.0	252.7	0.67	0.66	DIA
								277.0	278.1	1.10	0.48	DIA
								285.0	285.5	0.50	1.74	DIA
								299.4	300.1	0.74	0.65	DIA
								309.0	310.0	1.00	0.48	DIA
								323.0	334.2	11.42	0.60	DIA
								381.0	387.0	6.00	0.79	DIA
								425.0	427.0	2.00	0.41	DIA
								446.0	447.0	1.00	0.41	DIA
								455.0	456.0	1.00	1.06	DIA
								460.0	461.0	1.00	0.48	DIA
MS-008	794112.3	8493760.5	199.7	61.0	-64.0	430.1		4.0	5.0	1.00	0.43	DIA
								27.0	28.0	2.00	0.42	DIA
								38.3	41.0	2.75	0.65	DIA
								48.1	50.0	1.92	1.17	DIA
								67.0	68.0	1.00	0.47	DIA
								82.7	85.0	2.28	1.18	DIA
								97.7	98.3	0.69	1.36	DIA
								156.9	157.8	0.84	0.63	DIA
								264.1	265.1	1.01	1.77	DIA
								280.7	287.0	6.52	1.28	DIA
							incl	280.7	283.0	2.52	2.86	DIA
								296.0	300.1	4.07	0.60	DIA
								313.1	314.0	0.93	0.67	DIA
								334.0	344.0	10.00	0.96	DIA
							incl	334.0	340.1	6.10	1.29	DIA
								357.0	359.0	2.00	1.26	DIA
								379.0	380.0	1.00	0.59	DIA
								390.3	391.0	0.75	0.45	DIA
								400.6	401.0	0.38	0.54	DIA
								405.5	406.0	0.55	0.60	DIA



PC GOLD

Hole No.	Grid Co-ordinates		Survey Data				Intersections					
	MGA94 Grid Easting	MGA94 Grid Northing	RL (m)	Azimuth (°)	Dip (°)	Depth (m)		From (m)	To (m)	Interval (m)	Grade (g/t Au)	Sample Type
MS-014	794343.2	8493857.5	245.9	253.0	-62.0	210.1		411.0	411.8	0.77	0.45	DIA
								419.0	420.0	1.00	0.47	DIA
								83.0	84.0	1.00	0.28	DIA
								141.0	142.0	1.00	0.55	DIA
MS-016	794082.0	8493699.0	182.8	65.0	-52.0	467.1		69.0	88.5	19.48	1.15	DIA
								92.7	96.0	3.35	0.76	DIA
								99.0	100.0	1.00	0.38	DIA
								103.0	104.0	1.00	0.53	DIA
								109.0	110.0	1.00	0.38	DIA
								117.0	118.0	1.00	1.22	DIA
								130.5	132.0	1.47	0.60	DIA
								138.2	140.0	1.80	1.56	DIA
								146.0	147.0	1.00	0.39	DIA
								269.0	269.6	0.59	1.68	DIA
								302.8	305.0	2.73	1.14	DIA
								330.6	338.0	7.42	0.65	DIA
								349.9	351.3	1.36	0.87	DIA
								381.9	392.0	10.10	1.03	DIA
								400.0	401.0	1.00	0.98	DIA
								414.0	414.5	0.47	3.83	DIA
								417.0	418.0	1.03	0.35	DIA
MS-017	794163.7	8493730.0	192.7	65.0	-53.0	405.3		109.0	109.7	0.7	0.78	DIA
								132.0	133.0	1.0	0.49	DIA
								169.7	170.5	0.8	0.60	DIA
								228.9	229.3	0.4	2.18	DIA
								233.0	234.0	1.0	1.13	DIA
								263.7	265.0	1.3	4.75	DIA
								304.0	305.0	1.0	0.79	DIA
								307.0	308.0	1.0	1.04	DIA
MS-019	794159.5	8493732.3	192.9	65.0	-53.0	420.0		52.6	53.1	0.4	0.92	DIA
								130.8	131.8	1.0	0.64	DIA
								136.0	137.2	1.2	0.41	DIA
								140.9	149.0	8.2	1.34	DIA
								249.0	259.0	10.0	1.53	DIA
								268.0	269.0	1.0	0.47	DIA
								305.0	307.0	2.0	1.28	DIA
								310.1	311.0	0.9	0.88	DIA
								321.0	322.0	1.0	1.16	DIA
								324.0	325.0	1.0	0.62	DIA
								330.0	330.7	0.7	0.88	DIA
								351.0	354.0	3.0	0.48	DIA
								393.8	396.7	2.9	0.40	DIA
MS-022	794261.3	8493705.0	158.2	70.4	-55.1	312.1		200.0	202.0	2.0	0.4	DIA
MS-023	794261.1	8493704.9	158.1	64.3	-69.9	330.9		145.0	146.0	1.0	0.5	DIA
								201.0	204.7	3.2	1.1	DIA



PC GOLD

Hole No.	Grid Co-ordinates		Survey Data				Intersections					
	MGA94 Grid Easting	MGA94 Grid Northing	RL (m)	Azimuth (°)	Dip (°)	Depth (m)		From (m)	To (m)	Interval (m)	Grade (g/t Au)	Sample Type
MS-024	794012.9	8493672.3	159.4	60.2	-50.0	498.3		146.0 189.0	166.0 194.0	18.0 7.2	1.49 1.28	DIA DIA
MS-026	793982.5	8493728.4	160.2	63.0	-57.0	462.3		0.0	137.0			awaited
								265.5	268.8	3.4	1.30	DIA
								276.0	278.0	2.0	0.33	DIA
								284.0	287.7	3.7	0.32	DIA
								295.0	296.4	1.4	2.37	DIA
								299.6	319.0	39.7	0.97	DIA
								353.7	363.0	8.3	6.98	DIA
							incl	353.7	357.0	3.3	15.83	DIA
								372.0	374.0	2.0	0.41	DIA
								383.0	384.0	1.0	0.33	DIA
								411.0	462.3			awaited
MS-030	794134.7	8493966.9	198.8	61.0	-48.0	162.2		0.0	102.0			awaited
								115.0	117.0	2.0	0.72	DIA
								131.8	136.3	4.5	4.52	DIA
								144.0	147.0	3.0	7.49	DIA
								152.0	153.0	1.0	0.47	DIA
								156.0	157.0	1.0	1.33	DIA

Notes:

- (i) Results are based on ore grade 500g photon assay for Au.
- (ii) Intersections are from diamond core drilling with half-core samples or from RC drilling with 1m representative samples.
- (iii) Core sample intervals were constrained by geology, alteration or structural boundaries, intervals varied between a minimum of 0.2 metres to a maximum of 1.2 metres.
- (iv) Mean grades have been calculated on a 0.3g/t Au lower cut-off grade with no upper cut-off grade applied, and maximum internal waste of 3.0 metres.
- (v) All intersections are downhole intervals, and reflect approximate true widths.
- (vi) All downhole deviations have been verified by downhole camera and or downhole gyro
- (vii) Collar coordinates surveyed by PCGOLD using Garmin GPS.
- (viii) The Company maintains a QA/QC program in compliance with the requirements of JORC 2012.
- (ix) The assay laboratories responsible for the assays was Intertek Pty Ltd, Perth, WA.

Appendix 1: JORC Code, 2012 Table 1

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling - measures taken to ensure sample representivity. - Aspects of the determination of mineralisation that are Material to the Public Report.	PC Gold 2025-26: - Diamond drill core of HQ-3 size (61.1mm diameter) was collected from both the reported intervals as part of the evaluation drilling at Spring Hill. The core is oriented based on the driller's mark from the down-hole orientation tool, and the bottom of core line marked along with the down-hole direction, recoveries measured, and logged in detail for lithology, mineralisation, and structure. The sample intervals are marked with sample numbers and photographed. Core is processed in an automated core cutting facility on site at Spring Hill. Cut sheets are provided to the core cutting operator listing the required sample intervals, and their corresponding numbers and instructions for CRMs, blanks, and duplicates, if any. - Diamond core will be sawn in half, and one half of the core was used for assaying. The remaining half is retained in the core trays. Samples are taken generally on 1 m intervals, since the sheeted vein systems at Spring Hill contain numerous millimetre- to decimetre- thickness veins on which sampling of individual veins is impractical. Shorter sample intervals are taken at defined contacts of lithological units where relevant. Following cutting, the half core intervals are placed in pre-numbered calico bags. The half core is dried and crushed at the Intertek sample preparation facility in Darwin, using jaw crushers, with the entire sample crushed to nominal - 2 mm. The crushed product is then split, and 500g placed into a jar to be freighted to Intertek Perth for Photon assay, which has a lower detection limit of 0.02grams per tonne Au. - RC samples were collected at 1m intervals at the drill rig cyclone and split using riffle splitters situated below the cyclone. Cyclone and the splitter were cleaned after each sample. Approximately 3kg of RC sample is sent to the laboratory for preparation and assaying. Duplicate samples were collected every 40th sample together with the main sample. Aliquots of Certified Reference Material and blanks were inserted every 30th sample into the RC sample batch. - For RC chip samples, the whole sample of about 3 kg was dried and crushed at the Intertek sample preparation facility in Darwin, using jaw crushers, with the entire sample crushed to nominal -2 mm. The crushed product is then split, and 500g placed into a jar to be freighted to Intertek Perth for Photon assay, which has a lower detection limit of 0.02grams per tonne Au. PC Gold 2021 and 2022 RC & Diamond Drilling: - All samples were logged and delivered to North Australian Laboratories Pty Ltd (NAL) in Pine Creek for preparation and analysis. - Drill core was oriented, and the bottom of core line marked along with the down-hole direction, recoveries measured, and logged in detail for lithology, mineralisation, and structure. Sampling intervals are marked on the drill core, with sample numbers, photographed. In 2021, core cutting was undertaken at the Bacchus Resources core shed in Pine Creek. In 2022, drilling was processed in a facility installed on site at Spring Hill. Automatic core cutting machines were used at both locations. The SG of much of the half core was also measured by the immersion method during the processing routine. - RC samples were collected at 1m intervals at the drill rig cyclone and split using riffle splitters situated below the cyclone. Cyclone and the splitter were cleaned after each sample. Approximately 3kg of RC sample is sent to the laboratory for preparation and assaying. Duplicate samples were collected every 40th sample together with the main sample. Aliquots of Certified Reference Material and blanks were inserted every 30th sample into the RC sample batch. - Diamond core was sawn in half and one half of the core was used for assaying. The remaining half is retained in the core trays. Samples were



Criteria	JORC Code explanation	Commentary
		taken generally on 1 m intervals, since the sheeted vein systems at Spring Hill contain numerous millimetre- to decimetre- thickness veins on which sampling of individual veins is impractical. Smaller intervals of samples were taken at defined geological contacts of lithological units where relevant. The half core is dried and crushed at the laboratory using jaw crushers, with the entire sample crushed to nominal -10 mm. This is then passed through a Keegor Mill and ground to 100 µ for analysis by 50-gram fire assay with ICP-MS finish on the prill, to a detection limit of 0.01 ppm Au. - For RC chip samples, the whole sample of about 3 kg was crushed to 1 mm using a roll crusher and split. A 1 kg sub-sample collected and pulverised to 100µ from which 50 g aliquots are taken for gold assay as for the core samples. Previous drilling - Previous drilling and sampling at the Spring Hill project that is used for this report occurred from 1989 to 2012, by several different operators, who generally conducted drilling and sampling in line with the current standards for those times. Only that data which has provenance trackable by PC Gold has been included in the drilling database, and the following statements are generalisations for those programs. See Section 2 below for more details on previous sampling. - Diamond Drill (DD) Core, RC and RAB sampling were the main sample types. - Diamond core was geologically logged and sampled to lithological contacts or changes in mineralisation. Nominal samples lengths of 1.0 m with a minimum sample length of 0.2 m. Core were half core sampled. - RC chips were sampled at 1m intervals. This was riffle split to produce a sample of approximately 3 kg to be sent to the laboratory for analysis.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit, or other type, whether core is oriented and if so, by what method, etc).	PC Gold 2025-26: - Drilling at Spring Hill in 2025 and 2026 has been a combination of reverse circulation drilling (RC) and diamond core drilling, all of which has been HQ-3, using the services of two core drilling contractors and one RC contractor. - RC drilling was completed using a 5 ¾ inch drop centre hammer. - Some Diamond drill holes for resource purposes will be drilled from RC pre-collars, followed by HQ3 coring. - Wherever possible oriented core was collected, using state of the art downhole devices. Single shot surveys were run at generally 30 m intervals, presently a down-hole north- seeking gyro is being used to monitor hole direction and adjust drill parameters accordingly. PC Gold 2021 and 2022 drilling: - Drilling at Spring Hill was a combination of reverse circulation drilling (RC) and diamond core drilling (DD) both NQ2 and HQ3. - RC drilling was completed using a 5 ¾ inch drop centre hammer. - Some Diamond drill holes for resource purposes were drilled with RC pre-collars, followed by HQ3. During 2021 and 2022, most core sampling of mineralised zones was deliberately of HQ3 size, to maximise sample size to provide the best possible sampling statistics and recovery. In deeper parts of holes, NQ2 was standard cored. HQ3 was used from surface in many holes, due to the difficulties encountered in keeping RC holes straight on the chosen grid orientation. - Wherever possible oriented core was collected, using state of the art downhole devices. Single shot surveys were run at generally 30 m intervals, but in the 2022 program, all open holes were surveyed by Borehole Wireline Pty Ltd using a downhole north-seeking gyro probe, and since this showed significant hole deviation and interference with magnetic bearings, subsequently a down-hole north- seeking gyro was run for the latter part of the 2022 season. Previous Drilling: - RC drilling typically used a 5.5" face sampling hammer. - Diamond drill holes from surface were generally angled at -60° towards 090°



Criteria	JORC Code explanation	Commentary
		or 270°. Diamond core size was typically HQ3 and NQ. Diamond core was not oriented, or orientation was attempted, but with devices that did not always produce reliable results. The reliability of orientations was always checked while logging by joining the core on long lengths of angle iron and tracing a bottom of core line to ensure consistent orientation. Open hole percussion drilling was geologically logged and sampled and included in the database but not used in this resource interpretation due to uncertainty of sample method and quality.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	PC Gold 2021-22 & 2025-26: - For RC drilling sample recovery and condition are visually assessed and recorded in the drill log. - For diamond drilling drilled metres and recovered metres are recorded by the drill crew but later checked by company personnel. Any discrepancies noted were followed up with the drillers. Zones of core loss are recorded in the geological log and are assumed to have no gold. In general core recoveries for mineralised intervals are close to 100%. - Preferential sample loss effecting grade has not generally been obvious with either RC or DD drilling at Spring Hill. Previous Drilling - Historical records and reports were reviewed to find reports of drill sample recovery which were generally noted in logs. - Measures taken to maximize sample recovery and ensure representative nature of the samples were monitored for all of the drill programs used for this resource calculation. - No analysis on relationship between sample core recovery and grade has been undertaken due to low percentage of data affected by poor recovery.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	PC Gold 2021-22 & 2025-26: - All RC chips and diamond core has been geologically logged. - Geological logging typically detailed lithology, veining, alteration, sulphides, and weathering. Alpha and beta angles of structures like bedding, contacts and veining are recorded when core can be orientated. - Logging was to an industry standard and of sufficient detail to support the resource model. - Drill core is photographed wet and dry for more detailed geotechnical logging. - Logging was quantitative and consist of diagnostics of the rocks and minerals and degree of the rocks weathering. - Recording of the observed characteristics was made into electronic devices. 100% of the drill holes are logged. - Logging of all 1 m RC chip samples was carried out by the geologist onto handwritten logs and entered into the geological database, along with assay data, surveyed collar position and any down-hole survey information (usually for DD only). Previous Drilling: - Logging of all 1 m chip samples was carried out by the geologist onto handwritten logs and entered into the geological database, along with assay data, surveyed collar position and any down-hole survey information (for DD only). - All RC and DD drillholes were logged in full. - Logging has been conducted both qualitatively and quantitatively – full description of lithologies, alteration and comments were noted, as well as percentage estimates on alteration, veining and sulphide amount. - Drilling by different companies has meant that inconsistencies occur in the drillhole records for geological information based on what was entered, though PC Gold has made efforts to standardise many of the inconsistencies



Criteria	JORC Code explanation	Commentary
		by relogging core as necessary.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality, and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	PC Gold 2021-22 & 2025-26: - RC samples are collected at 1 m intervals straight from the rig-mounted cyclone and riffle splitter. - Quality control procedures for RC drilling included the insertion of certified reference materials and blanks at a rate of 1 every 30 samples. Field duplicates were collected straight from the rig cyclone at a rate of 1 every 40 samples. - Sampling of diamond core is generally on 1m intervals and is selective based on observed indicators of mineralisation. Diamond core is sawn in half with one half sent off for analysis. - Quality control procedures for diamond drilling included the insertion of certified reference materials and blanks at a rate of 1 every 20 or 40 samples. - Given the coarse nature of gold at Spring Hill, "duplicate" quarter core assays would be statistically meaningless, and reliance has been placed on obtaining large sample sizes for representativity. Since 2025, all drill samples have been assayed for Au using 500g aliquots and Photon assays, which is current state of the art for coarse grained gold mineralisation of the type encountered at Spring Hill. Previous Drilling: - Historical records and reports were reviewed for descriptions of sub-sampling techniques and sample preparation. These were reported for most of the Billiton and Ross Mining work, but the information was not incorporated into the latest studies. - All dry RC 1 m samples were split by a 3 tier splitter with the remnant bulk samples being left on the pad in plastic bags, with the split sample in a calico bag being sent for analysis. Wet samples were grab sampled by site geologists once the samples were dried of free water
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	PC Gold 2025-26: - All half- core samples are submitted to Intertek Darwin for sample preparation of 500g of -2mm aliquots for Photon assay of each interval with a lower limit of detection of 0.02g/t Au. The Photon method of gold assay is considered current state of the art for assay of gold at economic grades. - Quality control procedures are outlined in the sections above in this table. PC Gold 2021-22: - All samples are submitted to NAL to be analysed for gold by 50 g fire assay. Fire assay is a total digest. - Screen fire analysis was conducted across a subset of the results due to the coarse nature of gold within the deposit. - NAL conducted extensive QAQC procedures throughout their laboratory processes, including up to four multiple repeat fire assays on erratic results. In addition, PC Gold conducted its own internal QAQC process which typically involved certified reference materials, blanks, duplicates, and limited cross-check analyses by a second accredited laboratory. - Umpire checks were undertaken by SGS in Perth, and some check Screen Fire Assay (SFA) analysis was undertaken both at NAL and SGS Previous Drilling: - Assay laboratories in Darwin and Pine Creek were used for assaying. QAQC procedures were generally in line with industry practices at the time. - Assaying for gold by both main laboratories was done using 50 g Fire Assay with AAS finish. - Laboratories used had internal QAQC standard regimes and re-assayed



PC GOLD

Criteria	JORC Code explanation	Commentary
		generally every 20th samples. - Blanks and standards were submitted on a routine basis in the sample stream; and - Inter-laboratory checks of pulps. - The precision of duplicate and other check assays from Pine Creek Orogen sheeted vein deposits is generally low compared with fine grained gold deposits because of the widespread occurrence of free gold grains within the individual veins. At Spring Hill, there is a good correlation between visible gold and high grades, but often poor repeatability on duplicates and repeats. PC Gold is continually reviewing potential improvements to current procedures, e.g. trialling of photon assaying methods. It is believed that large sample size is the key to high precision gold assays at Spring Hill.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	- Validation of significant intersections is done with alternative company personnel checking recorded intervals and grades, which will be checked again by the independent Resource estimation team during their assessment - Data verification for surveying, sample collection and assaying are considered to be industry standard practice based on historical reports reviewed covering the sampling procedures by previous operators. - The primary returned assay result was used for reporting of all intersections in the mineral resource estimation, no averaging with field duplicates or laboratory repeats was undertaken so as not to introduce volume bias.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	- The coordinate reference system used for the project area is GDA94 / MGA zone 52. The GDA coordinate system has been used for interpretation of the resource model. - Drill hole locations were set out using a handheld GPS. After completion of the drillholes all collars were surveyed using a differential GPS (DGPS), generally to an accuracy of ± 0.1 m in X, Y, and Z directions. All historic holes that have been locatable have also been picked up using DGPS instruments. - Accurate drill rig alignment was achieved using both visual compass orientations and a gyro alignment system. During and after completion of the drillhole, all holes were down-hole surveyed using a north-seeking gyro tool, or in earlier a magnetic single shot camera at 12 m or 30 m intervals. - A Spring Hill surface DTM was provided by Spring Hill for validation with RLS of the collar pick-ups and agree closely to the DTM. Where there are minor discrepancies, this is the result of more recent earth works. A recent Lidar survey is being processed and will be used to update the DTM.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- Drilling data spacing: - Infill drill data spacing was appropriate for the resource classification. The majority of drilling over the resource area is a nominal 25 m x 25 m pattern, with closer spaced infill drilling in specific areas. - This spacing is considered adequate to determine the geological and grade continuity for reporting of Mineral Resources. - The data spacing may not be adequate to establish the continuity of the gold occurrences observed in this report. - The sample intervals will be reported separately, as well as composited over any continuous intervals of grade over 0.3g/t Au with no more than 3m of included <0.3g/t intervals.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have</i>	- Drilling is orientated generally normal to the dip and plunge of the major mineralisation bodies. Different orientations were selected to target different portions of the mineralisation. - At this time, it is not clear if sampling bias is introduced by the orientation of these mineralised structures.



PC GOLD

Criteria	JORC Code explanation	Commentary
	<i>introduced a sampling bias, this should be assessed and reported if material.</i>	
Sample security	<i>The measures taken to ensure sample security.</i>	Samples are collected during the day and securely locked at the core farm overnight. From the core farm samples are delivered by senior company personnel directly to the Laboratory in Darwin for processing.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No relevant external audits of sampling techniques and data are known to have been implemented, but various internal reviews are recorded in project literature. These have not been analysed for this review.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The mineral lease (ML23812) was renewed to TM Gold Pty Ltd on 23rd January 2025, having replaced the many smaller titles. - ML23812 covers an area of 1,035 Ha, which includes the Spring Hill Project. - The overlying exploration title has recently been consolidated by the renewal of EL33234 of 11 blocks (36.57 km²) to TM Gold Pty Ltd on 24th February 2025 for two years. - PC Gold has a 100% interest in both tenements. - Leases are both granted and are in good standing. - The Spring Hill Project is subject to: - a 5% NSR royalty payable to RIVI Opportunity Fund, which includes an option for the Company to buy-back 2% of the NSR; - a cash royalty of \$14.00 per ounce of gold extracted from the Tenements where gold is sold for amounts over \$1,500 per ounce to Franco-Nevada and Carthew; and - a royalty imposed under the Mineral Royalties Act 2024 (NT) based on an ad valorem scheme.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- Gold was first worked at Spring Hill in 1880, during the first phase of serious gold mining activity that followed on from the discovery of coarse gold near Yam Creek in 1870 during the construction of the Overland Telegraph Line. At Spring Hill, numerous alluvial, eluvial and hard rock workings were in operation, mainly by Chinese miners. The extensive surface workings suggest that significant amounts of gold were extracted. About 20,000 oz of gold production was recorded between 1880 and 1905, and the area was worked intermittently until 1966. The major hard rock workings were on the Main (or Western) Lode where oxidised ore was mined in a shaft to a depth of up to 109 m, but there was also widespread eluvial and alluvial work on the steep slopes and narrow, high-energy gullies that drain the range. - From 1933 to 1938, the Spring Hill Gold Mining Company drove an adit from the east side of Spring Hill with the portal 120 m below the surface exposure of the Main Lode. In 1949, Northern Territory Prospecting and Development Co. extended the adit to 427 m, reached the Main Lode, and carried out a little development work. Another company, Spring Hill Gold NL later carried out some stoping on the East Lode, but production was limited by a lack of water to process ore through the battery near the adit portal. Total gold produced from the Main Adit East Lode stopes was 20.2 kg gold at an average ore grade of 18.6 g/t Au. - From 1985 to September 1988 Territory Resources NL held the key leases over the major mined areas. The Main Adit was reopened, mapped and sampled where possible. - Ross Mining NL acquired the project from Territory Resources in 1988, and soon after formed an exploration joint venture with Billiton Australia (at the time, the metals division of The Shell Company of Australia Limited), who carried out a major programme of work as operators from November 1988 until it withdrew from the Spring Hill Joint Venture in March 1992. - In 1989-91, Billiton installed a 25m line spaced grid over the tenements that was used for geological mapping, soil sampling and a ground magnetic survey, followed by costeans, reverse circulation and diamond drilling, as well as some metallurgical testwork, petrology, a TEM survey, structural mapping and mineralisation modelling. This resulted in encouragement, with a 300 m extension to the Hong Kong Vein System recognised on the



PC GOLD

Criteria	JORC Code explanation	Commentary
		west side of the Property by 1990. - In the north part of the deposit, as far as 11900N, soil results produced discrete geochemical anomalies over veining of the Lasagne vein system, between 10400N and 11900N. The Lasagne system is largely within Gerowie Tuff, with a variety of vein styles including saddle reefs, bedding parallel, and tension gash styles, dominantly on the west limb of the main anticline. The tension gash style is parallel to the orientation of the Hong Kong System. While veining is strongly developed, the grades returned at Lasagne were low, with the best result being 0.47 g/t Au. It was noted that the veins are quartz- rich and have a lower sulphide content than those that carry gold further south in the vein systems in Mount Bonnie Formation. - The 1989-91 drilling program proceeded in five phases: - In June 1989, 25 RC holes were drilled for 2,428 m at targets from earlier grid soil BLEG sampling. In October 1989, an additional 26 RC holes for 2,600 m were drilled, focusing on optioned leases to assist with exercise decisions, as well as infill at "Strawberry Pastry" (later renamed Macau?), Hong Kong, and a southern extension of Hong Kong at the time called "Toothpaste". - Diamond drilling in 1990 of 608 m in holes SHDH001 to SHDH007 at Hong Kong and the main anticline. The best intersection was in SHDH001 at Hong Kong, where 30 m @ 1.82 g/t Au was intersected between 67 m and 96 m. - Drilling of RC holes SHRC052 to SHRC067 hit individual intersections of significance at Main Lode, Middle Lode and Hong Kong, while four holes drilled at Lasagne were unsuccessful. - In 1991, drilling of RC holes SHRC068 to SHRC078 (863 m), then later a second program drilled SHRC079 to SHRC087(688m). - Diamond drilling in 1991 consisted of four holes, SHDH008 to SHDH010 (775 m), which were extensions of SHRC077, SHRC072, and SHRC078 respectively; and the 50 m vertical HQ hole, RM001, to obtain samples for metallurgical test work from the main lens of the Hong Kong sheeted vein system. - Billiton completed a column leaching test on the presumably oxidised crushed core from hole RM001, which produced a recovery of 73% of Au over 83 days, with 50% recovery in the first 6 days. - Billiton also reinterpreted the resource distribution and re-estimated the resource based upon their exploration. - In May 1991, Billiton were able to purchase 100% of the Union Reefs Project (MLN1109) and appear to have withdrawn from their other joint ventures with Pegasus at Mount Todd and with Ross Mining at Spring Hill after this success at Union Reefs. - In March 1992, Ross Mining NL reached agreement to purchase Shell's 50% in Spring Hill and finalised the agreement on 3rd August 1992. Ross Mining then proceeded to explore the Spring Hill Project in their own right. In the remainder of 1992, Ross Mining compiled the Billiton data and produced an updated Mineral Resource estimate on the Hong Kong Sheeted Vein Resource (Indicated and Inferred resources of 3.4 Mt at 1.5 g/t Au for 158 k Oz Au, not constrained by pit optimisation shells). - Ross Mining conducted an active exploration program on the Spring Hill titles during 1993 and 1994. The first phase of this was detailed field checking, including mapping and sampling of selected portions of the project area based on the previous results to develop a detailed proposal for field work, accompanied by drilling



PC GOLD

Criteria	JORC Code explanation	Commentary
		of 13 RC holes, SHRC089 to SHRC101 for 1,287m in October 1993 to follow up early findings (Melville, 1994). - This resulted in Ross elevating the exploration intensity at Spring Hill in 1994, (Sheldon, Scrimgeour and Edwards, 1994). This work identified extensions to the Hong Kong Vein System, and new mineralised zones at Steve's Gully, Vein Heaven, and Zbonsky Trend, confirmed with RC drilling. Diamond drilling also extended the dimensions of the mineralised envelope along strike and to depth. The Hong Kong Zone was extended by 250 m to the north and 225 m to the south. - Following this program, the project moved to pre- feasibility studies in 1995, including water quality monitoring, environmental monitoring, metallurgical testwork, resource/ reserve estimations, scoping studies, and rehabilitation. - In the mid- 1990s Ross Mining was acquired by Placer Dome. All titles were surrendered on 12th March 2001. - During 2003, the subsequent owner of the Project, Tennant Creek Gold (NT) Pty Ltd, commissioned McDonald Speijers to undertake a first pass economic assessment of the mineralisation and to create a preliminary pit design for the Hong Kong, Main, Middle and East Zones. - In 2007 Western Desert Resources Limited (WDR) acquired the project from Tennant Creek Gold (NT) Pty Ltd. - In mid-2011 WDR Gold entered into a joint venture agreement with TM Gold Pty Ltd (a subsidiary of Thor Mining PLC) for a 25% share in the project. TM Gold subsequently purchased 100% of the project. Thor Mining completed DD drilling, metallurgical testwork, a high-resolution aeromagnetic survey and screen fire assay testwork. - Thor commenced a divestment process to private equity firm, PC Gold Pty Ltd in late 2015. - PC Gold has since conducted significant brown field exploration drilling and provided new significant intersections which have been used for updating the mineral resource.
Geology	<i>Deposit type, geological setting, and style of mineralisation.</i>	- The Spring Hill Project is in the Central Domain of the Pine Creek Orogen (PCO), most recently described in detail by Ahmad and Munson (2013). The stratigraphy at Spring Hill falls within the South Alligator Group and Finnis River Group of the Cosmo Supergroup, in greenschist facies metamorphosed sediments, which are isoclinally folded along north- west trending axes in an embayment with lobes of the Cullen Batholith to the north- east and south-west. The main anticline at Spring Hill plunges at a moderate angle to the southeast. - Spring Hill also falls within the Pine Creek Shear Zone, a north-west / south- east trending strike- slip fault system that follows the same embayment between the Cullen Batholith lobes and appears to have been reactivated multiple times during and after granite emplacement. The Pine Creek Shear Zone is most likely a major control on gold mineralisation. The bulk of discovered mineralisation at Spring Hill has been deposited in structures in the Mount Bonnie Formation of the South Alligator Group. - These structural events controlling the distribution of gold mineralisation in and near the Pine Creek Shear Zone deposits most commonly follows a pattern of association with fold structures, in particular anticlines, in ferruginous quartz vein zones with a variety of structural controls. Spring Hill is one of the group of deposits in and around the Pine Creek Shear Zone that share similar characteristics.
Drill hole Information	<i>A summary of all information material to the understanding of the</i>	Tabulation of recent drillholes is contained in the IPO Prospectus, Supplementary Prospectus and subsequent ASX Release. The data



Criteria	JORC Code explanation	Commentary
	exploration results including a tabulation of the following information for all Material drill holes: ○ easting and northing of the drill hole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	for holes relevant to this release have already been previously published. • For the sake of completeness, the following background information is provided in relation to the drill holes. • Easting, Northing and RL of the drill hole collars are in the coordinates of MGA94 Zone 52. • Dip is the inclination of the hole from the horizontal. For example, a vertically down drilled hole from the surface is -90°. Azimuth is reported in magnetic degrees as the direction toward which the hole is drilled. • Down hole length of the hole is the distance from the surface to the end of the hole, as measured along the drill trace. Depth is the distance down the hole as measured along the drill trace. Intersection width is the downhole distance of an intersection as measured along the drill trace. • Drill hole length is the distance from the surface to the end of the hole, as measured along the drill trace.
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• Reported drill intercepts are length-weighted averages of gold grades over contiguous intervals above a nominal lower cut-off grade of 0.3 g/t Au, allowing for up to 3 metres of internal dilution below cut-off. • High-grade intervals are reported within broader mineralised zones where appropriate. • No top-cut has been applied to the reported intercepts. • Metal equivalent values are not used.
Relationship between mineralisation widths and intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	• Most of the drill holes contained within the drilling database that are material to the July 2026 MRE (as reported in the IPO Prospectus, Supplementary Prospectus and subsequent ASX Releases) were drilled at right angle to the mineralisation at the Spring Hill deposit. The majority of holes were drilled at -60° angle to the local grid easting providing intersections normal to the mineralisation.
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	• Maps and sections are included in the body of this report as deemed appropriate by the Competent Person.
Balanced reporting	• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	• All results above 0.5 g/t Au lower cut-off or 1 g/t Au have been reported in previous public releases by PC Gold.



PC GOLD

Criteria	JORC Code explanation	Commentary
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No other exploration data is considered meaningful or material in the context of this report and its exclusion does not detract from the understanding of this report.
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	- Exploration programs targeting the infill and extension of known mineralisation are presently underway. - In addition, drill testing of the exploration prospects of Lasagne, Steve's Gully, Vein Heaven and Eastern zone is advancing. - Appropriate plans and an outline of ongoing works are included in the body of this report.