

North Kalgoorlie Hub, WA – Drilling Update

High-grade Lakeview extension, Sovereign underground permitted, and excellent metallurgy results.

- Ongoing growth drilling at the Comet Vale Gold Project in WA (part of Gorilla Gold's 1.2Moz 3.7g/t Au North Kalgoorlie Hub) has significantly expanded Lakeview mineralisation:
 - **7.0m @ 12.6g/t Au from 392.7m** in LVEX173, growing high grades at depth
- The **final permit** at the **Sovereign Deposit** (410,000 oz 4.2 g/t Au and growing) to allow underground mining has been received, in line with Gorilla's strategy to **derisk project pipelines** alongside **growth**.
- **Excellent metallurgical test work** results using a **coarse grind size** of 150 microns from the Comet Vale Project have been received across all deposits:
 - **94.6% Average gold recovery from gravity and leach extraction** after 48hr leach from **18 samples** from representative lithologies and grades across **Sovereign, Cheer and Lakeview** deposits.
 - **42.3% average gravity recoverable** considered very positive for project economics.
 - **90.1% Average gold recovery after 8hrs** demonstrating very quick leach kinematics which is considered very positive for project economics.
- Drilling continues across the North Kalgoorlie Hub and Vivien Project targeting resource growth across multiple prospects.
- **Drilling is ongoing at the Vivien Project.**

Gorilla Gold Mines Ltd ('Gorilla', 'GG8' or 'the Company'), is pleased to report further significant drilling results, permitting update and metallurgical results from its 100%-owned Comet Vale Gold Project, located 100km north of Kalgoorlie in WA. The Comet Vale Project forms part of Gorilla's North Kalgoorlie Hub, which hosts current Mineral Resources of 1.2Moz @ 3.7g/t Au and is expanding rapidly with ongoing drilling.

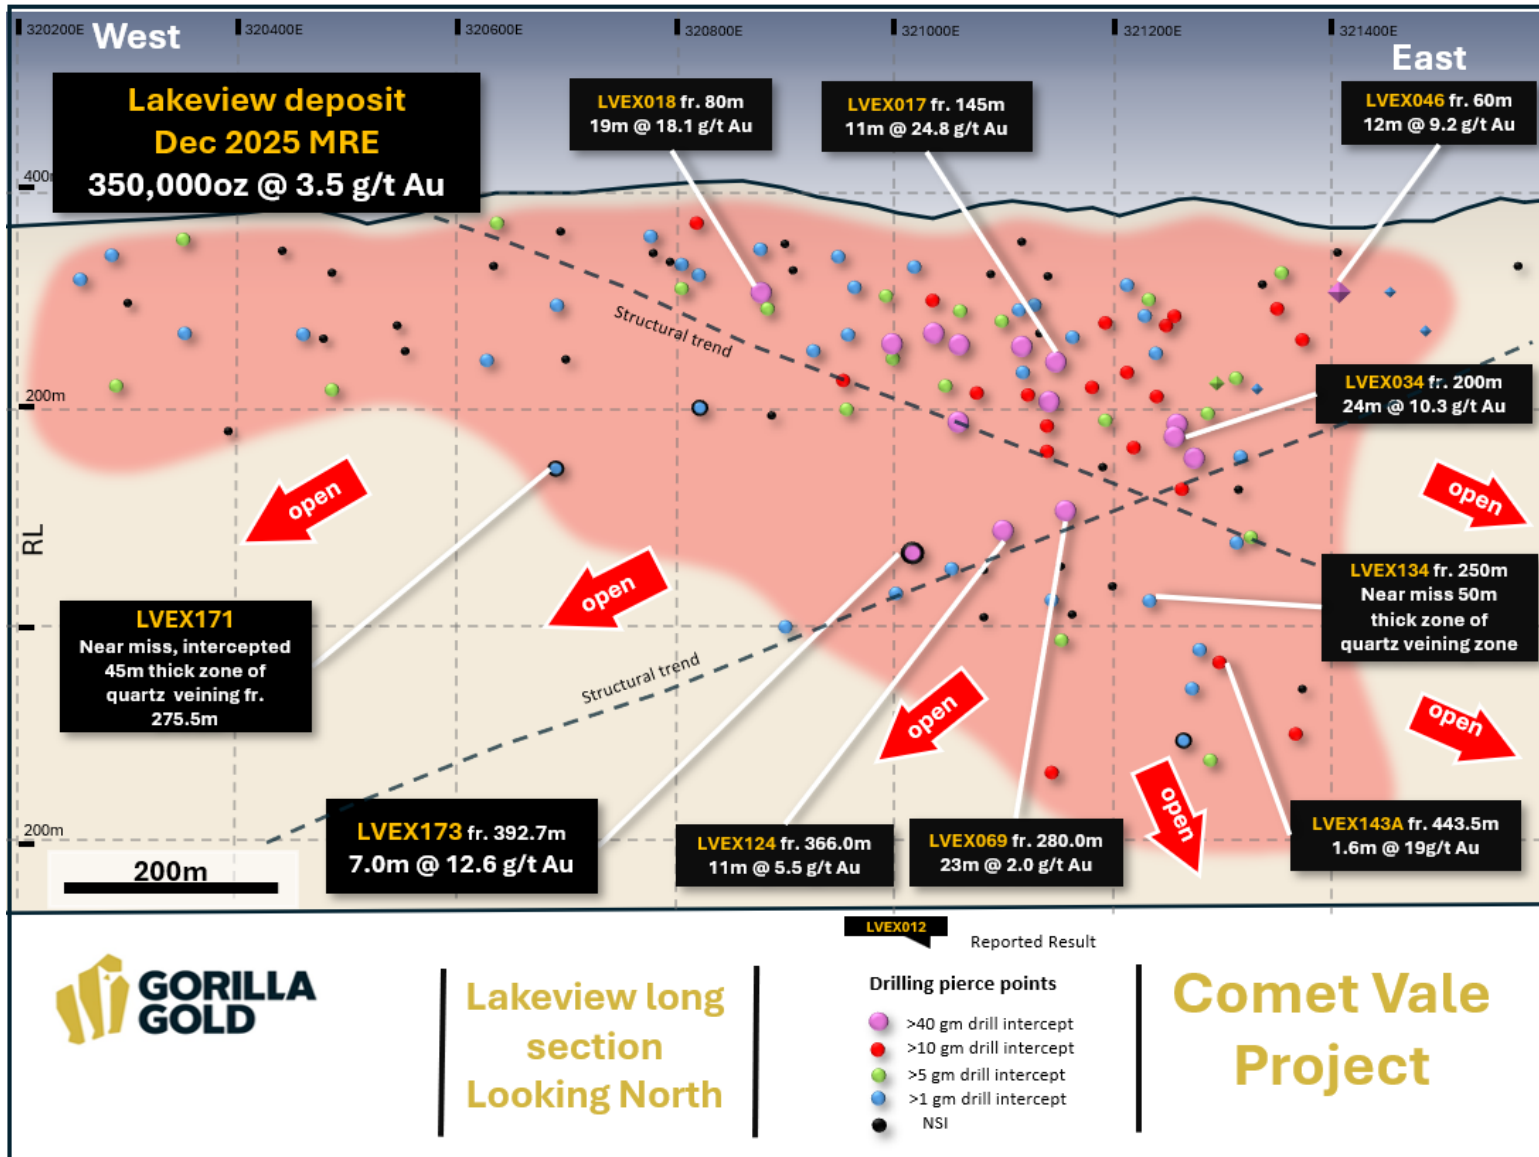


Figure 1. Lakeview long section

Gorilla Chief Executive Officer, Charles Hughes, commented:

"This is an exciting development at Lakeview, following on from the maiden resource for the Lakeview discovery in December 2025 Gorilla has been awaiting approvals to drill from positions that allow us to reach certain parts of the system that were previously inaccessible. These approvals have come through, and this drilling has demonstrated nice widths and grades at depth in LVEX173. We have also had a near miss in LVEX171, a large step out hole that is worth mentioning too, due to the sheer volume of quartz veining in that hole, we think strong mineralisation is close by."

"This all demonstrates that Lakeview is open at depth and with more drilling Gorilla thinks it will be able to grow the resource base at this deposit."

"At the same time as undertaking this growth drilling Gorilla has been progressing with permitting and studies. This is to de-risk the project pipeline at the same time as growing the resource base."

"To this end the Sovereign Deposit, which was mined last in 2020 is now fully permitted for underground activities. The permitting story doesn't end here though, Gorilla continues to progress permitting across all projects."

"In addition to this permitting news, we have received further outstanding metallurgical test work results from the three deposits at Comet Vale currently in resource, also a key contributing item to de-risking the Project. The initial Lakeview metallurgical test work in 2025 demonstrated excellent and rapid recovery at a 80 micron grind size, this new test work at a coarser (150 micron) grind size has demonstrated consistent recoveries across not only Lakeview but all deposits at Comet Vale."

"This is exciting news for the Company, and what all our work across the North Kalgoorlie Hub is designed to achieve – not simply to extend known deposits, but to improve our understanding of these mineralised systems, identify new opportunities for growth and de-risk the project. Drilling is continuing at pace across the North Kalgoorlie Hub, with the rigs also turning again at Vivien – positioning us for strong news-flow in the weeks ahead."

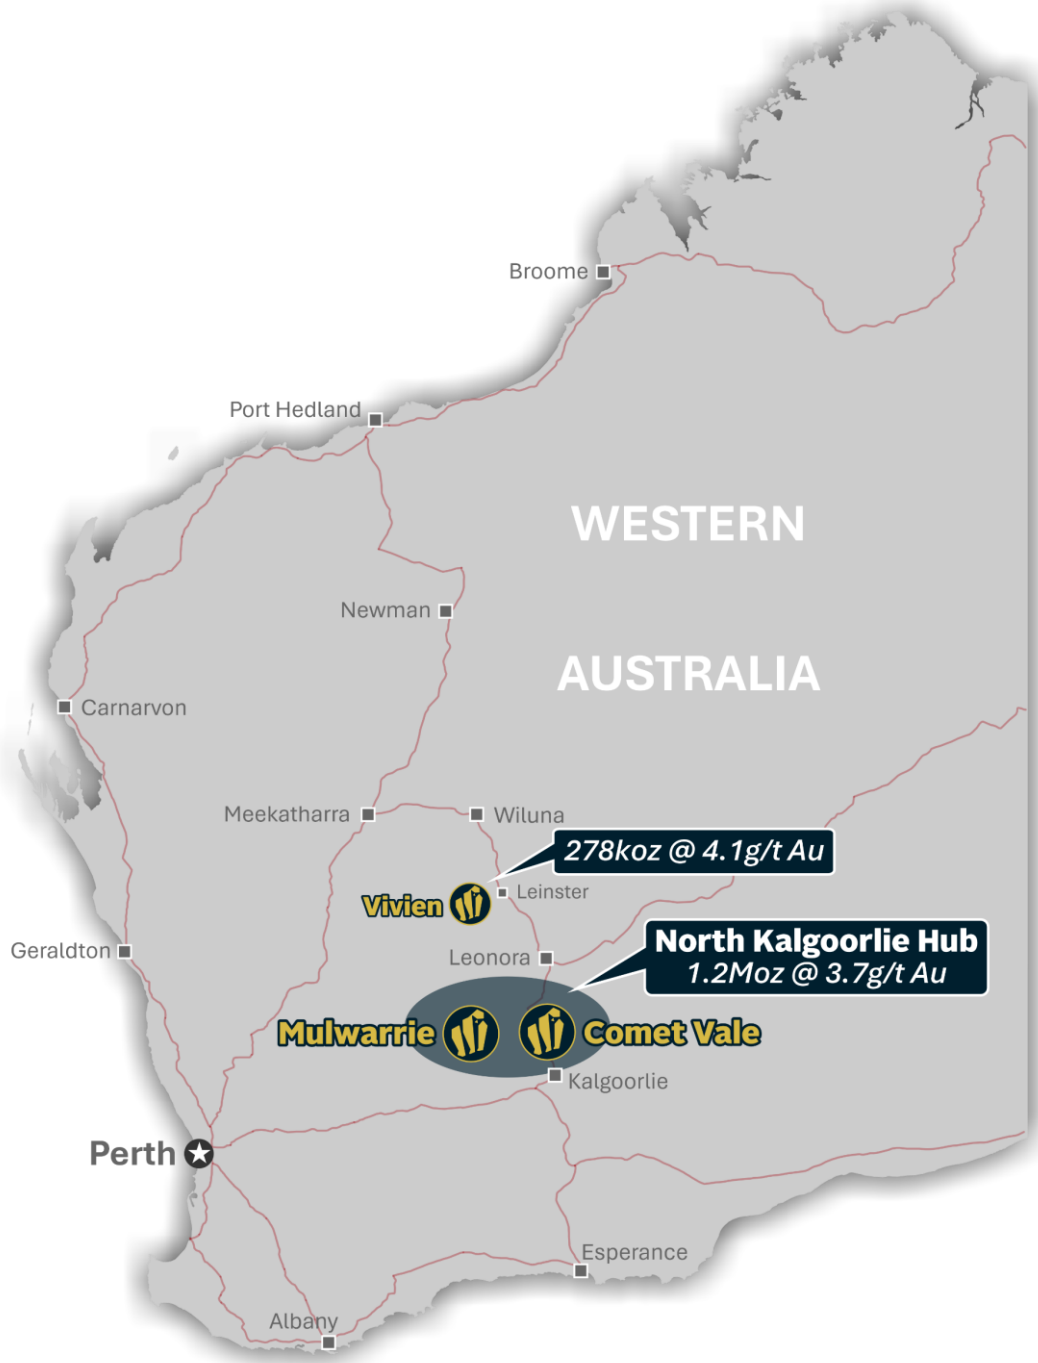


Figure 2. Location of GG8 Projects in WA

Growth and Exploration activities at The North Kalgoorlie Hub

The North Kalgoorlie Hub has a resource base of 1,200,000oz @ 3.7g/t Au and is historically under-explored, with more than 60km of high priority drill targets. The Hub comprises the Comet Vale and Mulwarrie Projects, both on granted Mining Licences and close to milling and transport infrastructure.

Gorilla Gold added >1,000,000oz to the North Kalgoorlie Hub's resource base in 2025 by progressively drilling its pipeline of exploration targets.

Gorilla has an aggressive strategy to **Discover** further gold resources, **Define** these resources and **Develop** the project.

The Comet Vale Project has a Mineral Resource Estimate of 0.86Moz @ 3.7g/t Au and has delivered historical gold production of >200koz @ >20g/t Au, with underground mining operations occurring as recently as 2020.

The Comet Vale Project lies within granted Mining Leases, adjacent to the Goldfields Highway, in a region with multiple operational gold mills within a 100km radius. The Company has identified a 10km by 3km zone of interrelated structural deformation and mineralisation zones, within which the Sovereign shear-zone, King Kong shear-zone, and the Silverback shear-zones are situated.

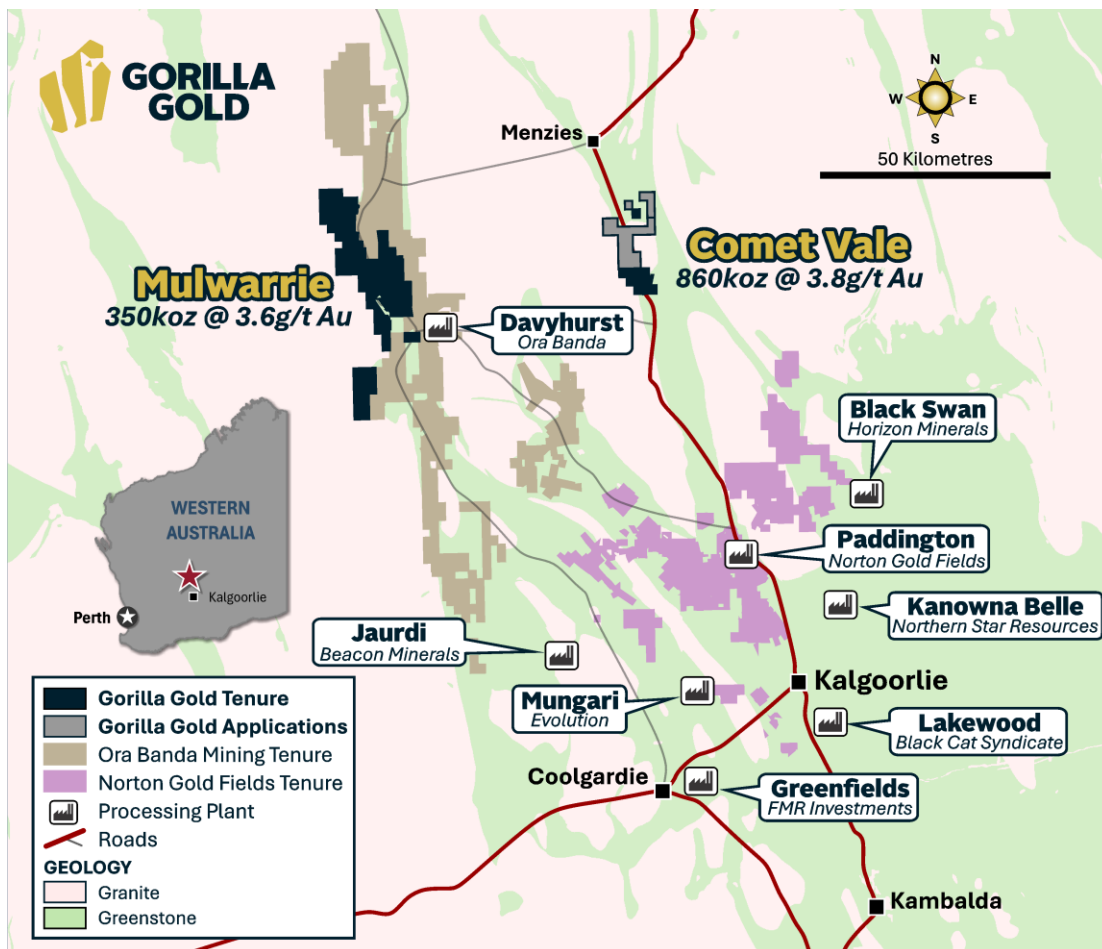


Figure 3. Location of Kalgoorlie North Hub, showing Mulwarrie and Comet Vale Projects.

Growth drilling at the Lakeview deposit continues to intersect high grade mineralisation

Drilling targeting mineralisation growth at the Lakeview deposit has intersected intercept high grade gold mineralisation.

Mineralisation at Lakeview is hosted within quartz veins associated with pyrrhotite-chalcopryrite-, often with visible gold.

Mineralised zones form within a major shear zone developed within ultramafic lithologies close to the margins of a major granitoid intrusion.

LVEX173 returned classic Lakeview style quartz veining with pyrrhotite-chalcopryrite within amphibole biotite altered ultramafic stratigraphies. LVEX171 which was drilled 350m west of LVEX173 was notable for the very large veining and alteration package with lower grade gold values intersected which is suggestive of a near miss in that vicinity.



Figure 4. Core photo of LVEX173 showing mineralised intercept from 392.7m, 7.0m @ 12.6 g/t Au

Permitting update from Sovereign

Permitting is ongoing for all projects to de-risk the project pipeline at the same time as growing the resource base. At the Comet Vale Project various pieces of permitting are underway to allow a pipeline of project development at each of the resource bases once a critical resource mass is reached. The Sovereign deposit is now permitted to the extent where underground activities can resume when a critical resource mass and advanced study work at the deposit is reached.

Metallurgical test work update from Comet Vale

Following on from positive metallurgical test work from Lakeview reported in 2025, Gorilla has undertaken variability leach test work on samples from the Sovereign, Lakeview and Cheer deposits (Tables 1 and 2).

A total of 18 samples has been composited from leftover photon assay jars, crushed, ground to p100 150micron, subjected to a bench top gravity concentrator with a mercury amalgam and cyanide leach well test work by ALS Metallurgy Perth.

A relatively coarse grind size of 150 micron has been selected initially and samples of varying grades from different host rocks with different mineral assemblages, to represent the spectrum of potential future mill feed from the project.

Test work has demonstrated high gravity recoverable gold and leach extraction. Average gravity extraction is 42.3% (range 16.8%-73%), average total extraction after a 48hr leach 94.6% (range 83.4%-98.2%).

Given the relatively coarse grind size that has been chosen for this initial test work, gravity and cyanide extraction rates could be even higher with finer grind sizes, and this will form part of the next phase of metallurgical test work; understanding the effects of different grind sizes on gold recovery rates.

Reagent consumption was higher in one sample from Lakeview in response to copper bearing chalcopyrite presence. These consumption numbers are in line with industry standards in the goldfields and given the majority of sampling has no demonstrable increase in reagent use is not thought to be an issue, no deleterious elements have been recorded from this sampling.

Comet Vale Deposit	Test ID	Grind Size P100 (µm)	Head Au Grade (g/t)		Au Extraction (%)						Tail Au Grade (g/t)	Reagents (kg/t)	
			Assay	Calc.	Grav	2-hr	4-hr	8-hr	24-hr	48-hr		NaCN	Lime
Lakeview	VF1298	150	0.93/0.83	0.99	1.01	52.59	77.38	89.26	94.96	94.96	0.05	1.52	17.20
Lakeview	VF1299	150	4.29/4.31	3.45	16.83	33.51	54.89	78.82	91.91	93.47	0.23	2.38	14.48
Lakeview	VF1300	150	1.96/1.86	1.72	34.30	88.79	91.12	93.31	95.35	95.35	0.08	0.58	3.30
Lakeview	VF1301	150	12.8/11.9	13.10	47.25	80.75	86.57	92.31	97.67	98.17	0.24	0.61	2.32
Lakeview	VF1302	150	1.29/1.17	1.59	28.97	82.64	90.22	92.59	94.80	96.85	0.05	0.68	2.84
Lakeview	VF1303	150	3.23/4.00	3.68	41.60	75.20	83.92	92.10	95.92	95.92	0.15	1.05	5.98
Lakeview	VF1304	150	0.39/0.35	1.34	57.51	86.15	92.14	97.76	97.76	97.76	0.03	1.11	2.84
Lakeview	VF1305	150	0.77/0.52	0.88	62.45	86.63	91.19	91.19	91.19	94.89	0.05	0.94	3.48
Cheer	VF1306	150	3.58/3.82	3.59	51.26	84.50	91.21	94.35	96.31	97.21	0.10	1.04	3.04
Cheer	VF1307	150	0.73/1.32	1.01	33.61	84.16	88.13	88.13	91.60	91.60	0.09	0.68	2.22
Cheer	VF1308	150	0.67/0.71	0.69	17.49	79.57	85.41	85.41	90.53	90.53	0.07	1.01	2.16
Cheer	VF1309	150	4.82/3.32	4.32	73.14	91.88	93.74	94.61	96.24	96.99	0.13	0.60	1.98
Cheer	VF1310	150	3.20/3.44	4.40	34.08	88.29	89.99	91.48	93.36	92.84	0.32	1.20	3.48
Cheer	VF1311	150	14.0/10.1	10.12	63.51	90.03	93.59	95.08	96.47	96.79	0.33	0.60	8.30

Sovereign	VF1312	150	1.01/0.91	1.35	28.06	75.24	78.20	80.98	80.98	83.39	0.23	0.60	2.46
Sovereign	VF1313	150	0.94/0.63	0.85	63.67	88.79	88.79	88.79	92.93	92.93	0.06	0.59	4.52
Sovereign	VF1314	150	6.17/5.73	5.51	58.85	80.52	85.62	89.03	94.13	97.09	0.16	1.09	4.62
Sovereign	VF1315	150	2.22/5.54	1.70	47.73	77.85	84.94	87.16	93.36	95.29	0.08	0.87	2.94

Table 1. Variability leach test work data.

Met sample ID	Deposit	Holeid	Hole type	Sample type	From	To	Interval	Lab Grade	Est. weight
VF1298	Lakeview	LVEX129	DD	photon Jars	506.0	515.0	9.00	1.39	4.5
VF1299	Lakeview	LVEX124	DD	photon Jars	366.0	367.0	1.00	3.95	1
VF1300	Lakeview	LVEX036	RC	photon Jars	155.2	160.0	4.80	3.21	2.5
VF1301	Lakeview	LVEX097	RC	photon Jars	71.0	72.0	1.02	2.19	1
VF1302	Lakeview	LVEX030	RC	photon Jars	138.0	144.0	6.00	13.87	3
VF1303	Lakeview	LVEX066	DD	photon Jars	166.5	168.0	1.50	3.99	1
VF1304	Lakeview	LVEX095	RC	photon Jars	100.3	102.0	1.70	0.99	1
VF1305	Lakeview	LVEX107	RC	photon Jars	166.0	171.0	5.00	1.06	2.5
VF1306	Cheer	CVEX044	DD	photon Jars	64.5	67.0	2.50	3.92	2.5
VF1307	Cheer	CVEX069	RC	photon Jars	204.0	206.0	2.00	1.00	1
VF1308	Cheer	CVEX070	RC	photon Jars	256.0	258.0	2.00	0.69	1
VF1309	Cheer	CVEX071	RC	photon Jars	170.0	172.0	2.00	4.40	1
VF1310	Cheer	CVEX071	RC	photon Jars	176.0	178.0	2.00	2.37	1
VF1311	Cheer	CVEX102	RC	photon Jars	96.0	101.0	5.00	11.80	2.5
VF1312	Sovereign	STEX038	RC_DDT	photon Jars	655.55	658.00	2.45	0.99	1.50
VF1313	Sovereign	STEX057	RC	photon Jars	151.00	155.00	4.00	1.23	2.00
VF1314	Sovereign	STEX077	RC	photon Jars	198.00	204.00	6.00	9.07	3.00
VF1315	Sovereign	STEX087	DD	photon Jars	298.48	299.55	1.07	1.87	2.00

Table 2. Variability leach test work sample information.

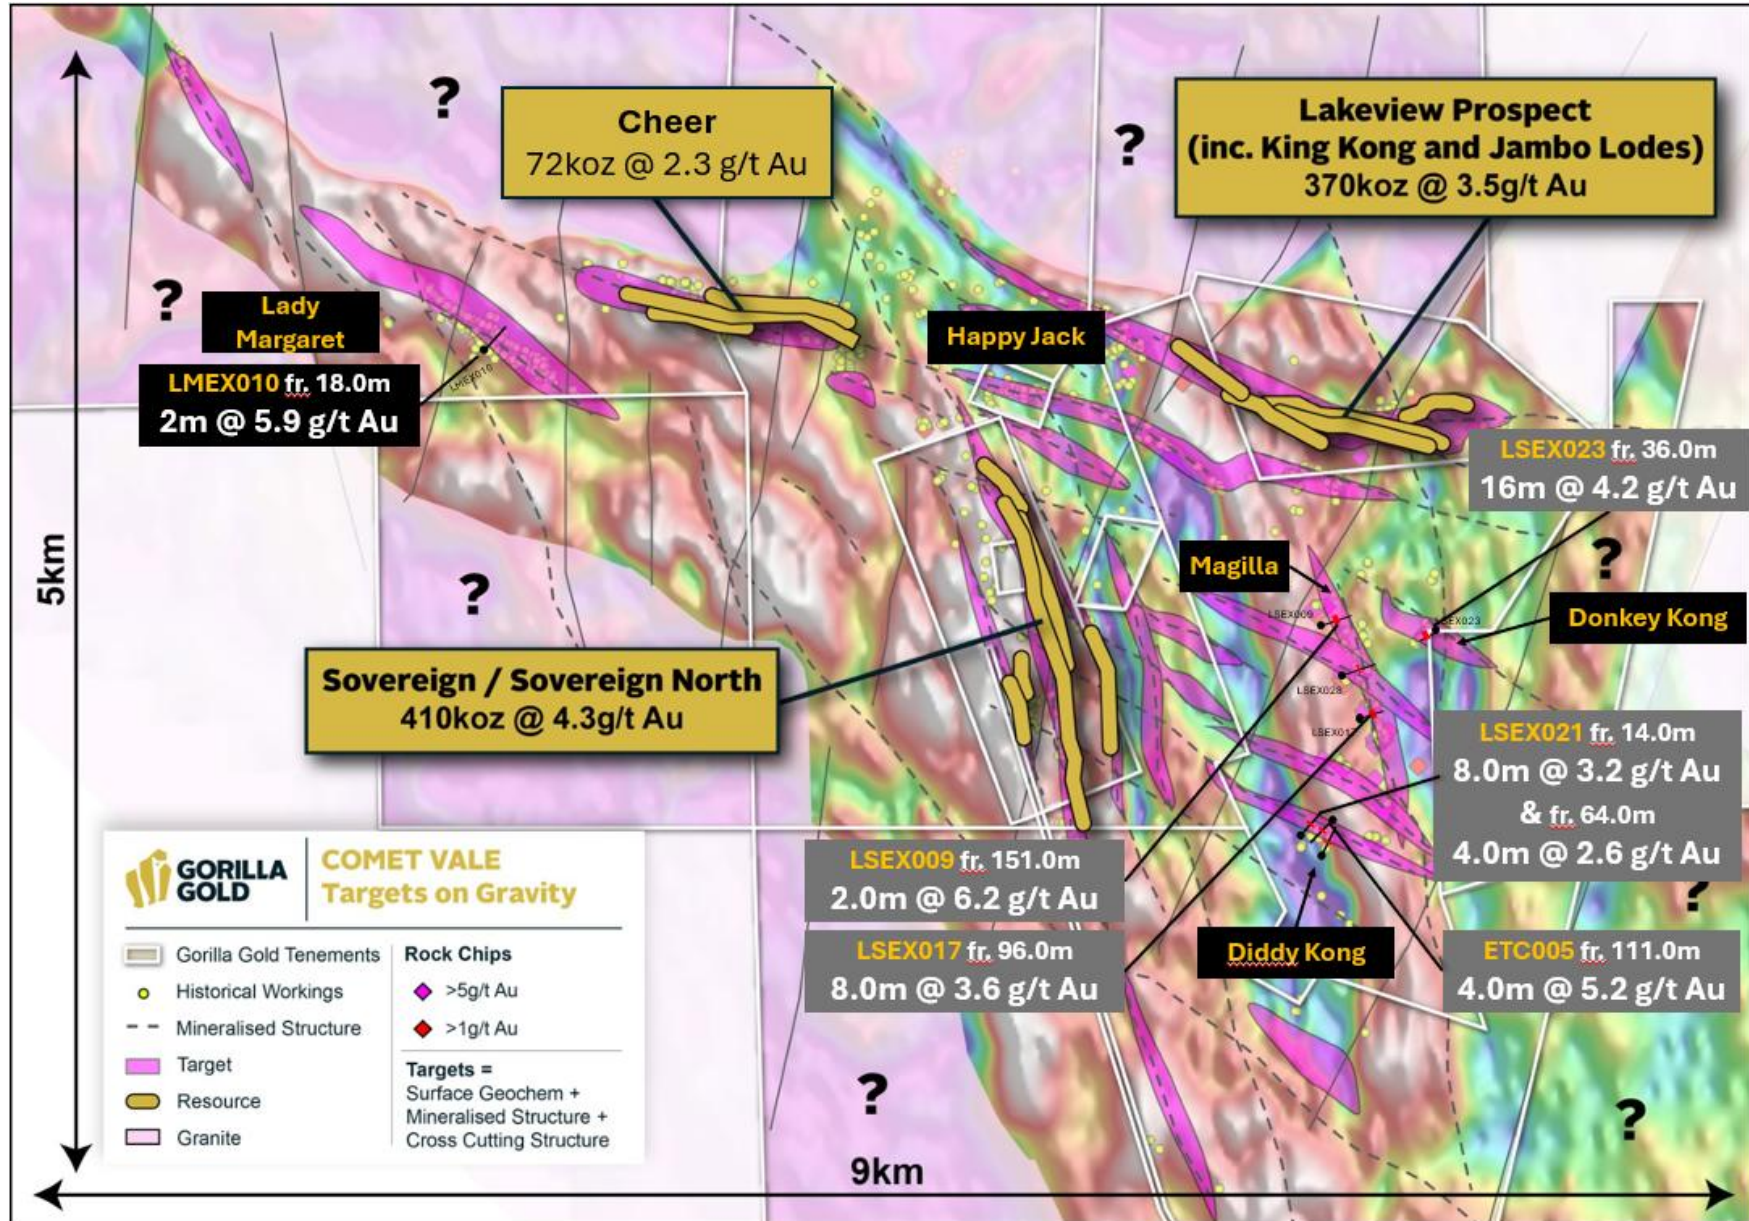


Figure 5. Comet Vale targets and resource areas 2026

Next Steps at North Kalgoorlie Hub

Multiple rigs are drilling at the North Kalgoorlie Hub and Vivien Projects, targeting multiple high priority growth targets.

Results from this drilling are expected on an ongoing basis, with the turnaround time from assay labs currently slower than usual due to higher demand for laboratories within the industry.

Other Definition work, including engineering, geotechnical, metallurgical and hydrological studies, is ongoing, alongside Development work which at this stage is focused on project permitting.

This announcement has been authorised and approved for release by the Board.

Investor Enquiries

Charles Hughes
Chief Executive Officer
admin@gg8.com.au

Media Inquiries

Read Corporate - Nicholas Read
Mobile: (0419 929 046)
nicholas@readcorporate.com.au

Competent Person's Statement:

The information in this announcement relates to exploration and metallurgical results for the Comet Vale Project which Mr. Charles Hughes has reviewed and approves. Mr. Hughes is an employee of Gorilla Gold Mines Ltd, a professional geoscientist and a Member of the Australian Institute of Geoscientists. Mr. Hughes has sufficient experience relevant to the style of mineralisation and type of deposits under consideration, and to the activities which have been undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration results, Mineral Resources and Ore Reserves. Mr. Hughes consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

Specific exploration results referred to in this announcement were originally reported in the following Company announcements in accordance with ASX Listing Rule 5.7:

Title	Date
Sovereign Footwall Grows Beyond 1km	3 September 2026
High Grade Growth Results & Comet Vale Discovery Drilling	23 June 2026
High Grade Zone at Sovereign Grows	29 May 2026
Fourth Gold Discovery in Three Weeks at Comet Vale	11 May 2026
High-Grade Discovery at Sovereign	4 May 2026

New Discoveries at Comet Vale	27 April 2026
High Grade Hits from Comet Vale	8 April 2026
Thick Drilling Intercepts at Comet Vale	23 February 2026
Comet Vale POW's Granted, Soil Targets and Extra Tenure	12 February 2026
Major Resource Upgrade for Comet Vale	15 December 2025
Comet Vale Drill Results and MRE Timing Update	11 November 2025
High Priority Surface Geochem Targets – Comet Vale / Mulwarrie	17 October 2025
Key Leadership Appointments Drive Growth & Comet Vale Update	9 October 2025
Camp Scale Gold System Emerges at Comet Vale	8 September 2025
High-Grade Discovery at Happy Jack	21 August 2025
Bonanza Grades from Sovereign	19 August 2025
Comet Vale Drilling Update	14 August 2025
Results from Initial Metallurgy Testwork at Lakeview	5 August 2025
Lakeview Drilling Update	7 July 2025
Update for Comet Vale and Mulwarrie	2 July 2025
Lakeview Update	6 June 2025
Parallel Structure Discovered at Lakeview	19 May 2025
Lakeview Update	8 May 2025
Lakeview Extended 125m Along Strike	17 April 2025
Further Intercepts from Lakeview Prospect	21 March 2025
Further High-Grade Hits from Lakeview & Sovereign Prospects	17 March 2025
Lakeview High-Grade Intercepts Grow Mineralisation	28 February 2025
Gold Intercepts from New Prospects at Comet Vale and Vivien	24 February 2025
Maiden Gold Drilling Results at Cheer	6 November 2024
LRL Set to Acquire Vivien Project and 100% of Comet Vale	17 July 2024
Comet Vale Mineral Resource Estimate	11 April 2023

The Company confirms that it is not aware of any information or data that materially affects the information included in the said original announcements and the form and context in which the Competent Persons' findings are presented have not materially modified from the original market announcements.

Current Mineral Resource Statement for the Comet Vale Project:

Comet Vale Mineral Resource estimate						
		Resource category	Cut-off	Au		
			grade	Tonnes	Grade	Au
			(Au g/t)	(kt)	(Au g/t)	(koz)
All	OP	Indicated	0.5	1,300	4.3	180
		Inferred		2,400	2.3	180
		Sub Total		3,700	3.0	350
	UG	Measured	1.1			
		Indicated		400	3.7	47
		Inferred		3,200	4.5	460
		Sub Total		3,600	4.4	510
	ALL	Measured				
		Indicated		1,700	4.1	220
		Inferred		5,600	3.5	640
		Total Resource		7,300	3.7	860

The Company confirms that it is not aware of any new information or data that materially affects the information as previously released on 15 December 2025 and all material assumptions and technical parameters underpinning the estimate continue to apply and have not materially changed.

Current Mineral Resource Statement for the Mulwarrie Project:

Mulwarrie Mineral Resource Estimate Summary (0.5g/t cut-off Open pit, 1.1 g/t Underground)			
Category	Tonnage (Mt)	Au Grade (g/t)	Au Ounces
Indicated	1.3	2.8	110,000
Inferred	1.8	4.2	240,000
Total	3	3.6	350,000

The Company confirms that it is not aware of any new information or data that materially affects the information as previously released on 4 August 2025 and all material assumptions and technical parameters underpinning the estimate continue to apply and have not materially changed.

Current Mineral Resource Statement for the Vivien Project:

Vivien Mineral Resource Estimate Summary (0.5g/t cut-off Open pit, 1.1 g/t Underground)			
Category	Tonnage (Mt)	Au Grade (g/t)	Au Ounces
Indicated	0.15	4.9	24,000
Inferred	1.95	4.1	254,000
Total	2.10	4.1	278,000

The Company confirms that it is not aware of any new information or data that materially affects the information as previously released on 15 April 2025 and all material assumptions and technical parameters underpinning the estimate continue to apply and have not materially changed.

APPENDIX 1 NEW COLLAR INFORMATION THIS RELEASE

Hole ID	Depth From	Interval (m)	Grade (g/t Au)
LVEX173	392.7	7.0	12.6
LVEX173	353.0	0.6	1.2
LVEX173	357.2	1.0	0.8
LVEX173	362.8	1.0	0.4
LVEX173	367.0	1.0	0.4
LVEX170	75.2	0.5	0.6
LVEX170	430.0	0.8	1.3
LVEX170	433.8	0.5	0.8
LVEX171	275.5	0.6	0.5
LVEX171	289.4	0.7	1.3
LVEX171	294.6	5.2	0.6
LVEX171	321.1	0.6	0.6
LVEX172	266.4	0.3	0.5
LVEX172	270.8	0.3	1.4
LVEX172	275.4	0.3	0.4

Prospect	Hole ID	Depth	Type	Grid	East	North	RL	Dip	Azimuth
Lakeview	LVEX170	456.6	DD	GDA94Z51	321362.0	6685433.0	361.0	63.0	197.0
Lakeview	LVEX171	528.8	DD	GDA94Z51	320761.0	6685200.6	408.1	64.8	357.2
Lakeview	LVEX172	366.3	DD	GDA94Z51	320808.0	6685149.2	409.2	50.7	7.7
Lakeview	LVEX173	453.3	DD	GDA94Z51	321054.2	6685545.1	371.5	44.2	186.9

APPENDIX 2 JORC TABLES

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Comments
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). - In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	- RC drilling - samples collected as 4m composites and in areas where interesting lithology, alteration, mineralisation or veining was encountered, 1m splits were taken. Composite samples are collected from samples piles, 1m splits are taken for every metre from the cyclone with duplicate samples taken at the instruction of the field geologist from the second chute on the cone. - DD drilling has samples collected as half core in intervals between 0.3-1m based on lithology. - Samples collected by GG8 field crew and submitted to ALS Laboratory in Kalgoorlie, WA. All samples are considered to be representative for the manner in which they are used. - The samples were analysed using the photon assay method which uses a 0.5kg sample and requires minimal handling. The samples are riffle split at the lab and crushed to 80% passing 2mm to ensure homogeneity as uniform sample distribution is important to a quality analysis. - MET - individual photon assay samples were composited to form the met sample. The entirety of the met sample was ground to p80 80micron, this sample was riffle split in half with one half reserved for assay and one half used for test work. For the assay the 500g split was further split to produce a 50g charge for FA, the remainder was used directly in the test work SOILS - Soil samples were collected by Gorilla Gold and contractors (OZEX Exploration Services and Omni GeoX) personnel on a 400x200m across Mulwarrie (Mulline) and 200x40m, 200x20m and 100x20m grid across Comet Vale. - Samples were collected by digging a 30x30x10cm pit, homogenising and then sieving and collection of a dry 250g -2mm sample. - Samples were submitted to LabWest (Perth) for Ultra Fine Fraction (UFF) separation (<2µm) and analysis by Aqua Regia ICP-MS and ICP-OES for determination of Au and 51 elements.

Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	RC drilling was completed by several contractors using multiple modern RC rigs capable of significant drill depths. RC drilling uses a standard 5.5in bit and an auxiliary booster capable of 900psi, sufficient to keep sample dry at most depths. DD drilling was completed by contractors using multiple modern DD rigs. All drill rigs utilised by GG8 are industry best standard.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	RC sample recovery was qualitatively assessed by the field geologists. Good recoveries were had. DD recovery measured actual core length between drillers blocks to the nearest cm. Sample weights are recorded by the laboratory and average 3kg.
	Measures taken to maximise sample recovery and ensure representative nature of the samples	Sample depths were cross-checked regularly. The cyclone was regularly cleaned to ensure no material build up and sample material was checked for any potential downhole contamination. The drilling sample recoveries/quality are acceptable and are appropriately representative for the style of mineralisation.
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	No obvious sample recovery biases or biases related to loss or gain of fines have been identified.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	- Logged for geology on the 1m intervals with chips washed and stored in chip trays by the geologist. Logging was inputted directly into the onsite laptops using suitable Company logging. - DD core stored in trays with every metre logged. - Logging is of a qualitative nature.
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	RC chips and DD were logged for lithology, colour, weathering, texture and minerals present. Structural measurements and geotechnical data were recorded on DD core
	The total length and percentage of the relevant intersections logged.	N/A
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all cores taken.	Core is sawn with half cores taken for assay
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	- RC drilling single 1 metre splits were automatically taken at the time of drilling by a cone splitter attached to the cyclone. 4m composite samples were taken from sample piles. Samples have been dry. Samples are then riffle split at the lab into 0.5kg samples and crushed to 2mm prior to photon assay with a particle size distribution test to ensure 80% passing the 2mm threshold. SOILS - Soil samples were submitted to LabWest in Perth where the -2µm particle size fraction is extracted using the Ultra Fine method developed by CSIRO and LabWest.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	- The technique was appropriate for the work undertaken. During RC logging samples that showed mineralisation, veining or alteration had 1m split samples collected. 1m split samples are later taken from where 4m composites show >0.2g/t gold anomalism. During DD logging any sulphide veining or alteration were sampled. SOILS - The Ultra Fine Fraction sampling and analysis has been proven to be an effective technique for gold exploration across a wide range of regolith types.
	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	QAQC reference samples and duplicates were submitted by GG8. In house standards and blanks were also inserted by ALS.

For personal use only

		SOILS Sub-sampling is conducted by LabWest using their proprietary UFF method.
	Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	1m samples are automatically bagged from the cyclone, field duplicates are taken from a second chute off the splitter. DD duplicates are taken by sampling quarter core over the same interval as the primary sample. SOILS - Every 50 samples a field duplicate is collected by digging a second pit within 2-3m of the original sample pit, homogenising and then sieving and collection of a dry 250g -2mm sample.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	- All RC samples are collected to approximately 1-5 kg. The sample sizes taken are appropriate relative to the style of mineralisation and analytical methods undertaken. DD sample size is appropriate. - Met sample size is appropriate for this stage of study. SOILS - Sample sizes are appropriate for the grain size of the material sampled.
	Quality of assay data and laboratory tests The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	- All samples were sent to ALS laboratory in Kalgoorlie. Photon Assay method has shown to provide quick turnaround times and high accuracy. - Met samples were subject to 50g Fire assays at ALS and are considered appropriate for this level of study SOILS - Samples were screened in the field to -2mm. LabWest then takes a sub-sample of <2µm material for analysis. - The UFF sample preparation was defined following a Research and Development project conducted under the direction of CSIRO. - Field duplicates are submitted and perform to internal GG8 standards.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	All analytical results from drilling listed are from an accredited laboratory using photon assay method with fire assay as a check method.
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	- Certified Reference Materials (CRMs) are included in each batch to ensure the reliability of the assay. These CRMs, such as OREAS254C, OREAS230, and OREAS241, are specifically chosen for photon assay to maintain quality standards and were evaluated against published certificates. The standard deviation was minimal for samples. Selected photon assays over a range of grades and from different parts of orebodies are umpire checked with Fire Assays and so far shows no material difference in reported grades. SOILS - Field duplicates at a frequency of 1:50 are submitted and performed to GG8 internal standards.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	- External verification has not been carried out, but values were checked against logging and photographs to ensure the intersected Au values are in line with logged alteration, mineralisation or veining. Significant intercepts have been verified by the Exploration Manager, the CEO and Principal consulting geologist. SOILS - Significant results are revisited with ground-truthing and follow-up sampling where appropriate.

	The use of twinned holes	No twinned holes at this stage as the project is still advancing.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Data was captured directly into specific geological logging software. Assay files have been sent directly from the lab to database manager to avoid operator errors. All physical sampling sheets are filed and scanned electronically and submissions to the lab checked to ensure that no samples are missing or incorrect IDs.
	Discuss any adjustment to assay data.	SOILS - Sample locations and track files are stored directly onto the sampler's GPS and downloaded for verification. Assay files have been sent directly from the lab to database manager to avoid operator errors. All physical sampling sheets are filed and scanned electronically and submissions to the lab checked to ensure that no samples are missing or incorrect IDs. - No adjustments were made to the assay data because none are needed.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	Samples were located using handheld Garmin GPS, the GPS is accurate within 3-5m.
	Specification of the grid system used.	All locations and maps quoted in this Report are using the GDA1994 MGA, Zone 51 coordinate system.
	Quality and adequacy of topographic control.	Topography based on detailed topographic surveys.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	Data spacing is varied.
	Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	SOILS - Data spacing is varied with sampling at 400x200m across Mulwarrie (Mulline) and 200x40m, 200x20m and 100x20m grid across Comet Vale. - Data spacing is sufficient for the Mineral Resources estimate, no Reserves have been estimated yet.
	Whether sample compositing has been applied.	Intercepts are aggregated based upon 0.5g/t Au cut-off grade and 4m of dilution material.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	The relationship between the drilling orientation and the orientation of mineralised structures is not considered to have introduced a sampling bias. Most holes have been drilled perpendicular to the main orientation of the interpreted mineralised zone.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	SOILS - Soil lines have been oriented perpendicular to interpreted structures and lithological contacts as appropriate in orogenic gold exploration. - No drilling orientation related sampling bias has been identified at the Project. Some orientation changes were made to historic holes, and the main structure was intersected at the interpreted depth.
Sample security	The measures taken to ensure sample security.	Samples were transported from the field to the lab by GG8 personnel or GG8's freight contractor.
		SOILS Samples were transported from the field to LabWest by GG8's freight contractor.
Audits reviews or	The results of any audits or reviews of sampling techniques and data.	GG8 undertakes continuous audits and reviews of all its field processes and results.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	Gorilla Gold Mines Ltd 100% owns the projects through its wholly owned subsidiaries. COMET VALE M29/35, M29/52, M29/85, M29/185, M29/186, M29/197, M29/198, M29/199, M29/200, M29/201, M29/232, M29/233, M29/235, M29/270, M29/321 Kakara Part A has been granted Native Title over the project area. The Company does not at present have any agreements with Kakara part A but are in the process of engagement. MULWARRIE M30/119, M30/145, E30/511, E30/512, E30/513, P30/1141, P30/1142, P30/1143. Marlinyu Ghoorlie has a Native Title claim over the project area. The Company has an existing agreement over the majority of the project area and is currently negotiating the inclusion of the additional tenements with Marlinyu Ghoorlie. VIVIEN M36/111, M36/292, M36/34, M36/61, M36/64, P36/1890 Tjiwarl has a Native Title claim over the project area. The Company does not at present have any agreements with Tiwarl but are in the process of engagement.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	No known impediments exist with respect to the exploration or development of the tenements.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	See previous announcements. In particular ASX announcement, 13 September 2024, Review of Historical Vivien and Comet Vale Databases and the Bardoc/Spitfire ASX announcement 19 March 2019, High-grade diamond drilling results at Mulwarrie confirm lode structures and pave way for resource upgrade.
Geology	Deposit type, geological setting and style of mineralisation.	COMET VALE & MULWARRIE & VIVIEN Archean orogenic gold mineralisation associated with major structures and mafic-ultramafic stratigraphy with intermediate intrusives adjacent to intracratonic monzogranites, gold mineralisation is associated with quartz veining, pyrrhotite chalcopyrite, galena, sphalerite, and amphibole-biotite-chlorite alteration.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length.	Tables reported in the announcement.

	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	No information material to the understanding of the exploration results has been excluded.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	- Assay results reported here have been length weighted. - No metal equivalent calculations were applied. - Cut off grades is 0.5g/t Au.
	Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	- All samples were 1m or 4m samples were reported as returned. - Compositing is based on a maximum of 4m internal dilution with a minimum cut off of 0.5g/t Au.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No weighting used.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results.	All samples reported are downhole width.
	If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	Mineralization is generally perpendicular to drilling orientation.
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	All intercepts are down hole lengths, true widths not yet determined.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Plans and sections are located in the body of the announcement.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All samples were reported for Au and their context discussed.

Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All other relevant data has been included within this report.
Further work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).	COMET VALE Additional soil sampling across the Comet Vale project is planned. Drilling is ongoing, refer to end of text for more comprehensive update. MULWARRIE Additional drilling and soil sampling across the Mulwarrie project is planned and drilling is scheduled to recommence in Q4 2025. VIVIEN Additional drilling across the Vivien Project is planned, refer to end text for more context.
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Supporting diagrams are all found in the body of the text.