

# ASX ANNOUNCEMENT

23 June 2025

## Mineral Resource Estimate upgrade paves way for Northern Silica Project PFS

- Updated Mineral Resource Estimate for the Si2 Deposit, with 187.5Mt of Measured Mineral Resource.
- 16% increase in total tonnage at Si2. Measured Mineral Resource increased from 49.5Mt to 187.5Mt, a 278% upgrade
- Total MRE has increased by 513% since 2021
- Timely upgrade further supports recent Major Project Status designation by Federal Government
- Improved geological foundation for upcoming PFS and mine planning
- PFS to consider 25 year life of mine operation supporting 3-5mtpa production

**Emerging silica sands developer, Diatreme Resources Limited (ASX:DRX)** announced today an updated Mineral Resource Estimate (MRE) for its Northern Silica Project Si2 Deposit (**Si2**), which forms part of the Company's broader three project silica sand portfolio in North Queensland. The upgraded estimate confirms the Northern Silica Project's Si2 Deposit as one of Australia's most significant undeveloped high-grade silica sand deposits, providing both scale and quality for future development.

The Si2 Deposit, located within the world-class Cape Bedford–Cape Flattery Dune Field, and immediately adjacent to the Port of Cape Flattery, is uniquely positioned to supply the booming demand for high-purity silica, especially for photovoltaic glass used in solar energy applications. The updated MRE significantly enhances the Company's geological confidence and positions Diatreme for its next phase of development and mine development pre-planning. The results of the MRE are provided in Table 1.

Diatreme's CEO, Neil McIntyre commented: *"This major Resource upgrade reinforces the outstanding potential of our Northern Silica Project. We've more than confirmed the scale and purity needed to support a long-life mining operation targeting photovoltaic silica markets. With permitting and testwork underway, and a PFS next on the agenda, we're building the foundations for an exciting new silica sand supply chain out of Cape York with decades of mine life."*

| Resource Category | Silica Sand<br>Mt | SiO <sub>2</sub><br>% | Fe <sub>2</sub> O <sub>3</sub><br>% | TiO <sub>2</sub><br>% | Al <sub>2</sub> O <sub>3</sub><br>% |
|-------------------|-------------------|-----------------------|-------------------------------------|-----------------------|-------------------------------------|
| Measured          | 187.5             | 99.24                 | 0.10                                | 0.14                  | 0.11                                |
| Indicated         | 42                | 99.15                 | 0.12                                | 0.16                  | 0.11                                |
| Inferred          | 43                | 99.11                 | 0.11                                | 0.15                  | 0.11                                |
| <b>Total</b>      | <b>272.5</b>      | <b>99.21</b>          | <b>0.11</b>                         | <b>0.14</b>           | <b>0.11</b>                         |

Table 1: June 2025 Si<sub>2</sub> Deposit Mineral Resource Estimate

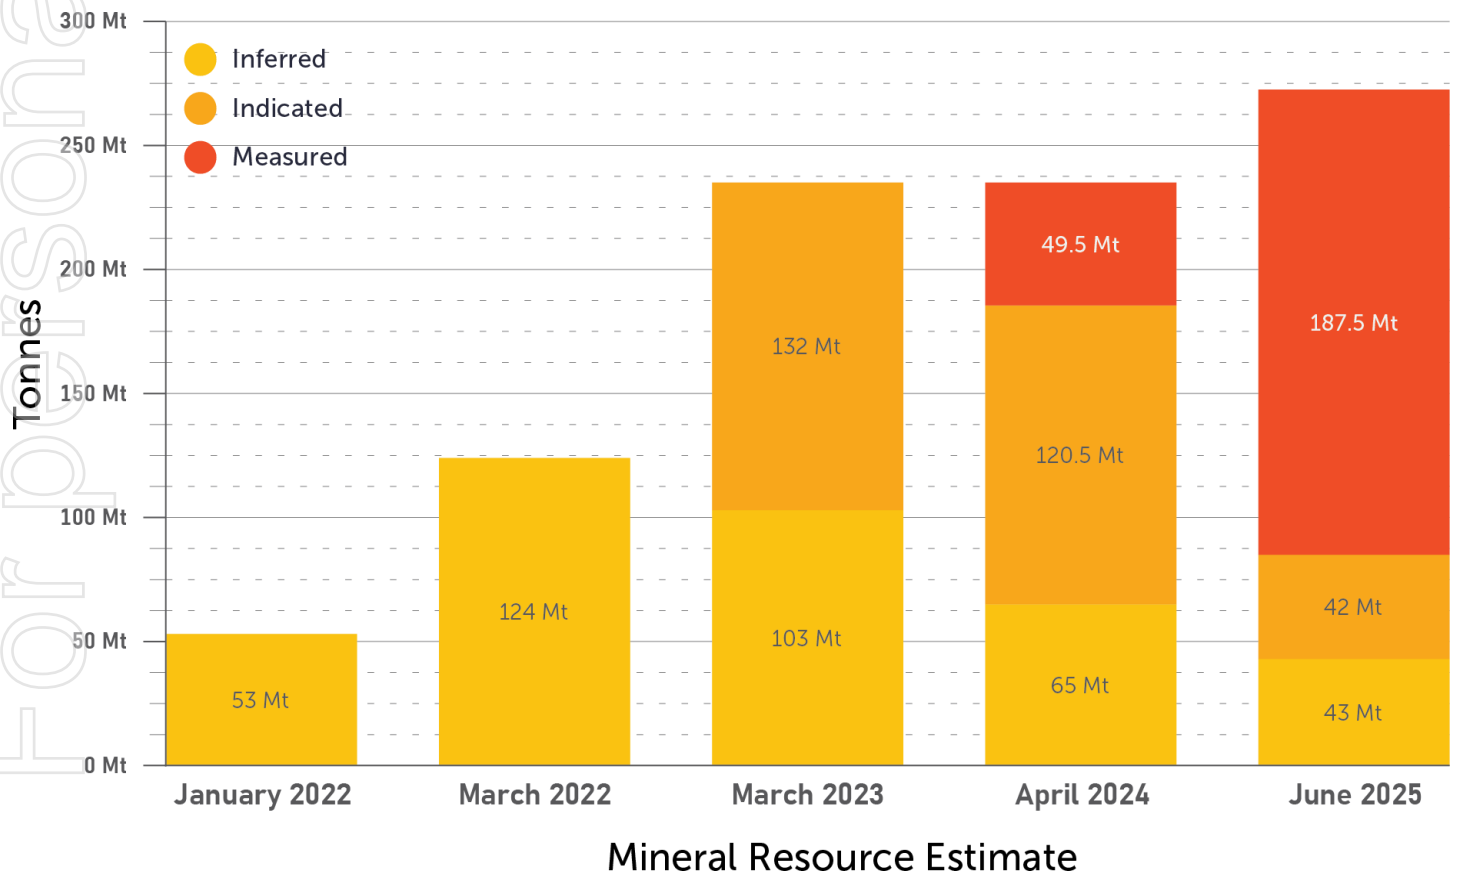


Figure 1: Mineral Resource growth since discovery of Si<sub>2</sub> in November 2021

## RESULTS OVERVIEW

The results of the Si2 Deposit Mineral Resource update in summary are as follows:

- Measured Mineral Resource increased from 49.5Mt to 187.5Mt, a 278% upgrade.
- Diatreme now has a MRE of suitable confidence to support mine planning. This provides the foundation for a PFS and Ore Reserve estimation.
- 16% increase in tonnes at the Si2 Deposit, from 235mt to 272.5Mt.
- Bulk density of 1.65t/m<sup>3</sup> following recent testwork, further refining the prior assumption of 1.6t/m<sup>3</sup>
- Particle size distribution results confirm the deposit hosts a relatively homogeneous silica sand profile, suitable for downstream processing into high-end products.
- Global resource estimates now exceed 500Mt (501.16Mt) across the Cape Flattery & Cape Bedford area.

## NEXT STEPS

With this updated Mineral Resource Estimate, Diatreme now has a robust geological and grade foundation to progress finalisation of the Pre-Feasibility Study (PFS). This will include mine schedule optimisation and mine design, underpinned by the continuity and scale established at the Si2 Deposit.

Environmental permitting continues as the Company's foremost focus. Detailed impact and mitigation assessments are underway as part of the Environmental Impact Statement (EIS), progressing toward final EIS submission in Q3 2025.

Metallurgical testwork is ongoing to refine product specifications and further confirm suitability for photovoltaic and other industrial applications. Following successful testwork, Diatreme will commence binding offtake discussions with targeted end-users in the global silica sand market.

For personal use only

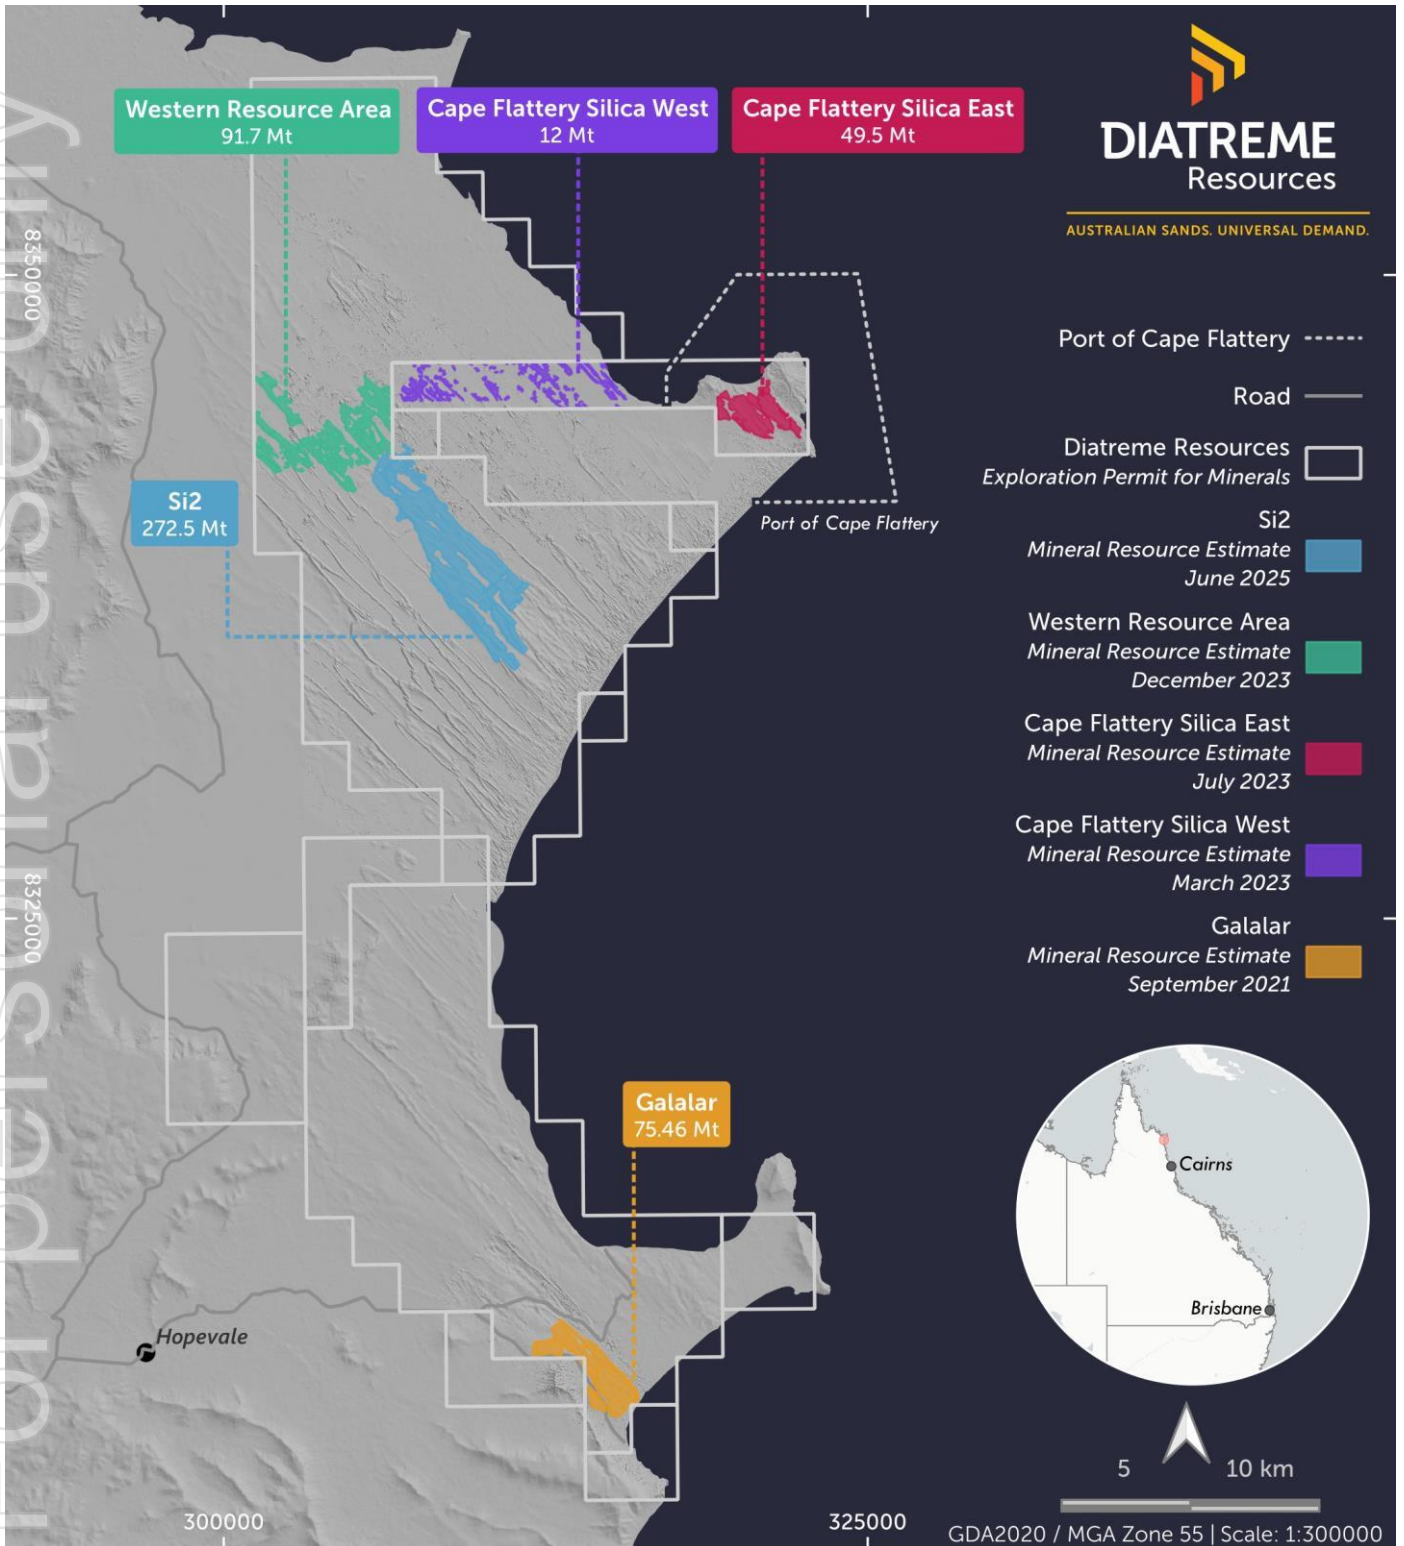


Figure 2: Diatreme Resources' Silica Sand Projects

## ASX LISTING RULE 5.8.1 SUMMARY

This section provides a summary of the Mineral Resource Estimate for the Si2 Deposit. This executive summary is provided consistent with ASX Listing Rule 5.8.1 and is effective from the date of issue.

### GEOLOGY AND GEOLOGICAL INTERPRETATION

The Si2 Deposit is located within the Cape Bedford–Cape Flattery Dune Field, a major aeolian dune system covering over approximately 700 km<sup>2</sup> on the east coast of Cape York Peninsula. The dune field developed from quartz-rich sandstones of the Gilbert River Formation and Dalrymple Sandstone, supplemented by contributions from coastal granites and Hodgkinson Formation metasediments. Weathering and leaching processes, both within the Laura Basin aquifer system and through subsequent surface erosion, produced silica sand now concentrated in the dune systems.

Silica sand mineralisation is predominantly hosted within the trailing arms and apices of elongate parabolic aeolian dunes. Interdunal areas are often devoid of thick aeolian sand and predominantly exhibit exposed B1 horizons, clays, bedrock, or other sediments. Sediments tend to have undergone reworking due to successive deflationary events.

Dune deflation tends to hold a parabolic shape and deflates in a downward direction, until reaching a zone (typically a wet zone, either groundwater or saturated clays) where sand grains are less available to movement by wind. There is an observable basement high coincident with the topographic high towards the coastline on the western dunes. Dunal features tend to be steeper toward the coast, compared to a less pronounced steepness distal from the coastline. Figure 1 highlights the features in an active elongate parabolic dune.

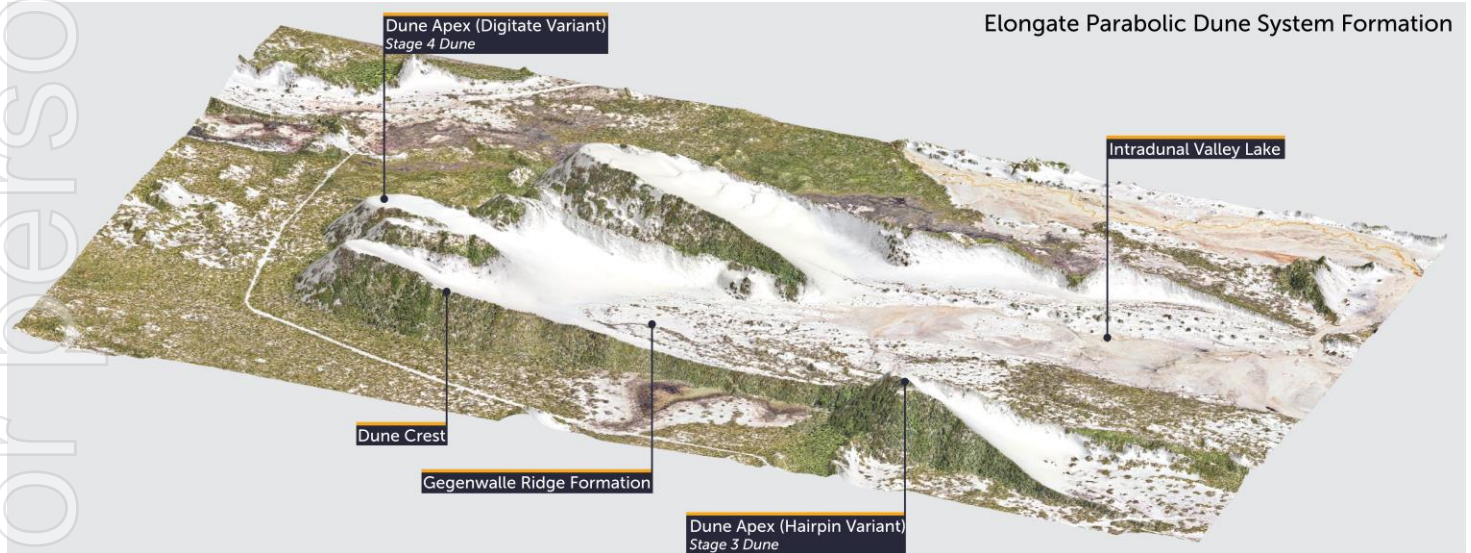


Figure 3: Evolution of active elongate parabolic dune system

| Sampling Program                | ID Series | # Holes | Drilling Method | Commentary  |
|---------------------------------|-----------|---------|-----------------|---|
| November 2021 to January 2022   | PLTxxx    | 99      | Vacuum          | Vacuum drill collected 2-3 kg cuttings which reported to a return thick perspex canister mounted on the drill rig (100% of drill material returned by the vacuum drill rig) after passing through a single tiered (50/50) riffle splitter. Samples were collected in numbered calico sample bags, and sealed ready for assaying as drilling progressed.<br>Primary Analysis Lab: ALS<br>QC: Duplicates 1 in 50                      |
| September 2022 to November 2022 | Si20xxx   | 82      | Aircore         | 1 m interval samples were collected from an aircore drill rig after passing through a single tiered (50/50) riffle splitter. The samples were collected in numbered calico sample bags, and sealed ready for assaying as drilling progressed.<br>Primary Analysis Lab: Bureau Veritas<br>QC: Introduction of ELIM22 CRM<br>Duplicates 1 in 25   |
| August 2023 to November 2023    | Si21xxx   | 88      |                 | 1 m interval samples were collected from an aircore drill rig after passing through a single tiered (50/50) riffle splitter. The samples were collected in numbered calico sample bags, and sealed ready for assaying as drilling progressed.<br>Primary Analysis Lab: Bureau Veritas<br>QC: Introduction of Coarse Blanks<br>Samples were composited in 2024 to 3m and assayed at ALS on a target market size fraction, using ICP. |
| August 2024 to December 2024    | Si22xxxx  | 154     |                 | 1m interval samples were collected from an aircore drill rig, before being composited to a nominal 3m composite.<br>All samples were assayed at 3m including XRF full sample, and target market production fraction.<br>Primary Analysis Lab: ALS<br>QC: Introduction of systematic recovery sampling.<br>Introduction of NCS DC 60116a & NCS DC 60117a CRM   |
| December 2021                   | AHxxx     | 1       | Hand Auger      | 1m interval samples were collected before being split in a 50/50 riffle splitter. The samples were collected in numbered calico sample bags and sealed ready for assaying.<br>Primary Analysis Lab: ALS   |
| September 2022 to December 2022 | Si2HAxxx  | 60      |                 | 1m interval samples were collected before being split in a 50/50 riffle splitter. The samples were collected in numbered calico sample bags and sealed ready for assaying.<br>Primary Analysis Lab: BV for first part of season, ALS for second part of season.   |
| January 2025 to February 2025   | Si23xxxH  | 14      |                 | 1m interval samples were collected and retained in numbered calico sample bags and sealed. No assaying completed, strictly for geological observations.   |

Table 2: Sampling Program Details

## SAMPLING AND SUB-SAMPLING TECHNIQUES

All drill holes were photographed, logged and sampled under the supervision of Mr Watson, Diatreme Resources' Technical Services Lead. The samples are stored in clearly labelled chip trays with bagged samples and stored at CSHPL's Cooktown laydown yard. The Competent Persons have determined that the quality of the drilling, sampling, and analysis meets the necessary standard for inclusion in a publicly reported Mineral Resource estimate, as per the JORC Code (2012)

## DRILLING TECHNIQUES

Four hundred and ninety-eight drill holes were used to define the Mineral Resource Estimate. Samples were obtained by vacuum drilling, aircore drilling or hand augering methods and were drilled vertically.

Drilling programs were mainly concentrated on the trailing arms and apexes of the elongate parabolic dunes. Additionally, hand augering was specifically carried out in the deflationary troughs between the dunes to support geological interpretation and constrain the lateral extent of the resource in areas typically devoid of mineralisation. Table 2 highlights the drilling techniques and holes used in the Mineral Resource Estimate.

Vacuum drilling was undertaken by contractor Yearlong Contracting using a 4x4 tractor mounted drill rig with a blade drill bit diameter of 60 mm equivalent to NQ sample size with 1.8 m rods. Aircore drilling was undertaken by a Diatreme Resources track mounted drill rig, with a 3" blade drill bit, on 3 m rods. Hand augering was undertaken by Diatreme staff using a Dormer Sand Auger with an internal diameter of 2". Drilling terminated immediately at refusal when damp clay basement or wet sands were intersected. All drilling programs were designed and conducted under the supervision of Diatreme Resources geologists.

## SAMPLE ANALYSIS METHOD

Samples across the life of the project were either analysed at Bureau Veritas in Adelaide, or at ALS in Brisbane. The XRF methods at each lab are considered comparable (ALS' ME-XRF26, and Bureau Veritas' XF100). In 2024, to align more closely with JORC Code Clause 49, a size fraction representative of the target market specification was assayed at ALS by ME-ICP64.

## ESTIMATION METHODOLOGY

The Mineral Resource Estimate was prepared by modelling the silica sand unit (A2). The topography surface was surveyed using LIDAR to a resolution of 10 points/m<sup>2</sup> to create a 1m gridded digital elevation model with a 10cm relative vertical accuracy. The top surface of the resource volume was set at 0.3 m below the LIDAR topography, representing the base of the topsoil. The base of the resource was constructed from:

- The base depth of the A2 unit determined from drilling, or augering
- The depth of the groundwater table determined from drilling, and
- Interpretation of the dune edge from LiDAR survey and aerial imagery.

The resource boundary was established by geological interpretation and analysis of surface dune extents visible in LIDAR and aerial imagery. Both assayed drill samples and geological observations from hand auger holes were used to interpret the top and base of the mineralised profile.

Coordinates of drill-hole data and the block model were transformed so each dune base aligned to a single flattened RL, accounting for significant RL variations and dune thickness variability across the deposit. This allowed grade estimation to reflect podsolisation influences and reduce vertical smearing. Grades were interpolated within three semi-soft vertical domains (upper, middle, and lower sands) to capture observed vertical grade variations. After estimation, coordinates were transformed back to their original positions. A comparison with estimates run using

untransformed coordinates showed comparable global tonnes and grades, confirming no material bias from the transformation.

Hand auger holes were excluded from grade estimation due to concerns about sample contamination associated with the drilling method. These holes were predominantly located at the edges of the deposit, and their mineralised intervals were geologically interpreted to guide and constrain the resource boundaries. These intervals closely matched the interdunal level, further validating the geological interpretation.

A block model was used to estimate the deposit grade. The orientation of the block model was set to the average strike of the dunes (315 degrees). The dimensions for the parent blocks were determined as 25 m across strike by 25 m along strike by 3 m vertical, which were then subdivided into cubic sub-blocks of 1 x 1 x 1 m to best fit the undulating geological model.

All drillhole data were composited to nominal 3 m intervals prior to grade estimation. Grade estimation was completed using ordinary kriging, and a validation check estimate was completed using inverse distance weighting squared. The Ordinary Kriging (OK) method was used to estimate the grades and populate the block model for SiO<sub>2</sub>, Fe<sub>2</sub>O<sub>3</sub>, TiO<sub>2</sub>, Al<sub>2</sub>O<sub>3</sub> and LOI. The grade estimation process was conducted over 4 (four) sequential passes, each defined by specific search radii that help to guide to the categories of 'Measured', 'Indicated' and 'Inferred' in resource classification. This methodology involved setting the major sample search parameters for each block horizontally in the average strike direction of the dune (315 degrees), the semi-major search direction is also set horizontal (perpendicular to the major search direction) across the dune, and the minor search direction is set to vertical. The search distances used for each pass were derived from variography studies, ensuring that the interpolation aligns with the spatial characteristics of the geological data. All passes used a quadrant-based search with the maximum number of samples set at 16 and required a minimum of two drillholes for reliable grade estimation. Block discretisation of 4 x 4 x 4 (X,Y,Z) was employed.

Bulk density was determined through laboratory testwork on dried and compacted samples collected from drilling across the Si2 Deposit. A total of 132 samples were tested. The dry bulk density was calculated as the average of the measured samples, and a value of 1.65 tonnes per cubic metre was adopted for tonnage estimation.

Cross-checks were undertaken to assess the sensitivity of the resource estimate to varying parameters, including different block sizes, estimation methods (Inverse Distance Weighting vs Ordinary Kriging), and the application of domain boundaries and coordinate transformations (flattened versus real space). Results showed no material differences across these comparisons, confirming robustness and reliability of the final Mineral Resource Estimate.

## CUT OFF GRADES

No cut-off grade was applied during compositing, block estimation, or reporting. The Mineral Resource is reported from all classified blocks with interpolated SiO<sub>2</sub> grades. While no cut-off was applied, a minimum SiO<sub>2</sub> grade of approximately 98.5% was one of several factors considered when defining the base of the geological model in drillholes. Geological domains were based on a combination of SiO<sub>2</sub> grade, sand colour, and contaminant levels. Minor internal intervals with SiO<sub>2</sub> grades below 98.5% were included within the high-purity silica domain where they did not materially affect the overall quality of the Mineral Resource, and would not have an effect on minerals processing.

## RESOURCE CLASSIFICATION

The Mineral Resource has been classified according to the principles of the JORC Code (2012 edition). The resource has been divided into Measured, Indicated, and Inferred categories, corresponding to a high, moderate and low level of confidence in the geological and grade continuity of the resource. The classification integrates several key factors, including depth of geological knowledge of the deposit, geological and mineralisation continuity, drill hole spacing, and the results of quality control measures.

The classification also considers drill hole logging, analytical results from drill samples, geostatistical analysis, and confidence in geological and grade continuity, along with recent metallurgical/process test outcomes. Additionally, search and interpolation parameters, recently completed density data, and considerations from JORC Code Clause 49 are factored into the classification process.

## MINING AND METALLURGICAL METHODS AND PARAMETERS, AND OTHER MATERIAL FACTORS CONSIDERED TO DATE

Metallurgical testwork completed to-date confirms the silica sand resource is readily amenable to upgrading by conventional washing and screening methods to a low iron, high purity silica sand for photovoltaic applications (solar panels).

The potential for economic extraction at the Si2 Project has been evaluated considering various factors including open-pit mining methods, anticipated product specifications, marketability of the product, and advantageous logistics. Based on these considerations, it was concluded that the Si2 Project has Reasonable Prospects for Eventual Economic Extraction (RPEEE) and can be designated as an Industrial Mineral Resource according to JORC Code Clause 49.

The results of the Mineral Resource Estimate are provided in Table 1 and the Resource Area is shown in Figure 4 on the following page. Representative dune profiles across the Resource Area are shown in the cross section and long section in Figure 5 below. All Mineral Resources are contained within EPM 17795.

For personal use only

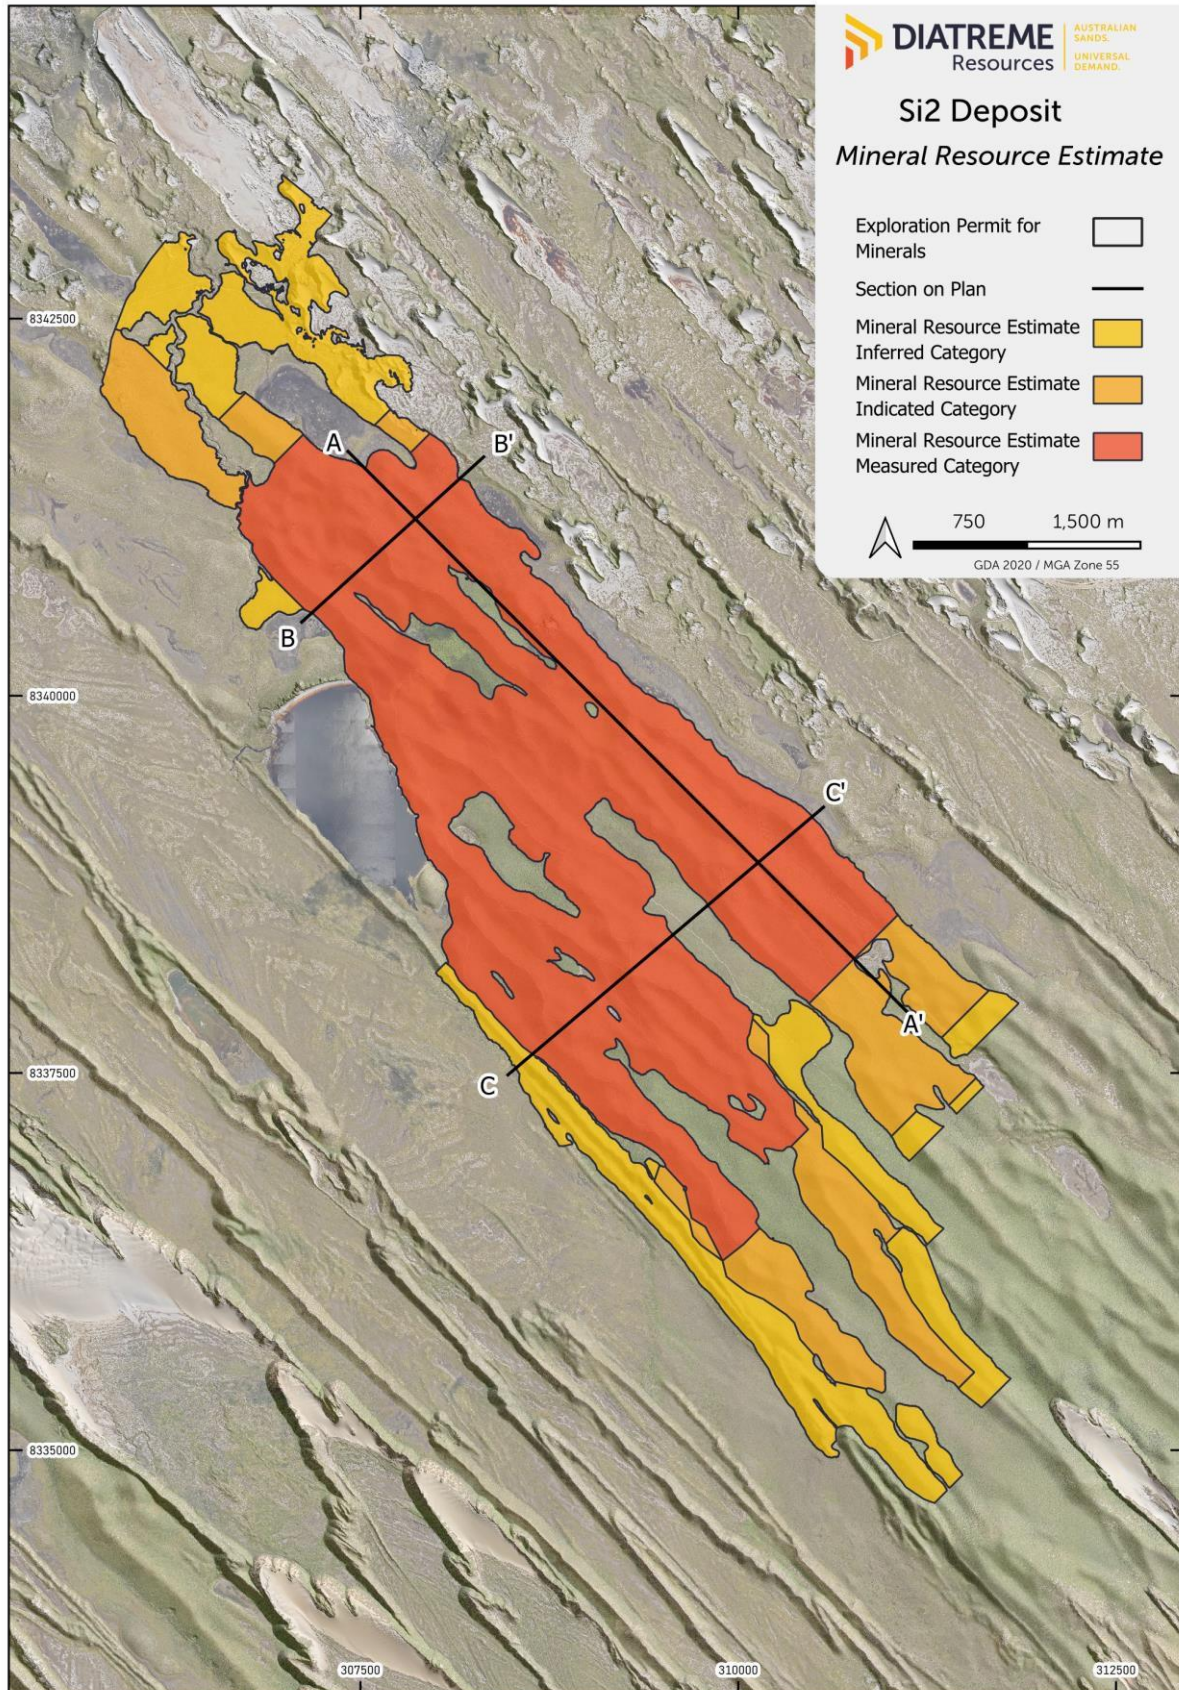


Figure 4: Mineral Resource Categories

personal use only

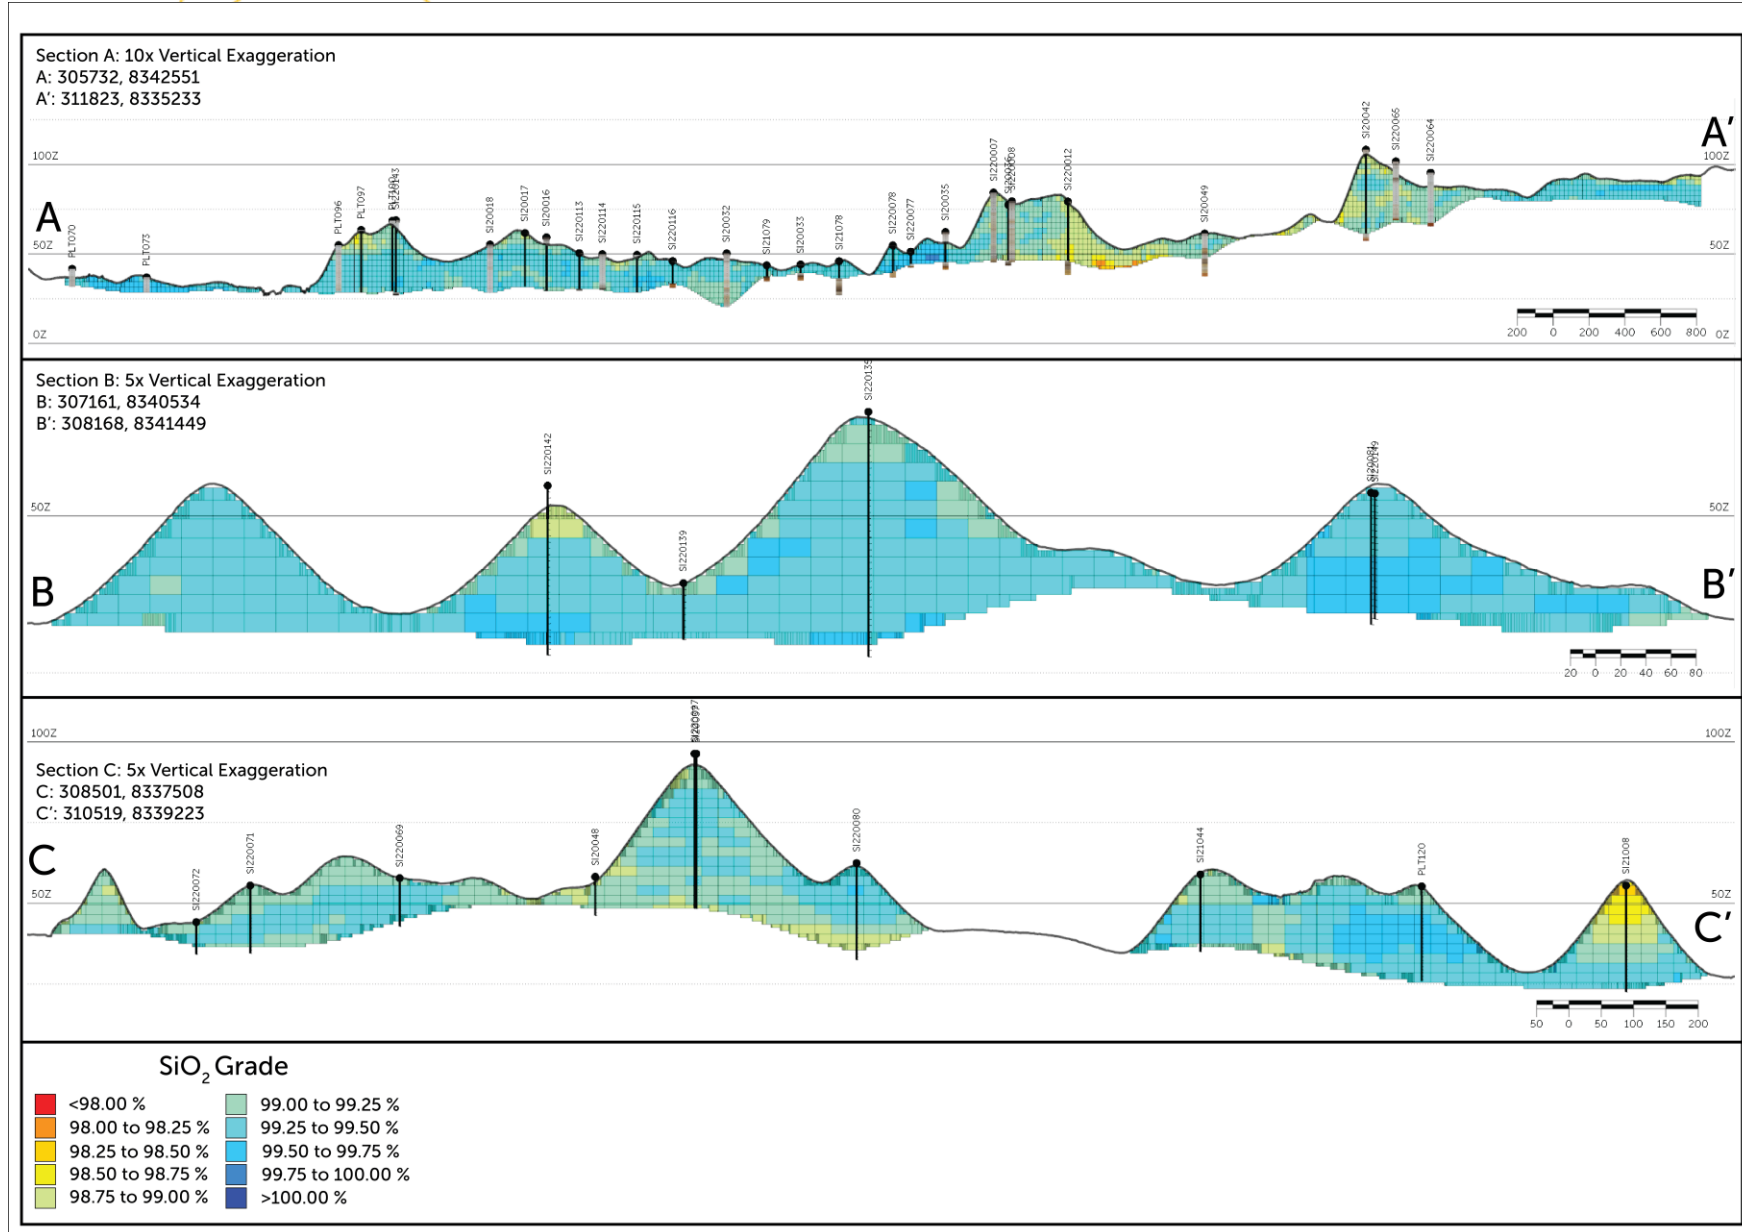


Figure 5: Sections indicating SiO<sub>2</sub> grade across Si<sub>2</sub>.

+61 7 3397 2222

| Project           | Mineral Resource Category | Tonnes Mt | SiO <sub>2</sub> % | Fe <sub>2</sub> O <sub>3</sub> % | TiO <sub>2</sub> % | Al <sub>2</sub> O <sub>3</sub> % |
|-------------------|---------------------------|-----------|--------------------|----------------------------------|--------------------|----------------------------------|
| Galalar           | Measured                  | 43.12     | 99.21              | 0.09                             | 0.11               | 0.13                             |
|                   | Indicated                 | 23.12     | 99.16              | 0.09                             | 0.13               | 0.10                             |
|                   | Inferred                  | 9.22      | 99.10              | 0.11                             | 0.16               | 0.11                             |
|                   | Total                     | 75.46     | 99.18              | 0.09                             | 0.12               | 0.12                             |
| Si2               | Measured                  | 187.5     | 99.24              | 0.10                             | 0.14               | 0.11                             |
|                   | Indicated                 | 42        | 99.15              | 0.12                             | 0.16               | 0.11                             |
|                   | Inferred                  | 43        | 99.11              | 0.11                             | 0.15               | 0.11                             |
|                   | Total                     | 272.5     | 99.21              | 0.11                             | 0.14               | 0.11                             |
| WRA               | Indicated                 | 10.3      | 99.20              | 0.15                             | 0.24               | 0.16                             |
|                   | Inferred                  | 81.4      | 99.38              | 0.09                             | 0.15               | 0.06                             |
|                   | Total                     | 91.7      | 99.36              | 0.10                             | 0.16               | 0.07                             |
| CFS West          | Inferred                  | 12        | 99.15              | 0.09                             | 0.16               | 0.12                             |
|                   | Total                     | 12        | 99.15              | 0.09                             | 0.16               | 0.12                             |
| CFS East          | Measured                  | 16.1      | 99.20              | 0.08                             | 0.12               | 0.22                             |
|                   | Indicated                 | 33.2      | 99.05              | 0.10                             | 0.18               | 0.25                             |
|                   | Inferred                  | 0.2       | 99.00              | 0.12                             | 0.27               | 0.28                             |
|                   | Total                     | 49.5      | 99.10              | 0.09                             | 0.16               | 0.24                             |
| Total Silica Sand | Measured                  | 246.72    | 99.23              | 0.10                             | 0.13               | 0.12                             |
|                   | Indicated                 | 108.62    | 99.13              | 0.11                             | 0.17               | 0.16                             |
|                   | Inferred                  | 145.82    | 99.26              | 0.10                             | 0.15               | 0.08                             |
|                   | Total                     | 501.16    | 99.22              | 0.10                             | 0.15               | 0.12                             |

Table 2: Diatreme Resources Mineral Resource Inventory across all Silica Sand Projects.

This announcement is authorised for release by the Board.

**Neil McIntyre**

Chief Executive Officer

Mr Neil McIntyre

Ph: +61 (0)7 3397 2222

[manager@diatreme.com.au](mailto:manager@diatreme.com.au)

[www.diatreme.com.au](http://www.diatreme.com.au)

For investor/media queries, please contact:

Anthony Fensom, Fensom Advisory

[anthony@fensom.com.au](mailto:anthony@fensom.com.au)

Ph: +61 (0)407 112 623

**About Diatreme Resources Limited (ASX Code: DRX)**

Diatreme Resources (ASX: DRX) is an emerging Australian producer of mineral and silica sands based in Brisbane. Our key projects comprise the Northern Silica Project and Galalar Silica Sand Project in Far North Queensland, located next to the world's biggest silica sand mine at Cape Flattery, together with the recently acquired Cape Flattery Silica Project. Both the Northern Silica and Cape Flattery projects have been designated "Coordinated Projects" by the Queensland Government and are strategically located adjacent to the export-focused Cape Flattery Port.

Global material solutions group Sibelco is Diatreme's development partner on its Queensland silica projects portfolio. Sibelco has completed an investment of circa \$49 million into both the silica sands projects and Diatreme at the corporate level.

In Western Australia's Eucla Basin, Diatreme's Cyclone Zircon Project is considered one of a handful of major zircon-rich discoveries of the past decade. Diatreme also owns 100% of the Clermont Copper-Gold Project in central Queensland.

Diatreme's silica sand resources will support global decarbonisation by providing the necessary high-grade, premium-quality silica for use in the solar PV industry. The Company has a strong focus on its ESG obligations, working closely with its local communities and all other key stakeholders to ensure the long-term sustainability of our operations, including health, safety and environmental stewardship.

Diatreme has an experienced Board and management, with expertise across all stages of project exploration, mine development and project financing together with strong community and government engagement skills.

For more information, please visit [www.diatreme.com.au](http://www.diatreme.com.au)

**ASX releases referenced for this release:**

- 17 June 2025 - Northern Silica Project awarded Major Project Status
- 20 March 2025 – 2024 Exploration Program results for the Northern Silica Project
- 17 April 2024 – Mineral Resource upgrade paves way for Northern Silica Project

Diatreme confirms that it is not aware of any new information or data that materially affects the information included in the original releases and that all material assumptions and technical parameters underpinning the estimates in the original releases continue to apply and have not materially changed. Diatreme confirms that the form and context in which the competent person's findings are presented have not been materially modified from the original releases.

## COMPETENT PERSONS STATEMENT

The information in this report that relates to Mineral Resources is based on the work carried out by Mr Chris Ainslie, Principal Resource Geologist. Mr Ainslie is an employee of Measured Group Pty Ltd and a Member of the Australian Institute of Geoscientists. Mr Ainslie takes responsibility for estimation, classification and modelling of the Mineral Resource Estimate. Mr Ainslie has been engaged to assist preparing this report and there is no conflict of interest between the parties. Mr Ainslie has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity for which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (The JORC Code). Mr Ainslie consents to the inclusion in the report on the matters based on their information in the form and context in which it appears.

The information in this report that relates to Exploration Targets, Exploration Results & Mineral Resources is based on information compiled by Mr Frazer Watson, Technical Services Lead, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy, and the Australian Institute of Geoscientists. Mr Watson takes responsibility for the sampling, analytical results, and the general technical basis to support the Reasonable Prospects of Eventual Economic Extraction, and provides technical oversight of the Mineral Resource Estimate. Mr Watson is a full-time employee of Diatreme Resources Limited. Mr Watson has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resource and Ore Reserves'. Mr Watson consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The corresponding JORC 2012 Table 1 is attached to this report and can be found in Appendix 1.

# APPENDIX A: JORC TABLE 1

## SECTION 1: SAMPLING TECHNIQUES AND DATA

| Criteria            | Explanation  | Commentary   |
|---------------------|--|--|
| Sampling techniques | <ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul> | <ul style="list-style-type: none"> <li>For drillholes reported PLT001 to PLT247, Vacuum drilling samples were collected in 1m intervals, before being passed through a single-tiered 50/50 riffle splitter. The sample was sent to ALS Brisbane from which 250g was pulverised to produce a fused bead before being assayed by method code ME-XRF26.</li> <li>For drillholes reported Si20001 through to Si20076, Aircore drilling samples were collected in 1m intervals (~2kg) after passing through a single-tiered (50/50) riffle splitter. The sample was sent to Bureau Veritas in South Australia from which 150g was pulverised to produce a fused bead before being assayed by method code XF100.</li> <li>For drillholes reported Si20077 through to Si20082, Aircore drilling samples were collected in 1m intervals (~2kg) after passing through a single-tiered (50/50) riffle splitter. The sample was sent to ALS Brisbane from which 250g was pulverised to produce a fused bead before being assayed by method code ME-XRF26.</li> <li>For hand auger hole reported AH001, hollow stem auger samples were collected in 1m intervals (~2kg) after passing through a single-tiered (50/50) riffle splitter. The sample was sent to Bureau Veritas in South Australia from which 150g was pulverised to produce a fused bead before being assayed by method code XF100.</li> <li>For hand auger holes reported Si2HA0002 to Si2HA0013, hollow stem auger samples were collected in 1m intervals (~2kg) after passing through a single-tiered (50/50) riffle splitter. The sample was sent to Bureau Veritas in South Australia from which 150g was pulverised to produce a fused bead before being assayed by method code XF100.</li> <li>For hand auger holes reported Si2HA0014 to Si2HA0061, hollow stem auger samples were collected in 1m intervals (~2kg) after passing through a single-tiered (50/50) riffle splitter. The sample was sent to ALS Brisbane from which 250g was pulverised to produce a fused bead before being assayed by method code ME-XRF26.</li> <li>For hand auger holes reported Si23001H to Si23130H, hollow stem auger samples were collected in 1m intervals (~2kg). These samples were not sent for assay, instead were used primarily as geological observations. The full sample has been retained for any future analysis.</li> <li>For drillholes reported Si21001 through to Si210088, Aircore drilling samples were collected in 1m intervals (~2kg) after passing through a single-tiered (50/50) riffle splitter. The sample was sent to Bureau Veritas in South Australia from which 150g was pulverised to produce a fused bead before being assayed by method code XF100. A second analysis program (focussing on grade of a particular size fraction) was conducted on the Si21 series drillholes. The original sample material was composited into nominal 3m composites and submitted to ALS Brisbane for sieving into three fractions +710µm, -710µm+106µm and -106µm. The respective fractions were then weighed, followed with the 710µm+106µm fraction pulverised and assayed by method code ME-ICP64.</li> <li>For drillholes reported Si220001 to Si220153, Aircore drilling samples were collected in 1m intervals, before being composited by scoop into nominal 3m samples (~1kg). This material was then composited into nominal 3m composites and submitted to</li> </ul> |

personal use only

| Criteria                                       | Explanation   | Commentary  |
|--|---|---|
|  |   | <p>ALS Brisbane for sieving into three fractions +710µm, -710µm+106µm and -106µm. The respective fractions were then weighed, followed with the 710µm+106µm fraction pulverised and assayed by method code ME-ICP64. In addition a sample representing the full particle size distribution was split, pulverised and then assayed by ME-XRF26.</p> <ul style="list-style-type: none"> <li>Mr Watson considers the quality of the sampling method to be fit for the deposit style, and the stage of exploration, given the homogenous nature of this silica sand deposit.</li> </ul>   |
| Drilling techniques                            | <ul style="list-style-type: none"> <li>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</li> </ul>   | <ul style="list-style-type: none"> <li>Three (3) types of drilling have been utilised for exploration, Aircore (AC), Vacuum (VX and Hand Auger (HA).</li> <li>AC drilling was by a track mounted drill rig with a 3” blade bit, and a rod length of 3m.</li> <li>VX drilling was by a tractor mounted drill rig with a 60mm diameter blade bit, and a rod length of 1.8m</li> <li>Hand Auguring (HA) was conducted using a Dormer Sand Auger with an internal diameter of 2”.</li> <li>Aircore and Vacuum drilling was to refusal, which occurs at geologically determined contact such as clayey sands at the base of mineralisation, or a water table. This is due to the limitations of AC drilling at the water table, and limitations of the AC drill rig when penetrating the clay layers.</li> <li>Mr Watson considers the quality of the sampling method to be fit for the deposit style, as mineral sands are easily contaminated, or recoveries can be poor and not representative using other drilling methods.</li> </ul>   |
| Drill sample recovery                          | <ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>                            | <ul style="list-style-type: none"> <li>During the 2024 drilling program, sample recovery is monitored at the rig by recording sample mass of each 1m interval to observe for the presence or deviation from a consistent sample size. Weighing of samples at the drill site was not undertaken in a systematic manner in prior years. In the absence of systematic weighing, sample recovery was visually monitored on the rig for a consistent sample size.</li> <li>Sample recovery is maximised within a closed system from the drill bit to the riffle splitter.</li> <li>After encountering wet clays, sacrificial rods are drilled into clean dry sand, to flush out any contamination through the drilling hoses, prior to drilling the subsequent drill hole.</li> <li>No relationship between recovery and grade has been observed, as the orebody is relatively homogenous.</li> <li>Correct interval delineation on AC drilling is achieved with metre intervals marked on the drill mast, and samples are collected when the base of the top drive reaches a metre interval.</li> </ul> |
| Logging  | <ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul> | <ul style="list-style-type: none"> <li>All drillholes have been logged in their entirety, with qualitative descriptions of grain size, sphericity, roundness, moisture content, lithology, and colour recorded.</li> <li>Photography is captured on a chip tray basis firstly at the drill rig, and then later on a chip tray compartment by compartment basis when samples have dried.</li> <li>Sample photography in a controlled setting using Imago software with a Canon EOS R5 and a Canon 24-50mm lens , a hexadecimal colour value is extracted from the imagery, and the RGB values are derived through python scripts. Colour photography is verified against a Calibrite ColorChecker.</li> <li>The quality of logging is sufficient for this stage of exploration.</li> </ul>   |
| Sub-sampling techniques and sample preparation | <ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</li> </ul>   | <ul style="list-style-type: none"> <li>Prior to 2023, VX and AC samples were riffle split after the cyclone, and placed in sample bags representing 1m intervals.</li> <li>In 2024, AC samples were scooped from the sample bags representing 1m intervals, and composited to a nominal 3m composite. The single scoop is approximately 330g in mass.</li> <li>Where sample preparation was completed at ALS in Brisbane. Full samples are dried at 105°C, then weighed (WEI-22g), then a split is screened (SCR-61) into three size fractions +710µm, -710µm+106µm and -106µm, with a split of the raw sample</li> </ul>   |

personal use only

| Criteria                                   | Explanation   | Commentary  |
|--|---|---|
|  | <ul style="list-style-type: none"> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>  | <p>retained. A nominal 150g split of the raw sample, and a nominal 150g split of the -710µm+106µm fraction are then pulverised using a tungsten carbide ring mill (PUL-33), prior to being assayed. Prior to 2024, only the full sample was assayed, no screening was conducted.</p> <ul style="list-style-type: none"> <li>Where sample preparation was completed by BV in South Australia. Samples progressed through the PR001 method where samples are sorted, weighed wet, and then dried at 105°C, samples are then split using a rotary sample divider, and volumetrically weighed to a nominal 150g before undergoing the PR305 method where samples are pulverised in a tungsten carbide bowl.</li> <li>Importantly, Mr Watson remarks that the -710µm+106µm does not represent “product” grade, as heavy minerals are not removed through the sieving process, nor is the material washed.</li> <li>The PUL-33 method has a QC check on a 20g split to ensure &gt;85% passes -75µm</li> <li>Coarse flushes of an unpulverized sample matching ELIM22 CRM has been introduced to both clean the lab pulveriser between drillholes, and test for any contamination. ELIM22 was prepared by OREAS, specifically for ore grade material in the Cape Bedford / Cape Flattery dune systems.</li> <li>Field duplicate results are validated upon receipt of lab results, particular attention is paid to Fe<sub>2</sub>O<sub>3</sub>, and TiO<sub>2</sub>.</li> <li>A coarse flush of the raw ELIM22 sample is included after intersecting a deleterious horizon – and this is used to clean the Tungsten Carbide ring mill / pulveriser at ALS Brisbane. All samples are pulverised sequentially through the same pulveriser.</li> <li>Crushing is not required as the grain size of the sample material is suitable for pulverizing.</li> <li>Mr Watson considers the drill sample sizes as appropriate for the grain size of the material, the style of mineralisation and the nature of the drilling program.</li> <li>These methods are determined to be appropriate by the Competent Person to avoid sample carry-over contamination, in addition Cr<sub>2</sub>O<sub>3</sub> is monitored to ensure that pulverisation is performed in a non-ferrous pulverising bowl.</li> </ul> |
| Quality of assay data and laboratory tests | <ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</li> </ul> | <ul style="list-style-type: none"> <li>ME-ICP64 is considered a partial digest, it is considered appropriate for silica sand due to the high purity of the -710µm+106µm sample, and the low detection limit for Fe<sub>2</sub>O<sub>3</sub> comparative to XRF methods.</li> <li>As ME-XRF26, and XF100 methods are considered a total digest, it is considered appropriate for silica sand when assessing full sample geochemistry.</li> <li>Loss On Ignition (LOI) determined by thermogravimetric analysis (TGA) using method code OA-GRA05x or ME-GRA05 at ALS or TG002 at Bureau Veritas) and, where a sample is placed in a furnace at ambient temperature and then heated to 1000°C, and then weighed.</li> <li>Field duplicates were submitted at a nominal rate of 1 in 25 in line with the quality assurance procedure. Prior to 2023, this was nominally 1 in 50.</li> <li>CRM (ELIM22) is utilised every 33rd sample. This CRM was introduced to the program in 2021.</li> <li>Either CRM NCS 60116a or NCS 60117a are used 2 in 100 – for samples drilled in 2024.</li> <li>ALS Brisbane, and verification of CRM and field duplicate results have indicated that for the method ME-ICP64, Al<sub>2</sub>O<sub>3</sub> and Fe<sub>2</sub>O<sub>3</sub> are acceptable for the broader range of grades, however TiO<sub>2</sub> recovery is poor on lower purity samples. However recovery is acceptable for higher purity samples. For this reason, Al<sub>2</sub>O<sub>3</sub> and Fe<sub>2</sub>O<sub>3</sub> results are considered material and appropriate to report, while reporting TiO<sub>2</sub> recovery would be considered misleading.</li> <li>The quality control procedures adopted by Diatreme establish an acceptable level of accuracy and precision. Bureau Veritas, and ALS conducts their own internal checks, and these results have been provided to Diatreme and are monitored by both parties as part of the quality control process.</li> </ul>   |

personal use only

| Criteria  | Explanation  | Commentary   |
|---|--|--|
| Verification of sampling and assaying                   | <ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data</li> </ul>   | <ul style="list-style-type: none"> <li>The variability observed between the primary sample and the field duplicate assay results are considered appropriate for the style of mineralisation by the Competent Person.</li> <li>Mr Watson and various Diatreme Resources' Exploration Geologists have personally inspected all sample intervals.</li> <li>Several twinned holes have been completed, with minimal sampling bias observed, the only difference being the depth of refusal changed. This is considered to be temporally related to groundwater levels.</li> <li>Collar and geological logging is captured by and stored within the geological logging/database software MX Deposit, in accordance with company procedures.</li> <li>Photographic data is captured, and stored within Imago, a software package that acts as a repository and analysis tool for geoscientific imagery.</li> <li>Assay data is recorded, and stored in MX Deposit, a Drillhole Database software.</li> <li>No adjustment has been made to assay data.</li> </ul>   |
| Location of data points                                 | <ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>  | <ul style="list-style-type: none"> <li>All drill hole locations have been surveyed using Spectra Precision SP60, with a Trimble RTX CenterPoint DGPS correction <math>\pm 0.05\text{m}</math> on the horizontal plane.</li> <li>The collar data is recorded in the UTM coordinate system: Map Grid of Australia 1994 (MGA94) Zone 55, this is then reprojected to GDA2020 Zone 55 for compatibility with other spatial files.</li> <li>All drill holes are shallow and vertical, no down-hole surveying is conducted.</li> <li>Digital elevation models derived from LiDAR (December 2022) were used as the topographic surface to generate RL's for each collar. The DEM was generated via a cloth simulation function, using an approximate 10 ground classified points per square metre. Relative accuracy is considered to be <math>\pm 0.1\text{m}</math>.</li> </ul>   |
| Data spacing and distribution                           | <ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> </ul>   | <ul style="list-style-type: none"> <li>Auger drilling occasionally is performed at the edge of the a given dune to provide geological observations of the contact between the eluviated sand and the illuviated horizon.</li> <li>First pass drilling spaced nominally at 380m along dune crests, and infill drilling at a nominal 180 - 200m along the trailing arm of an elongate parabolic dune, and in the interdunal valleys, although the Competent Person considers data spacing at these intervals are not a material constraint on the development of geological grade or geological continuity, and as such, the Competent Person considers the data spacing to be more than appropriate for this style of deposit, at this stage of exploration.</li> <li>Select samples have been composited to nominal 3m intervals, following recommendations from a variability assessment completed by Measured Group in 2024, and also on an assessment that the 3m compositing also aligns with likely SMU's for the deposit. This is defined in further detail in the Sampling Techniques section of this Table.</li> </ul> |
| Orientation of data in relation to geological structure | <ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul> | <ul style="list-style-type: none"> <li>The deposit style is an un lithified aeolian sand deposit, comprised of a series of complex parabolic and elongate parabolic dune systems which are repeatedly deflated and are superimposed upon older dune systems.</li> <li>The mineralisation process (podsolisation) is gravitationally controlled. The Competent Person has determined that vertical drilling intersects the bedforms at an angle which represents the true width of mineralisation.</li> <li>The orientation of heavy mineral bedding (if present) is considered immaterial due to the processing methods of silica sand. The main grade control on economic extraction is the podsolisation profile.</li> <li>No sampling bias is introduced by the orientation of drilling.</li> </ul>   |
| Sample security   | <ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>  | <ul style="list-style-type: none"> <li>Sample bags were sealed by cable-tie, and transported in polywoven bags, then securely stored in a locked yard on-site until transported by courier to the respective laboratories.</li> </ul>  |

personal use only

| Criteria          | Explanation   | Commentary  |
|-------------------|---|---|
| Audits or reviews | <ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul> | <ul style="list-style-type: none"> <li>Transport chain of custody forms have been reviewed for each sample dispatch.</li> <li>Submission reconciliation reports are provided by the laboratory and checked against the sample submission forms.</li> <li>Mr Ainslie (Measured Group) has conducted an audit on the drillhole database, but not the sampling techniques.</li> <li>Internal reviews by Diatreme staff on both the drillhole database and sampling techniques have been conducted, indicating compliance to internal standards.</li> <li>No external reviews have been completed at this stage.</li> </ul> |

## SECTION 2: REPORTING OF EXPLORATION RESULTS

| Criteria                                | Explanation  | Commentary   |
|---|--|--|
| Mineral tenement and land tenure status | <ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul> | <ul style="list-style-type: none"> <li>These Exploration Results comprise exploration on the Si2 Deposit, which is the mineral resource within the Northern Silica Project, which is located adjacent to the coastline in Far North Queensland, approximately 53km north of Cooktown. The project is adjacent to the south of the Cape Flattery Silica Mines (CFSM) Mining Lease. CFSM has been in operation since 1967 and is Queensland’s largest producer of high purity silica and is reported to have the highest production of high purity silica sand of any mine historically.</li> <li>The project is located at the northern end of the Cape Flattery/Cape Bedford dune field complex within the Exploration Permits for Minerals (EPM) 17795 &amp; 27212.</li> <li>Most of the EPM, and the entirety of the Si2 Deposit is located on one land title, Lot 35/SP232620, a freehold lot of 110,000 hectares.</li> <li>The Project and EPM is in the Mareeba Mining District and falls within the Hope Vale Aboriginal Shire Council area. This lies approximately 35km north of the township of Hope Vale, with a population of approximately 1,500 in the Hope Vale Aboriginal Shire Council.</li> <li>EPM 17795 is owned by Northern Silica Pty Ltd, a wholly owned subsidiary of the Joint Venture Cape Silica Holdings Pty Ltd between Diatreme Resources 73.2% and Sibelco Silica Pty Ltd 26.8%.</li> <li>Diatreme was granted a renewal on EPM 17795 “Cape Bedford” until 21 June 2026 on the basis of continued targeting of heavy mineral sands and silica sand. The EPM was granted under protected Native Title Protection Conditions. As of March 2025, the tenure is in good standing.</li> <li>EPM 17795 is an extensive EPM comprising 147 continuous subblocks (approximately 480km2) covering the majority of the Cape Flattery-Cape Bedford Quaternary dune field complex.</li> <li>Three EPM’s contiguous with EPM 17795 have been taken up by Diatreme, EPM 27212 (granted 27th September 2021), EPM 27265 (granted 30th January 2020, and currently in renewal) and application EPM 27430 (granted 26th October 2021). These tenements cover small areas of the dune field not covered by EPM 17795. EPM 27212 is held by Cape Silica Holdings Pty Ltd, EPM 27430, EPM 27265 are held by Northern Silica Pty Ltd.</li> <li>An additional EPM 25734 also targeting silica sand was acquired by Diatreme through a takeover of Metallica Minerals in 2024.</li> </ul> |

personal use only

| Criteria                          | Explanation  | Commentary  |
|-----------------------------------|--|---|
| Exploration done by other parties | <ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>  | <ul style="list-style-type: none"> <li>Exploration for silica sand has been undertaken in the Cape Flattery – Cape Bedford area in 11 Authorities to Prospect (ATP’s) or Exploration Permits for Minerals (EPMs) since the 1960’s. In general, past exploration of the dune field has primarily focused on the prominent active parabolic dunes of clean white silica sand.</li> <li>Historical exploration activities appear to have missed the Si2 Deposit in its entirety, until discovery by Diatreme Resources in late 2021.</li> <li>As there are no assay certificates for this historic data, and the locations of which are dubious, the data is considered qualitative and is not used for Mineral Resource Estimation, or Exploration Targeting.</li> </ul>  |
| Geology                           | <ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>  | <ul style="list-style-type: none"> <li>The Northern Silica Project is comprised of unlithified aeolian dune complexes.</li> <li>The Cape Flattery &amp; Cape Bedford dune fields are aeolian dunes established in the Pleistocene epoch and regularly remobilised during the Pleistocene and Holocene epochs. The dune fields are situated on a coastal plain overlying the Hodgkinson Formation basement with Dalrymple Sandstone forming mesa on basement highs.</li> <li>Mineralisation is thought to be due to repeated eluviation and illuviation events on immobilised dune systems comprised of an existing quartzose sand source, with reactivated dune systems also exhibiting mineralisation. Intradunal valleys tend to be a surface expression of the B1 horizon, and typically are not considered mineralised.</li> <li>Deleterious metals are thought to have been eluviated by organic acids, which are transported by gravity through the stratigraphic column and illuviated either by binding to clay rich horizons, or transported away from the deposit through the water table.</li> </ul> |
| Drill hole Information            | <ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case</li> </ul> | <ul style="list-style-type: none"> <li>All material collar information for drillholes has been aggregated in the Table of Material Drillholes and Results attached in this appendix to the announcement.</li> </ul>   |

| Criteria  | Explanation  | Commentary   |
|---|--|--|
| Data aggregation methods  | <ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated</li> </ul> | <ul style="list-style-type: none"> <li>Data aggregation used in this report is a calculation of the mean average for each reported variable across the respective mineralised profile for that drillhole.</li> <li>All intercepts have been aggregated in the Table of Material Drillholes and Results attached in this appendix to this report.</li> </ul>  |
| Relationship between mineralisation widths and intercept length | <ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. <ul style="list-style-type: none"> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</li> </ul> </li> </ul>  | <ul style="list-style-type: none"> <li>All drilling was vertical (-90°) intersecting undulating flat-lying aeolian dune sands.</li> <li>Downhole length correlates with true width of mineralisation.</li> <li>The deposit is a large homogenous mass of eluviated aeolian sands. Intercept length is an order of magnitude smaller than the mineralisation width. The eluviated zone is gradual, with in most cases a distinct delineable contact for the illuviated zone.</li> </ul> |
| Diagrams  | <ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>  | <ul style="list-style-type: none"> <li>Plan view of drill hole collar locations and appropriate are contained in this report.</li> </ul>   |
| Balanced reporting  | <ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid</li> </ul>   | <ul style="list-style-type: none"> <li>All mineralised silica sand results used in the estimation of this Mineral Resource are reported.</li> <li>Where the results in the table are not published, there is either organics present in the first metre, or unmineralized sands / sandy clays below the mineralised horizon, or are considered immaterial for the RE.</li> </ul>   |

personal use only

| Criteria                           | Explanation   | Commentary   |
|------------------------------------|---|--|
| Other substantive exploration data | <p data-bbox="600 199 956 252">misleading reporting of Exploration Results.</p> <ul data-bbox="551 264 956 580" style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul> | <ul data-bbox="1010 264 2190 1027" style="list-style-type: none"> <li>Fe<sub>2</sub>O<sub>3</sub> percentage is the most significant limiting factor on conversion of ore to high purity silica sand product and determines value after SiO<sub>2</sub> percentage.</li> <li>Fe<sub>2</sub>O<sub>3</sub> when found in association with TiO<sub>2</sub>, does not act as a contaminant or barrier to refining high- purity silica sand, with metallurgical testing showing gravity separation to accurately remove this impurity.</li> <li>Colour (oranges, yellows, reds) tend to be a significant - but not limiting – indicator on the identification of deleterious or low yielding sands.</li> <li>For the 1t bulk sample, a nominal 850g was composited from each of 1147 intervals drilled in 2023 selected to represent the Measured Category of the Si<sub>2</sub> Mineral Resource. The relevant drillholes and intervals are included in this Appendix in the Table of Material Drillholes and Results.</li> <li>Metallurgical testwork was performed at MT Carrara.</li> <li>Geochemical results were performed at ALS Brisbane using ME-XRF26 for head grade &amp; lower purity samples, and ME-PKG85 for higher purity product samples. ME-PKG85 and ME-XRF26 are considered a full digest.</li> <li>Metallurgical testwork was performed at MT Carrara, and consisted of:               <ul data-bbox="1106 676 2190 1027" style="list-style-type: none"> <li>Receiving a 1t bulk sample,</li> <li>Sample homogenisation, and then sub sampling 5kg of feed material.</li> <li>Sieving and retaining the -1mm+0.045mm product stream</li> <li>Sieving and retaining the -0.710mm+0.106mm product stream sample</li> <li>Undertaking a Heavy Liquid Separation using Bromoform and Acetone to achieve a SG of 2.7 (This is a benchtop scale testwork method to simulate the gravity separation process)</li> <li>The 2.7 SG floats are then attritioned for 5 minutes with 75% solids without any reagents</li> <li>The material is then wet sieved at 0.106mm, with the oversize fraction then passed through two reading IRMS units at 3.0A, 11500 Gauss and 8.0A and 18000 Gauss, respectively. Both with a Pole Gap of 4mm and a Roll Speed of 140rpm.</li> <li>The Non Magnetic fraction is then considered representative of final product for this stage of study.</li> </ul> </li> </ul> |
| Further work                       | <ul data-bbox="551 1038 965 1331" style="list-style-type: none"> <li>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>   | <ul data-bbox="1010 1038 2190 1412" style="list-style-type: none"> <li>Mr Watson and Mr Ainslie recommend the following programs to increase geological confidence on the deposit.</li> <li>Undertake sizing analysis and ICP (or other suitable low Fe<sub>2</sub>O<sub>3</sub> detection limit assay) on samples from 2021 &amp; 2022 programs, and maintaining this on future drill programs.</li> <li>In particular, the B1 horizon needs to be checked and tested in the interdune locations by drilling, or geological observations with hand augering to assist better defining geological continuity and support potential upgrade areas.</li> <li>Further study stages may require an improved understanding of environmental and cultural constraints (currently being identified through an EIS) relevant to the development of the deposit.</li> <li>Maintain regular bulk density measurements in future drill programs.</li> <li>Complete mineralogical analysis on Fe bearing minerals (such as surface coats, and inclusions) within the silica sands, and with respect to the relevant size fractions.</li> <li>Establishment of a geometallurgical model to underpin the relationship between head grade and amenability to processing.</li> </ul>   |

personal use only

| Criteria | Explanation | Commentary  |
|----------|-------------|---|
|          |             | <ul style="list-style-type: none"> <li>Submission of samples for umpire checks and bulk density assessment, is underway.</li> <li>Testing of lateral extensions of the deposit toward the Southeast</li> <li>Maintain the routine use of Certified Reference Materials (CRMs) to monitor and validate assay accuracy for primary and deleterious element</li> <li>Geochemical analysis of the +710µm and -106µm fractions</li> <li>Maintain regular collection of bulk density measurements to support accurate tonnage estimation.</li> <li>Verify and refine the interpretation of topsoil thickness across the resource area, considering the observed variability in vegetation density.</li> </ul> |

### SECTION 3: ESTIMATION AND REPORTING OF MINERAL RESOURCES

| Criteria                  | Explanation   | Commentary   |
|---------------------------|---|--|
| Database integrity        | <ul style="list-style-type: none"> <li>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</li> <li>Data validation procedures used.</li> </ul> | <ul style="list-style-type: none"> <li>The Mineral Resource Estimate for the Si2 Deposit is based on information developed by CSHPL. Mr Watson and Mr Ainslie consider it appropriate and reasonable for the purpose of estimating Mineral Resources in accordance with the guidelines of the JORC Code (2012).</li> <li>The data used for resource estimation, includes but was not limited to: <ul style="list-style-type: none"> <li>Drillhole collar information, including total hole depths;</li> <li>Drillhole lithological logging data;</li> <li>Sample data, including sample intervals and assay results</li> <li>Metallurgical testwork results;</li> <li>Density measurements;</li> <li>Quality Assurance/Quality Control (QAQC) data.</li> </ul> </li> <li>Data validation procedures included checks on collar locations, assay results against laboratory certificates, lithological coding consistency, and QAQC performance. No material data errors were identified.</li> </ul> |
| Site visits               | <ul style="list-style-type: none"> <li>Comment on any site visits undertaken by the Competent Person and the outcome of those visits.</li> <li>If no site visits have been undertaken indicate why this is the case.</li> </ul>   | <ul style="list-style-type: none"> <li>The Competent Person (Mr Ainslie) completed a site visit to the Si2 Deposit on 18 October 2022, The Competent Person (Mr Watson) completes quarterly site visits throughout 2021-2025. During the visits, active drilling and sampling procedures were observed, and field observations were made of the dune field characteristics. The site visit confirmed that drilling practices, sampling methods, and geological interpretations were consistent with the data provided.</li> </ul>  |
| Geological interpretation | <ul style="list-style-type: none"> <li>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</li> </ul>   | <ul style="list-style-type: none"> <li>The Si2 Deposit is located within the Cape Bedford–Cape Flattery Dune Field. Silica sand mineralisation is predominantly hosted within the trailing arms and apices of elongate parabolic aeolian dunes.</li> </ul>   |

personal use only

| Criteria                            | Explanation  | Commentary   |
|-------------------------------------|--|--|
|                                     | <ul style="list-style-type: none"> <li>Nature of the data used and of any assumptions made.</li> <li>The effect, if any, of alternative interpretations on Mineral Resource estimation.</li> <li>The use of geology in guiding and controlling Mineral Resource estimation.</li> <li>The factors affecting continuity both of grade and geology.</li> </ul>  | <ul style="list-style-type: none"> <li>The Mineral Resource is generally constrained to these dune features, which are clearly defined by surface LiDAR imagery. Drilling often intersects overlapped dunal features, which are not represented by LiDAR or aerial photography.</li> <li>Interdunal areas are often devoid of thick aeolian sand and predominantly exhibit exposed B1 horizons, clays, bedrock, or other sediments. Where drilling has intersected obscured silica sand mineralisation, the sampled sand has been included in the geological model.</li> <li>There is an observable basement high coincident with the topographic high towards the coastline on the western dunes.</li> <li>The interpreted geology of the Si2 Deposit is considered robust, and alternative interpretations are unlikely to materially impact the Mineral Resource Estimate.</li> </ul>   |
| Dimensions                          | <ul style="list-style-type: none"> <li>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</li> </ul>   | <ul style="list-style-type: none"> <li>The Mineral Resource Estimate spans a total area of approximately 1400 hectares with varying dimensions: a maximum length along strike of 9.5 km and a width up to 2.7 km. The average thickness of the resource is ~11 metres, though it can reach up to 55 metres. The top of the resource varies in elevation from 22 mRL to 114 mRL, corresponding to the topography, while the bottom ranges from 16 mRL to 96.5 mRL, aligning with the water table or resource basement level.</li> </ul>   |
| Estimation and modelling techniques | <ul style="list-style-type: none"> <li>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</li> <li>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</li> <li>The assumptions made regarding recovery of by-products.</li> <li>Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).</li> </ul> | <ul style="list-style-type: none"> <li>The Mineral Resource Estimate was prepared by modelling the high-purity silica sand unit (A2). The topography surface was surveyed using LIDAR techniques to a resolution of 1 m horizontally and 10 cm relative vertical accuracy. The top surface of the resource volume was set at 0.3 m below the LIDAR topography, representing the base of the topsoil. The base of the resource was constructed from:             <ul style="list-style-type: none"> <li>The base depth of the A2 unit determined from drilling</li> <li>The depth of the groundwater table determined from drilling</li> <li>Interpretation of the dune edge from LiDAR survey and aerial imagery</li> </ul> </li> <li>The resource boundary was established by geological interpretation and analysis of surface dune extents visible in LIDAR and aerial imagery. Both assayed drill samples and geological observations from hand auger holes were used to interpret the top and base of the mineralised profile</li> <li>Coordinates of drill-hole data and the block model were transformed so each dune base aligned to a single flattened RL, accounting for significant RL variations and dune thickness variability across the deposit. This allowed grade estimation to reflect podsolisation influences and reduce vertical smearing. Grades were interpolated within three semi-soft vertical domains (upper, middle, and lower sands) to capture observed vertical grade variations. After estimation, coordinates were transformed back to their original positions. A comparison with estimates run using untransformed coordinates showed comparable global tonnes and grades, confirming no material bias from the transformation.</li> <li>Hand auger holes were excluded from grade estimation due to concerns about sample contamination associated with the drilling method. These holes were predominantly located at the edges of the deposit, and their mineralised intervals were geologically interpreted to guide and constrain the resource boundaries. These intervals closely matched the interdunal level, further validating the geological interpretation.</li> <li>A block model was used to estimate the deposit grade. The orientation of the block model was set to the average strike of the dunes (315 degrees). The dimensions for the parent blocks were determined as 25 m across strike by 25</li> </ul> |

| Criteria                      | Explanation   | Commentary   |
|-------------------------------|---|--|
|                               | <ul style="list-style-type: none"> <li>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</li> <li>Any assumptions behind modelling of selective mining units.</li> <li>Any assumptions about correlation between variables.</li> <li>Description of how the geological interpretation was used to control the resource estimates.</li> <li>Discussion of basis for using or not using grade cutting or capping.</li> <li>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</li> </ul> | <p>m along strike by 3 m vertical, which were then subdivided into sub-blocks of 1 x 1 x 1 m to best fit the undulating geological model.</p> <ul style="list-style-type: none"> <li>All drillhole data were composited to nominal 3 m intervals prior to grade estimation. Grade estimation was completed using ordinary kriging, and a validation check estimate was completed using inverse distance weighting squared. The Ordinary Kriging (OK) method was used to estimate the grades and populate the block model for SiO<sub>2</sub>, Fe<sub>2</sub>O<sub>3</sub>, TiO<sub>2</sub>, Al<sub>2</sub>O<sub>3</sub> and LOI. The grade estimation process was conducted over 4 (four) sequential passes, each defined by specific search radii that help to guide to the categories of 'Measured', 'Indicated' and 'Inferred' in resource classification. This methodology involved setting the major sample search parameters for each block horizontally in the average strike direction of the dune (315 degrees), the semi-major search direction is also set horizontal (perpendicular to the major search direction) across the dune, and the minor search direction is set to vertical. The search distances used for each pass were derived from variography studies, ensuring that the interpolation aligns with the spatial characteristics of the geological data. All passes used a quadrant-based search with the maximum number of samples set at 16 and required a minimum of two drillholes for reliable grade estimation. Block discretisation of 4 x 4 x 4 (X,Y, Z) was employed.</li> </ul> |
| Moisture                      | <ul style="list-style-type: none"> <li>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</li> </ul>  | <ul style="list-style-type: none"> <li>Tonnages are estimated on a dry basis. Bulk density testwork was completed on dried and compacted samples, supporting a dry bulk density of 1.65 tonnes per cubic metre, which is typical for silica sand deposits.</li> </ul>  |
| Cut-off parameters            | <ul style="list-style-type: none"> <li>The basis of the adopted cut-off grade(s) or quality parameters applied.</li> </ul>  | <ul style="list-style-type: none"> <li>No cut-off grade was applied during compositing, block estimation, or reporting. The Mineral Resource is reported from all classified blocks with interpolated SiO<sub>2</sub> grades.</li> <li>While no cut-off was applied, a minimum SiO<sub>2</sub> grade of approximately 98.5% was one of several factors considered when defining the base of the geological model in drillholes. Geological domains were based on a combination of SiO<sub>2</sub> grade, sand colour, and contaminant levels.</li> <li>Minor internal intervals with SiO<sub>2</sub> grades below 98.5% were included within the high-purity silica domain where they did not materially affect the overall quality of the Mineral Resource.</li> </ul>  |
| Mining factors or assumptions | <ul style="list-style-type: none"> <li>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining</li> </ul>  | <ul style="list-style-type: none"> <li>The 2023 Northern Silica Scoping Study identified that mining operations will involve extracting material directly from the face using a Wheel Loader. Once extracted, the material will be transported to the processing plant either through a conveyor system or via a slurry pipeline.</li> <li>The Scoping Study excluded selective mining. The entire face will be sampled.</li> <li>Some intervals of less than 98.5% SiO<sub>2</sub> are included within the high purity silica unit however these do not materially dilute estimation.</li> <li>The upper 300 mm is likely to be topsoil and reserved for rehabilitation purposes. This overburden surface forms the upper boundary of the estimated geological domain and is not included in the Mineral Resource Estimate.</li> </ul>  |

personal use only

personal use only

| Criteria                             | Explanation  | Commentary   |
|--------------------------------------|--|--|
|                                      | <p>methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</p>   |  |
| Metallurgical factors or assumptions | <ul style="list-style-type: none"> <li>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</li> </ul>   | <ul style="list-style-type: none"> <li>Metallurgical testwork completed to-date confirms the silica sand resource is readily amenable to upgrading by screening, density separation, attritioning, and magnetic separation to produce a low iron, high purity silica sand for photovoltaic applications (solar panels).</li> <li>Metallurgical testwork completed to date across the NSP has been benchtop in nature. However the benchtop methods are agreeable with bulk testwork undertaken at the Cape Flattery Silica deposit, and the Galalar Silica Sand project.</li> <li>These initial metallurgical test results clearly demonstrate that low iron, high purity silica sands are potentially deliverable. As final products may require tight specifications, further systematic metallurgical testing should be considered from future infill and grade control drilling.</li> </ul>  |
| Environmental factors or assumptions | <ul style="list-style-type: none"> <li>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</li> </ul> | <ul style="list-style-type: none"> <li>CSHPL is currently undertaking an EIS on the Northern Silica Project. The study has not yet been completed, this Mineral Resource Estimate does not include a detailed environmental assessment at the Si2 Deposit, although early findings are considered material.</li> <li>Based on the nature of the deposit and proposed mining method, environmental factors are not expected to present significant barriers to eventual economic extraction.</li> <li>The 2023 Northern Silica Scoping Study identified in a processing flowsheet where high Fe, oversize, low grade, heavy minerals or slimes are rejected from product streams. The material will be stacked to form a replacement dune as a post mining surface, suitable for rehabilitation. The coagulants and flocculants used in processing are considered to be environmentally neutral. Early-stage considerations indicate that the proposed mining and processing activities are likely to have manageable environmental impacts, subject to future detailed assessments.</li> <li>The Si2 dune system lies above a perched aquifer, and a deeper dune aquifer which are hydrogeologically connected to window lakes within the dune fields. At present there is no relationship established between mining and the water levels of these lakes.</li> <li>The Si2 deposit area is proximal to several wetlands, vegetation types in the dune area are considered habitat for the Ctenotus rawlinsonii skink, and there are several protected plant species in the area such as Xanthostemon arenius, Acacia solenota, Dendrobium johannis, Myrmecodia beccarii.</li> </ul> |

| Criteria                                    | Explanation   | Commentary  |
|---|---|---|
| Bulk density                                | <ul style="list-style-type: none"> <li>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</li> <li>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc.), moisture and differences between rock and alteration zones within the deposit.</li> <li>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</li> </ul> | <ul style="list-style-type: none"> <li>Bulk density was determined through laboratory testwork on dried and compacted samples collected from drilling across the Si2 Deposit. A total of 132 samples were tested. The dry bulk density was calculated as the average of the measured samples, and a value of 1.65 tonnes per cubic metre was adopted for tonnage estimation. Void spaces and porosity are not considered material given the aeolian dune nature of the deposit.</li> </ul>  |
| Classification                              | <ul style="list-style-type: none"> <li>The basis for the classification of the Mineral Resources into varying confidence categories.</li> <li>Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</li> <li>Whether the result appropriately reflects the Competent Person's view of the deposit.</li> </ul>  | <ul style="list-style-type: none"> <li>The Mineral Resource has been classified according to the principles of the JORC Code (2012 edition). The resource has been divided into Measured, Indicated, and Inferred categories, corresponding to a high, moderate and low level of confidence in the geological and grade continuity of the resource. The classification integrates several key factors, including: depth of geological knowledge of the deposit, geological and mineralisation continuity, drill hole spacing, and the results of quality control measures.</li> <li>The classification also considers drill hole logging, analytical results from drill samples, geostatistical analysis, and confidence in geological and grade continuity, along with recent metallurgical/process test outcomes. Additionally, search and interpolation parameters, recently completed density data, and considerations from JORC Code Clause 49 are factored into the classification process.</li> <li>All relevant factors have been considered and the result reflects Mr Watson and Mr Ainslie's view of the deposit.</li> </ul> |
| Audits or reviews.                          | <ul style="list-style-type: none"> <li>The results of any audits or reviews of Mineral Resource estimates.</li> </ul>   | <ul style="list-style-type: none"> <li>Internal reviews of the Mineral Resource Estimate were conducted and confirmed that the results were robust and aligned with industry standards.</li> </ul>  |
| Discussion of relative accuracy/ confidence | <ul style="list-style-type: none"> <li>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify</li> </ul>  | <ul style="list-style-type: none"> <li>The Mineral Resource classification reflects the Competent Person's assessment of the confidence in the distribution of mineralisation and grade variability across the Si2 Deposit on a global basis.</li> <li>A high degree of confidence is placed in the geological interpretation, supported by the known formation processes of the aeolian dune sands. Consistently high SiO<sub>2</sub> grades and strong geological continuity have been observed across all drillholes. A detailed LiDAR survey provides high confidence in the volume estimation of the dunes.</li> <li>The interpreted geology of the Si2 Deposit is considered robust, and alternative interpretations are unlikely to materially impact the Mineral Resource Estimate.</li> </ul>  |

personal use only

| Criteria | Explanation | Commentary   |
|----------|-------------|--|
|          |             | <p>the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</p> <ul style="list-style-type: none"> <li>• The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</li> <li>• These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</li> </ul> |
|          |             | <ul style="list-style-type: none"> <li>• No production data is available for comparison. Estimation was based on interpolation of composited drillhole data within geological domains guided by dune morphology and lithological logging.</li> </ul>   |

personal use only

# APPENDIX B: TABLE OF MATERIAL DRILLHOLES

| Hole ID | Collar Information |                  |      |         |      |       | Mineralised Interval |      |      | Grain Size Fractions |                  |          | <0.71mm >0.106mm Grade         |                                | Head Grade       |                                |                  |                                |      |        |   |
|---------|--------------------|------------------|------|---------|------|-------|----------------------|------|------|----------------------|------------------|----------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|---|
|         | Northing           | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To   | <0.71mm              | <0.71mm >0.106mm | >0.106mm | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |   |
|         | GDA 2020 Zone 55   | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m    | m                    | m                | m        | %                              | %                              | %                | %                              | %                | %                              | %    | %      | % |
| AH001   | 8342968            | 306235           | 27.7 | 0°      | -90° | 1     | 2                    | 0.3  | 2    |                      |                  |          |                                |                                | 99.15            | 0.07                           | 0.53             | 0.12                           | 0.09 | 100.05 |   |
| PLT002  | 8342658            | 306128           | 32.7 | 0°      | -90° | 1     | 3.5                  | 0.3  | 3.5  |                      |                  |          |                                |                                | 99.02            | 0.08                           | 0.2              | 0.08                           | 0.19 | 99.65  |   |
| PLT003  | 8342713            | 306306           | 30.8 | 0°      | -90° | 1     | 6                    | 0.3  | 6    |                      |                  |          |                                |                                | 99.44            | 0.04                           | 0.08             | 0.05                           | 0.08 | 99.71  |   |
| PLT004  | 8342753            | 306470           | 28.8 | 0°      | -90° | 1     | 5                    | 0.3  | 5    |                      |                  |          |                                |                                | 99.15            | 0.09                           | 0.25             | 0.11                           | 0.12 | 99.8   |   |
| PLT005  | 8342691            | 306640           | 31.2 | 0°      | -90° | 1     | 4                    | 0.3  | 4    |                      |                  |          |                                |                                | 98.98            | 0.1                            | 0.22             | 0.06                           | 0.2  | 99.63  |   |
| PLT006  | 8342702            | 306874           | 31.2 | 0°      | -90° | 1, 2  | 2                    |      |      |                      |                  |          |                                |                                |                  |                                |                  |                                |      |        |   |
| PLT007  | 8342825            | 307012           | 31.4 | 0°      | -90° | 1     | 2                    | 0.3  | 2    |                      |                  |          |                                |                                | 99.18            | 0.02                           | 0.04             | 0.04                           | 0.41 | 99.71  |   |
| PLT008  | 8342934            | 307025           | 30.9 | 0°      | -90° | 1     | 2                    | 0.3  | 2    |                      |                  |          |                                |                                | 99.8             | 0.03                           | 0.04             | 0.05                           | 0.08 | 100.05 |   |
| PLT009  | 8343040            | 307169           | 31.1 | 0°      | -90° | 1     | 2                    | 0.3  | 2    |                      |                  |          |                                |                                | 99.31            | 0.04                           | 0.07             | 0.03                           | 0.19 | 99.67  |   |
| PLT010  | 8343190            | 307275           | 31.3 | 0°      | -90° | 1     | 2.5                  | 0.3  | 2.5  |                      |                  |          |                                |                                | 99.42            | 0.02                           | 0.03             | 0.03                           | 0.17 | 99.7   |   |
| PLT011A | 8343331            | 307086           | 33.8 | 0°      | -90° | 1, 3  | 4                    | 0.3  | 4    |                      |                  |          |                                |                                | 99.15            | 0.09                           | 0.17             | 0.04                           | 0.13 | 99.62  |   |
| PLT011B | 8343326            | 307090           | 33.3 | 0°      | -90° | 1     | 6                    | 0.3  | 6    |                      |                  |          |                                |                                | 98.99            | 0.11                           | 0.22             | 0.07                           | 0.05 | 99.5   |   |
| PLT012  | 8342909            | 306693           | 33.7 | 0°      | -90° | 1     | 5.7                  | 0.3  | 5.7  |                      |                  |          |                                |                                | 99.05            | 0.05                           | 0.09             | 0.07                           | 0.14 | 99.44  |   |
| PLT057  | 8342503            | 306740           | 30.9 | 0°      | -90° | 1     | 2.5                  | 0.3  | 2.5  |                      |                  |          |                                |                                | 99.17            | 0.06                           | 0.15             | 0.06                           | 0.2  | 99.7   |   |
| PLT058  | 8342398            | 306945           | 32.4 | 0°      | -90° | 1     | 2.8                  | 0.3  | 2.8  |                      |                  |          |                                |                                | 99.26            | 0.05                           | 0.11             | 0.07                           | 0.26 | 99.78  |   |
| PLT059  | 8342263            | 307090           | 31.9 | 0°      | -90° | 1     | 1.7                  | 0.3  | 1.7  |                      |                  |          |                                |                                | 99.11            | 0.05                           | 0.13             | 0.07                           | 0.39 | 99.77  |   |
| PLT060  | 8342196            | 307299           | 35.7 | 0°      | -90° | 1     | 5                    | 0.3  | 5    |                      |                  |          |                                |                                | 99.15            | 0.11                           | 0.21             | 0.1                            | 0.18 | 99.8   |   |
| PLT061  | 8342014            | 307422           | 33.5 | 0°      | -90° | 1     | 3                    | 0.3  | 3    |                      |                  |          |                                |                                | 99.32            | 0.06                           | 0.1              | 0.1                            | 0.11 | 99.71  |   |
| PLT062  | 8341948            | 307592           | 37.8 | 0°      | -90° | 1     | 6.7                  | 0.3  | 6.7  |                      |                  |          |                                |                                | 99.4             | 0.05                           | 0.09             | 0.07                           | 0.14 | 99.79  |   |
| PLT063  | 8341783            | 307739           | 38.2 | 0°      | -90° | 1     | 7.5                  | 0.3  | 7.5  |                      |                  |          |                                |                                | 99.22            | 0.1                            | 0.16             | 0.08                           | 0.16 | 99.78  |   |
| PLT064  | 8341689            | 307909           | 39.5 | 0°      | -90° | 1     | 8.5                  | 0.3  | 8.5  |                      |                  |          |                                |                                | 99.62            | 0.03                           | 0.05             | 0.05                           | 0.14 | 99.93  |   |
| PLT065  | 8341524            | 308035           | 46.1 | 0°      | -90° | 1     | 17                   | 0.3  | 14   |                      |                  |          |                                |                                | 99.66            | 0.04                           | 0.08             | 0.06                           | 0.13 | 99.99  |   |
| PLT066  | 8341340            | 307874           | 53.7 | 0°      | -90° | 1     | 23.5                 | 0.3  | 23.5 |                      |                  |          |                                |                                | 99.62            | 0.07                           | 0.11             | 0.07                           | 0.1  | 99.99  |   |
| PLT067  | 8341466            | 307691           | 49.7 | 0°      | -90° | 1     | 19.5                 | 0.3  | 19.5 |                      |                  |          |                                |                                | 99.4             | 0.13                           | 0.22             | 0.08                           | 0.18 | 100.06 |   |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| PLT068             | 8341199          | 308033           | 51.9 | 0°      | -90° | 1     | 32.5                 | 0.3  | 16                   |         |                  |                        |                                |                                | 99.77            | 0.06                           | 0.09             | 0.08                           | 0.09 | 100.1  |
| PLT069             | 8341078          | 307568           | 74.3 | 0°      | -90° | 1     | 40                   | 0.3  | 40                   |         |                  |                        |                                |                                | 99.04            | 0.24                           | 0.33             | 0.11                           | 0.15 | 99.95  |
| PLT070             | 8342335          | 305852           | 41.7 | 0°      | -90° | 1     | 10                   | 0.3  | 10                   |         |                  |                        |                                |                                | 99.32            | 0.12                           | 0.19             | 0.08                           | 0.08 | 99.84  |
| PLT071             | 8342239          | 305916           | 40.6 | 0°      | -90° | 1     | 9.7                  | 0.3  | 9.7                  |         |                  |                        |                                |                                | 99.62            | 0.05                           | 0.06             | 0.05                           | 0.11 | 99.89  |
| PLT072             | 8341992          | 305924           | 46   | 0°      | -90° | 1     | 15.5                 | 0.3  | 15.5                 |         |                  |                        |                                |                                | 99.24            | 0.09                           | 0.14             | 0.07                           | 0.22 | 99.82  |
| PLT073             | 8342028          | 306133           | 37   | 0°      | -90° | 1     | 8.5                  | 0.3  | 8.5                  |         |                  |                        |                                |                                | 99.64            | 0.06                           | 0.09             | 0.06                           | 0.07 | 99.96  |
| PLT074             | 8341881          | 306057           | 41.2 | 0°      | -90° | 1     | 10.8                 | 0.3  | 10.8                 |         |                  |                        |                                |                                | 99.49            | 0.13                           | 0.21             | 0.1                            | 0.11 | 100.09 |
| PLT075             | 8341683          | 306120           | 41.1 | 0°      | -90° | 1     | 11                   | 0.3  | 11                   |         |                  |                        |                                |                                | 99.49            | 0.09                           | 0.15             | 0.09                           | 0.14 | 100.02 |
| PLT076             | 8341551          | 306266           | 34.2 | 0°      | -90° | 1     | 4.4                  | 0.3  | 4.4                  |         |                  |                        |                                |                                | 99.68            | 0.03                           | 0.05             | 0.07                           | 0.15 | 100    |
| PLT077             | 8341495          | 306459           | 36.3 | 0°      | -90° | 1     | 7                    | 0.3  | 7                    |         |                  |                        |                                |                                | 99.22            | 0.11                           | 0.19             | 0.08                           | 0.13 | 99.77  |
| PLT078             | 8341360          | 306596           | 34.1 | 0°      | -90° | 1     | 6                    | 0.3  | 6                    |         |                  |                        |                                |                                | 99.36            | 0.05                           | 0.16             | 0.06                           | 0.13 | 99.79  |
| PLT079             | 8341253          | 307443           | 65.7 | 0°      | -90° | 1     | 37                   | 0.3  | 28                   |         |                  |                        |                                |                                | 99.18            | 0.19                           | 0.28             | 0.1                            | 0.1  | 99.92  |
| PLT080             | 8341408          | 307348           | 58.2 | 0°      | -90° | 1     | 31                   | 0.3  | 29                   |         |                  |                        |                                |                                | 99.25            | 0.09                           | 0.11             | 0.09                           | 0.06 | 99.62  |
| PLT081             | 8341496          | 307161           | 56.6 | 0°      | -90° | 1, 3  | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 98.85            | 0.2                            | 0.35             | 0.1                            | 0.12 | 99.7   |
| PLT081A            | 8341491          | 307167           | 57.1 | 0°      | -90° | 1     | 27                   | 0.3  | 22                   |         |                  |                        |                                |                                | 99.28            | 0.14                           | 0.19             | 0.07                           | 0.12 | 99.84  |
| PLT082             | 8341625          | 307014           | 50.2 | 0°      | -90° | 1     | 22                   | 0.3  | 22                   |         |                  |                        |                                |                                | 99.43            | 0.08                           | 0.09             | 0.08                           | 0.14 | 99.85  |
| PLT083             | 8341748          | 306847           | 49.4 | 0°      | -90° | 1     | 20.5                 | 0.3  | 20.5                 |         |                  |                        |                                |                                | 99.43            | 0.11                           | 0.19             | 0.07                           | 0.11 | 99.98  |
| PLT084             | 8341870          | 306708           | 49.1 | 0°      | -90° | 1     | 20                   | 0.3  | 20                   |         |                  |                        |                                |                                | 99.54            | 0.06                           | 0.1              | 0.06                           | 0.14 | 99.95  |
| PLT085             | 8342503          | 306552           | 30.3 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 98.83            | 0.04                           | 0.04             | 0.25                           | 0.3  | 99.54  |
| PLT086             | 8342301          | 306544           | 30.2 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.33            | 0.05                           | 0.08             | 0.1                            | 0.34 | 99.95  |
| PLT087             | 8342102          | 306612           | 31   | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 98.95            | 0.13                           | 0.29             | 0.12                           | 0.47 | 100.05 |
| PLT088             | 8340916          | 307690           | 66.6 | 0°      | -90° | 1     | 35                   | 0.3  | 35                   |         |                  |                        |                                |                                | 99.46            | 0.13                           | 0.16             | 0.08                           | 0.13 | 100.02 |
| PLT089             | 8340766          | 307833           | 58.8 | 0°      | -90° | 1     | 26                   | 0.3  | 26                   |         |                  |                        |                                |                                | 99.54            | 0.08                           | 0.11             | 0.07                           | 0.12 | 99.96  |
| PLT090             | 8340691          | 307998           | 68.3 | 0°      | -90° | 1     | 30                   | 0.3  | 30                   |         |                  |                        |                                |                                | 99.31            | 0.12                           | 0.18             | 0.08                           | 0.11 | 99.85  |
| PLT091             | 8341067          | 308189           | 48   | 0°      | -90° | 1     | 26.5                 | 0.3  | 12                   |         |                  |                        |                                |                                | 99.01            | 0.17                           | 0.28             | 0.1                            | 0.09 | 99.72  |
| PLT092             | 8340920          | 308340           | 45.3 | 0°      | -90° | 1     | 14.5                 | 0.3  | 8                    |         |                  |                        |                                |                                | 99.16            | 0.18                           | 0.32             | 0.11                           | 0.13 | 99.98  |
| PLT093             | 8340772          | 308511           | 44.8 | 0°      | -90° | 1     | 14.5                 | 0.3  | 10                   |         |                  |                        |                                |                                | 99.39            | 0.14                           | 0.24             | 0.11                           | 0.17 | 100.13 |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| PLT094             | 8341354          | 307052           | 54.8 | 0°      | -90° | 1     | 26                   | 0.3  | 26                   |         |                  |                        |                                |                                | 99.18            | 0.12                           | 0.15             | 0.08                           | 0.08 | 99.66  |
| PLT095             | 8341250          | 306983           | 60.3 | 0°      | -90° | 1     | 32                   | 0.3  | 32                   |         |                  |                        |                                |                                | 99.08            | 0.12                           | 0.18             | 0.07                           | 0.15 | 99.65  |
| PLT096             | 8341213          | 306829           | 54.9 | 0°      | -90° | 1     | 26                   | 0.3  | 26                   |         |                  |                        |                                |                                | 99.31            | 0.07                           | 0.11             | 0.05                           | 0.16 | 99.72  |
| PLT097             | 8341133          | 306930           | 63.4 | 0°      | -90° | 1     | 35                   | 0.3  | 35                   |         |                  |                        |                                |                                | 99.15            | 0.11                           | 0.15             | 0.07                           | 0.12 | 99.64  |
| PLT098             | 8341119          | 307020           | 70.5 | 0°      | -90° | 1     | 42.5                 | 0.3  | 42.5                 |         |                  |                        |                                |                                | 99.14            | 0.09                           | 0.13             | 0.06                           | 0.14 | 99.58  |
| PLT099             | 8341008          | 306929           | 71.1 | 0°      | -90° | 1, 3  | 42                   | 0.3  | 42                   |         |                  |                        |                                |                                | 99.21            | 0.08                           | 0.11             | 0.06                           | 0.08 | 99.56  |
| PLT100             | 8341005          | 307049           | 68.5 | 0°      | -90° | 1     | 39.5                 | 0.3  | 39.5                 |         |                  |                        |                                |                                | 99.21            | 0.11                           | 0.15             | 0.07                           | 0.09 | 99.68  |
| PLT101             | 8340923          | 306975           | 66.6 | 0°      | -90° | 1     | 36.5                 | 0.3  | 36.5                 |         |                  |                        |                                |                                | 99.35            | 0.08                           | 0.11             | 0.06                           | 0.1  | 99.75  |
| PLT102             | 8340830          | 307040           | 58.6 | 0°      | -90° | 1     | 27                   | 0.3  | 27                   |         |                  |                        |                                |                                | 99.22            | 0.11                           | 0.18             | 0.07                           | 0.1  | 99.72  |
| PLT103             | 8340756          | 307115           | 56.8 | 0°      | -90° | 1     | 25                   | 0.3  | 25                   |         |                  |                        |                                |                                | 99.42            | 0.11                           | 0.18             | 0.06                           | 0.1  | 99.92  |
| PLT104             | 8340589          | 308561           | 63.3 | 0°      | -90° | 1     | 35                   | 0.3  | 33                   |         |                  |                        |                                |                                | 99.3             | 0.1                            | 0.11             | 0.08                           | 0.12 | 99.77  |
| PLT105             | 8340432          | 308685           | 49.7 | 0°      | -90° | 1     | 26                   | 0.3  | 23                   |         |                  |                        |                                |                                | 99.51            | 0.09                           | 0.16             | 0.08                           | 0.13 | 100.07 |
| PLT106             | 8340399          | 308891           | 42.3 | 0°      | -90° | 1     | 14                   | 0.3  | 14                   |         |                  |                        |                                |                                | 99.42            | 0.05                           | 0.07             | 0.08                           | 0.1  | 99.77  |
| PLT107             | 8340251          | 309031           | 38.7 | 0°      | -90° | 1     | 10.5                 | 0.3  | 10.5                 |         |                  |                        |                                |                                | 99.12            | 0.09                           | 0.15             | 0.09                           | 0.12 | 99.6   |
| PLT108             | 8340062          | 309147           | 52.2 | 0°      | -90° | 1     | 24                   | 0.3  | 24                   |         |                  |                        |                                |                                | 99.19            | 0.12                           | 0.2              | 0.09                           | 0.07 | 99.72  |
| PLT109             | 8339886          | 309285           | 67.1 | 0°      | -90° | 1     | 39                   | 0.3  | 39                   |         |                  |                        |                                |                                | 99.02            | 0.17                           | 0.25             | 0.09                           | 0.09 | 99.7   |
| PLT110             | 8339786          | 309472           | 69.8 | 0°      | -90° | 1     | 42                   | 0.3  | 42                   |         |                  |                        |                                |                                | 99.2             | 0.14                           | 0.19             | 0.09                           | 0.08 | 99.78  |
| PLT111             | 8339677          | 309648           | 51.2 | 0°      | -90° | 1     | 23.5                 | 0.3  | 23.5                 |         |                  |                        |                                |                                | 99.24            | 0.09                           | 0.1              | 0.08                           | 0.13 | 99.71  |
| PLT112             | 8339537          | 309796           | 50.1 | 0°      | -90° | 1     | 22                   | 0.3  | 22                   |         |                  |                        |                                |                                | 99.36            | 0.08                           | 0.08             | 0.07                           | 0.13 | 99.79  |
| PLT113             | 8339410          | 309957           | 41.8 | 0°      | -90° | 1     | 14.5                 | 0.3  | 14.5                 |         |                  |                        |                                |                                | 99.22            | 0.1                            | 0.15             | 0.09                           | 0.08 | 99.7   |
| PLT114             | 8339282          | 310121           | 44.5 | 0°      | -90° | 1     | 17.5                 | 0.3  | 17                   |         |                  |                        |                                |                                | 99.17            | 0.13                           | 0.2              | 0.11                           | 0.11 | 99.78  |
| PLT115             | 8339163          | 310331           | 56.2 | 0°      | -90° | 1     | 29                   | 0.3  | 29                   |         |                  |                        |                                |                                | 98.86            | 0.24                           | 0.36             | 0.12                           | 0.1  | 99.77  |
| PLT116             | 8339016          | 310475           | 48.1 | 0°      | -90° | 1     | 22                   | 0.3  | 22                   |         |                  |                        |                                |                                | 99.36            | 0.1                            | 0.14             | 0.08                           | 0.11 | 99.84  |
| PLT117             | 8338868          | 310614           | 44   | 0°      | -90° | 1     | 18.5                 | 0.3  | 18.5                 |         |                  |                        |                                |                                | 99.26            | 0.13                           | 0.16             | 0.11                           | 0.1  | 99.85  |
| PLT118             | 8338620          | 310478           | 53.3 | 0°      | -90° | 1     | 28                   | 0.3  | 25                   |         |                  |                        |                                |                                | 99.41            | 0.07                           | 0.06             | 0.08                           | 0.08 | 99.72  |
| PLT119             | 8338746          | 310316           | 63   | 0°      | -90° | 1     | 37                   | 0.3  | 35                   |         |                  |                        |                                |                                | 99.36            | 0.07                           | 0.07             | 0.07                           | 0.12 | 99.72  |
| PLT120             | 8338882          | 310170           | 55.3 | 0°      | -90° | 1     | 29.5                 | 0.3  | 29.5                 |         |                  |                        |                                |                                | 99.39            | 0.08                           | 0.11             | 0.07                           | 0.12 | 99.81  |

| Collar Information |                  |                  |      |         |      |       |       | Mineralised Interval |      | Grain Size Fractions |                  |          | <0.71mm >0.106mm Grade         |                                | Head Grade       |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|-------|-------|----------------------|------|----------------------|------------------|----------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth | From                 | To   | <0.71mm              | <0.71mm >0.106mm | >0.106mm | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m     | m                    | m    | m                    | %                | %        | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| PLT121             | 8339029          | 310024           | 51.1 | 0°      | -90° | 1     | 25    | 0.3                  | 25   |                      |                  |          |                                |                                | 99.17            | 0.12                           | 0.17             | 0.09                           | 0.21 | 99.81  |
| PLT122             | 8339171          | 309871           | 54.5 | 0°      | -90° | 1     | 29    | 0.3                  | 29   |                      |                  |          |                                |                                | 99.45            | 0.08                           | 0.1              | 0.07                           | 0.12 | 99.86  |
| PLT123             | 8339299          | 309731           | 56.5 | 0°      | -90° | 1     | 32    | 0.3                  | 31   |                      |                  |          |                                |                                | 99.5             | 0.07                           | 0.09             | 0.07                           | 0.12 | 99.87  |
| PLT124             | 8339449          | 309604           | 62.5 | 0°      | -90° | 1     | 40    | 0.3                  | 40   |                      |                  |          |                                |                                | 99.1             | 0.19                           | 0.31             | 0.11                           | 0.16 | 99.94  |
| PLT125             | 8339606          | 309477           | 59.1 | 0°      | -90° | 1     | 34    | 0.3                  | 34   |                      |                  |          |                                |                                | 99.49            | 0.07                           | 0.11             | 0.07                           | 0.1  | 99.89  |
| PLT126             | 8339726          | 309306           | 68.2 | 0°      | -90° | 1     | 42    | 0.3                  | 42   |                      |                  |          |                                |                                | 99.43            | 0.12                           | 0.17             | 0.08                           | 0.09 | 99.97  |
| PLT127             | 8339622          | 309236           | 62.5 | 0°      | -90° | 1     | 30    | 0.3                  | 29   |                      |                  |          |                                |                                | 99.31            | 0.17                           | 0.25             | 0.08                           | 0.11 | 100.03 |
| PLT128             | 8338612          | 310261           | 44.8 | 0°      | -90° | 1     | 12    | 0.3                  | 10   |                      |                  |          |                                |                                | 99.48            | 0.06                           | 0.08             | 0.08                           | 0.13 | 99.89  |
| PLT129             | 8338772          | 310109           | 59.5 | 0°      | -90° | 1     | 31    | 0.3                  | 29   |                      |                  |          |                                |                                | 99.54            | 0.07                           | 0.09             | 0.08                           | 0.09 | 99.93  |
| PLT130             | 8338278          | 310236           | 50.5 | 0°      | -90° | 1     | 21    | 0.3                  | 18   |                      |                  |          |                                |                                | 99.5             | 0.07                           | 0.1              | 0.1                            | 0.07 | 99.89  |
| PLT131             | 8338413          | 310091           | 54.9 | 0°      | -90° | 1     | 21    | 0.3                  | 19   |                      |                  |          |                                |                                | 99.17            | 0.1                            | 0.14             | 0.07                           | 0.09 | 99.61  |
| PLT132             | 8338566          | 309971           | 59   | 0°      | -90° | 1     | 31    | 0.3                  | 23   |                      |                  |          |                                |                                | 99.19            | 0.12                           | 0.18             | 0.09                           | 0.08 | 99.7   |
| PLT133             | 8338763          | 309885           | 63.5 | 0°      | -90° | 1     | 36.8  | 0.3                  | 29   |                      |                  |          |                                |                                | 99.03            | 0.14                           | 0.21             | 0.11                           | 0.09 | 99.65  |
| PLT134             | 8338903          | 309742           | 66.7 | 0°      | -90° | 1     | 44.5  | 0.3                  | 38   |                      |                  |          |                                |                                | 99.17            | 0.09                           | 0.11             | 0.1                            | 0.11 | 99.62  |
| PLT135             | 8339045          | 309590           | 62.6 | 0°      | -90° | 1     | 33    | 0.3                  | 29   |                      |                  |          |                                |                                | 99.21            | 0.08                           | 0.11             | 0.11                           | 0.11 | 99.66  |
| PLT136             | 8339160          | 309427           | 62.7 | 0°      | -90° | 1     | 25    | 0.3                  | 22   |                      |                  |          |                                |                                | 99.38            | 0.05                           | 0.09             | 0.08                           | 0.11 | 99.74  |
| PLT137             | 8339287          | 309276           | 57.1 | 0°      | -90° | 1, 3  | 2     | 0.3                  | 2    |                      |                  |          |                                |                                | 99.73            | 0.06                           | 0.2              | 0.09                           | 0.16 | 100.25 |
| PLT243             | 8342658          | 307200           | 47.2 | 0°      | -90° | 1, 3  | 9     | 0.3                  | 9    |                      |                  |          |                                |                                | 99.42            | 0.05                           | 0.05             | 0.06                           | 0.1  | 99.73  |
| PLT244             | 8340676          | 307226           | 54.8 | 0°      | -90° | 1     | 23    | 0.3                  | 23   |                      |                  |          |                                |                                | 99.28            | 0.06                           | 0.1              | 0.07                           | 0.1  | 99.67  |
| PLT245             | 8340880          | 307340           | 61.3 | 0°      | -90° | 1     | 30    | 0.3                  | 30   |                      |                  |          |                                |                                | 99.28            | 0.09                           | 0.12             | 0.06                           | 0.13 | 99.75  |
| PLT246             | 8340772          | 307531           | 49.6 | 0°      | -90° | 1     | 17.7  | 0.3                  | 17.7 |                      |                  |          |                                |                                | 99.31            | 0.08                           | 0.13             | 0.08                           | 0.14 | 99.8   |
| PLT247             | 8341060          | 307196           | 59.8 | 0°      | -90° | 1     | 33    | 0.3                  | 32   |                      |                  |          |                                |                                | 99.55            | 0.04                           | 0.08             | 0.07                           | 0.12 | 99.9   |
| SI20001            | 8340578          | 308145           | 56.9 | 0°      | -90° | 1     | 21    | 0.3                  | 19   |                      |                  |          |                                |                                | 99.13            | 0.17                           | 0.23             | 0.12                           | 0.08 | 99.85  |
| SI20002            | 8340437          | 308281           | 58   | 0°      | -90° | 1     | 30    | 0.3                  | 16   |                      |                  |          |                                |                                | 99.15            | 0.13                           | 0.15             | 0.14                           | 0.12 | 99.77  |
| SI20003            | 8340267          | 308422           | 56.4 | 0°      | -90° | 1     | 15    | 0.3                  | 13   |                      |                  |          |                                |                                | 99.09            | 0.17                           | 0.19             | 0.16                           | 0.1  | 99.8   |
| SI20004            | 8340152          | 308572           | 59.7 | 0°      | -90° | 1     | 28    | 0.3                  | 19   |                      |                  |          |                                |                                | 99.25            | 0.12                           | 0.13             | 0.11                           | 0.17 | 99.84  |
| SI20005            | 8340039          | 308705           | 58.4 | 0°      | -90° | 1     | 31    | 0.3                  | 19   |                      |                  |          |                                |                                | 99.31            | 0.11                           | 0.12             | 0.14                           | 0.21 | 99.95  |

| Collar Information |                  |                  |       |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|-------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL    | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m     |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| SI20006            | 8339894          | 308832           | 52.3  | 0°      | -90° | 1     | 18                   | 0.3  | 16                   |         |                  |                        |                                |                                | 99.2             | 0.15                           | 0.2              | 0.16                           | 0.17 | 99.95  |
| SI20007            | 8339714          | 308948           | 56.1  | 0°      | -90° | 1     | 21                   | 0.3  | 12                   |         |                  |                        |                                |                                | 99.26            | 0.13                           | 0.22             | 0.12                           | 0.19 | 99.99  |
| SI20008            | 8339610          | 308940           | 63.3  | 0°      | -90° | 1     | 24                   | 0.3  | 23                   |         |                  |                        |                                |                                | 99.18            | 0.14                           | 0.16             | 0.17                           | 0.23 | 99.95  |
| SI20009            | 8339410          | 309149           | 64.6  | 0°      | -90° | 1     | 24                   | 0.3  | 21                   |         |                  |                        |                                |                                | 99.43            | 0.08                           | 0.13             | 0.09                           | 0.16 | 99.96  |
| SI20010            | 8339299          | 309268           | 58.2  | 0°      | -90° | 1     | 21                   | 0.3  | 16                   |         |                  |                        |                                |                                | 99.37            | 0.06                           | 0.08             | 0.1                            | 0.13 | 99.8   |
| SI20011            | 8339687          | 308773           | 44.4  | 0°      | -90° | 1     | 21                   | 0.3  | 10                   |         |                  |                        |                                |                                | 99.56            | 0.06                           | 0.07             | 0.11                           | 0.15 | 100.02 |
| SI20012            | 8339815          | 308551           | 59.3  | 0°      | -90° | 1     | 36                   | 0.3  | 22                   |         |                  |                        |                                |                                | 99.43            | 0.07                           | 0.12             | 0.12                           | 0.12 | 99.94  |
| SI20013            | 8339940          | 308175           | 62.6  | 0°      | -90° | 1     | 30                   | 0.3  | 30                   |         |                  |                        |                                |                                | 99.55            | 0.04                           | 0.05             | 0.08                           | 0.08 | 99.86  |
| SI20014            | 8340021          | 308100           | 66    | 0°      | -90° | 1     | 39                   | 0.3  | 36                   |         |                  |                        |                                |                                | 99.55            | 0.07                           | 0.09             | 0.07                           | 0.09 | 99.94  |
| SI20015            | 8340179          | 307848           | 56.3  | 0°      | -90° | 1     | 30                   | 0.3  | 30                   |         |                  |                        |                                |                                | 99.34            | 0.08                           | 0.12             | 0.14                           | 0.13 | 99.88  |
| SI20016            | 8340356          | 307613           | 59.3  | 0°      | -90° | 1     | 30                   | 0.3  | 30                   |         |                  |                        |                                |                                | 99.27            | 0.11                           | 0.15             | 0.1                            | 0.13 | 99.86  |
| SI20017            | 8340427          | 307511           | 61.8  | 0°      | -90° | 1     | 30                   | 0.3  | 30                   |         |                  |                        |                                |                                | 99.23            | 0.1                            | 0.17             | 0.09                           | 0.14 | 99.82  |
| SI20018            | 8340566          | 307373           | 55.3  | 0°      | -90° | 1     | 27                   | 0.3  | 27                   |         |                  |                        |                                |                                | 99.41            | 0.06                           | 0.1              | 0.09                           | 0.14 | 99.86  |
| SI20019            | 8336235          | 310064           | 107.4 | 0°      | -90° | 1     | 54                   | 0.3  | 54                   |         |                  |                        |                                |                                | 99.09            | 0.19                           | 0.24             | 0.12                           | 0.17 | 99.88  |
| SI20020            | 8336619          | 309877           | 99.6  | 0°      | -90° | 1     | 40                   | 0.3  | 37                   |         |                  |                        |                                |                                | 99.34            | 0.1                            | 0.11             | 0.12                           | 0.19 | 99.94  |
| SI20021            | 8336915          | 309662           | 79    | 0°      | -90° | 1     | 21                   | 0.3  | 18                   |         |                  |                        |                                |                                | 99.23            | 0.12                           | 0.16             | 0.14                           | 0.17 | 99.91  |
| SI20022            | 8337162          | 309350           | 74    | 0°      | -90° | 1     | 21                   | 0.3  | 18                   |         |                  |                        |                                |                                | 99.42            | 0.08                           | 0.11             | 0.09                           | 0.11 | 99.9   |
| SI20023            | 8337451          | 309132           | 75.9  | 0°      | -90° | 1     | 36                   | 0.3  | 31                   |         |                  |                        |                                |                                | 99.38            | 0.08                           | 0.12             | 0.14                           | 0.12 | 99.93  |
| SI20024            | 8337756          | 308905           | 63.8  | 0°      | -90° | 1     | 27                   | 0.3  | 25                   |         |                  |                        |                                |                                | 99.19            | 0.11                           | 0.19             | 0.17                           | 0.2  | 99.95  |
| SI20025            | 8338022          | 308704           | 74.9  | 0°      | -90° | 1     | 39                   | 0.3  | 36                   |         |                  |                        |                                |                                | 99.25            | 0.12                           | 0.2              | 0.12                           | 0.16 | 99.95  |
| SI20026            | 8338229          | 308519           | 53.3  | 0°      | -90° | 1     | 21                   | 0.3  | 18                   |         |                  |                        |                                |                                | 99.36            | 0.11                           | 0.15             | 0.13                           | 0.18 | 100    |
| SI20027            | 8338466          | 308283           | 57.1  | 0°      | -90° | 1     | 27                   | 0.3  | 27                   |         |                  |                        |                                |                                | 99.41            | 0.11                           | 0.15             | 0.1                            | 0.14 | 99.98  |
| SI20028            | 8338754          | 308278           | 68.5  | 0°      | -90° | 1     | 36                   | 0.3  | 36                   |         |                  |                        |                                |                                | 99.4             | 0.09                           | 0.13             | 0.1                            | 0.13 | 99.94  |
| SI20029            | 8338998          | 308085           | 51.9  | 0°      | -90° | 1     | 21                   | 0.3  | 21                   |         |                  |                        |                                |                                | 99.36            | 0.12                           | 0.2              | 0.1                            | 0.12 | 99.97  |
| SI20030            | 8339382          | 307940           | 48.9  | 0°      | -90° | 1     | 18                   | 0.3  | 18                   |         |                  |                        |                                |                                | 99.35            | 0.1                            | 0.17             | 0.09                           | 0.11 | 99.88  |
| SI20031            | 8339727          | 307770           | 60.7  | 0°      | -90° | 1     | 30                   | 0.3  | 30                   |         |                  |                        |                                |                                | 99.39            | 0.08                           | 0.11             | 0.08                           | 0.17 | 99.92  |
| SI20032            | 8339539          | 308204           | 50.3  | 0°      | -90° | 1     | 30                   | 0.3  | 30                   |         |                  |                        |                                |                                | 99.31            | 0.08                           | 0.12             | 0.08                           | 0.17 | 99.85  |

| Collar Information |                  |                  |       |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |   |
|--------------------|------------------|------------------|-------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|---|
| Hole ID            | Northing         | Easting          | RL    | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |   |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m     |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      | % |
| SI20033            | 8339245          | 308496           | 44.1  | 0°      | -90° | 1     | 9                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.16            | 0.07                           | 0.11             | 0.08                           | 0.15 | 99.64  |   |
| SI20034            | 8338987          | 308770           | 42.3  | 0°      | -90° | 1     | 9                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.29            | 0.09                           | 0.16             | 0.15                           | 0.19 | 99.93  |   |
| SI20035            | 8338649          | 309044           | 62.2  | 0°      | -90° | 1     | 21                   | 0.3  | 19                   |         |                  |                        |                                |                                | 99.62            | 0.05                           | 0.06             | 0.08                           | 0.11 | 99.98  |   |
| SI20036            | 8338378          | 309266           | 77.5  | 0°      | -90° | 1     | 34                   | 0.3  | 33                   |         |                  |                        |                                |                                | 99.41            | 0.11                           | 0.15             | 0.09                           | 0.1  | 99.95  |   |
| SI20037            | 8338154          | 309315           | 96.3  | 0°      | -90° | 1     | 48                   | 0.3  | 48                   |         |                  |                        |                                |                                | 99.26            | 0.11                           | 0.14             | 0.11                           | 0.18 | 99.89  |   |
| SI20038            | 8337961          | 309689           | 67.5  | 0°      | -90° | 1     | 36                   | 0.3  | 29                   |         |                  |                        |                                |                                | 99.2             | 0.12                           | 0.18             | 0.1                            | 0.16 | 99.84  |   |
| SI20039            | 8337728          | 309931           | 61.4  | 0°      | -90° | 1     | 21                   | 0.3  | 19                   |         |                  |                        |                                |                                | 99.34            | 0.07                           | 0.11             | 0.1                            | 0.12 | 99.82  |   |
| SI20040            | 8337442          | 310118           | 71.7  | 0°      | -90° | 1     | 21                   | 0.3  | 20                   |         |                  |                        |                                |                                | 99.06            | 0.18                           | 0.25             | 0.13                           | 0.15 | 99.87  |   |
| SI20041            | 8337128          | 310338           | 78.7  | 0°      | -90° | 1     | 21                   | 0.3  | 18                   |         |                  |                        |                                |                                | 99.3             | 0.1                            | 0.15             | 0.11                           | 0.18 | 99.92  |   |
| SI20042            | 8336831          | 310528           | 108.2 | 0°      | -90° | 1     | 51                   | 0.3  | 49                   |         |                  |                        |                                |                                | 99.18            | 0.16                           | 0.19             | 0.11                           | 0.12 | 99.87  |   |
| SI20043            | 8336887          | 310178           | 69.8  | 0°      | -90° | 1, 2  | 6                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI20044            | 8337151          | 310050           | 69.7  | 0°      | -90° | 1     | 9                    | 0.3  | 7                    |         |                  |                        |                                |                                | 98.88            | 0.24                           | 0.37             | 0.13                           | 0.18 | 99.91  |   |
| SI20045            | 8337344          | 309807           | 68.2  | 0°      | -90° | 1     | 12                   | 0.3  | 6                    |         |                  |                        |                                |                                | 99.24            | 0.16                           | 0.2              | 0.13                           | 0.16 | 99.99  |   |
| SI20046            | 8337584          | 309566           | 75.5  | 0°      | -90° | 1     | 18                   | 0.3  | 16                   |         |                  |                        |                                |                                | 98.15            | 0.33                           | 0.49             | 0.15                           | 0.5  | 99.77  |   |
| SI20047            | 8337817          | 309357           | 58.3  | 0°      | -90° | 1     | 9                    | 0.3  | 6                    |         |                  |                        |                                |                                | 99.18            | 0.11                           | 0.19             | 0.13                           | 0.28 | 99.96  |   |
| SI20048            | 8338117          | 309141           | 58.2  | 0°      | -90° | 1     | 12                   | 0.3  | 9                    |         |                  |                        |                                |                                | 99.41            | 0.08                           | 0.16             | 0.09                           | 0.2  | 100.01 |   |
| SI20049            | 8337505          | 309932           | 61.4  | 0°      | -90° | 1     | 24                   | 0.3  | 14                   |         |                  |                        |                                |                                | 99.34            | 0.12                           | 0.15             | 0.11                           | 0.2  | 99.98  |   |
| SI20050            | 8337744          | 309606           | 66.9  | 0°      | -90° | 1     | 18                   | 0.3  | 15                   |         |                  |                        |                                |                                | 99.23            | 0.12                           | 0.15             | 0.14                           | 0.14 | 99.86  |   |
| SI20051            | 8338361          | 308937           | 67.2  | 0°      | -90° | 1     | 21                   | 0.3  | 19                   |         |                  |                        |                                |                                | 99.17            | 0.14                           | 0.2              | 0.13                           | 0.16 | 99.89  |   |
| SI20052            | 8338547          | 308608           | 60.6  | 0°      | -90° | 1     | 24                   | 0.3  | 22                   |         |                  |                        |                                |                                | 99.15            | 0.13                           | 0.21             | 0.12                           | 0.15 | 99.88  |   |
| SI20053            | 8338149          | 308189           | 47.8  | 0°      | -90° | 1     | 18                   | 0.3  | 16                   |         |                  |                        |                                |                                | 99.19            | 0.07                           | 0.13             | 0.12                           | 0.15 | 99.82  |   |
| SI20054            | 8339986          | 307709           | 40.4  | 0°      | -90° | 1     | 12                   | 0.3  | 12                   |         |                  |                        |                                |                                | 99.16            | 0.05                           | 0.1              | 0.15                           | 0.23 | 99.78  |   |
| SI20055            | 8339588          | 308408           | 34.3  | 0°      | -90° | 1     | 15                   | 0.3  | 6                    |         |                  |                        |                                |                                | 99.3             | 0.09                           | 0.18             | 0.08                           | 0.15 | 99.93  |   |
| SI20056            | 8339043          | 308921           | 44.1  | 0°      | -90° | 1     | 21                   | 0.3  | 17                   |         |                  |                        |                                |                                | 99.35            | 0.09                           | 0.17             | 0.13                           | 0.15 | 99.96  |   |
| SI20057            | 8338544          | 309577           | 41.8  | 0°      | -90° | 1, 2  | 17                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI20058            | 8337965          | 310117           | 38    | 0°      | -90° | 1, 2  | 15                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI20059            | 8337465          | 310608           | 48.1  | 0°      | -90° | 1, 2  | 18                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |   |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|---|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |   |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      | % |
| SI20060            | 8337676          | 310388           | 38.4 | 0°      | -90° | 1, 6  | 15                   | 0.3  | 15                   |         |                  |                        |                                |                                | 98.29            | 0.17                           | 0.37             | 0.64                           | 0.39 | 99.94  |   |
| SI20061            | 8338299          | 309835           | 37.7 | 0°      | -90° | 1, 2  | 21                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI20062            | 8338820          | 309305           | 35.6 | 0°      | -90° | 1     | 18                   | 0.3  | 16                   |         |                  |                        |                                |                                | 99.48            | 0.04                           | 0.1              | 0.12                           | 0.15 | 99.99  |   |
| SI20063            | 8339308          | 308657           | 42.1 | 0°      | -90° | 1     | 21                   | 0.3  | 19                   |         |                  |                        |                                |                                | 98.46            | 0.09                           | 0.17             | 0.32                           | 0.71 | 99.87  |   |
| SI20064            | 8339872          | 308425           | 49.9 | 0°      | -90° | 1     | 24                   | 0.3  | 20                   |         |                  |                        |                                |                                | 99.23            | 0.12                           | 0.21             | 0.11                           | 0.16 | 99.91  |   |
| SI20065            | 8338040          | 310505           | 47.2 | 0°      | -90° | 1     | 21                   | 0.3  | 13                   |         |                  |                        |                                |                                | 99.37            | 0.08                           | 0.14             | 0.11                           | 0.18 | 99.99  |   |
| SI20066            | 8337495          | 310852           | 67.7 | 0°      | -90° | 1     | 34                   | 0.3  | 32                   |         |                  |                        |                                |                                | 99.24            | 0.12                           | 0.19             | 0.11                           | 0.16 | 99.91  |   |
| SI20067            | 8337770          | 310799           | 46.8 | 0°      | -90° | 1     | 15                   | 0.3  | 10                   |         |                  |                        |                                |                                | 99.2             | 0.17                           | 0.31             | 0.14                           | 0.16 | 100.06 |   |
| SI20068            | 8338469          | 310389           | 39.7 | 0°      | -90° | 1     | 12                   | 0.3  | 7                    |         |                  |                        |                                |                                | 99.29            | 0.14                           | 0.22             | 0.12                           | 0.17 | 100.03 |   |
| SI20069            | 8338015          | 310865           | 31.9 | 0°      | -90° | 1     | 12                   | 0.3  | 11                   |         |                  |                        |                                |                                | 99.15            | 0.05                           | 0.1              | 0.14                           | 0.28 | 99.84  |   |
| SI20070            | 8337828          | 311098           | 30.4 | 0°      | -90° | 1, 2  | 12                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI20071            | 8338238          | 310586           | 31   | 0°      | -90° | 1     | 15                   | 0.3  | 9                    |         |                  |                        |                                |                                | 99.18            | 0.05                           | 0.07             | 0.11                           | 0.3  | 99.83  |   |
| SI20072            | 8338575          | 310881           | 35.2 | 0°      | -90° | 1     | 15                   | 0.3  | 15                   |         |                  |                        |                                |                                | 99.32            | 0.1                            | 0.15             | 0.12                           | 0.11 | 99.94  |   |
| SI20073            | 8338123          | 311311           | 43.5 | 0°      | -90° | 1     | 24                   | 0.3  | 24                   |         |                  |                        |                                |                                | 98.62            | 0.33                           | 0.47             | 0.17                           | 0.14 | 99.89  |   |
| SI20074            | 8338352          | 311101           | 38.2 | 0°      | -90° | 1     | 18                   | 0.3  | 18                   |         |                  |                        |                                |                                | 98.98            | 0.18                           | 0.25             | 0.15                           | 0.19 | 99.91  |   |
| SI20075            | 8338727          | 310750           | 44.1 | 0°      | -90° | 1     | 21                   | 0.3  | 21                   |         |                  |                        |                                |                                | 99.08            | 0.17                           | 0.23             | 0.14                           | 0.14 | 99.89  |   |
| SI20076            | 8341248          | 307662           | 46.2 | 0°      | -90° | 1     | 12                   | 0.3  | 9                    |         |                  |                        |                                |                                | 99.36            | 0.04                           | 0.08             | 0.08                           | 0.2  | 99.84  |   |
| SI20077            | 8341375          | 307834           | 55.2 | 0°      | -90° | 1     | 27                   | 0.3  | 26                   |         |                  |                        |                                |                                | 99.41            | 0.07                           | 0.1              | 0.08                           | 0.08 | 99.79  |   |
| SI20078            | 8341334          | 307879           | 53.5 | 0°      | -90° | 1     | 24                   | 0.3  | 23                   |         |                  |                        |                                |                                | 99.37            | 0.07                           | 0.11             | 0.08                           | 0.03 | 99.74  |   |
| SI20079            | 8341608          | 308005           | 39.5 | 0°      | -90° | 1     | 12                   | 0.3  | 12                   |         |                  |                        |                                |                                | 99.11            | 0.04                           | 0.07             | 0.13                           | 0.16 | 99.56  |   |
| SI20080            | 8341399          | 307996           | 39.9 | 0°      | -90° | 1     | 12                   | 0.3  | 12                   |         |                  |                        |                                |                                | 99.29            | 0.09                           | 0.15             | 0.12                           | 0.07 | 99.8   |   |
| SI20081            | 8341278          | 307934           | 53.7 | 0°      | -90° | 1     | 21                   | 0.3  | 19                   |         |                  |                        |                                |                                | 99.33            | 0.07                           | 0.1              | 0.1                            | 0.05 | 99.72  |   |
| SI20082            | 8341122          | 308130           | 44.4 | 0°      | -90° | 1     | 12                   | 0.3  | 8                    |         |                  |                        |                                |                                | 99.1             | 0.1                            | 0.16             | 0.14                           | 0.14 | 99.73  |   |
| SI21001            | 8339979          | 309213           | 52.9 | 0°      | -90° |       | 30                   | 0.3  | 30                   | 0.1     | 95.3             | 4.6                    | 0.07                           | 0.108                          | 99.27            | 0.17                           | 0.2              | 0.12                           | 0.14 | 99.99  |   |
| SI21002            | 8339831          | 309383           | 60.8 | 0°      | -90° |       | 39                   | 0.3  | 37                   | 0.1     | 96.3             | 3.7                    | 0.06                           | 0.097                          | 99.4             | 0.13                           | 0.16             | 0.11                           | 0.12 | 100    |   |
| SI21003            | 8339731          | 309562           | 60.3 | 0°      | -90° |       | 36                   | 0.3  | 36                   | 0.2     | 97               | 2.8                    | 0.065                          | 0.105                          | 99.32            | 0.14                           | 0.17             | 0.11                           | 0.17 | 99.98  |   |
| SI21004            | 8339590          | 309728           | 51.6 | 0°      | -90° |       | 27                   | 0.3  | 27                   | 0.1     | 97.3             | 2.5                    | 0.059                          | 0.072                          | 99.45            | 0.08                           | 0.09             | 0.11                           | 0.19 | 99.98  |   |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| SI21005            | 8339460          | 309875           | 50.7 | 0°      | -90° |       | 27                   | 0.3  | 27                   | 0.4     | 97.2             | 2.4                    | 0.056                          | 0.065                          | 99.49            | 0.08                           | 0.08             | 0.1                            | 0.15 | 99.97  |
| SI21006            | 8339317          | 310036           | 48.4 | 0°      | -90° |       | 24                   | 0.3  | 24                   | 0.1     | 97               | 3                      | 0.067                          | 0.092                          | 99.39            | 0.12                           | 0.13             | 0.12                           | 0.15 | 99.97  |
| SI21007            | 8339233          | 310245           | 44   | 0°      | -90° |       | 21                   | 0.3  | 19                   | 0.1     | 97.7             | 2.3                    | 0.079                          | 0.11                           | 99.29            | 0.14                           | 0.17             | 0.13                           | 0.18 | 99.97  |
| SI21008            | 8339094          | 310405           | 55.5 | 0°      | -90° |       | 33                   | 0.3  | 33                   | 0.1     | 96               | 4                      | 0.093                          | 0.176                          | 99               | 0.25                           | 0.34             | 0.14                           | 0.16 | 99.98  |
| SI21009            | 8338948          | 310535           | 44.5 | 0°      | -90° |       | 24                   | 0.3  | 24                   | 0.1     | 96.6             | 3.4                    | 0.076                          | 0.126                          | 99.28            | 0.15                           | 0.18             | 0.12                           | 0.15 | 99.96  |
| SI21010            | 8338784          | 310685           | 47.5 | 0°      | -90° |       | 30                   | 0.3  | 29                   | 0.1     | 97               | 2.9                    | 0.092                          | 0.124                          | 99.28            | 0.13                           | 0.14             | 0.13                           | 0.2  | 99.95  |
| SI21011            | 8338651          | 310818           | 40.1 | 0°      | -90° |       | 24                   | 0.3  | 24                   | 0.1     | 97.3             | 2.6                    | 0.096                          | 0.112                          | 99.19            | 0.12                           | 0.13             | 0.14                           | 0.32 | 99.98  |
| SI21012            | 8338525          | 310962           | 35.4 | 0°      | -90° |       | 15                   | 0.3  | 15                   | 0.1     | 97.3             | 2.6                    | 0.101                          | 0.13                           | 99.32            | 0.13                           | 0.14             | 0.15                           | 0.18 | 99.98  |
| SI21013            | 8338672          | 310392           | 65.8 | 0°      | -90° |       | 40                   | 0.3  | 36                   | 0.2     | 96.9             | 2.9                    | 0.065                          | 0.083                          | 99.5             | 0.1                            | 0.09             | 0.1                            | 0.13 | 99.98  |
| SI21014            | 8338826          | 310239           | 56.2 | 0°      | -90° |       | 33                   | 0.3  | 33                   | 0.1     | 95.6             | 4.3                    | 0.106                          | 0.091                          | 99.41            | 0.11                           | 0.13             | 0.16                           | 0.14 | 99.98  |
| SI21015            | 8338932          | 310086           | 58.1 | 0°      | -90° |       | 34                   | 0.3  | 33                   | 0.1     | 96.1             | 3.8                    | 0.061                          | 0.088                          | 99.41            | 0.12                           | 0.14             | 0.1                            | 0.13 | 99.98  |
| SI21016            | 8339096          | 309940           | 53   | 0°      | -90° |       | 30                   | 0.3  | 29                   | 0.3     | 96.5             | 3.2                    | 0.155                          | 0.069                          | 99.16            | 0.14                           | 0.18             | 0.16                           | 0.17 | 99.87  |
| SI21017            | 8339240          | 309811           | 56.4 | 0°      | -90° |       | 33                   | 0.3  | 33                   | 0.9     | 96.3             | 2.8                    | 0.087                          | 0.071                          | 99.39            | 0.09                           | 0.07             | 0.1                            | 0.15 | 99.85  |
| SI21018            | 8339370          | 309660           | 59.7 | 0°      | -90° |       | 42                   | 0.3  | 40                   | 0.2     | 95.9             | 4                      | 0.072                          | 0.087                          | 99.4             | 0.09                           | 0.1              | 0.09                           | 0.13 | 99.87  |
| SI21019            | 8339515          | 309541           | 58.2 | 0°      | -90° |       | 36                   | 0.3  | 36                   | 0.1     | 96.8             | 3.1                    | 0.097                          | 0.072                          | 99.37            | 0.08                           | 0.11             | 0.14                           | 0.16 | 99.9   |
| SI21020            | 8339650          | 309367           | 60   | 0°      | -90° |       | 36                   | 0.3  | 36                   | 0.2     | 96.6             | 3.2                    | 0.061                          | 0.098                          | 99.44            | 0.11                           | 0.16             | 0.09                           | 0.13 | 99.97  |
| SI21021            | 8339760          | 309253           | 69.3 | 0°      | -90° |       | 45                   | 0.3  | 45                   | 0.2     | 95.9             | 3.9                    | 0.068                          | 0.109                          | 99.42            | 0.14                           | 0.2              | 0.09                           | 0.1  | 100.01 |
| SI21022            | 8339691          | 309266           | 66.8 | 0°      | -90° |       | 42                   | 0.3  | 39                   | 0.2     | 96.1             | 3.7                    | 0.062                          | 0.086                          | 99.48            | 0.11                           | 0.13             | 0.08                           | 0.1  | 99.95  |
| SI21023            | 8339591          | 309216           | 63.3 | 0°      | -90° |       | 33                   | 0.3  | 28                   | 0.1     | 95.5             | 4.5                    | 0.144                          | 0.192                          | 99.01            | 0.23                           | 0.29             | 0.17                           | 0.14 | 99.92  |
| SI21024            | 8339643          | 309105           | 62.4 | 0°      | -90° |       | 27                   | 0.3  | 24                   | 0.1     | 92.9             | 7                      | 0.082                          | 0.119                          | 99.21            | 0.16                           | 0.2              | 0.12                           | 0.12 | 99.86  |
| SI21025            | 8339674          | 309035           | 58.8 | 0°      | -90° |       | 21                   | 0.3  | 20                   | 0.3     | 95.9             | 3.9                    | 0.105                          | 0.152                          | 99.18            | 0.19                           | 0.17             | 0.13                           | 0.16 | 99.91  |
| SI21026            | 8339818          | 308909           | 52.4 | 0°      | -90° |       | 15                   | 0.3  | 13                   | 0.1     | 97.3             | 2.8                    | 0.545                          | 0.228                          | 99.26            | 0.15                           | 0.15             | 0.11                           | 0.15 | 99.88  |
| SI21027            | 8339668          | 308894           | 64.2 | 0°      | -90° |       | 24                   | 0.3  | 23                   | 0.1     | 96.7             | 3.3                    | 0.067                          | 0.106                          | 99.26            | 0.15                           | 0.18             | 0.11                           | 0.11 | 99.87  |
| SI21028            | 8339552          | 308992           | 55.2 | 0°      | -90° |       | 30                   | 0.3  | 15                   | 0.2     | 95.7             | 4.1                    | 0.079                          | 0.087                          | 99.38            | 0.11                           | 0.12             | 0.13                           | 0.17 | 99.96  |
| SI21029            | 8339495          | 309084           | 60.3 | 0°      | -90° |       | 21                   | 0.3  | 16                   | 0.1     | 97.6             | 2.4                    | 0.085                          | 0.064                          | 99.31            | 0.08                           | 0.1              | 0.11                           | 0.1  | 99.82  |
| SI21030            | 8339360          | 309205           | 59   | 0°      | -90° |       | 21                   | 0.3  | 16                   | 0.1     | 98               | 2                      | 0.063                          | 0.045                          | 99.35            | 0.05                           | 0.06             | 0.11                           | 0.11 | 99.86  |
| SI21031            | 8339223          | 309323           | 49   | 0°      | -90° |       | 9                    | 0.3  | 6                    | 0.1     | 97.9             | 2                      | 0.081                          | 0.054                          | 99.47            | 0.07                           | 0.08             | 0.13                           | 0.14 | 100.09 |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| SI21032            | 8339093          | 309504           | 55.3 | 0°      | -90° |       | 24                   | 0.3  | 18                   | 0.1     | 97.7             | 2.3                    | 0.071                          | 0.059                          | 99.56            | 0.07                           | 0.08             | 0.11                           | 0.1  | 100.08 |
| SI21033            | 8338969          | 309674           | 59.3 | 0°      | -90° |       | 32                   | 0.3  | 27                   | 0.1     | 97.9             | 2.1                    | 0.066                          | 0.054                          | 99.5             | 0.07                           | 0.07             | 0.1                            | 0.11 | 99.96  |
| SI21034            | 8338808          | 309776           | 61   | 0°      | -90° |       | 30                   | 0.3  | 30                   | 0.1     | 98.2             | 1.7                    | 0.073                          | 0.049                          | 99.39            | 0.07                           | 0.07             | 0.11                           | 0.13 | 99.84  |
| SI21035            | 8338897          | 309851           | 70.5 | 0°      | -90° |       | 45                   | 0.3  | 42                   | 0.1     | 97.8             | 2.1                    | 0.072                          | 0.085                          | 99.28            | 0.1                            | 0.13             | 0.15                           | 0.11 | 99.84  |
| SI21036            | 8339158          | 309562           | 56   | 0°      | -90° |       | 27                   | 0.3  | 25                   | 0.1     | 96.8             | 3.2                    | 0.087                          | 0.131                          | 98.84            | 0.17                           | 0.28             | 0.14                           | 0.17 | 99.69  |
| SI21037            | 8339224          | 309498           | 55.7 | 0°      | -90° |       | 36                   | 0.3  | 36                   | 0.2     | 96.5             | 3.3                    | 0.186                          | 0.167                          | 98.61            | 0.21                           | 0.24             | 0.24                           | 0.2  | 99.81  |
| SI21038            | 8339305          | 309438           | 56.6 | 0°      | -90° |       | 27                   | 0.3  | 23                   | 0.1     | 97.4             | 2.6                    | 0.098                          | 0.138                          | 99.06            | 0.18                           | 0.27             | 0.13                           | 0.15 | 99.88  |
| SI21039            | 8339386          | 309386           | 60.3 | 0°      | -90° |       | 27                   | 0.3  | 23                   | 0.2     | 98.1             | 1.7                    | 0.082                          | 0.086                          | 99.29            | 0.11                           | 0.14             | 0.11                           | 0.13 | 99.86  |
| SI21040            | 8339452          | 309303           | 63.2 | 0°      | -90° |       | 30                   | 0.3  | 26                   | 0.1     | 97.3             | 2.7                    | 0.072                          | 0.081                          | 99.45            | 0.1                            | 0.14             | 0.11                           | 0.11 | 100.02 |
| SI21041            | 8339512          | 309259           | 64.3 | 0°      | -90° |       | 30                   | 0.3  | 28                   | 0.1     | 96.7             | 3.3                    | 0.107                          | 0.155                          | 99               | 0.23                           | 0.33             | 0.16                           | 0.14 | 99.96  |
| SI21042            | 8338756          | 309887           | 62.9 | 0°      | -90° |       | 33                   | 0.3  | 29                   | 0.1     | 97.4             | 2.6                    | 0.092                          | 0.111                          | 99.1             | 0.16                           | 0.22             | 0.15                           | 0.13 | 99.86  |
| SI21043            | 8338846          | 309829           | 66.6 | 0°      | -90° |       | 39                   | 0.3  | 36                   | 0.1     | 97.3             | 2.7                    | 0.076                          | 0.096                          | 99.31            | 0.12                           | 0.17             | 0.13                           | 0.05 | 99.9   |
| SI21044            | 8338660          | 309909           | 58.9 | 0°      | -90° |       | 24                   | 0.3  | 20                   | 0.1     | 96.3             | 3.7                    | 0.07                           | 0.095                          | 99.36            | 0.16                           | 0.26             | 0.12                           | 0.04 | 100.06 |
| SI21045            | 8338489          | 310044           | 56.1 | 0°      | -90° |       | 21                   | 0.3  | 20                   | 0.1     | 97.6             | 2.4                    | 0.064                          | 0.055                          | 99.44            | 0.07                           | 0.1              | 0.1                            | 0.11 | 99.94  |
| SI21046            | 8338336          | 310171           | 52.8 | 0°      | -90° |       | 24                   | 0.3  | 21                   | 0.2     | 97.6             | 2.1                    | 0.054                          | 0.046                          | 99.5             | 0.07                           | 0.09             | 0.08                           | 0.11 | 100    |
| SI21047            | 8338217          | 310321           | 49   | 0°      | -90° |       | 15                   | 0.3  | 13                   | 0.1     | 98               | 2                      | 0.062                          | 0.045                          | 99.54            | 0.06                           | 0.07             | 0.09                           | 0.13 | 99.98  |
| SI21048            | 8338146          | 310386           | 49   | 0°      | -90° |       | 15                   | 0.3  | 14                   | 0.1     | 98.7             | 1.2                    | 0.063                          | 0.033                          | 99.46            | 0.05                           | 0.06             | 0.1                            | 0.14 | 99.91  |
| SI21049            | 8338099          | 310439           | 47.9 | 0°      | -90° |       | 15                   | 0.3  | 10                   | 0.1     | 98.6             | 1.4                    | 0.075                          | 0.063                          | 99.32            | 0.08                           | 0.13             | 0.13                           | 0.18 | 99.94  |
| SI21050            | 8338869          | 309942           | 62.2 | 0°      | -90° |       | 39                   | 0.3  | 34                   | 0.1     | 96.9             | 3.1                    | 0.09                           | 0.104                          | 99.03            | 0.14                           | 0.22             | 0.15                           | 0.13 | 99.78  |
| SI21051            | 8338673          | 310174           | 53.5 | 0°      | -90° |       | 24                   | 0.3  | 20                   | 0.1     | 97               | 2.9                    | 0.078                          | 0.067                          | 99.36            | 0.08                           | 0.11             | 0.13                           | 0.14 | 99.89  |
| SI21052            | 8338533          | 310327           | 40.3 | 0°      | -90° |       | 12                   | 0.3  | 7                    | 0.4     | 94.2             | 5.6                    | 0.068                          | 0.077                          | 98.99            | 0.14                           | 0.15             | 0.1                            | 0.17 | 99.71  |
| SI21053            | 8338390          | 310455           | 38.2 | 0°      | -90° |       | 18                   | 0.3  | 18                   | 0.4     | 95.6             | 4                      | 0.223                          | 0.114                          | 98.84            | 0.13                           | 0.14             | 0.27                           | 0.27 | 99.8   |
| SI21054            | 8338324          | 310529           | 33.3 | 0°      | -90° |       | 12                   | 0.3  | 12                   | 0.2     | 94.8             | 5.1                    | 0.071                          | 0.046                          | 99.28            | 0.04                           | 0.08             | 0.1                            | 0.18 | 99.8   |
| SI21055            | 8338577          | 310556           | 43.5 | 0°      | -90° |       | 21                   | 0.3  | 20                   | 0.2     | 98.2             | 1.6                    | 0.065                          | 0.035                          | 99.3             | 0.03                           | 0.06             | 0.09                           | 0.15 | 99.73  |
| SI21056            | 8338516          | 310650           | 38.5 | 0°      | -90° |       | 16                   | 0.3  | 15                   | 0.1     | 98.3             | 1.7                    | 0.103                          | 0.076                          | 99.17            | 0.09                           | 0.15             | 0.16                           | 0.19 | 99.87  |
| SI21057            | 8338450          | 310720           | 36.4 | 0°      | -90° |       | 15                   | 0.3  | 12                   | 0.1     | 98               | 2                      | 0.084                          | 0.072                          | 99.57            | 0.1                            | 0.15             | 0.14                           | 0.15 | 100.24 |
| SI21058            | 8338406          | 310764           | 34.5 | 0°      | -90° |       | 15                   | 0.3  | 12                   | 0.1     | 98.2             | 1.8                    | 0.143                          | 0.044                          | 99.19            | 0.06                           | 0.1              | 0.22                           | 0.23 | 99.9   |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |   |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|---|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |   |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      | % |
| SI21059            | 8338236          | 311235           | 40.9 | 0°      | -90° |       | 21                   | 0.3  | 21                   | 0.1     | 96.5             | 3.5                    | 0.148                          | 0.142                          | 98.83            | 0.18                           | 0.19             | 0.21                           | 0.2  | 99.76  |   |
| SI21060            | 8338109          | 310272           | 36.4 | 0°      | -90° | 2     | 12                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21061            | 8338036          | 310205           | 38.1 | 0°      | -90° | 2     | 18                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21062            | 8337830          | 310250           | 37.3 | 0°      | -90° | 4     | 15                   | 0.3  | Excluded             | 0.5     | 97.5             | 2                      | 0.834                          | 0.06                           | 97.9             | 0.07                           | 0.1              | 0.94                           | 0.74 | 99.86  |   |
| SI21063            | 8337561          | 310510           | 47   | 0°      | -90° | 2     | 16                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21064            | 8338092          | 309981           | 37.3 | 0°      | -90° | 2     | 15                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21065            | 8338406          | 309721           | 39.6 | 0°      | -90° | 2     | 14                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21066            | 8338656          | 309418           | 38.1 | 0°      | -90° | 2     | 18                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21067            | 8338951          | 309137           | 33.2 | 0°      | -90° |       | 12                   | 0.3  | 7                    | 0.1     | 96.4             | 3.5                    | 0.076                          | 0.037                          | 99.82            | 0.06                           | 0.1              | 0.12                           | 0.1  | 100.3  |   |
| SI21068            | 8339158          | 308966           | 31.7 | 0°      | -90° |       | 9                    | 0.3  | 3                    | 0.3     | 92.1             | 7.6                    | 0.096                          | 0.052                          | 98.79            | 0.08                           | 0.14             | 0.18                           | 0.48 | 99.75  |   |
| SI21069            | 8339209          | 309117           | 34.7 | 0°      | -90° | 2     | 14                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21070            | 8339087          | 309240           | 33.8 | 0°      | -90° | 2     | 12                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21071            | 8338926          | 309406           | 34.9 | 0°      | -90° | 2     | 12                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |   |
| SI21072            | 8339428          | 309014           | 43.9 | 0°      | -90° |       | 9                    | 0.3  | 8                    | 0.1     | 98.6             | 1.3                    | 0.087                          | 0.035                          | 99.3             | 0.05                           | 0.06             | 0.13                           | 0.16 | 99.78  |   |
| SI21073            | 8339307          | 308981           | 37.3 | 0°      | -90° |       | 9                    | 0.3  | 8                    | 0.2     | 97.1             | 2.7                    | 0.071                          | 0.033                          | 99.36            | 0.05                           | 0.07             | 0.14                           | 0.18 | 99.9   |   |
| SI21074            | 8339415          | 308835           | 34.6 | 0°      | -90° |       | 12                   | 0.3  | 7                    | 0.3     | 98               | 1.7                    | 0.096                          | 0.028                          | 99.29            | 0.04                           | 0.08             | 0.19                           | 0.18 | 99.87  |   |
| SI21075            | 8339516          | 308716           | 31.9 | 0°      | -90° |       | 12                   | 0.3  | 11                   | 0.4     | 96.9             | 2.7                    | 0.109                          | 0.03                           | 99.18            | 0.05                           | 0.1              | 0.19                           | 0.22 | 99.84  |   |
| SI21076            | 8339450          | 308535           | 32.3 | 0°      | -90° |       | 12                   | 0.3  | 11                   | 0.6     | 96.2             | 3.3                    | 0.121                          | 0.054                          | 99.13            | 0.07                           | 0.13             | 0.2                            | 0.23 | 99.85  |   |
| SI21077            | 8339192          | 308783           | 42.3 | 0°      | -90° |       | 23                   | 0.3  | 15                   | 0.1     | 97.5             | 2.5                    | 0.112                          | 0.075                          | 99.34            | 0.08                           | 0.14             | 0.14                           | 0.15 | 99.95  |   |
| SI21078            | 8339080          | 308633           | 45.9 | 0°      | -90° |       | 19                   | 0.3  | 10                   | 0.3     | 97.2             | 2.5                    | 0.087                          | 0.057                          | 99.5             | 0.1                            | 0.09             | 0.12                           | 0.17 | 100.03 |   |
| SI21079            | 8339386          | 308370           | 43.7 | 0°      | -90° |       | 9                    | 0.3  | 6                    | 0.1     | 97.6             | 2.4                    | 0.086                          | 0.078                          | 99.45            | 0.07                           | 0.09             | 0.11                           | 0.16 | 99.98  |   |
| SI21080            | 8339651          | 308002           | 59.4 | 0°      | -90° |       | 30                   | 0.3  | 27                   | 0.1     | 98.5             | 1.5                    | 0.072                          | 0.088                          | 99.26            | 0.1                            | 0.13             | 0.1                            | 0.13 | 99.82  |   |
| SI21081            | 8339574          | 307851           | 49.7 | 0°      | -90° |       | 18                   | 0.3  | 18                   | 0.1     | 97.5             | 2.4                    | 0.086                          | 0.1                            | 99.09            | 0.13                           | 0.21             | 0.11                           | 0.17 | 99.83  |   |
| SI21082            | 8339444          | 307858           | 51.1 | 0°      | -90° |       | 21                   | 0.3  | 21                   | 0.1     | 97.6             | 2.4                    | 0.066                          | 0.09                           | 99.21            | 0.12                           | 0.17             | 0.09                           | 0.12 | 99.81  |   |
| SI21083            | 8339206          | 307991           | 43.3 | 0°      | -90° |       | 15                   | 0.3  | 15                   | 0.2     | 97.6             | 2.3                    | 0.065                          | 0.057                          | 99.35            | 0.08                           | 0.1              | 0.09                           | 0.08 | 99.82  |   |
| SI21084            | 8338858          | 308178           | 57.1 | 0°      | -90° |       | 24                   | 0.3  | 24                   | 0.1     | 95.7             | 4.2                    | 0.074                          | 0.155                          | 98.86            | 0.21                           | 0.31             | 0.1                            | 0.16 | 99.76  |   |
| SI21085            | 8338615          | 308194           | 57.6 | 0°      | -90° |       | 27                   | 0.3  | 27                   | 0.2     | 97.7             | 2.1                    | 0.063                          | 0.059                          | 99.41            | 0.08                           | 0.11             | 0.09                           | 0.14 | 99.89  |   |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |       |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|-------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %     |
| SI21086            | 8338361          | 308383           | 52.6 | 0°      | -90° |       | 21                   | 0.3  | 21                   | 0.1     | 96.8             | 3.1                    | 0.058                          | 0.052                          | 99.44            | 0.07                           | 0.11             | 0.08                           | 0.16 | 99.93 |
| SI21087            | 8338160          | 308619           | 62.6 | 0°      | -90° |       | 27                   | 0.3  | 23                   | 0.3     | 97.7             | 2.1                    | 0.062                          | 0.068                          | 99.25            | 0.09                           | 0.13             | 0.11                           | 0.13 | 99.79 |
| SI21088            | 8337859          | 308773           | 62.3 | 0°      | -90° |       | 30                   | 0.3  | 27                   | 0.3     | 97.6             | 2.2                    | 0.067                          | 0.055                          | 99.27            | 0.07                           | 0.12             | 0.11                           | 0.11 | 99.78 |
| SI220001           | 8339318          | 308084           | 40.7 | 0°      | -90° |       | 12                   | 0.3  | 12                   | 0.4     | 94.6             | 5                      | 0.093                          | 0.042                          | 98.78            | 0.07                           | 0.11             | 0.12                           | 0.22 | 99.41 |
| SI220002           | 8339166          | 308293           | 40.4 | 0°      | -90° | 2     | 15                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |
| SI220003           | 8338973          | 308474           | 38.2 | 0°      | -90° | 2     | 15                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |
| SI220004           | 8338777          | 308633           | 40.3 | 0°      | -90° | 2     | 15                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |
| SI220005           | 8338609          | 308836           | 44.3 | 0°      | -90° | 2     | 12                   |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |
| SI220006           | 8338468          | 308983           | 48.8 | 0°      | -90° |       | 9                    | 0.3  | 4                    | 0.3     | 94.7             | 4.9                    | 0.085                          | 0.049                          | 98.84            | 0.07                           | 0.1              | 0.08                           | 0.15 | 99.33 |
| SI220007           | 8338405          | 309170           | 84.3 | 0°      | -90° |       | 39                   | 0.3  | 37                   | 0.1     | 95.6             | 4.3                    | 0.061                          | 0.086                          | 99.04            | 0.15                           | 0.18             | 0.07                           | 0.12 | 99.67 |
| SI220008           | 8338323          | 309232           | 79.4 | 0°      | -90° |       | 34                   | 0.3  | 32                   | 0.2     | 96.6             | 3.2                    | 0.066                          | 0.058                          | 98.96            | 0.09                           | 0.09             | 0.07                           | 0.14 | 99.43 |
| SI220009           | 8338050          | 309348           | 85.2 | 0°      | -90° |       | 42                   | 0.3  | 42                   | 0.2     | 96.5             | 3.3                    | 0.153                          | 0.087                          | 98.97            | 0.13                           | 0.15             | 0.13                           | 0.14 | 99.63 |
| SI220010           | 8337920          | 309457           | 78.4 | 0°      | -90° |       | 36                   | 0.3  | 36                   | 0.1     | 95.8             | 4                      | 0.248                          | 0.103                          | 98.7             | 0.15                           | 0.18             | 0.32                           | 0.21 | 99.67 |
| SI220011           | 8337643          | 309751           | 67.8 | 0°      | -90° |       | 23                   | 0.3  | 16                   | 0.3     | 97.2             | 2.6                    | 0.08                           | 0.058                          | 98.91            | 0.08                           | 0.07             | 0.09                           | 0.13 | 99.37 |
| SI220012           | 8338099          | 309451           | 79.3 | 0°      | -90° |       | 41                   | 0.3  | 33                   | 0.1     | 95.6             | 4.3                    | 0.073                          | 0.08                           | 98.83            | 0.1                            | 0.11             | 0.1                            | 0.15 | 99.39 |
| SI220013           | 8338051          | 309572           | 79   | 0°      | -90° |       | 57                   | 0.3  | 36                   | 0.1     | 95.3             | 4.7                    | 0.073                          | 0.097                          | 98.87            | 0.12                           | 0.15             | 0.09                           | 0.15 | 99.49 |
| SI220014           | 8337894          | 309758           | 70.5 | 0°      | -90° |       | 39                   | 0.3  | 36                   | 0.4     | 94.5             | 5.1                    | 0.261                          | 0.135                          | 98.04            | 0.18                           | 0.2              | 0.52                           | 0.34 | 99.41 |
| SI220015           | 8337808          | 309872           | 64.7 | 0°      | -90° |       | 30                   | 0.3  | 24                   | 0.2     | 95.8             | 4                      | 0.182                          | 0.106                          | 98.67            | 0.13                           | 0.14             | 0.2                            | 0.18 | 99.43 |
| SI220016           | 8337577          | 310047           | 55.4 | 0°      | -90° |       | 30                   | 0.3  | 10                   | 0.1     | 95.4             | 4.5                    | 0.084                          | 0.057                          | 98.94            | 0.08                           | 0.12             | 0.09                           | 0.16 | 99.47 |
| SI220017           | 8337361          | 310196           | 65.5 | 0°      | -90° |       | 27                   | 0.3  | 13                   | 0.1     | 95.6             | 4.3                    | 0.087                          | 0.11                           | 98.21            | 0.31                           | 0.49             | 0.16                           | 0.19 | 99.55 |
| SI220018           | 8337241          | 310271           | 66.4 | 0°      | -90° |       | 27                   | 0.3  | 9                    | 0.1     | 95.6             | 4.4                    | 0.113                          | 0.125                          | 98.35            | 0.18                           | 0.28             | 0.17                           | 0.15 | 99.25 |
| SI220019           | 8336999          | 310463           | 71.7 | 0°      | -90° |       | 24                   | 0.3  | 13                   | 0.1     | 93.3             | 6.7                    | 0.101                          | 0.131                          | 98.49            | 0.21                           | 0.33             | 0.14                           | 0.12 | 99.43 |
| SI220020           | 8337049          | 310199           | 72.6 | 0°      | -90° |       | 18                   | 0.3  | 9                    | 0.1     | 96.4             | 3.5                    | 0.085                          | 0.084                          | 98.78            | 0.12                           | 0.13             | 0.14                           | 0.15 | 99.42 |
| SI220021           | 8337242          | 309926           | 67.6 | 0°      | -90° |       | 12                   | 0.3  | 3                    | 0.5     | 92.3             | 7.2                    | 0.178                          | 0.126                          | 98.73            | 0.21                           | 0.29             | 0.24                           | 0.2  | 99.83 |
| SI220022           | 8337487          | 309632           | 73.7 | 0°      | -90° |       | 24                   | 0.3  | 15                   | 0.1     | 94.4             | 5.5                    | 0.115                          | 0.168                          | 98.52            | 0.27                           | 0.36             | 0.19                           | 0.16 | 99.66 |
| SI220023           | 8337653          | 309480           | 77.5 | 0°      | -90° |       | 24                   | 0.3  | 18                   | 0.3     | 93.9             | 5.9                    | 0.112                          | 0.113                          | 98.72            | 0.17                           | 0.24             | 0.17                           | 0.16 | 99.61 |
| SI220024           | 8337951          | 309252           | 54.6 | 0°      | -90° |       | 18                   | 0.3  | 5                    | 0.3     | 93               | 6.8                    | 0.168                          | 0.089                          | 98.62            | 0.14                           | 0.18             | 0.2                            | 0.19 | 99.46 |

| Collar Information |                  |                  |       |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|-------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL    | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m     |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| SI220025           | 8338024          | 309192           | 53.7  | 0°      | -90° |       | 12                   | 0.3  | 5                    | 0.5     | 93.5             | 5.9                    | 0.127                          | 0.049                          | 98.68            | 0.08                           | 0.13             | 0.23                           | 0.4  | 99.66  |
| SI220026           | 8338197          | 309096           | 64.4  | 0°      | -90° |       | 18                   | 0.3  | 15                   | 0.1     | 95.2             | 4.8                    | 0.092                          | 0.067                          | 98.81            | 0.08                           | 0.11             | 0.11                           | 0.18 | 99.39  |
| SI220027           | 8338232          | 309163           | 69.7  | 0°      | -90° |       | 24                   | 0.3  | 21                   | 0.2     | 95.7             | 4.1                    | 0.076                          | 0.064                          | 99.25            | 0.08                           | 0.1              | 0.11                           | 0.14 | 99.78  |
| SI220028           | 8338290          | 309034           | 70.7  | 0°      | -90° |       | 25                   | 0.3  | 23                   | 0.4     | 95.7             | 3.9                    | 0.14                           | 0.136                          | 98.81            | 0.15                           | 0.12             | 0.15                           | 0.21 | 99.55  |
| SI220029           | 8338420          | 308852           | 64.8  | 0°      | -90° |       | 21                   | 0.3  | 17                   | 0.1     | 94.6             | 5.3                    | 0.105                          | 0.13                           | 98.81            | 0.17                           | 0.25             | 0.13                           | 0.13 | 99.61  |
| SI220030           | 8338495          | 308740           | 60.6  | 0°      | -90° |       | 21                   | 0.3  | 17                   | 0.2     | 95.4             | 4.4                    | 0.074                          | 0.077                          | 99.01            | 0.11                           | 0.16             | 0.12                           | 0.13 | 99.63  |
| SI220031           | 8338576          | 308518           | 56.3  | 0°      | -90° |       | 24                   | 0.3  | 18                   | 0.1     | 96.8             | 3.1                    | 0.105                          | 0.07                           | 98.78            | 0.09                           | 0.09             | 0.13                           | 0.15 | 99.32  |
| SI220032           | 8338662          | 308383           | 58.9  | 0°      | -90° |       | 30                   | 0.3  | 28                   | 1.6     | 95.6             | 2.9                    | 0.082                          | 0.059                          | 99.18            | 0.08                           | 0.08             | 0.1                            | 0.2  | 99.71  |
| SI220033           | 8338423          | 308200           | 44.9  | 0°      | -90° |       | 15                   | 0.3  | 15                   | 0.1     | 97.2             | 2.7                    | 0.134                          | 0.083                          | 98.66            | 0.13                           | 0.19             | 0.16                           | 0.17 | 99.46  |
| SI220034           | 8338292          | 308189           | 48.3  | 0°      | -90° |       | 18                   | 0.3  | 18                   | 0.1     | 95.1             | 4.9                    | 0.06                           | 0.075                          | 99.01            | 0.11                           | 0.18             | 0.07                           | 0.15 | 99.62  |
| SI220035           | 8338027          | 308260           | 42    | 0°      | -90° |       | 15                   | 0.3  | 9                    | 0.1     | 93.9             | 6                      | 0.072                          | 0.073                          | 98.73            | 0.12                           | 0.21             | 0.07                           | 0.16 | 99.41  |
| SI220036           | 8337638          | 308916           | 57    | 0°      | -90° |       | 26                   | 0.3  | 18                   | 0.1     | 96.6             | 3.4                    | 0.062                          | 0.061                          | 99.06            | 0.08                           | 0.11             | 0.06                           | 0.09 | 99.49  |
| SI220037           | 8337514          | 309002           | 63.7  | 0°      | -90° |       | 29                   | 0.3  | 23                   | 0.1     | 97.9             | 2.1                    | 0.135                          | 0.08                           | 98.86            | 0.09                           | 0.13             | 0.2                            | 0.13 | 99.6   |
| SI220038           | 8337218          | 309270           | 80.3  | 0°      | -90° |       | 29                   | 0.3  | 27                   | 0.1     | 97.7             | 2.3                    | 0.084                          | 0.117                          | 99.02            | 0.13                           | 0.16             | 0.1                            | 0.08 | 99.58  |
| SI220039           | 8337085          | 309487           | 80.6  | 0°      | -90° |       | 25                   | 0.3  | 23                   | 0.2     | 98.2             | 1.7                    | 0.117                          | 0.145                          | 98.94            | 0.18                           | 0.22             | 0.12                           | 0.14 | 99.7   |
| SI220040           | 8337003          | 309581           | 82.1  | 0°      | -90° |       | 24                   | 0.3  | 23                   | 0.1     | 98.3             | 1.6                    | 0.096                          | 0.096                          | 99.17            | 0.11                           | 0.13             | 0.12                           | 0.11 | 99.73  |
| SI220041           | 8336837          | 309779           | 77.1  | 0°      | -90° |       | 15                   | 0.3  | 14                   | 0.1     | 97.6             | 2.4                    | 0.096                          | 0.197                          | 98.87            | 0.21                           | 0.28             | 0.12                           | 0.12 | 99.71  |
| SI220042           | 8336705          | 309834           | 91.2  | 0°      | -90° |       | 32                   | 0.3  | 32                   | 0.3     | 97.6             | 2                      | 0.123                          | 0.134                          | 98.92            | 0.15                           | 0.16             | 0.15                           | 0.12 | 99.6   |
| SI220043           | 8336511          | 309912           | 99.7  | 0°      | -90° |       | 39                   | 0.3  | 38                   | 0.3     | 96.6             | 3.1                    | 0.12                           | 0.168                          | 98.74            | 0.21                           | 0.25             | 0.14                           | 0.11 | 99.61  |
| SI220044           | 8336362          | 310033           | 102.7 | 0°      | -90° |       | 45                   | 0.3  | 43                   | 0.1     | 98               | 1.9                    | 0.108                          | 0.128                          | 99               | 0.17                           | 0.18             | 0.12                           | 0.12 | 99.68  |
| SI220045           | 8336255          | 309897           | 78.5  | 0°      | -90° |       | 25                   | 0.3  | 21                   | 0.1     | 97.6             | 2.4                    | 0.088                          | 0.095                          | 99.08            | 0.12                           | 0.13             | 0.1                            | 0.12 | 99.63  |
| SI220046           | 8336384          | 309832           | 80.5  | 0°      | -90° |       | 27                   | 0.3  | 24                   | 0.1     | 97.8             | 2.1                    | 0.08                           | 0.116                          | 99.07            | 0.14                           | 0.15             | 0.09                           | 0.12 | 99.68  |
| SI220047           | 8336480          | 309782           | 73.4  | 0°      | -90° |       | 15                   | 0.3  | 12                   | 0.1     | 96.9             | 3.1                    | 0.072                          | 0.111                          | 98.98            | 0.16                           | 0.24             | 0.08                           | 0.09 | 99.65  |
| SI220048           | 8336537          | 309692           | 67.2  | 0°      | -90° |       | 21                   | 0.3  | 7                    | 0.1     | 95               | 5                      | 0.078                          | 0.08                           | 99.42            | 0.12                           | 0.19             | 0.11                           | 0.13 | 100.03 |
| SI220049           | 8336148          | 310186           | 92.1  | 0°      | -90° |       | 37                   | 0.3  | 30                   | 0.1     | 98.3             | 1.6                    | 0.096                          | 0.077                          | 99.24            | 0.09                           | 0.08             | 0.1                            | 0.14 | 99.72  |
| SI220050           | 8336097          | 310298           | 89.6  | 0°      | -90° |       | 29                   | 0.3  | 27                   | 0.1     | 98.5             | 1.4                    | 0.101                          | 0.102                          | 99.05            | 0.11                           | 0.11             | 0.11                           | 0.13 | 99.58  |
| SI220051           | 8335844          | 310372           | 79.9  | 0°      | -90° |       | 12                   | 0.3  | 9                    | 0.5     | 96.9             | 2.6                    | 0.072                          | 0.103                          | 99.1             | 0.1                            | 0.16             | 0.09                           | 0.14 | 99.69  |

| Collar Information |                  |                  |       |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |       |        |
|--------------------|------------------|------------------|-------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|-------|--------|
| Hole ID            | Northing         | Easting          | RL    | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI   | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m     |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %     | %      |
| SI220052           | 8335856          | 310487           | 96.4  | 0°      | -90° |       | 26                   | 0.3  | 25                   | 0.1     | 97.4             | 2.6                    | 0.094                          | 0.148                          | 98.86            | 0.18                           | 0.21             | 0.12                           | 0.11  | 99.59  |
| SI220053           | 8335631          | 310681           | 102.7 | 0°      | -90° |       | 34                   | 0.3  | 30                   | 0.1     | 97.8             | 2.2                    | 0.109                          | 0.109                          | 98.99            | 0.13                           | 0.13             | 0.13                           | 0.12  | 99.57  |
| SI220054           | 8335499          | 310848           | 97    | 0°      | -90° |       | 17                   | 0.3  | 15                   | 0.1     | 99.1             | 0.9                    | 0.101                          | 0.106                          | 98.99            | 0.12                           | 0.08             | 0.12                           | 0.12  | 99.5   |
| SI220055           | 8335342          | 311025           | 91.8  | 0°      | -90° | 2     | 6                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |       |        |
| SI220056           | 8335186          | 311129           | 105.3 | 0°      | -90° |       | 18                   | 0.3  | 16                   | 0.2     | 98.6             | 1.3                    | 0.12                           | 0.126                          | 98.97            | 0.14                           | 0.12             | 0.13                           | 0.17  | 99.62  |
| SI220057           | 8335336          | 311180           | 86.5  | 0°      | -90° | 2     | 6                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |       |        |
| SI220058           | 8335488          | 311282           | 81.4  | 0°      | -90° | 2     | 6                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |       |        |
| SI220059           | 8335670          | 311292           | 99.4  | 0°      | -90° |       | 24                   | 0.3  | 21                   | 0.2     | 98.4             | 1.4                    | 0.057                          | 0.07                           | 99.27            | 0.09                           | 0.12             | 0.06                           | 0.09  | 99.7   |
| SI220060           | 8335844          | 311127           | 101.7 | 0°      | -90° |       | 26                   | 0.3  | 24                   | 0.3     | 98.3             | 1.5                    | 0.058                          | 0.046                          | 99.27            | 0.06                           | 0.08             | 0.08                           | 0.1   | 99.65  |
| SI220061           | 8336009          | 311028           | 101.1 | 0°      | -90° |       | 30                   | 0.3  | 27                   | 0.1     | 98.8             | 1.1                    | 0.061                          | 0.043                          | 99.31            | 0.06                           | 0.07             | 0.09                           | 0.09  | 99.69  |
| SI220062           | 8336165          | 310905           | 103   | 0°      | -90° |       | 28                   | 0.3  | 27                   | 0.1     | 98.4             | 1.6                    | 0.077                          | 0.048                          | 99.31            | 0.07                           | 0.09             | 0.11                           | 0.07  | 99.72  |
| SI220063           | 8336345          | 310815           | 101.5 | 0°      | -90° |       | 25                   | 0.3  | 24                   | 0.4     | 97.5             | 2.1                    | 0.067                          | 0.084                          | 99.05            | 0.11                           | 0.16             | 0.11                           | 0.18  | 99.7   |
| SI220064           | 8336508          | 310705           | 95.4  | 0°      | -90° |       | 30                   | 0.3  | 28                   | 0.4     | 97.3             | 2.3                    | 0.056                          | 0.062                          | 99.13            | 0.08                           | 0.13             | 0.1                            | 0.1   | 99.63  |
| SI220065           | 8336656          | 310579           | 101.7 | 0°      | -90° |       | 33                   | 0.3  | 31                   | 0.1     | 98.1             | 1.9                    | 0.063                          | 0.08                           | 98.94            | 0.11                           | 0.16             | 0.1                            | 0.13  | 99.54  |
| SI220066           | 8336735          | 310751           | 82.5  | 0°      | -90° |       | 21                   | 0.3  | 20                   | 0.1     | 97.4             | 2.6                    | 0.068                          | 0.097                          | 98.95            | 0.13                           | 0.19             | 0.12                           | 0.09  | 99.57  |
| SI220067           | 8336645          | 310831           | 78.4  | 0°      | -90° |       | 15                   | 0.3  | 13                   | 0.1     | 97.6             | 2.4                    | 0.074                          | 0.084                          | 99.28            | 0.11                           | 0.17             | 0.12                           | 0.08  | 99.83  |
| SI220068           | 8337667          | 309333           | 63.6  | 0°      | -90° |       | 10                   | 0.3  | 9                    | 0.1     | 96               | 3.9                    | 0.057                          | 0.069                          | 99.18            | 0.1                            | 0.17             | 0.1                            | 0.16  | 99.77  |
| SI220069           | 8337873          | 308951           | 57.8  | 0°      | -90° |       | 15                   | 0.3  | 13                   | 0.5     | 97.7             | 1.8                    | 0.06                           | 0.056                          | 99.42            | 0.09                           | 0.13             | 0.1                            | 0.91  | 100.71 |
| SI220070           | 8337875          | 308705           | 70.2  | 0°      | -90° |       | 39                   | 0.3  | 36                   | 0.3     | 98               | 1.7                    | 0.079                          | 0.051                          | 99.23            | 0.06                           | 0.07             | 0.11                           | 0.14  | 99.68  |
| SI220071           | 8337736          | 308764           | 55.5  | 0°      | -90° |       | 21                   | 0.3  | 19                   | 0.1     | 97.3             | 2.7                    | 0.081                          | 0.073                          | 99.21            | 0.09                           | 0.14             | 0.12                           | 0.1   | 99.73  |
| SI220072           | 8337694          | 308690           | 44.2  | 0°      | -90° |       | 10                   | 0.3  | 8                    | 0.1     | 94.3             | 5.5                    | 0.07                           | 0.034                          | 99.25            | 0.06                           | 0.11             | 0.09                           | 0.08  | 99.66  |
| SI220073           | 8337716          | 308589           | 47.4  | 0°      | -90° |       | 10                   | 0.3  | 8                    | 0.1     | 97.3             | 2.7                    | 0.071                          | 0.053                          | 98.99            | 0.07                           | 0.11             | 0.1                            | 0.06  | 99.41  |
| SI220074           | 8337890          | 308439           | 45.8  | 0°      | -90° |       | 9                    | 0.3  | 8                    | 0.1     | 96.8             | 3.2                    | 0.081                          | 0.064                          | 99.07            | 0.09                           | 0.13             | 0.11                           | 0.14  | 99.62  |
| SI220075           | 8338521          | 309283           | 54.5  | 0°      | -90° |       | 18                   | 0.3  | 16                   | 0.4     | 96.6             | 3.1                    | 0.072                          | 0.057                          | 99.27            | 0.07                           | 0.11             | 0.12                           | 0.16  | 99.81  |
| SI220076           | 8338593          | 309190           | 54.1  | 0°      | -90° |       | 15                   | 0.3  | 14                   | 0.1     | 97.3             | 2.6                    | 0.095                          | 0.066                          | 99.3             | 0.08                           | 0.11             | 0.16                           | 0.15  | 99.9   |
| SI220077           | 8338784          | 308903           | 51.3  | 0°      | -90° |       | 9                    | 0.3  | 8                    | 0.1     | 98.6             | 1.3                    | 0.076                          | 0.043                          | 99.6             | 0.06                           | 0.07             | 0.09                           | -0.02 | 99.9   |
| SI220078           | 8338848          | 308824           | 54.8  | 0°      | -90° |       | 18                   | 0.3  | 15                   | 0.2     | 99               | 0.8                    | 0.076                          | 0.045                          | 99.49            | 0.06                           | 0.06             | 0.1                            | 0.06  | 99.86  |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |       |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|-------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %     |
| SI220079           | 8338486          | 309441           | 49.3 | 0°      | -90° |       | 12                   | 0.3  | 10                   | 0.4     | 95.8             | 3.9                    | 0.137                          | 0.095                          | 99.21            | 0.11                           | 0.16             | 0.16                           | 0.17 | 99.93 |
| SI220080           | 8338350          | 309474           | 62.4 | 0°      | -90° |       | 30                   | 0.3  | 27                   | 0.1     | 98.5             | 1.5                    | 0.082                          | 0.086                          | 99.24            | 0.23                           | 0.12             | 0.12                           | 0.07 | 99.87 |
| SI220081           | 8338269          | 309653           | 43.6 | 0°      | -90° |       | 6                    | 2    | 4                    | 0.2     | 92.7             | 7.1                    | 0.102                          | 0.11                           | 98.93            | 0.17                           | 0.26             | 0.18                           | 0.15 | 99.8  |
| SI220082           | 8338130          | 309791           | 44.8 | 0°      | -90° |       | 15                   | 0.3  | 9                    | 0.2     | 96.3             | 3.5                    | 0.076                          | 0.066                          | 99.13            | 0.08                           | 0.13             | 0.1                            | 0.12 | 99.66 |
| SI220083           | 8337991          | 309892           | 47.4 | 0°      | -90° |       | 12                   | 0.3  | 9                    | 0.2     | 97.2             | 2.6                    | 0.136                          | 0.074                          | 99.03            | 0.09                           | 0.14             | 0.16                           | 0.18 | 99.69 |
| SI220084           | 8337835          | 310018           | 46.6 | 0°      | -90° |       | 12                   | 0.3  | 11                   | 0.3     | 95.3             | 4.4                    | 0.071                          | 0.046                          | 99.15            | 0.06                           | 0.11             | 0.12                           | 0.08 | 99.61 |
| SI220085           | 8337754          | 310074           | 46.4 | 0°      | -90° |       | 12                   | 0.3  | 9                    | 0.8     | 94.1             | 5                      | 0.098                          | 0.063                          | 99.18            | 0.09                           | 0.14             | 0.12                           | 0.09 | 99.71 |
| SI220086           | 8337838          | 310249           | 37.5 | 0°      | -90° | 2     | 9                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |
| SI220087           | 8337688          | 310386           | 37.6 | 0°      | -90° |       | 15                   | 0.3  | 15                   | 1.1     | 94               | 4.9                    | 0.145                          | 0.038                          | 99.41            | 0.05                           | 0.1              | 0.15                           | 0.13 | 99.94 |
| SI220088           | 8337657          | 310877           | 47.8 | 0°      | -90° |       | 24                   | 0.3  | 24                   | 0.3     | 95.9             | 3.8                    | 0.059                          | 0.057                          | 99.4             | 0.08                           | 0.12             | 0.09                           | 0.15 | 99.92 |
| SI220089           | 8337857          | 310710           | 46.8 | 0°      | -90° |       | 9                    | 0.3  | 7                    | 0.1     | 96.1             | 3.8                    | 0.062                          | 0.054                          | 99.44            | 0.09                           | 0.13             | 0.09                           | 0.11 | 99.92 |
| SI220090           | 8337957          | 310603           | 48.2 | 0°      | -90° |       | 12                   | 0.3  | 9                    | 0.1     | 98.3             | 1.6                    | 0.072                          | 0.052                          | 99.44            | 0.06                           | 0.08             | 0.11                           | 0.21 | 99.98 |
| SI220091           | 8337451          | 310960           | 65.7 | 0°      | -90° |       | 36                   | 0.3  | 33                   | 0.1     | 97.5             | 2.4                    | 0.066                          | 0.125                          | 98.91            | 0.18                           | 0.26             | 0.11                           | 0.09 | 99.65 |
| SI220092           | 8337381          | 311166           | 53.5 | 0°      | -90° |       | 24                   | 0.3  | 23                   | 0.1     | 97               | 3                      | 0.063                          | 0.068                          | 99.19            | 0.1                            | 0.14             | 0.1                            | 0.14 | 99.73 |
| SI220093           | 8337528          | 311211           | 37.4 | 0°      | -90° | 6     | 6                    | 0.3  | 3                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |
| SI220094           | 8337921          | 310968           | 32.5 | 0°      | -90° | 2     | 6                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |
| SI220095           | 8338800          | 309865           | 65.1 | 0°      | -90° |       | 39                   | 0.3  | 36                   | 0.1     | 97               | 3                      | 0.113                          | 0.092                          | 99.11            | 0.12                           | 0.15             | 0.15                           | 0.11 | 99.72 |
| SI220096           | 8338754          | 309357           | 37.7 | 0°      | -90° |       | 15                   | 0.3  | 15                   | 0.3     | 94               | 5.7                    | 0.362                          | 0.07                           | 98.57            | 0.09                           | 0.2              | 0.42                           | 0.39 | 99.74 |
| SI220097           | 8338159          | 309307           | 96.4 | 0°      | -90° |       | 48                   | 0.3  | 48                   | 0.2     | 96.7             | 3.1                    | 0.081                          | 0.085                          | 99.23            | 0.11                           | 0.13             | 0.13                           | 0.1  | 99.77 |
| SI220098           | 8341223          | 307482           | 70.1 | 0°      | -90° |       | 35                   | 0.3  | 32                   | 0.1     | 95.9             | 4.1                    | 0.081                          | 0.144                          | 98.89            | 0.21                           | 0.34             | 0.13                           | 0.12 | 99.81 |
| SI220099           | 8341307          | 307393           | 64   | 0°      | -90° |       | 33                   | 0.3  | 30                   | 0.1     | 96.9             | 3.1                    | 0.074                          | 0.109                          | 99.19            | 0.14                           | 0.18             | 0.1                            | 0.12 | 99.82 |
| SI220100           | 8341389          | 307463           | 54.9 | 0°      | -90° |       | 28                   | 0.3  | 23                   | 0.1     | 97               | 2.9                    | 0.054                          | 0.059                          | 99.17            | 0.08                           | 0.13             | 0.08                           | 0.15 | 99.68 |
| SI220101           | 8341425          | 307273           | 52.3 | 0°      | -90° |       | 24                   | 0.3  | 22                   | 0.2     | 96.4             | 3.4                    | 0.066                          | 0.084                          | 98.93            | 0.13                           | 0.21             | 0.09                           | 0.16 | 99.62 |
| SI220102           | 8341578          | 307074           | 49.9 | 0°      | -90° |       | 21                   | 0.3  | 21                   | 0.1     | 97.8             | 2.1                    | 0.081                          | 0.051                          | 99.34            | 0.08                           | 0.12             | 0.11                           | 0.18 | 99.91 |
| SI220103           | 8341484          | 307048           | 48.3 | 0°      | -90° |       | 22                   | 0.3  | 21                   | 0.5     | 96.2             | 3.3                    | 0.065                          | 0.086                          | 99.24            | 0.13                           | 0.21             | 0.09                           | 0.14 | 99.91 |
| SI220104           | 8341329          | 307238           | 43.5 | 0°      | -90° |       | 14                   | 0.3  | 11                   | 0.1     | 97.5             | 2.5                    | 0.05                           | 0.035                          | 99.24            | 0.06                           | 0.1              | 0.08                           | 0.11 | 99.64 |
| SI220105           | 8341109          | 307242           | 52.1 | 0°      | -90° |       | 30                   | 0.3  | 30                   | 0.3     | 96.6             | 3.1                    | 0.063                          | 0.07                           | 99.25            | 0.1                            | 0.17             | 0.09                           | 0.12 | 99.8  |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| SI220106           | 8341143          | 307143           | 54.6 | 0°      | -90° |       | 30                   | 0.3  | 29                   | 0.3     | 97               | 2.7                    | 0.053                          | 0.05                           | 99.42            | 0.06                           | 0.1              | 0.07                           | 0.12 | 99.83  |
| SI220107           | 8341136          | 307386           | 71   | 0°      | -90° |       | 45                   | 0.3  | 45                   | 0.5     | 97.2             | 2.4                    | 0.102                          | 0.054                          | 99.28            | 0.07                           | 0.09             | 0.11                           | 0.06 | 99.69  |
| SI220108           | 8341322          | 307039           | 52.3 | 0°      | -90° |       | 26                   | 0.3  | 24                   | 0.2     | 93.5             | 6.3                    | 0.056                          | 0.053                          | 99.3             | 0.1                            | 0.17             | 0.07                           | 0.13 | 99.85  |
| SI220109           | 8341192          | 306978           | 57.9 | 0°      | -90° |       | 33                   | 0.3  | 31                   | 0.1     | 95.8             | 4.2                    | 0.053                          | 0.047                          | 99.29            | 0.09                           | 0.13             | 0.06                           | 0.12 | 99.76  |
| SI220110           | 8341010          | 306927           | 71   | 0°      | -90° |       | 45                   | 0.3  | 45                   | 0.3     | 96               | 3.7                    | 0.051                          | 0.049                          | 99.44            | 0.07                           | 0.1              | 0.06                           | 0.1  | 99.86  |
| SI220111           | 8340846          | 307027           | 58.9 | 0°      | -90° |       | 33                   | 0.3  | 29                   | 0.5     | 96.3             | 3.3                    | 0.058                          | 0.089                          | 99.39            | 0.12                           | 0.19             | 0.08                           | 0.2  | 100.06 |
| SI220112           | 8340717          | 307163           | 55.7 | 0°      | -90° |       | 27                   | 0.3  | 27                   | 0.3     | 96.7             | 3.1                    | 0.059                          | 0.07                           | 99.36            | 0.09                           | 0.14             | 0.08                           | 0.15 | 99.88  |
| SI220113           | 8340212          | 307727           | 50.5 | 0°      | -90° |       | 21                   | 2    | 21                   | 0.1     | 96.5             | 3.4                    | 0.055                          | 0.051                          | 99.51            | 0.07                           | 0.11             | 0.09                           | 0.16 | 100.01 |
| SI220114           | 8340071          | 307759           | 49.9 | 0°      | -90° |       | 20                   | 0.3  | 19                   | 0.1     | 96.6             | 3.4                    | 0.062                          | 0.082                          | 99.09            | 0.09                           | 0.15             | 0.08                           | 0.12 | 99.6   |
| SI220115           | 8339952          | 307918           | 49.5 | 0°      | -90° |       | 21                   | 0.3  | 21                   | 0.1     | 96.7             | 3.3                    | 0.059                          | 0.09                           | 99.45            | 0.11                           | 0.17             | 0.08                           | 0.13 | 100.02 |
| SI220116           | 8339799          | 308045           | 46   | 0°      | -90° |       | 15                   | 0.3  | 13                   | 0.2     | 93.1             | 6.8                    | 0.061                          | 0.071                          | 99.43            | 0.09                           | 0.16             | 0.09                           | 0.11 | 99.95  |
| SI220117           | 8339874          | 307734           | 51.8 | 0°      | -90° |       | 24                   | 0.3  | 21                   | 0.1     | 97.2             | 2.8                    | 0.069                          | 0.105                          | 99.27            | 0.12                           | 0.19             | 0.09                           | 0.06 | 99.81  |
| SI220118           | 8340085          | 307959           | 50.6 | 0°      | -90° |       | 22                   | 0.3  | 22                   | 0.2     | 96.8             | 3                      | 0.077                          | 0.048                          | 99.36            | 0.07                           | 0.08             | 0.11                           | 0.16 | 99.86  |
| SI220119           | 8339958          | 308131           | 63   | 0°      | -90° |       | 33                   | 0.3  | 33                   | 0.6     | 97.1             | 2.3                    | 0.071                          | 0.041                          | 99.34            | 0.06                           | 0.08             | 0.13                           | 0.22 | 99.89  |
| SI220120           | 8339709          | 308323           | 35.1 | 0°      | -90° |       | 9                    | 0.3  | 9                    | 0.3     | 93.8             | 5.9                    | 0.456                          | 0.065                          | 98.47            | 0.1                            | 0.2              | 0.57                           | 0.31 | 99.73  |
| SI220121           | 8339887          | 308343           | 54.2 | 0°      | -90° |       | 29                   | 0.3  | 29                   | 0.1     | 97               | 3                      | 0.131                          | 0.062                          | 99.38            | 0.08                           | 0.12             | 0.17                           | 0.17 | 99.99  |
| SI220122           | 8339912          | 308511           | 66.8 | 0°      | -90° |       | 30                   | 0.3  | 25                   | 0.1     | 98               | 2                      | 0.071                          | 0.055                          | 99.52            | 0.07                           | 0.1              | 0.08                           | 0.14 | 99.97  |
| SI220123           | 8339664          | 308677           | 37.7 | 0°      | -90° |       | 11                   | 0.3  | 8                    | 0.1     | 97.2             | 2.8                    | 0.167                          | 0.05                           | 99.42            | 0.07                           | 0.09             | 0.21                           | 0.16 | 100.03 |
| SI220124           | 8339802          | 308848           | 47.5 | 0°      | -90° |       | 7                    | 0.3  | 4                    | 0.6     | 94.7             | 4.7                    | 0.079                          | 0.097                          | 99.02            | 0.14                           | 0.22             | 0.11                           | 0.12 | 99.73  |
| SI220125           | 8339911          | 308710           | 44.5 | 0°      | -90° |       | 9                    | 0.3  | 8                    | 0.8     | 95.8             | 3.5                    | 0.068                          | 0.071                          | 99.35            | 0.1                            | 0.18             | 0.09                           | 0.19 | 100    |
| SI220126           | 8340032          | 308571           | 44.1 | 0°      | -90° | 2     | 6                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI220127           | 8339971          | 308762           | 55.1 | 0°      | -90° |       | 18                   | 0.3  | 15                   | 0.1     | 97.9             | 2                      | 0.084                          | 0.117                          | 99.44            | 0.14                           | 0.19             | 0.13                           | 0.09 | 100.08 |
| SI220128           | 8340104          | 308637           | 57.6 | 0°      | -90° |       | 24                   | 0.3  | 18                   | 0.1     | 97.9             | 2                      | 0.097                          | 0.109                          | 99.25            | 0.14                           | 0.11             | 0.13                           | 0.23 | 99.94  |
| SI220129           | 8340221          | 308473           | 56.2 | 0°      | -90° |       | 15                   | 0.3  | 12                   | 0.2     | 97.6             | 2.2                    | 0.105                          | 0.12                           | 98.74            | 0.13                           | 0.14             | 0.12                           | 0.12 | 99.35  |
| SI220130           | 8340368          | 308353           | 57   | 0°      | -90° |       | 15                   | 0.3  | 14                   | 0.1     | 98               | 2                      | 0.09                           | 0.102                          | 99.19            | 0.11                           | 0.12             | 0.13                           | 0.2  | 99.83  |
| SI220131           | 8340505          | 308200           | 55.5 | 0°      | -90° |       | 18                   | 0.3  | 16                   | 0.2     | 97               | 2.8                    | 0.085                          | 0.088                          | 99.02            | 0.1                            | 0.12             | 0.09                           | 0.22 | 99.67  |
| SI220132           | 8340638          | 308072           | 59.3 | 0°      | -90° |       | 24                   | 0.3  | 21                   | 0.1     | 96.8             | 3.1                    | 0.099                          | 0.097                          | 99.05            | 0.13                           | 0.2              | 0.12                           | 0.14 | 99.76  |

| Collar Information |                  |                  |      |         |      |         | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|---------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes   | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |         | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| SI220133           | 8340710          | 307902           | 64.5 | 0°      | -90° |         | 28                   | 0.3  | 28                   | 0.1     | 97.7             | 2.3                    | 0.082                          | 0.056                          | 99.24            | 0.07                           | 0.1              | 0.1                            | 0.14 | 99.74  |
| SI220134           | 8340805          | 307743           | 61.6 | 0°      | -90° | 5       | 6                    | 0.3  | 6                    | 0.1     | 96.6             | 3.4                    | 0.084                          | 0.162                          | 98.53            | 0.21                           | 0.37             | 0.13                           | 0.16 | 99.55  |
| SI220134A          | 8340805          | 307743           | 61.6 | 0°      | -90° |         | 36                   | 0.3  | 35                   | 0.1     | 95.4             | 4.5                    | 0.072                          | 0.093                          | 99.23            | 0.12                           | 0.19             | 0.1                            | 0.1  | 99.83  |
| SI220135           | 8340996          | 307650           | 66.6 | 0°      | -90° |         | 39                   | 0.3  | 37                   | 0.1     | 97.4             | 2.5                    | 0.069                          | 0.075                          | 99.33            | 0.09                           | 0.14             | 0.09                           | 0.08 | 99.81  |
| SI220136           | 8341180          | 307598           | 57.8 | 0°      | -90° |         | 21                   | 0.3  | 19                   | 0.1     | 97.6             | 2.3                    | 0.089                          | 0.068                          | 99.22            | 0.09                           | 0.14             | 0.12                           | 0.13 | 99.79  |
| SI220137           | 8341147          | 307539           | 67.9 | 0°      | -90° |         | 33                   | 0.3  | 30                   | 0.1     | 95.8             | 4.1                    | 0.077                          | 0.123                          | 98.82            | 0.16                           | 0.26             | 0.11                           | 0.17 | 99.64  |
| SI220138           | 8340987          | 307400           | 45.9 | 0°      | -90° |         | 27                   | 0.3  | 27                   | 0.1     | 96.3             | 3.7                    | 0.057                          | 0.037                          | 99.35            | 0.05                           | 0.07             | 0.08                           | 0.17 | 99.79  |
| SI220139           | 8340895          | 307543           | 39.3 | 0°      | -90° |         | 9                    | 0.3  | 9                    | 0.5     | 94.7             | 4.8                    | 0.059                          | 0.047                          | 99.34            | 0.07                           | 0.13             | 0.08                           | 0.15 | 99.87  |
| SI220140           | 8340767          | 307622           | 41.4 | 0°      | -90° |         | 12                   | 0.3  | 10                   | 0.7     | 94               | 5.4                    | 0.052                          | 0.04                           | 99.15            | 0.07                           | 0.11             | 0.09                           | 0.2  | 99.7   |
| SI220141           | 8340667          | 307791           | 41.8 | 0°      | -90° | 6       | 9                    | 0.3  | 7                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI220142           | 8340850          | 307438           | 54.8 | 0°      | -90° |         | 27                   | 0.3  | 27                   | 0.1     | 97.8             | 2.1                    | 0.052                          | 0.051                          | 99.27            | 0.39                           | 0.1              | 0.09                           | 0.08 | 99.99  |
| SI220143           | 8340997          | 307070           | 68.9 | 0°      | -90° |         | 42                   | 0.3  | 42                   | 0.3     | 96.9             | 2.8                    | 0.062                          | 0.06                           | 99.38            | 0.07                           | 0.11             | 0.07                           | 0.1  | 99.79  |
| SI220144           | 8340939          | 307143           | 59.6 | 0°      | -90° |         | 33                   | 0.3  | 31                   | 0.1     | 96.4             | 3.6                    | 0.056                          | 0.054                          | 99.43            | 0.07                           | 0.11             | 0.06                           | 0.1  | 99.82  |
| SI220145           | 8340884          | 307240           | 49.5 | 0°      | -90° |         | 21                   | 0.3  | 21                   | 0.3     | 96.9             | 2.9                    | 0.098                          | 0.048                          | 99.38            | 0.06                           | 0.1              | 0.12                           | 0.15 | 99.89  |
| SI220146           | 8341320          | 306842           | 37.5 | 0°      | -90° |         | 12                   | 0.3  | 12                   | 0.8     | 94.9             | 4.3                    | 0.082                          | 0.033                          | 99.49            | 0.05                           | 0.09             | 0.09                           | 0.36 | 100.12 |
| SI220147           | 8341281          | 307725           | 50.4 | 0°      | -90° |         | 15                   | 0.3  | 14                   | 0.2     | 96.5             | 3.4                    | 0.078                          | 0.078                          | 99.25            | 0.11                           | 0.11             | 0.1                            | 0.23 | 99.86  |
| SI220148           | 8340892          | 307953           | 44.1 | 0°      | -90° |         | 9                    | 0.3  | 7                    | 0.1     | 96.6             | 3.4                    | 0.069                          | 0.039                          | 99.74            | 0.06                           | 0.08             | 0.07                           | 0.15 | 100.15 |
| SI220149           | 8341289          | 307928           | 53.6 | 0°      | -90° |         | 20                   | 0.3  | 18                   | 0.2     | 97.9             | 1.9                    | 0.058                          | 0.036                          | 99.4             | 0.05                           | 0.06             | 0.07                           | 0.12 | 99.74  |
| SI220150           | 8340776          | 308387           | 47   | 0°      | -90° |         | 12                   | 0.3  | 10                   | 0.2     | 97.2             | 2.6                    | 0.065                          | 0.066                          | 99.43            | 0.09                           | 0.12             | 0.07                           | 0.14 | 99.92  |
| SI220151           | 8340519          | 308622           | 60.4 | 0°      | -90° |         | 36                   | 0.3  | 34                   | 0.3     | 97.7             | 2                      | 0.06                           | 0.037                          | 99.64            | 0.05                           | 0.05             | 0.07                           | 0.16 | 100.02 |
| SI220152           | 8340075          | 308907           | 44.4 | 0°      | -90° |         | 15                   | 0.3  | 14                   | 0.8     | 96.2             | 3                      | 0.242                          | 0.103                          | 98.95            | 0.13                           | 0.12             | 0.27                           | 0.33 | 99.86  |
| SI220153           | 8340363          | 308572           | 34.9 | 0°      | -90° | 1, 2    | 3                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI23001H           | 8336702          | 309510           | 65.1 | 0°      | -90° |         | 4.7                  | 0.3  | 4.7                  |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI23013H           | 8340280          | 308917           | 31.4 | 0°      | -90° |         | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI23065H           | 8340512          | 308470           | 35.6 | 0°      | -90° |         | 3                    | 0.3  | 2                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI23066H           | 8340704          | 308357           | 41.9 | 0°      | -90° | 1, 2, 7 | 2                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI23067H           | 8340260          | 308694           | 35.2 | 0°      | -90° | 1, 2, 7 | 1                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |

| Collar Information |                  |                  |      |         |      |         | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |       |        |
|--------------------|------------------|------------------|------|---------|------|---------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|-------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes   | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total |        |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |         | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %     | %      |
| SI23080H           | 8341004          | 308005           | 29.5 | 0°      | -90° |         | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI23081H           | 8341042          | 307964           | 33.4 | 0°      | -90° |         | 3                    | 0.3  | 2                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI23106H           | 8336824          | 309552           | 62.3 | 0°      | -90° |         | 5                    | 0.3  | 4                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI23123H           | 8336882          | 309830           | 65.8 | 0°      | -90° |         | 3.2                  | 0.3  | 3                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI23124H           | 8336761          | 309970           | 67.1 | 0°      | -90° | 1, 2, 7 | 1.5                  |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI23125H           | 8336621          | 310083           | 68.3 | 0°      | -90° |         | 3.4                  | 0.3  | 3                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI23129H           | 8336109          | 309975           | 74.6 | 0°      | -90° | 1, 3, 7 | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI23130H           | 8335006          | 310646           | 78.5 | 0°      | -90° | 1, 2, 7 | 1                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI23130H_A         | 8335082          | 310648           | 82.3 | 0°      | -90° |         | 5.3                  | 0.3  | 5.3                  |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI2HA0002          | 8342276          | 306183           | 31.9 | 0°      | -90° |         | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.05            | 0.05                           | 0.09             | 0.11                           | 0.17 |       | 99.64  |
| SI2HA0003          | 8341048          | 307372           | 55.6 | 0°      | -90° | 1, 3    | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.22            | 0.18                           | 0.33             | 0.1                            | 0.21 |       | 100.17 |
| SI2HA0004          | 8340668          | 307609           | 40.8 | 0°      | -90° | 1, 3    | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.37            | 0.06                           | 0.12             | 0.09                           | 0.16 |       | 99.87  |
| SI2HA0005          | 8340076          | 308415           | 42.7 | 0°      | -90° | 1, 2    | 5                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI2HA0006          | 8340489          | 307874           | 35.3 | 0°      | -90° | 1, 2    | 3                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI2HA0007          | 8340256          | 308150           | 37.3 | 0°      | -90° | 1, 2    | 3                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI2HA0008          | 8341095          | 307854           | 42.2 | 0°      | -90° |         | 5                    | 0.3  | 4                    |         |                  |                        |                                |                                | 99.23            | 0.08                           | 0.17             | 0.21                           | 0.23 |       | 100    |
| SI2HA0009          | 8340942          | 308052           | 33.1 | 0°      | -90° |         | 5                    | 0.3  | 4                    |         |                  |                        |                                |                                | 99.3             | 0.02                           | 0.07             | 0.07                           | 0.27 |       | 99.83  |
| SI2HA0010          | 8340739          | 308233           | 41.4 | 0°      | -90° | 1, 2, 7 | 4                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI2HA0011          | 8340610          | 308388           | 37.3 | 0°      | -90° | 1, 2, 7 | 4                    |      |                      |         |                  |                        |                                |                                |                  |                                |                  |                                |      |       |        |
| SI2HA0012          | 8340632          | 306914           | 37.3 | 0°      | -90° |         | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.4             | 0.08                           | 0.16             | 0.1                            | 0.09 |       | 99.96  |
| SI2HA0013          | 8339375          | 308842           | 32.5 | 0°      | -90° |         | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.37            | 0.03                           | 0.09             | 0.07                           | 0.13 |       | 99.77  |
| SI2HA0014          | 8339858          | 309116           | 34.2 | 0°      | -90° |         | 5                    | 0.3  | 4                    |         |                  |                        |                                |                                | 98.69            | 0.06                           | 0.11             | 0.07                           | 0.17 |       | 99.19  |
| SI2HA0015          | 8339388          | 309409           | 57.4 | 0°      | -90° | 1, 3    | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 98.29            | 0.21                           | 0.34             | 0.11                           | 0.1  |       | 99.15  |
| SI2HA0016          | 8339183          | 309660           | 38   | 0°      | -90° | 1, 3    | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 98.77            | 0.07                           | 0.11             | 0.08                           | 0.09 |       | 99.16  |
| SI2HA0017          | 8338934          | 309877           | 64   | 0°      | -90° | 1, 3    | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 98.08            | 0.26                           | 0.45             | 0.11                           | 0.12 |       | 99.16  |
| SI2HA0018          | 8339088          | 310165           | 29.1 | 0°      | -90° | 1       | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 98.89            | 0.07                           | 0.16             | 0.12                           | 0.1  |       | 99.41  |
| SI2HA0019          | 8338815          | 310448           | 30.1 | 0°      | -90° | 1       | 4                    | 0.3  | 4                    |         |                  |                        |                                |                                | 98.9             | 0.07                           | 0.13             | 0.07                           | 0.08 |       | 99.32  |


| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | %                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| SI2HA0020          | 8339232          | 310443           | 29.2 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.27            | 0.09                           | 0.18             | 0.1                            | 0.07 | 99.78  |
| SI2HA0021          | 8339124          | 310534           | 29.9 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 98.99            | 0.14                           | 0.26             | 0.12                           | 0.09 | 99.69  |
| SI2HA0022          | 8339032          | 310600           | 28.3 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.17            | 0.04                           | 0.07             | 0.08                           | 0.16 | 99.59  |
| SI2HA0023          | 8339368          | 310180           | 29.1 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.23            | 0.06                           | 0.14             | 0.08                           | 0.11 | 99.7   |
| SI2HA0024          | 8339445          | 310039           | 29   | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 98.98            | 0.15                           | 0.4              | 0.12                           | 0.17 | 100.05 |
| SI2HA0025          | 8341172          | 308363           | 33.6 | 0°      | -90° | 1     | 4                    | 0.3  | 3                    |         |                  |                        |                                |                                | 97.48            | 0.16                           | 0.18             | 0.55                           | 0.58 | 99.03  |
| SI2HA0026          | 8341097          | 308456           | 33.7 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.11            | 0.06                           | 0.12             | 0.08                           | 0.17 | 99.59  |
| SI2HA0027          | 8341032          | 308569           | 34.2 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 98.88            | 0.1                            | 0.17             | 0.1                            | 0.13 | 99.44  |
| SI2HA0028          | 8340974          | 308518           | 32   | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.37            | 0.07                           | 0.15             | 0.13                           | 0.1  | 99.99  |
| SI2HA0029          | 8341345          | 308240           | 33.7 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.25            | 0.09                           | 0.19             | 0.09                           | 0.18 | 99.9   |
| SI2HA0030          | 8341255          | 308289           | 33.4 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.18            | 0.06                           | 0.14             | 0.07                           | 0.15 | 99.67  |
| SI2HA0031          | 8340835          | 308613           | 30.5 | 0°      | -90° | 1, 7  | 1                    | 0.3  | 1                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI2HA0032          | 8340748          | 308702           | 30.8 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.33            | 0.03                           | 0.08             | 0.05                           | 0.12 | 99.67  |
| SI2HA0033          | 8340689          | 308770           | 30.8 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.72            | 0.04                           | 0.1              | 0.09                           | 0.07 | 100.1  |
| SI2HA0034          | 8340556          | 308727           | 48.7 | 0°      | -90° | 1, 3  | 4                    | 0.3  | 4                    |         |                  |                        |                                |                                | 99.26            | 0.12                           | 0.22             | 0.09                           | 0.09 | 99.86  |
| SI2HA0035          | 8340585          | 308862           | 30.8 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.3             | 0.07                           | 0.18             | 0.08                           | 0.06 | 99.75  |
| SI2HA0036          | 8340476          | 308933           | 30.1 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.22            | 0.09                           | 0.24             | 0.09                           | 0.11 | 99.84  |
| SI2HA0037          | 8340361          | 309025           | 30.6 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.19            | 0.1                            | 0.27             | 0.09                           | 0.17 | 99.94  |
| SI2HA0038          | 8340269          | 309118           | 29.7 | 0°      | -90° | 1, 7  | 1                    | 0.3  | 1                    |         |                  |                        |                                |                                |                  |                                |                  |                                |      |        |
| SI2HA0039          | 8340168          | 309210           | 30.1 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.59            | 0.05                           | 0.12             | 0.07                           | 0.08 | 99.98  |
| SI2HA0040          | 8340054          | 309310           | 30.2 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.38            | 0.04                           | 0.1              | 0.05                           | 0.08 | 99.7   |
| SI2HA0041          | 8339991          | 309410           | 29.7 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.55            | 0.05                           | 0.12             | 0.07                           | 0.19 | 100.05 |
| SI2HA0042          | 8339907          | 309574           | 30.7 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.33            | 0.09                           | 0.2              | 0.07                           | 0.11 | 99.85  |
| SI2HA0043          | 8339818          | 309677           | 30   | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.18            | 0.05                           | 0.14             | 0.06                           | 0.18 | 99.68  |
| SI2HA0044          | 8339698          | 309791           | 30   | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.04            | 0.09                           | 0.22             | 0.08                           | 0.12 | 99.63  |
| SI2HA0045          | 8339576          | 309916           | 30.1 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 99.52            | 0.09                           | 0.22             | 0.09                           | 0.07 | 100.05 |
| SI2HA0046          | 8339300          | 310316           | 29.6 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.26            | 0.14                           | 0.28             | 0.12                           | 0.11 | 100    |

| Collar Information |                  |                  |      |         |      |       | Mineralised Interval |      | Grain Size Fractions |         |                  | <0.71mm >0.106mm Grade |                                | Head Grade                     |                  |                                |                  |                                |      |        |
|--------------------|------------------|------------------|------|---------|------|-------|----------------------|------|----------------------|---------|------------------|------------------------|--------------------------------|--------------------------------|------------------|--------------------------------|------------------|--------------------------------|------|--------|
| Hole ID            | Northing         | Easting          | RL   | Azimuth | Dip  | Notes | Depth                | From | To                   | <0.71mm | <0.71mm >0.106mm | >0.106mm               | Al <sub>2</sub> O <sub>3</sub> | Fe <sub>2</sub> O <sub>3</sub> | SiO <sub>2</sub> | Fe <sub>2</sub> O <sub>3</sub> | TiO <sub>2</sub> | Al <sub>2</sub> O <sub>3</sub> | LOI  | Total  |
|                    | GDA 2020 Zone 55 | GDA 2020 Zone 55 | m    |         |      |       | m                    | m    | m                    | m       | m                | %                      | %                              | %                              | %                | %                              | %                | %                              | %    | %      |
| SI2HA0047          | 8338234          | 311372           | 23.6 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 98.48            | 0.04                           | 0.1              | 0.2                            | 1.07 | 100    |
| SI2HA0048          | 8338318          | 311280           | 23.9 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 97.7             | 0.04                           | 0.09             | 0.26                           | 1.56 | 99.77  |
| SI2HA0049          | 8338390          | 311189           | 25.2 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 98.7             | 0.15                           | 0.27             | 0.13                           | 0.11 | 99.47  |
| SI2HA0050          | 8338463          | 311115           | 23.8 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 98.77            | 0.04                           | 0.1              | 0.08                           | 0.5  | 99.59  |
| SI2HA0051          | 8338549          | 311032           | 25.3 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 97.81            | 0.55                           | 1.05             | 0.17                           | 0.13 | 99.95  |
| SI2HA0052          | 8338679          | 310919           | 26.2 | 0°      | -90° | 1     | 3                    | 0.3  | 3                    |         |                  |                        |                                |                                | 99.06            | 0.23                           | 0.42             | 0.14                           | 0.09 | 100.05 |
| SI2HA0053          | 8338816          | 310811           | 26.7 | 0°      | -90° | 1     | 2                    | 0.3  | 2                    |         |                  |                        |                                |                                | 98.77            | 0.06                           | 0.11             | 0.08                           | 0.05 | 99.13  |
| SI2HA0054          | 8338903          | 310719           | 27.5 | 0°      | -90° | 1     | 3                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.12            | 0.14                           | 0.27             | 0.11                           | 0.12 | 99.83  |
| SI2HA0055          | 8338594          | 310546           | 44.6 | 0°      | -90° | 1, 3  | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.17            | 0.13                           | 0.22             | 0.1                            | 0.17 | 99.88  |
| SI2HA0056          | 8339574          | 309625           | 42.2 | 0°      | -90° | 1, 3  | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.52            | 0.06                           | 0.09             | 0.07                           | 0.05 | 99.91  |
| SI2HA0057          | 8339481          | 309721           | 42.9 | 0°      | -90° | 1, 3  | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.09            | 0.14                           | 0.24             | 0.11                           | 0.09 | 99.77  |
| SI2HA0058          | 8339402          | 309794           | 41.1 | 0°      | -90° | 1, 3  | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.33            | 0.05                           | 0.08             | 0.08                           | 0.04 | 99.64  |
| SI2HA0059          | 8339335          | 309875           | 38.7 | 0°      | -90° | 1, 3  | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.3             | 0.09                           | 0.14             | 0.08                           | 0.03 | 99.7   |
| SI2HA0060          | 8339257          | 309955           | 35.5 | 0°      | -90° | 1, 3  | 5                    | 0.3  | 5                    |         |                  |                        |                                |                                | 99.5             | 0.06                           | 0.08             | 0.08                           | 0.06 | 99.84  |
| SI2HA0061          | 8339171          | 310060           | 30.5 | 0°      | -90° | 1     | 4                    | 0.3  | 4                    |         |                  |                        |                                |                                | 99.46            | 0.06                           | 0.11             | 0.08                           | 0.06 | 99.84  |

### Notes

- 1 No Sizing or ICP Data undertaken
- 2 Drillhole did not intersect significant mineralisation
- 3 Drillhole is considered open at depth
- 4 Excluded on quality control grounds, drillhole was later twinned
- 5 Excluded due to drilling issues
- 6 Contaminated assay samples, geology suitable for constraining model.
- 7 Hand auger geology was used to identify mineralised intercept

Personal

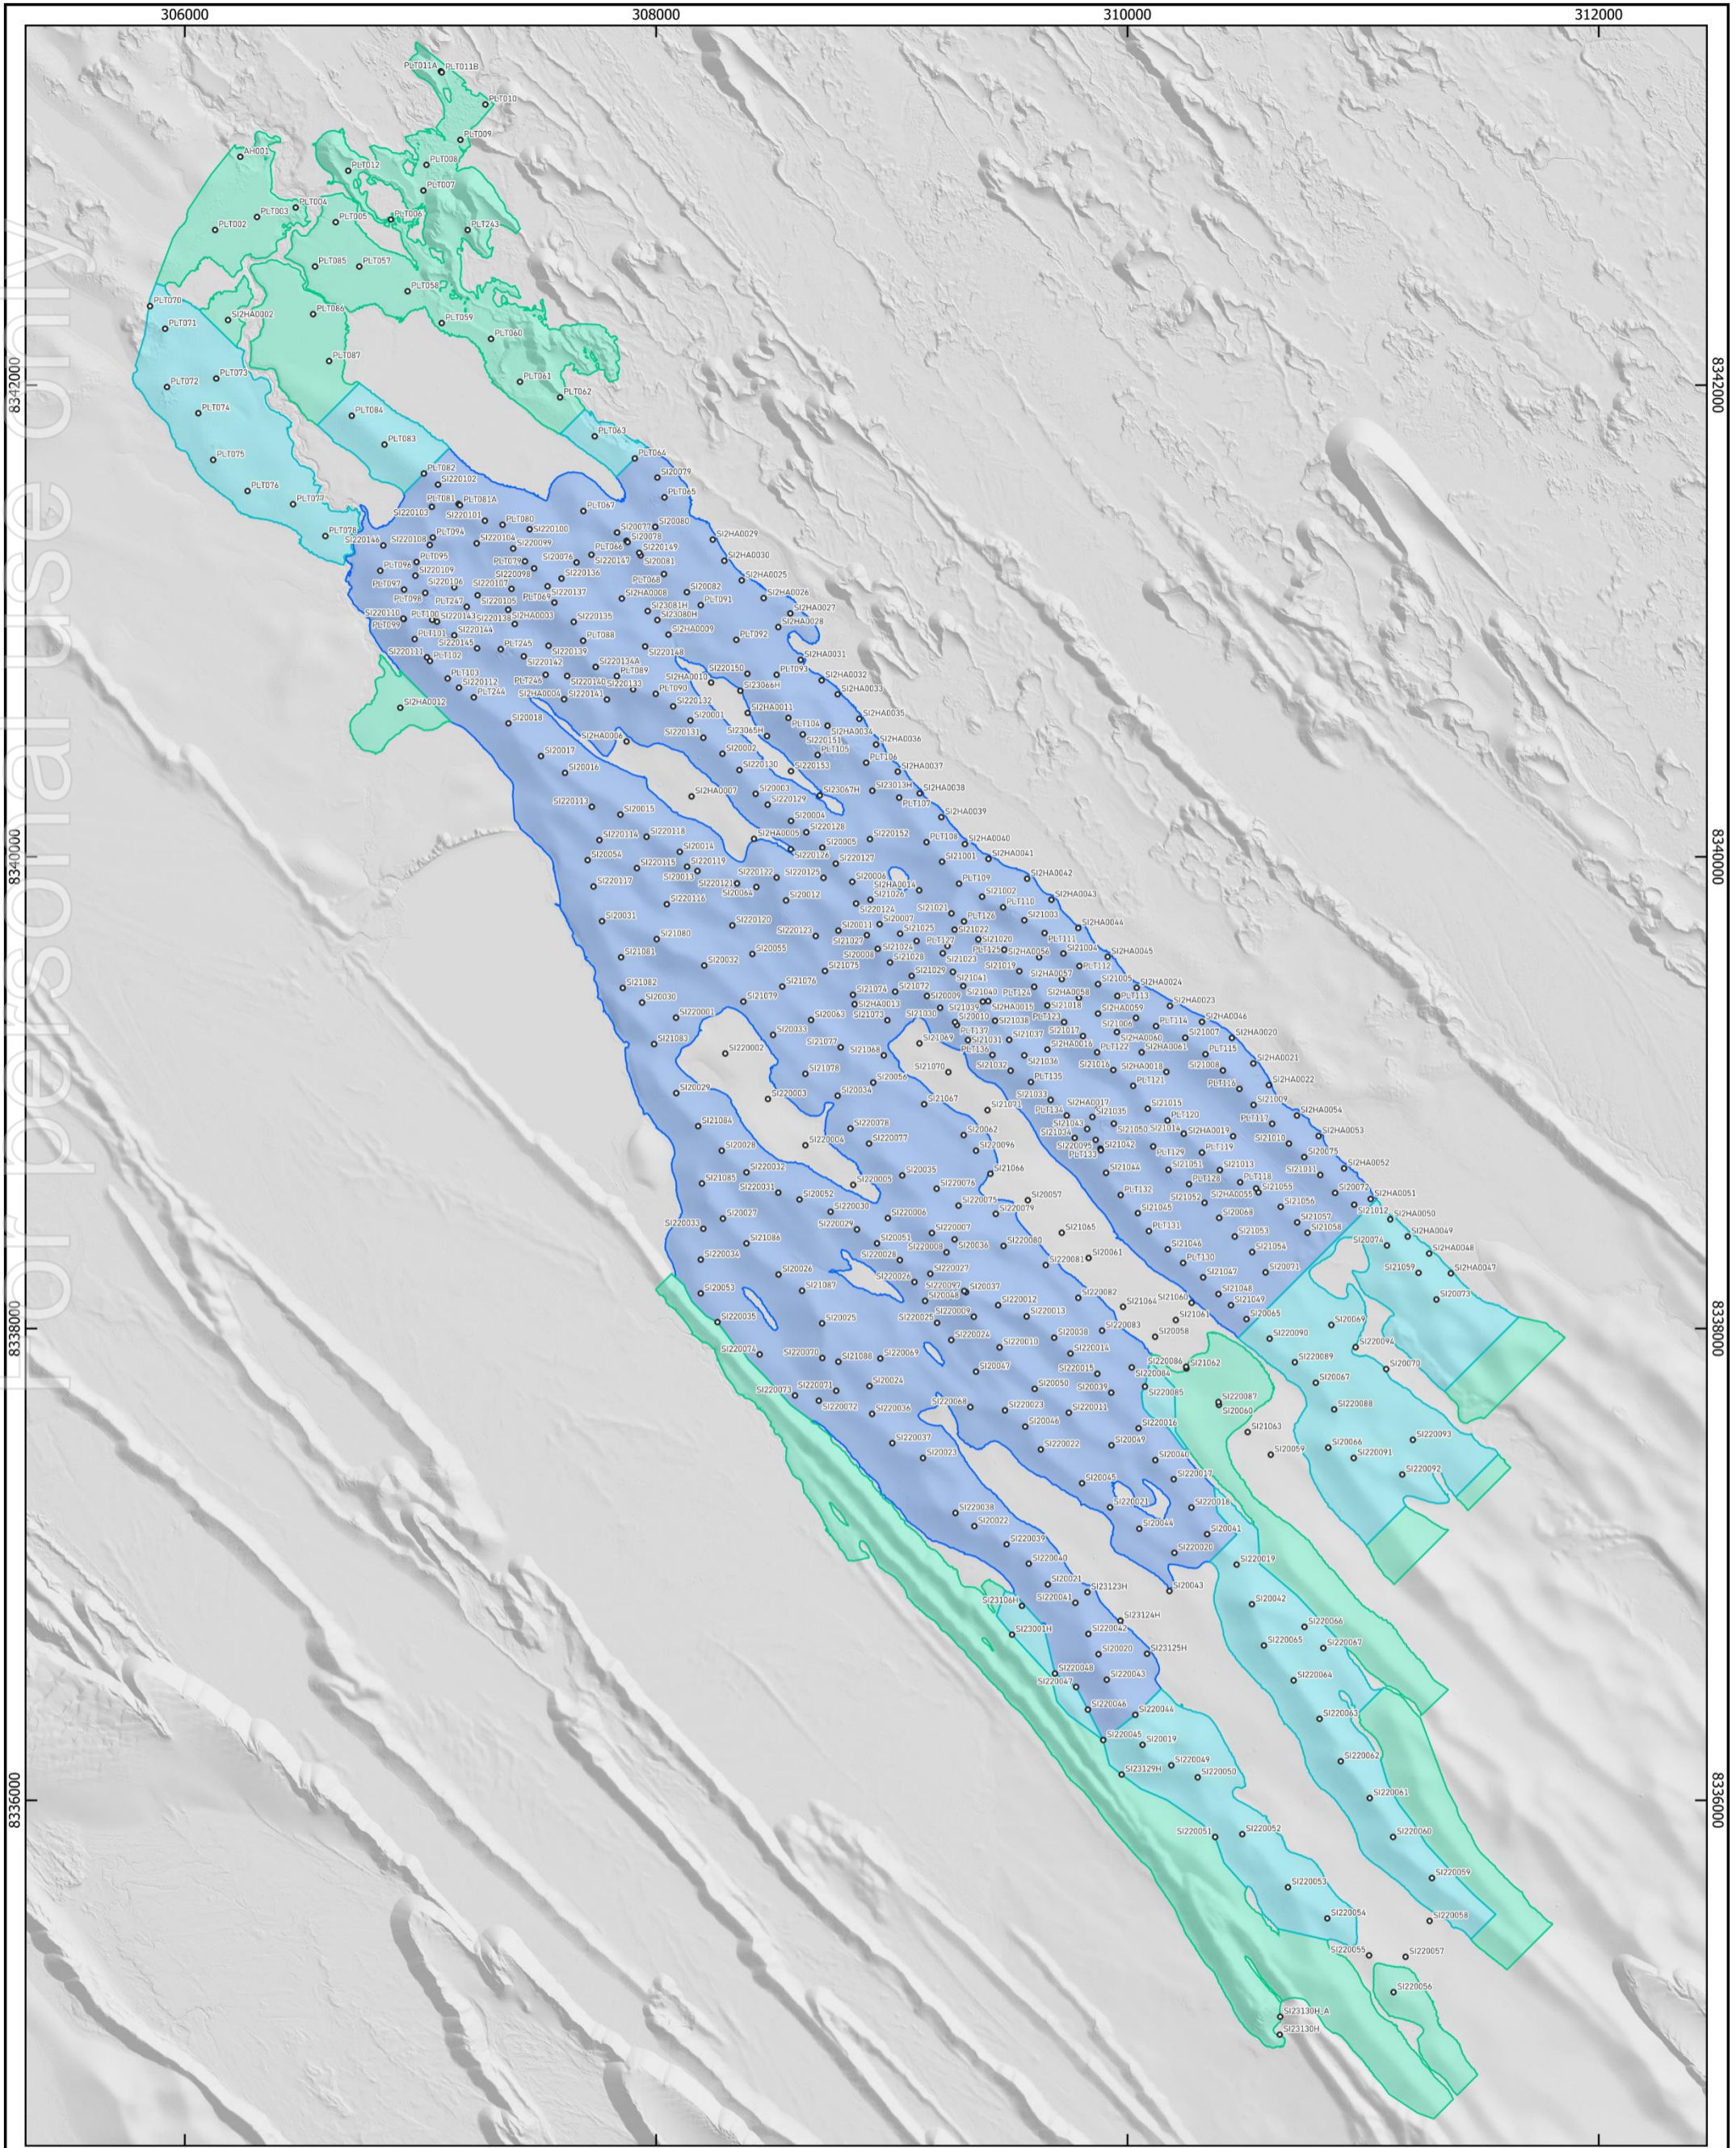

- Drill Holes
- Mineral Resource Estimate: Inferred Category
- Mineral Resource Estimate: Indicated Category
- Mineral Resource Estimate: Measured Category

Note: Refer to Table of Material Drillholes for status of drillhole in Mineral Resource Estimate.



500 1,000 m



### Drill Locations

*Mineral Resource Estimate  
(June 2025)*

|                                 |                            |
|---------------------------------|----------------------------|
| Document #: DRX_NSP_CP_MRE25_01 | Scale: 1:25000             |
| Version: 1.0                    | CRS: GDA2020 / MGA Zone 55 |
| Author: Frazer Watson           | Date Created: 01/06/2025   |
| Approved: Frazer Watson         | Date Approved: 01/06/2025  |