



# ASX ANNOUNCEMENT

3 July 2025

## EXPLORATION UPDATE

### TMT PROJECT, ARGENTINA

#### KEY HIGHLIGHTS

- Phase 1 drilling at TMT tested the first two of several high-priority targets across a large, underexplored area.
- First-pass drilling at Tambo South intersected broad, continuous zones of anomalous copper — a strong technical result in the maiden campaign.
- Updated 3D geological and geochemical modelling confirms mineralised zones at Tambo South (over 0.1% Cu) remain open laterally and at depth, suggesting strong expansion potential.
- Surface sampling at Toro South, an untested high-priority target that sits 20km southeast of ATEX Resources' 1.4 billion tonne copper/gold Valeriano Project<sup>1</sup>, returned anomalous copper, gold and silver, pointing to a potential epithermal system overlying a deeper porphyry target.
- Geophysical MT surveys are now being planned to refine targeting at Toro South and Tambo South ahead of potential Phase 2 drilling in the upcoming 2025 field season.


Belararox Limited (**ASX: BRX**) (**Belararox** or the **Company**) is pleased to announce an update on its highly prospective Toro-Malambo-Tambo (**TMT**) Project in Argentina's San Juan Province.

**Managing Director Arvind Misra commented:** *We're highly encouraged by the wide and anomalous copper zones intersected at Tambo South during our maiden drilling program at the TMT Project. These results represent a clear technical success and provide strong validation for our geological targeting model. While Tambo South is emerging as a compelling prospect that requires further testing, other high-priority targets, such as Toro South, also warrant follow-up exploration based on their geophysical and geochemical signatures. Altogether, the initial results give us a robust foundation, and we're excited to advance our understanding of the broader copper-gold porphyry potential in the next field campaign.*

**Exploration Manager Chris Blaser commented:** *Our exploration efforts leading up to the maiden Phase 1 drilling and our positive results show us that we are on the right track for further success. We are planning a magnetotellurics (MT) geophysical survey for Toro South and Tambo South to further delineate the most prospective zones for follow-up drill targeting.*

The Phase 1 drilling program tested two high-priority targets at Belararox's TMT Project, with several additional high-priority targets identified through satellite spectral imagery and geological interpretation (Figure 1, also see BRX ASX release 18 May 2023). Subsequently, the targets were mapped in the field and surface geochemistry samples were analysed. Out of the highest-ranking targets, only Tambo South and Malambo have been drill-tested by Belararox to date, with other highly prospective targets, such as Toro South, yet to be adequately drill-tested.

<sup>1</sup> Refer to <https://www.atexresources.com/valeriano-project/resources/>

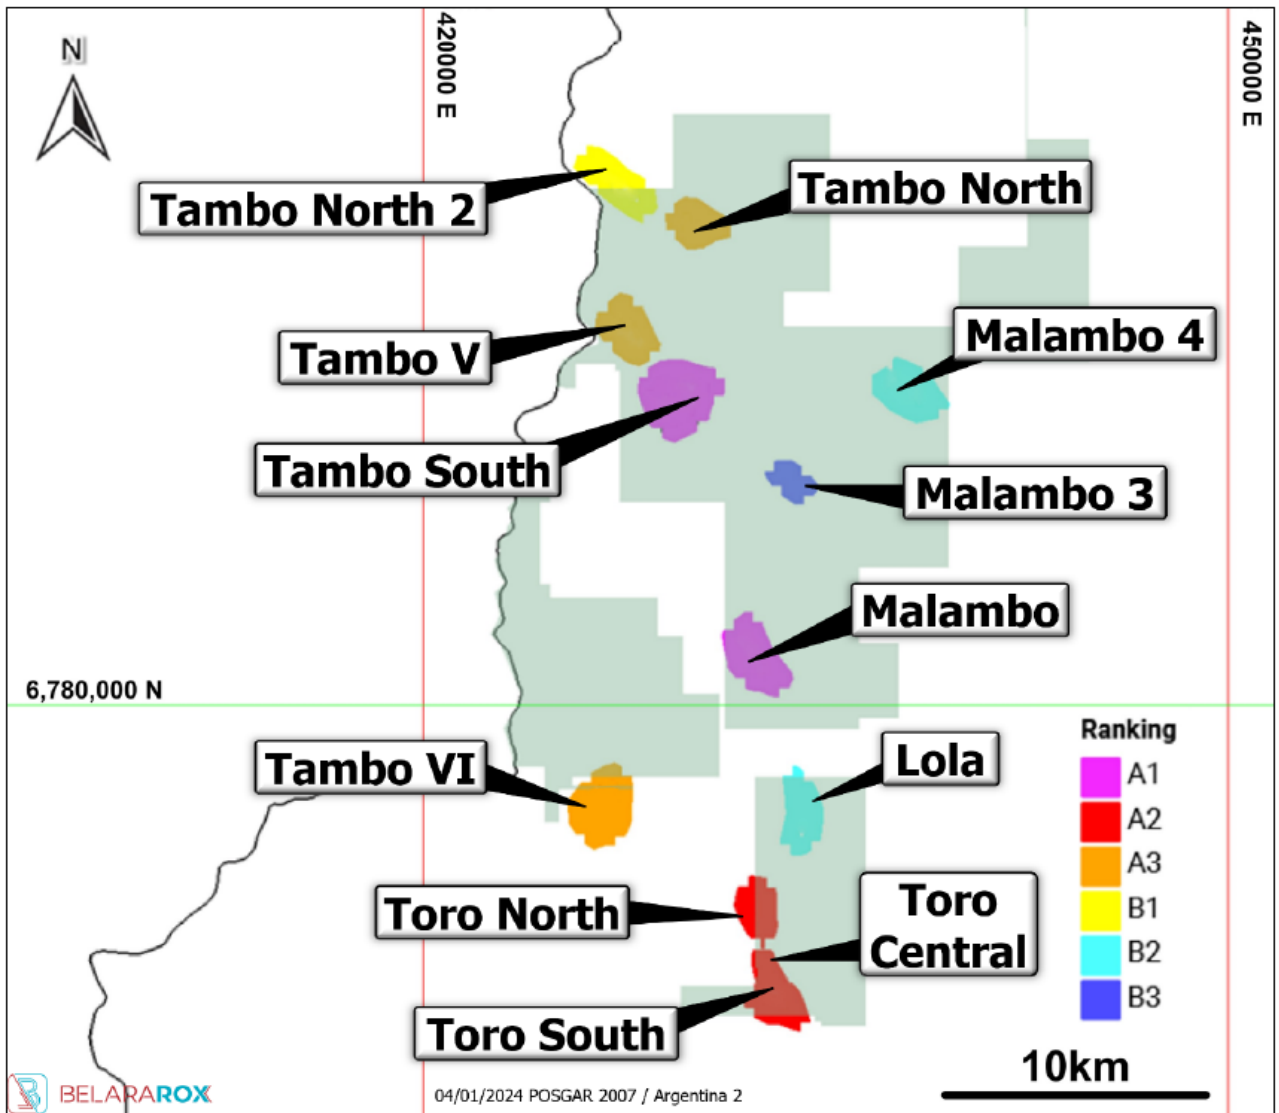

**Figure 1.** Targets from ASTER and SENTINEL 2 interpretation, for more information see BRX ASX Release (Amended ASX Release 18 May 2023). Note on target ranking: A-class targets are of higher priority than B-class targets. Within each target class, targets are prioritised from 1 (highest) to 3 (lowest). However, the sensitivity of the ranking method is coarse, such that there may not be a significant difference in the prospectivity of targets prioritised as 1 and 2 in each class (e.g. A1 > A2).

## Toro South

Belararox's Toro South target sits 20km southeast of ATEX Resources' Valeriano Project (current MRE of 1.41 billion tonnes at 0.67% CuEq and recent US\$40m strategic investment in ATEX by Agnico Eagle Mines Limited).<sup>1</sup>

Toro South is characterised by a porphyritic dacite intrusion (Figure 2) which is approximately 1.2km (east-west) and 600m (north-south). The dacitic stock intrudes across and along bedding in the sedimentary and volcanic rocks that form the country rocks. The dacite and adjacent contact zones are intensely and pervasively altered to quartz-sericite-clay-pyrite (phyllic) and jarosite-goethite. Jarosite and goethite are iron oxides formed after the oxidation and alteration of pyrite and other sulphide minerals. The peripheral portions of the hydrothermal system are characterised by moderate chlorite-epidote (propylitic) alteration.

Surface rock sampling at the Toro targets has returned assay results of up to 1.41% Cu, 1.28 ppm Au, 421 ppm Ag, 8.13% Zn, and >20.0% Pb (see BRX ASX release, 29 April 2024). These assay results are supported by anomalous pathfinder elements, including Tl, Li, As, Sb and Bi. The geochemical zoning at Toro South exhibits characteristics of a Cu-Au-Ag epithermal-type mineralisation, with potential for underlying Cu-Au porphyry-style mineralisation.



Two types of rock samples were collected and analysed:

1. Systematic samples were collected at intervals that range from 50m to 100m in zones of outcrop and road-cuttings (grid sampling; either rock chip or talus sample); and
2. Selective Rock chip samples that were taken from zones of geological interest and visually apparent mineralisation (Figure 3).

3D interpretation of surface assay results from Toro South has confirmed a significant copper porphyry target of considerable size. The 3D geochemical models indicate that porphyry targets exist, underneath a potential epithermal target (Figure 4).

A magnetotellurics (MT) geophysical survey is planned at Toro South to further characterise the most prospective zones for follow-up drill targeting. MT surveys can image zones of low resistivity from the surface to depths of over 2,000m. Areas of low MT resistivity anomalies typically coincide with Cu porphyry mineralisation and have been successfully used in Cu porphyry projects elsewhere for refined drill hole targeting, such as the nearby Valeriano Deposit from ATEX Resources (~20 km northwest of the Toro South target).

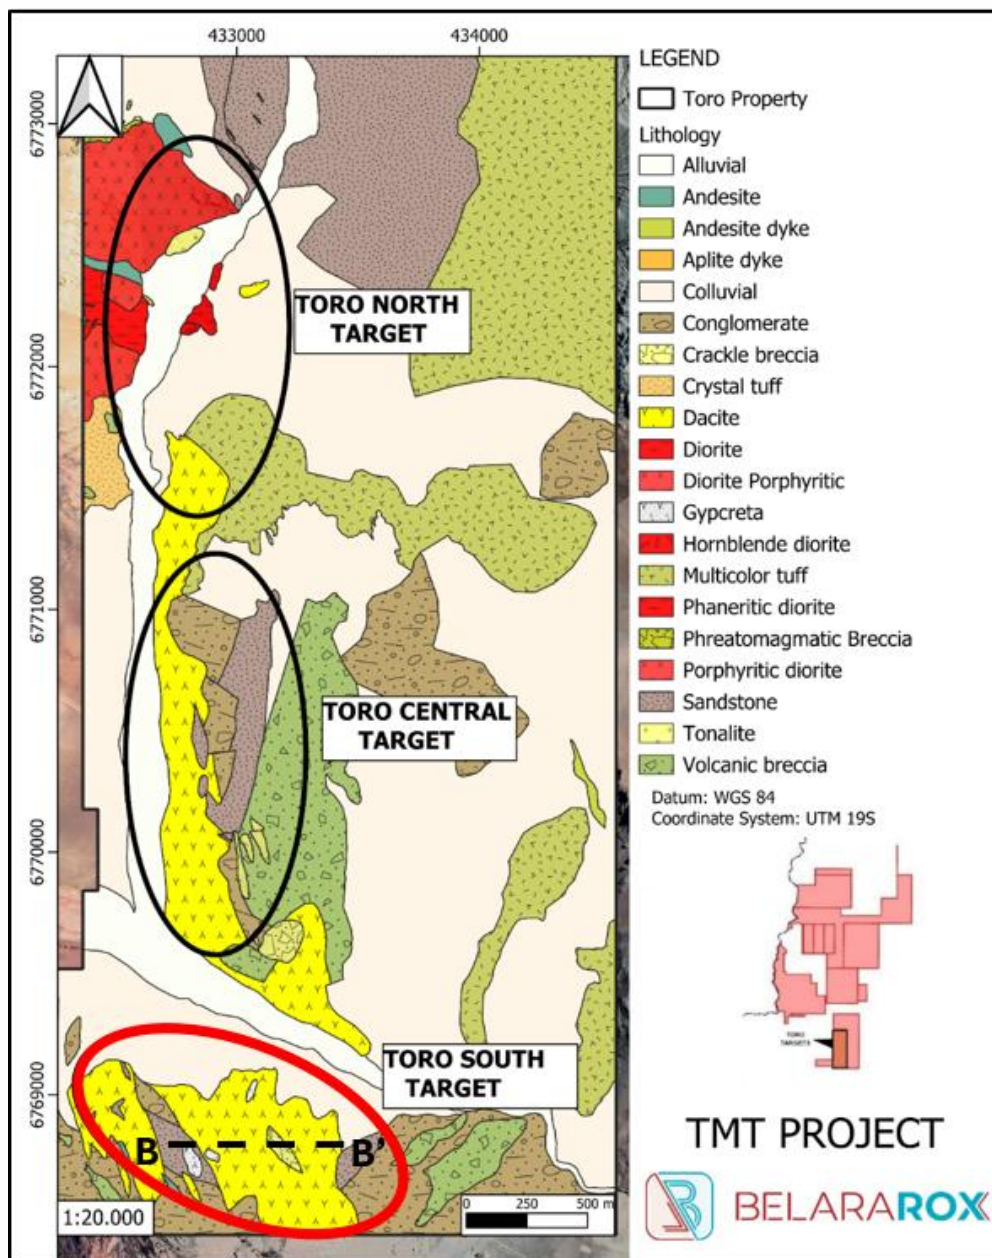


Figure 2: Geological map for the Toro project highlighting the Toro South Target, showing the zone of geochemical interest presented in Figure 3. Cross section B-B' is shown in Figure 4.



For BELARAROX'S EXAMINATION


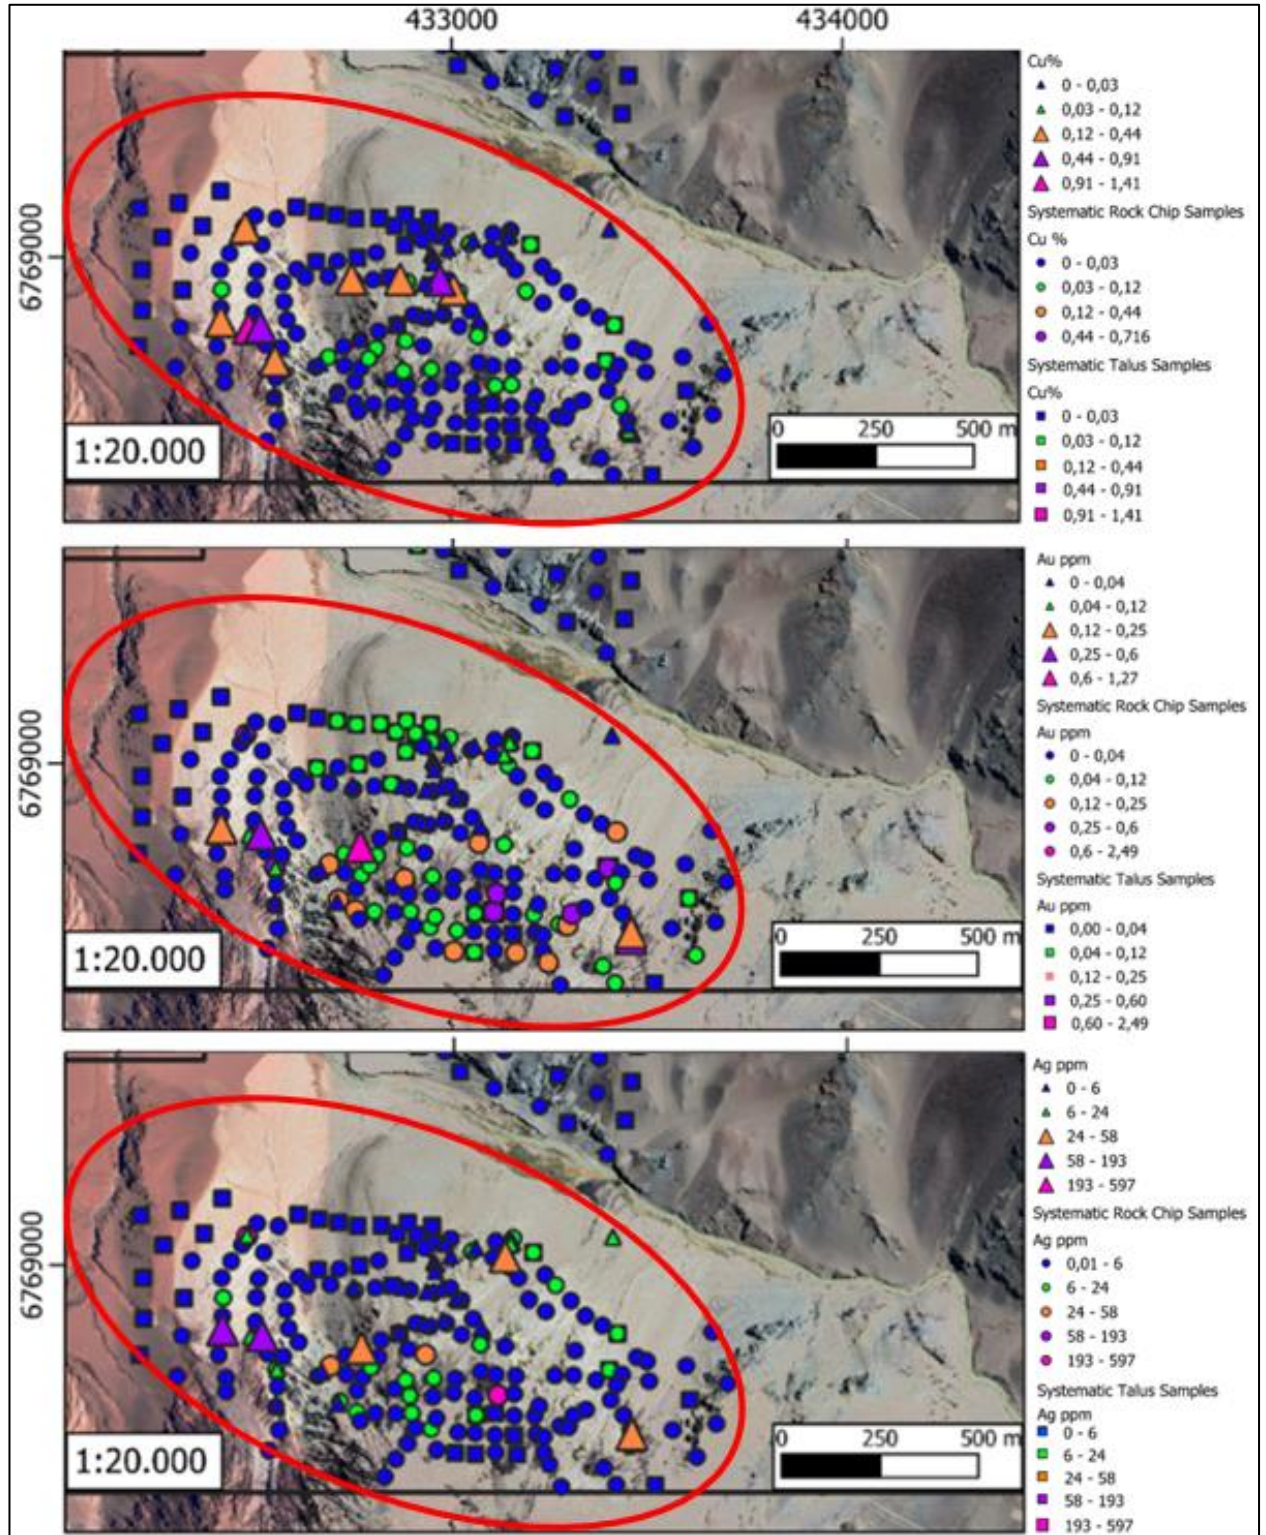


Figure 3: Cu (%), Au (ppm) and Ag (ppm) geochemical results from selective rock chip and systematic rocks and talus samples at the Toro South target. The red ellipse highlights the same area as in Figure 2. (see BRX ASX release, 29 April 2024).



For BELARAROX LIMITED

# Toro South Cross-Section B-B' Geological Interpretation

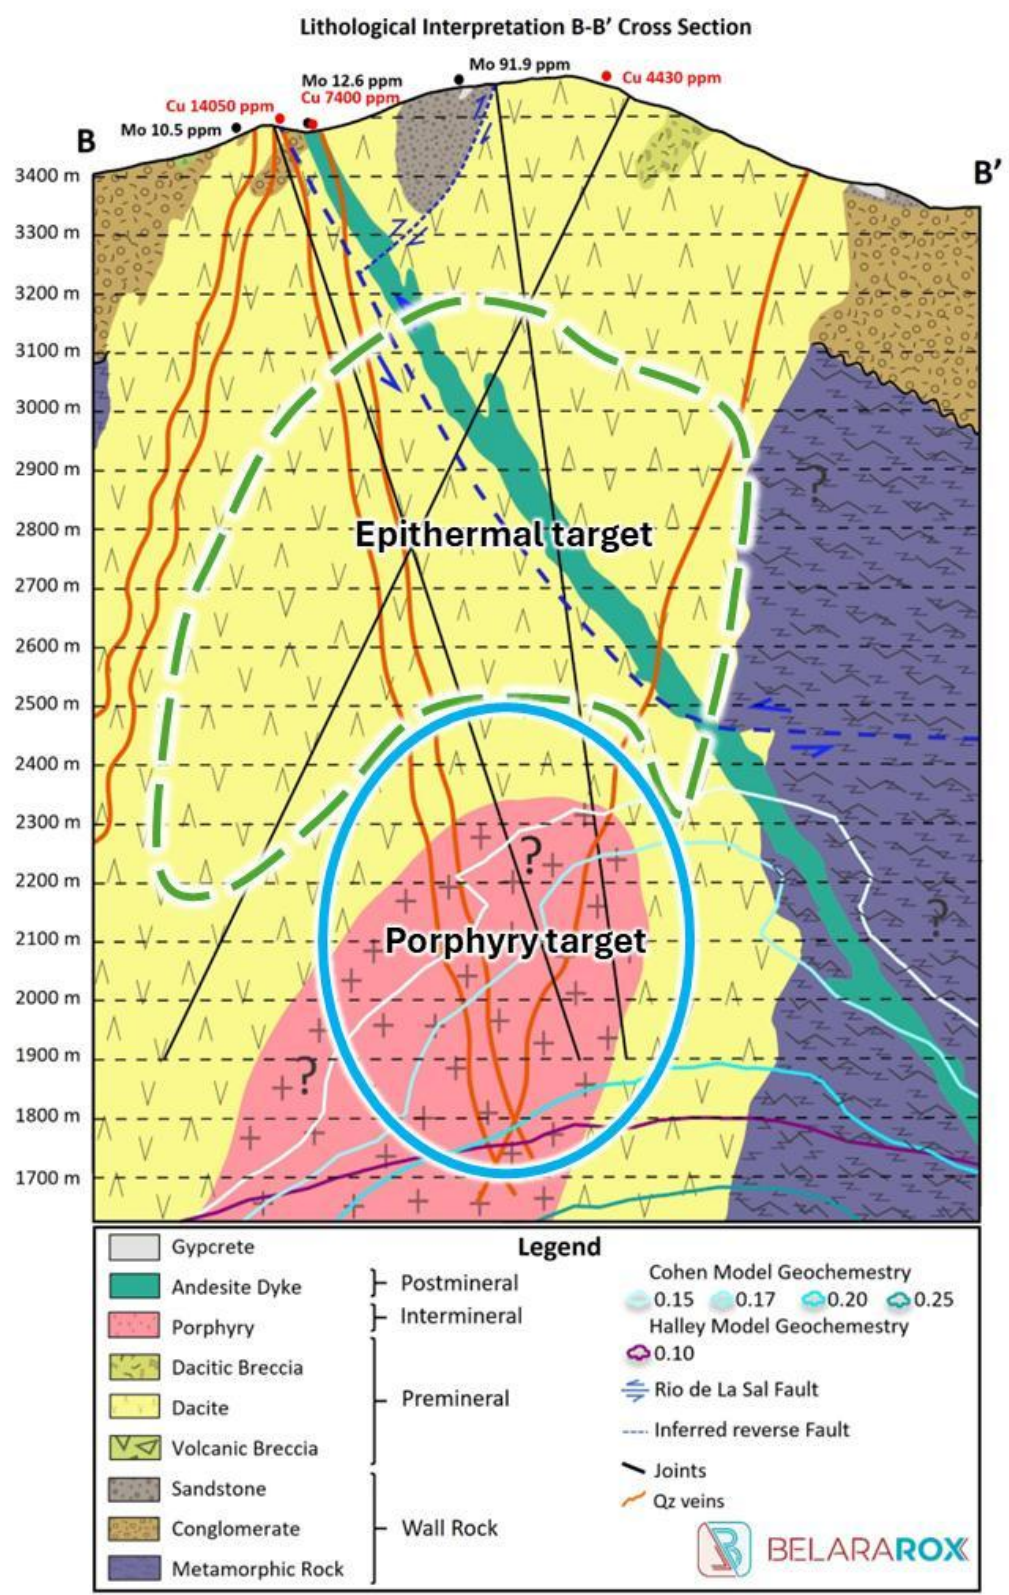

**Figure 4:** Geological cross section (looking north) for the Toro South target (see figure 2 for plan view location). Note the location of the 3D geochemical models, with the Halley model indicating a potential porphyry target at 1000m below the surface and the Halley model indicating a potential porphyry target at 1500m below the surface. (see BRX ASX release, 29 April 2024).



**Figure 5:** Toro South ‘selective’ rock chip sample (wet photo) with **assay grades of 21.3ppm Ag & 1.41% Cu**. The sample consists of a phyllic-altered dacite with sheeted manganese oxide and Cu-oxide veins that contain chalcantite and chrysocolla. Sample Identifier: TMTA00053 located at 432482mE, 6768818mN, WGS 1984, UTM Zone 19s). See BRX ASX release from 21 February 2024 for more sample results.

### Tambo South

First-pass drilling at Tambo South has intersected wide and continuous anomalous copper zones. The geological interpretation of the Tambo South drill core data indicates multiple intrusions with varying extents of copper mineralisation (refer to JORC (2012) Code Table 1 in appendix A and BRX ASX announcement 6 June 2025). The presence of covellite and hypogene chalcocite is consistent with the interpreted exploration model of a high-sulfidation epithermal overprint on the upper levels of a copper porphyry system, indicating the possibility of being peripheral to the higher-temperature mineral assemblages typical of copper porphyry systems.

The 3D geochemical models have been updated with drill hole information (assay and terraspec data). The revised models suggest that the upper parts of the copper porphyry target have been successfully tested, with the highest probability areas sitting past the current drill hole depths (Figure 7).

An MT geophysical survey is also planned at Tambo South to further delineate the most prospective zones for potential follow-up drill targeting.



For BELARAROX LIMITED

www.belararox.com.au  
ASX | BRX

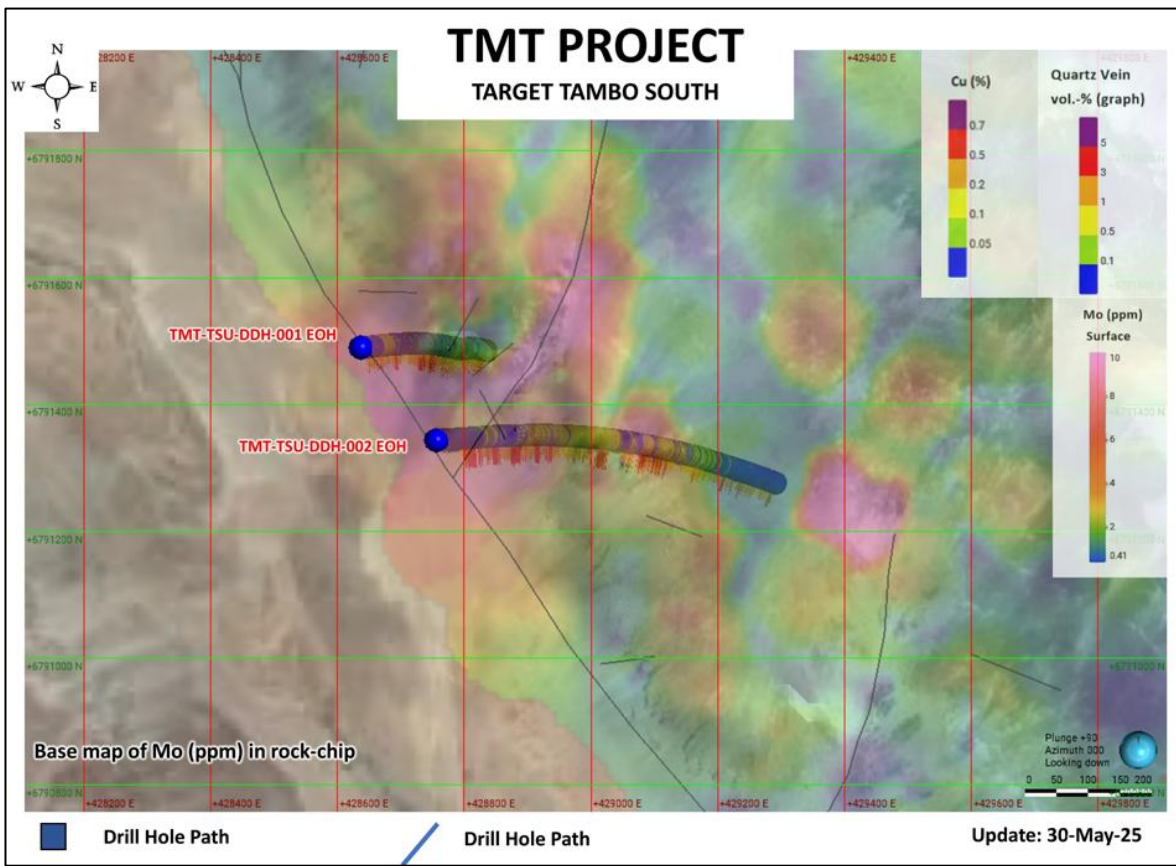


Figure 6: Plan view of the Tambo South Target, showing a summary of surface molybdenum values (ppm) and the drill paths of TMT-TSU-DDH-001 and TMT-TSU-DDH-002. Cu assays (weight-%) and quartz vein abundances (volume-%) are plotted on the drill holes, as indicated in the legend.

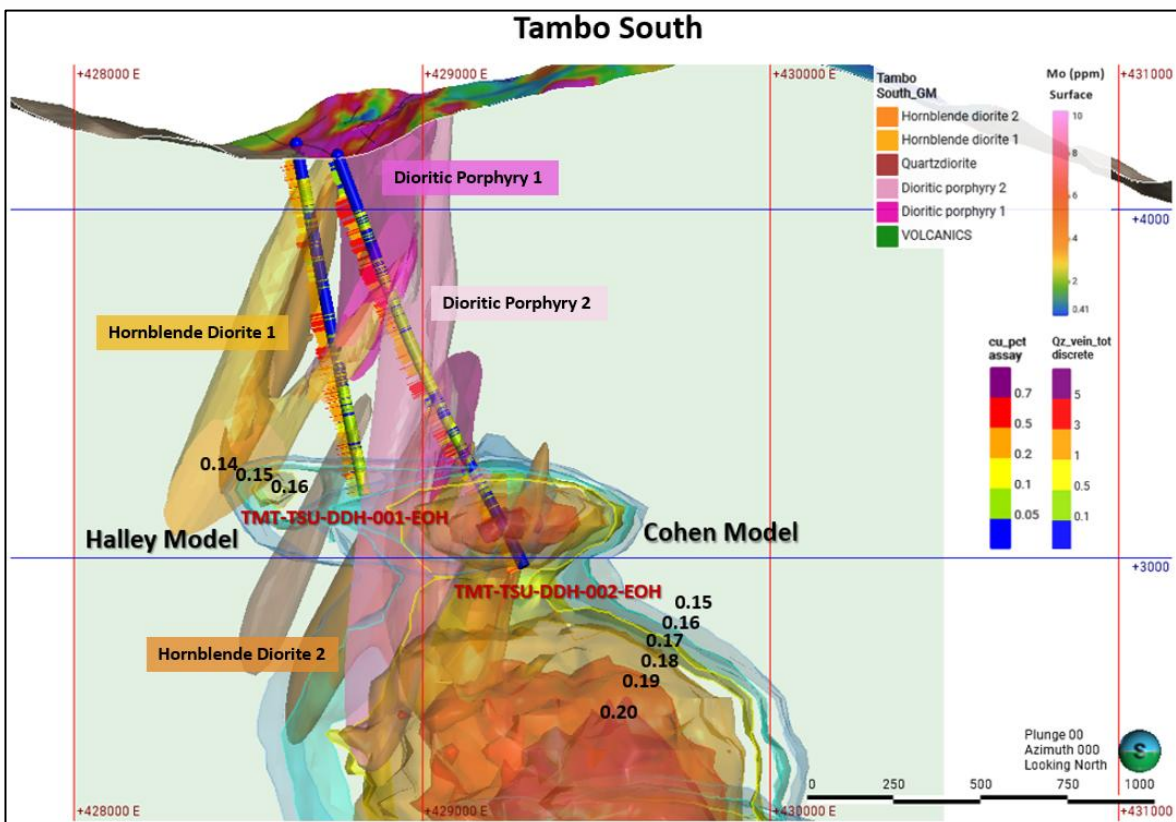


Figure 7: Cross-section of the Tambo South Target, showing the drill paths of TMT-TSU-DDH-001 and TMT-TSU-DDH-002 with Cu assays (weight-%) and quartz vein abundance (volume-%) plotted on the drill holes, as indicated in the legend. Note: The numbers on the iso surfaces represent probability scores (0-1) of the geochem models at Tambo matching with the reference metal-zoning models from Cohen (2011) and Halley et al. (2015). Values over 0.15 are considered 'significant', with a maximum score of 1.00 which corresponds to a 100% match.

## Further Work and Proposed Geophysical Survey

A magnetotellurics (**MT**) geophysical survey is planned at Toro South and Tambo to further characterise the most prospective zones for follow-up drill targeting. MT surveys can image zones of low resistivity from the surface to depths of over 2,000m. Areas of low MT resistivity anomalies typically coincide with Cu porphyry mineralisation and have been successfully used in Cu porphyry projects elsewhere for refined drill hole targeting, such as the nearby Valeriano Deposit from ATEX Resources (~20 km northwest of the Toro South target): *'The mineralisation within the Valeriano Copper-Gold Deposit correlates well with the broad MT resistivity anomaly that extends significantly to depth and laterally, suggesting continuation of the porphyry mineralisation in all directions'*. <https://www.atexresources.com/valeriano-project/geophysics/>



**Figure 8** – Winterised camp after demobilisation with Toro South prospect in the background.

***This announcement has been authorised for release by the Board of Belararox.***

### SHAREHOLDER ENQUIRIES

**Arvind Misra**

Managing Director  
Belararox Limited

[arvind.misra@belararox.com.au](mailto:arvind.misra@belararox.com.au)

### MEDIA ENQUIRIES

**Paul Berson**

Corporate Storytime

[paul@corporatestorytime.com](mailto:paul@corporatestorytime.com)

### GENERAL ENQUIRIES

**Belararox Limited**

[www.belararox.com.au](http://www.belararox.com.au)


[info@belararox.com.au](mailto:info@belararox.com.au)

## COMPETENT PERSON STATEMENT (TMT PROJECT ARGENTINA)

The information in this announcement to which this statement is attached relates to Exploration Results and is based on information compiled by Mr Chris Blaser. Mr Blaser is the Exploration Manager of Belararox Ltd and is a Competent Person who is a Member of the Australasian Institute of Mining and Metallurgy (AusIMM) and a Member of the Australian Institute of Geoscientists (AIG). Mr Blaser has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration, and to the exploration techniques being used to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Blaser has consented to the inclusion in this announcement of the matters based on his information, in the form and context in which they appear.



For BELARAROX LIMITED



The Company confirms that it is not aware of any new information or data that materially affects the information included in prior market announcements and, in the case of exploration results, that all material assumptions and technical parameters underpinning the results in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

### ABOUT BELARAROX LIMITED (ASX: BRX)

Belararox is a mineral explorer focused on securing and developing resources to meet the surge in demand from the technology, battery, and renewable energy markets. Our projects currently include the potential for copper, gold, silver and zinc resources.

The Company's portfolio includes the TMT Project in Argentina, targeting copper, gold, and other metals, a recent acquisition in Botswana's Kalahari Copper Belt, the Belara project in New South Wales, focused on zinc and copper, and the Bullabulling project (under Option to a 3<sup>rd</sup> Party) in Western Australia, targeting gold.

### TMT PROJECT

Situated within Argentina's San Juan Province, the Toro-Malambo-Tambo (**TMT**) project occupies an unexplored area between the prolifically mineralised El Indio and Maricunga Metallogenic Belts.

Belararox has already successfully identified numerous promising targets within the TMT project. These targets will undergo thorough exploration as part of an extensive program led by an experienced Belararox team currently established in Argentina.





## APPENDIX A: JORC (2012) CODE TABLE 1

Criteria	JORC Code Explanation	Commentary
<i>Sampling techniques</i>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representativity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done; this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold with inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant the disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Determination of mineralisation of hand specimens referenced in this presentation are quantitative, based on visual field estimates made by the geologists.</li> <li>Diamond drilling was undertaken to obtain core samples</li> </ul>
<i>Drilling techniques</i>	<ul style="list-style-type: none"> <li>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other types, whether the core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>PQ, HQ and NQ diamond drill core. Triple-tube wire line standard equipment. Surveys used DeviShot tool initially, then converted to Gyro (TruGyro) tool. Core is oriented using spear technique.</li> </ul>
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures are taken to maximise sample recovery and ensure the representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>For diamond drilling recovery is recorded for every run. In general core recovery is in excess of 99%.</li> <li>There is insufficient core loss to assess or consider a bias.</li> </ul>
<i>Logging</i>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>At selected and systematic locations during the Anaconda geological mapping, descriptions of lithology, alteration, mineralisation and other features were systematically recorded in the field and encoded into an Excel sheet for future reference.</li> <li>Samples are being collected in a systematic and selective fashion with descriptions of lithology, alteration, mineralisation and other features systematically recorded in the field and encoded into an Excel sheet for future reference.</li> <li>Visual estimates of mineral abundance based on the observations of the</li> </ul>



		<p>Company geologists should never be considered a proxy or substitute for laboratory concentrations where grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations. All visual estimates have been made by experienced Geologists using standardized abundance charts.</p> <ul style="list-style-type: none"> <li>• At the rig, core is photographed, initial geotechnical logging is performed, and the core is oriented.</li> <li>• Core is photographed, logged, cut and sampled by project personnel at a core logging area at the camp.</li> <li>• Geological and geotechnical logging is at a level of detail to support future Mineral Resource Estimation and other mining and metallurgical studies.</li> </ul>
<p><i>Sub-sampling techniques and sample preparation</i></p>	<ul style="list-style-type: none"> <li>• If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximise the representativity of samples.</li> <li>• Measures are taken to ensure that the sampling is representative of the in-situ material collected, including, for instance, results for field duplicate/second-half sampling.</li> <li>• Whether sample sizes are appropriate to the grain size of the sampled material.</li> </ul>	<ul style="list-style-type: none"> <li>• Core is sampled continuously down the hole.</li> <li>• Sample lengths are initially 4 metres.</li> <li>• Where visual estimates of mineralization exceed 20m at &gt; 0.1 volume-% Cu trigger the collection of samples every 2m.</li> <li>• 2m samples consist of half-core.</li> <li>• 4m samples consist of quarter core.</li> <li>• In cutting and sampling of half-core and quarter-core, the 0° orientation line is used to cut the core to avoid selective sample bias.</li> </ul>
<p><i>Quality of assay data and laboratory tests</i></p>	<ul style="list-style-type: none"> <li>• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>• For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis include instrument make and model, reading times, calibration factors applied and their derivation, etc.</li> <li>• Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>• ALS Patagonia has been selected to undertake analyses using the following:             <ul style="list-style-type: none"> <li>• ME-MS61 (Four acid digestion followed by ICP-MS measurement)</li> <li>• Au-AA23 (Au by fire assay and AAS)</li> <li>• HYP-PKG (TerraSpec® 4 HR scanning and aiSIRIS™)</li> </ul> </li> <li>• Quality control procedures are as follows:             <ul style="list-style-type: none"> <li>• Blanks every 50 samples</li> <li>• Standards every 50 samples</li> <li>• Duplicates 3 per 100 samples</li> </ul> </li> <li>• Acceptable levels of accuracy and precision have been established to date in the soils, talus and rock chip samples.</li> <li>• Results not yet received for the core samples.</li> </ul>
<p><i>Verification of sampling and assaying</i></p>	<ul style="list-style-type: none"> <li>• The verification of significant intersections by either independent or alternative company personnel.</li> <li>• The use of twinned holes.</li> <li>• Documentation of primary data, data entry procedures, data verification, and data storage (physical and electronic) protocols.</li> <li>• Discuss any adjustments to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>• Procedures for sampling and assaying are well documented. This includes the verification of significant intersections by the geological team (both the original logger and others as available.)</li> </ul>



*Location of data points*

- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in MineralResource estimation.
  - Specification of the grid system used.
  - Quality and adequacy of topographic control.
- GPS locations for the Anaconda geological mapping activities are being captured by handheld GPS units in the field and later encoded into an Excel spreadsheet containing the surface samples with descriptions of lithology, alteration, mineralisation and other features.
  - GPS sample locations are being captured by handheld GPS units in the field and later encoded into an Excel spreadsheet containing the surface samples with descriptions of lithology, alteration, mineralisation and other features.
  - GPS co-ordinates were recorded in Eastings and Northings for WGS84 Zone 19S
  - The data discussed in the current ASX Release includes two (2) different multispectral spaceborne datasets for the location of the twelve (12) targets:
    - [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer (“ASTER”); and
    - [ii] Sentinel-2.
  - The data is initially recorded by satellites and the processing and interpretation were delivered in the coordinate system of WGS84 Zone 19S.
  - The survey control is appropriate for the interpretation of the processed ASTER and Sentinel-2 to deliver regional targets as surface expressions that are likely to represent surface expressions of high-sulphidation epithermal and/or porphyry-style mineral systems.
  - Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping have used hand-held GPS to assist with the physical location of the collected samples.
  - Drillholes are located with handheld GPS and the alignment of the rig setup uses a handheld compass. Topographic control is via the GPS and the satellite 30m DEM.



*Data spacing and distribution*

- Data spacing for reporting of Exploration Results.
- Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.
- Whether sample compositing has been applied.

- The surface sample locations that are in the process of being collected vary from clusters at outcrops to surface samples aiming to cover a board area, ata spacing ~200m apart to cover and identify high-sulphidation epithermal and/or porphyry mineral systems.
- The data discussed in the current ASX Release deals with two (2) different multispectral spaceborne datasets:
  - [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer (“ASTER”); and
  - [ii] Sentinel-2.
- The data is initially recorded by satellites and the processing and interpretation were delivered in the coordinate system of WGS84 Zone 19S.
- Multispectral image sensors simultaneously capture image data within multiple wavelength ranges (bands) across the electromagnetic spectrum. Each band is commonly described by the band number and the band wavelength centre position.
- The ASTER processed datasets of a resolution of 15m for Visible Near Infrared (“VNIR) or 30m for Short Wavelength Infrared (“SWIR”).
- The Sentinel-2 resolution ranges from 10m to 60m dependent on bandwidth.
- The survey control and data resolution are appropriate for the interpretation of the processed ASTER and Sentinel-2 to deliver regional targets as surface expressions that are likely to represent surface expressions of high-sulphidation epithermal and/or porphyry-style mineral systems.
- Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping have used handheld GPS to assist with the physical location of the collected samples. Surface samples collected included Outcrop/Rock Chip, Talus, and Float Samples.

*Orientation of data in relation to geological structure*

- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.
- If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.

- The surface sample locations that are in the process of being collected vary from clusters at outcrops to surface samples aiming to cover a board area, ata spacing ~200m apart to cover and identify high-sulphidation epithermal and/or porphyry mineral systems.
- The data discussed in the current ASX Release deals with two (2) different multispectral spaceborne datasets:
  - [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer (“ASTER”); and
  - [ii] Sentinel-2.
- Multispectral image sensors simultaneously capture image data within multiple wavelength ranges (bands) across the electromagnetic spectrum. Each band is commonly described by the band number and the band wavelength centre position.
- The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS



		<p>(2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) &amp; Servicio Nacional de Geología y Minería (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.</p> <ul style="list-style-type: none"><li>• Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geology associated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation.</li><li>• Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping, using handheld GPS to assist with the physical location of the collected samples. Surface samples collected included Outcrop/Rock Chip, Talus, and Float Samples, these samples are selective for outcrop or spatially distributed across the ground surface for Talus and Float samples to generate a first-pass geochemical understanding of the exposed geology.</li></ul>
<i>Sample security</i>	<ul style="list-style-type: none"><li>• The measures taken to ensure sample security.</li></ul>	<ul style="list-style-type: none"><li>• Samples are bagged, numbered, zip tied and transported with dispatch information by project staff directly to the office/warehouse in San Juan. Routinely (fortnightly) samples are then transported to Mendoza ALS preparation lab.</li></ul>
<i>Audits or reviews</i>	<ul style="list-style-type: none"><li>• The results of any audits or reviews of sampling techniques and data.</li></ul>	<ul style="list-style-type: none"><li>• Sampling techniques have been developed in consultation with the Competent Person Jason Ward and Dr Steve Garwin.</li><li>• No audits or reviews have been undertaken to date.</li></ul>



## SECTION 2 REPORTING OF EXPLORATION RESULTS

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary									
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership, including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national parks and environmental settings.</li> <li>The security of the tenure held at the time of reporting and any known impediments to obtaining a license to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The mineral tenures are located in the province of San Juan, Argentina and details of the Terms Sheet for the Acquisition of the Fomo Ventures No1 Pty Ltd Argentinean mineral tenures are presented in Belararox Limited (ASX: BRX) ASX Release “Belararox secures rights to acquire Project in Argentina” dated 03-Jan-2023 <a href="https://cdn-api.markitdigital.com/apiman-gateway/ASX/asx-research/1.0/file/2924-02618068-6A1130657?access_token=83ff96335c2d45a094df02a206a39ff4">https://cdn-api.markitdigital.com/apiman-gateway/ASX/asx-research/1.0/file/2924-02618068-6A1130657?access_token=83ff96335c2d45a094df02a206a39ff4</a></li> <li>The details of the minerals tenures that make up the TMT Project are as follows:</li> </ul>									
						Tenure Name	Tenement	Tenure Type	Area (Ha)	Grant Date	Expiry Date
						<b>LOLA</b>	1124-181-M-2016	Discovery claim	2,367.0	29 Dec 2016	Not Applicable
						<b>MALAMBO</b>	425-101-2001	Discovery claim	3,004.0	13 Aug 2019	Not Applicable
						<b>MALAMBO 2</b>	1124-485-M-2019	Discovery claim	414.1	24 Jun 2021	Not Applicable
						<b>MALAMBO 3</b>	1124-074-2022	Discovery claim	2,208.0	Not Granted	Not Applicable
						<b>MALAMBO 4</b>	1124-073-2022	Discovery claim	2,105.0	27 Nov 2023	Not Applicable
						<b>TAMBO SUR</b>	1124-188-R-2007	Discovery claim	4,451.0	11 Jul 2019	Not Applicable
						<b>TAMBO SUR I</b>	1124-421-2020	Discovery claim	833.0	9 Nov 2021	Not Applicable
						<b>TAMBO SUR II</b>	1124-420-2020	Discovery claim	833.0	13 Dec 2021	Not Applicable
						<b>TAMBO SUR III</b>	1124-422-2020	Discovery claim	833.0	13 Jul 2022	Not Applicable
						<b>TAMBO SUR IV</b>	1124-299-2021	Discovery claim	584.0	3 Dec 2021	Not Applicable
						<b>TAMBO SUR V</b>	1124-577-2021	Cateo	7,500.0	Not Granted	Application
						<b>TAMBO SUR VI</b>	1124-579-2021	Cateo	5,457.0	5 Nov 2024	16-Feb-2028
<b>TORO</b>	1124-528-M-2011	Discovery claim	1,685.0	2 Jul 2013	Not Applicable						
<p>Note 1: For a Discovery Claim, there is no expiration date. The mineral tenure is retained while the minimum investment plan is followed.</p> <p>Note 2: All mineral tenures are held by GWK S.A.</p>											
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Historical exploration activities for the Toro (1124-528-M-11) tenure have been covered in the Belararox Limited (ASX:BRX) ASX Release dated 23<sup>rd</sup> Mar 2023 and titled ‘Binding Agreement executed to acquire TMT Project in Argentina Significant Zinc Mineralisation (266m @ 0.76% Zn) reported in historical drilling.’. Note: the aforementioned ASX Release contains a ‘Cautionary Statement’, and the ‘Exploration Results’ are yet to be reported to the JORC (2012) Code.</li> </ul>									
		<ul style="list-style-type: none"> <li>The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) &amp; USGS (2008)], crustal lineaments [Chernicoff, et. al,</li> </ul>									



		<p>(2002)], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) &amp; Servicio Nacional de Geología y Minería (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.</p> <ul style="list-style-type: none"> <li>• Fathom Geophysics (Core &amp; Core, 2023) processed the ASTER and Sentinel-2 data for use in the Garwin (2023) study, and the processed data is included in images within this ASX Release.</li> <li>• Fathom Geophysics processed the data reported Malambo Geophysics into MVI Amplitude, MVI Induced, MVI Remanent datasets. MVI Amplitude figures have been used in this announcement.</li> </ul>
<p><i>Geology</i></p>	<ul style="list-style-type: none"> <li>• Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>• <b>Regional Geology:</b> The TMT project is within or in proximity to a number of the significant regional metallogenic belts of South America, (1) the Andean Metallogenic Belt, (2) the El Indio Metallogenic (Cu-Au) Belt, and (3) the Maricunga Metallogenic (Cu-Au) Belt.</li> <li>• <b>Toro (1124-528-M-11) tenure and Specific Geology (from historical reports):</b> The identified rocks include the Valle del Cura Formation (Eocene), composed mainly of red conglomerates, sandstones, tuffs, andesites and pyroclastic ignimbrites. Some of these rocks outcrop on the surface, with tuffaceous breccias being intersected in historical drill holes. The sequence is intruded by subvolcanic bodies pseudo concordant to stratification, “Intrusivos Miocenos”, the source of the hydrothermal alteration-mineralization in the area. Rhyodacitic - dacitic rocks, altered by advanced argillic and phyllic alteration dominate the area. Silicification, argillic, and propylitic alteration are present in the Toro project tenure. Stockworks and at least one (1) Breccia Pipe have been identified during historical exploration activities at the Toro project.</li> <li>• <b>The ‘Targets’ interpreted from the Satellite Imagery:</b> 12 prospective targets are considered to represent surface expressions of high-sulphidation epithermal and/or porphyry-style mineral systems based on the interpretation of processed ASTER and Sentinel-2 datasets and comparison to regional Geological Analogue deposits with comparable surface mineralisation (South to North):             <ul style="list-style-type: none"> <li>○ Toro North;</li> <li>○ Toro Central;</li> <li>○ Toro South;</li> <li>○ Tambo VI;</li> <li>○ Lola;</li> <li>○ Malambo;</li> <li>○ Malambo 3;</li> <li>○ Malambo 4;</li> <li>○ Tambo South;</li> <li>○ Tambo V;</li> <li>○ Tambo North; &amp;</li> <li>○ Tambo North 2.</li> </ul> </li> <li>• The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) &amp; USGS (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) &amp; Servicio Nacional de Geología y Minería (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.</li> <li>• Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geology associated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation.</li> <li>• Follow-up on the ground exploration activities will be required to confirm the remote sensing</li> </ul>



		<p>interpretation of the geology.</p> <ul style="list-style-type: none"> <li>• <b>Filo del Sol deposit - Geological Analogue</b> (Ausenco Engineering Canada Inc, 2023) (Filo Mining Corp., 2020):</li> <li>• The Filo del Sol deposit has an estimated Total Mineral Resource of 644Mt @ an average grade of 0.31% Cu, 0.32g/t Au, &amp; 10.1 g/t Ag with cut-off grade varying for elements, oxide, sulphide, and AuEq, refer to source document for the cut-off grade (Ausenco Engineering Canada Inc, 2023). The Filo del Sol deposit is associated with oxide &amp; sulphide ores that are strongly associated with siliceous alteration (mapped silica and residual quartz), surrounded by quartz-alunite alteration.</li> <li>• The Filo del Sol Cu-Au-Ag deposit has been used as a geological analogue since it shows a similar response to the siliceous alteration (silica and residual quartz) and similar regional structural features, with N-S major lineament crosscut by a NW-SE structure.</li> <li>• <b>Veladero - Geological Analogue</b> (Holley, 2012)</li> <li>• The Veladero deposit displayed clear links between the ASTER thermal image and the surface-mapped silica / residual quartz alteration. The final pit predominantly targeted the surface ASTER interpreted Jarosite &amp; Pyrophyllite.</li> <li>• The Veladero surface alteration and mineralisation mapping presented against the final pit design by Holley (2012) includes silicification, quartz-kaolinite-sulphur, quartz-alunite, quartz-illite, chlorite-epidote, &amp; chlorite-epidote.</li> </ul>																																																																																				
<p><i>Drill hole Information</i></p>	<ul style="list-style-type: none"> <li>• A summary of all information material to the understanding of the exploration results, including a tabulation of the following information for all Material drill holes:</li> <li>• Easting and northing of the drill hole collar</li> <li>• Elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>• Dip and azimuth of the hole</li> <li>• Downhole length and interception depth</li> <li>• Hole length.</li> <li>• If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>• Summary information for drillholes</li> </ul> <table border="1" data-bbox="1227 746 2033 965"> <thead> <tr> <th>HoleID</th> <th>Easting</th> <th>Northing</th> <th>Elevation</th> <th>Azi</th> <th>Dip</th> <th>End Depth</th> </tr> </thead> <tbody> <tr> <td>TMT-TSU-DDH-001</td> <td>428637</td> <td>6791490</td> <td>4183</td> <td>91</td> <td>80</td> <td>1028.6</td> </tr> <tr> <td>TMT-TSU-DDH-002</td> <td>428756</td> <td>6791344</td> <td>4077</td> <td>89</td> <td>70.3</td> <td>1305</td> </tr> <tr> <td>TMT-MAL-DDH-001</td> <td>431839</td> <td>6781700</td> <td>3839</td> <td>86.7</td> <td>88.1</td> <td>1166.0</td> </tr> <tr> <td>TMT-MAL-DDH-002</td> <td>432356</td> <td>6781741</td> <td>3647</td> <td>260</td> <td>65.1</td> <td>631.5</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>• Copper intervals are determined using a 0.1% Cu cut-off and an internal waste of up to 10</li> </ul> <table border="1" data-bbox="1198 1050 2063 1353"> <thead> <tr> <th>Drillhole</th> <th>From (m)</th> <th>To (m)</th> <th>Interval (m)</th> <th>Cu (%)</th> <th>Au (ppm)</th> <th>Mo (ppm)</th> </tr> </thead> <tbody> <tr> <td>TMT-TSU-DDH-001</td> <td>102</td> <td>132</td> <td>30</td> <td>0.13</td> <td>0.04</td> <td>69.1</td> </tr> <tr> <td>TMT-TSU-DDH-001</td> <td>168</td> <td>184</td> <td>16</td> <td>0.11</td> <td>0.04</td> <td>14.6</td> </tr> <tr> <td>TMT-TSU-DDH-001</td> <td>898</td> <td>1027</td> <td>129</td> <td>0.12</td> <td>0.01</td> <td>72.1</td> </tr> <tr> <td>TMT-TSU-DDH-002</td> <td>369</td> <td>417</td> <td>48</td> <td>0.11</td> <td>0.04</td> <td>14.2</td> </tr> <tr> <td>TMT-TSU-DDH-002</td> <td>629</td> <td>731</td> <td>102</td> <td>0.11</td> <td>0.04</td> <td>53.8</td> </tr> <tr> <td>TMT-TSU-DDH-002</td> <td>823</td> <td>851</td> <td>28</td> <td>0.12</td> <td>0.02</td> <td>71.2</td> </tr> </tbody> </table> <p>meters. Gold and molybdenum values are averaged over the same intervals as determined by the Cu intersections.</p>	HoleID	Easting	Northing	Elevation	Azi	Dip	End Depth	TMT-TSU-DDH-001	428637	6791490	4183	91	80	1028.6	TMT-TSU-DDH-002	428756	6791344	4077	89	70.3	1305	TMT-MAL-DDH-001	431839	6781700	3839	86.7	88.1	1166.0	TMT-MAL-DDH-002	432356	6781741	3647	260	65.1	631.5	Drillhole	From (m)	To (m)	Interval (m)	Cu (%)	Au (ppm)	Mo (ppm)	TMT-TSU-DDH-001	102	132	30	0.13	0.04	69.1	TMT-TSU-DDH-001	168	184	16	0.11	0.04	14.6	TMT-TSU-DDH-001	898	1027	129	0.12	0.01	72.1	TMT-TSU-DDH-002	369	417	48	0.11	0.04	14.2	TMT-TSU-DDH-002	629	731	102	0.11	0.04	53.8	TMT-TSU-DDH-002	823	851	28	0.12	0.02	71.2
HoleID	Easting	Northing	Elevation	Azi	Dip	End Depth																																																																																
TMT-TSU-DDH-001	428637	6791490	4183	91	80	1028.6																																																																																
TMT-TSU-DDH-002	428756	6791344	4077	89	70.3	1305																																																																																
TMT-MAL-DDH-001	431839	6781700	3839	86.7	88.1	1166.0																																																																																
TMT-MAL-DDH-002	432356	6781741	3647	260	65.1	631.5																																																																																
Drillhole	From (m)	To (m)	Interval (m)	Cu (%)	Au (ppm)	Mo (ppm)																																																																																
TMT-TSU-DDH-001	102	132	30	0.13	0.04	69.1																																																																																
TMT-TSU-DDH-001	168	184	16	0.11	0.04	14.6																																																																																
TMT-TSU-DDH-001	898	1027	129	0.12	0.01	72.1																																																																																
TMT-TSU-DDH-002	369	417	48	0.11	0.04	14.2																																																																																
TMT-TSU-DDH-002	629	731	102	0.11	0.04	53.8																																																																																
TMT-TSU-DDH-002	823	851	28	0.12	0.02	71.2																																																																																



<p><i>Data aggregation methods</i></p>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>Significant intercepts for the TMT Project are calculated above a nominal cut-off grade of 0.1% Cu. Where gold and molybdenum values are reported, they were averaged over the same intervals as determined by the Cu intersections. Where appropriate, significant intersections may contain up to 10m down-hole distance of internal dilution (less than 0.1% Cu). Significant intersections are separated where internal dilution is greater than 10m down-hole distance.</li> <li>Length weighted averages are used for any non-uniform intersection sample lengths. Length weighted average is (sum product of interval x corresponding interval assay grade), divided by sum of interval lengths and rounded to one decimal place.</li> <li>No top cuts have been considered in reporting of grade results, nor was it deemed necessary for the reporting of significant intersections.</li> </ul>
<p><i>Relationship between mineralisation widths and intercept lengths</i></p>	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>Interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) &amp; USGS (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) &amp; Servicio Nacional de Geología y Minería (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.</li> <li>Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geology associated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation.</li> <li>Follow-up on the ground exploration activities is required to confirm the remote sensing interpretation of the geology and in particular confirm the dimensions of any surface expression of alteration and/or mineralisation.</li> <li>Field mapping has been completed on the Toro South and Toro North Targets; the field mapping is substantially complete for the Toro Central Target.</li> <li>All statistical information presented in this ASX Release is inclusive of Field Duplicates and assayed samples that have been allocated ½ of the lower detection limit, for any elements reported as below the detection limit.</li> </ul>
<p><i>Diagrams</i></p>	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>Appropriate maps and sections are displayed in the body of the ASX Release.</li> </ul>
<p><i>Balanced reporting</i></p>	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practised to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>Follow-up on the ground exploration activities is required to confirm the remote sensing interpretation of the geology and in particular confirm the dimensions of any surface expression of alteration and/or mineralisation.</li> <li>Field work is progressing across the targets to follow up the remote sensing work and new targets.</li> </ul>
<p><i>Other substantive exploration data</i></p>	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock</li> </ul>	<ul style="list-style-type: none"> <li>'Other substantive exploration data' is summarised in the Belararox Limited (ASX:BRX) ASX Releases dated:             <ul style="list-style-type: none"> <li>23<sup>rd</sup> May 2023: Amended Announcement – Porphyry Prospectivity Confirmed with additional TMT targets identified;</li> <li>17<sup>th</sup> July 2023: TMT project in Argentina Significant Zinc Mineralisation (266m @ 0.76% Zn) verified and reported under the JORC (2012) Code;</li> </ul> </li> </ul>



	<p>characteristics; potential deleterious or contaminating substances.</p>	<ul style="list-style-type: none"><li>○ 30<sup>th</sup> Oct 2023: TMT Project – Field Work Commenced and Additional High Sulphide Epithermal &amp; Porphyry Targets Characterised;</li><li>○ 12<sup>th</sup> Dec 2023: TMT Project – Field Work Update; and</li><li>○ 22<sup>nd</sup> Jan 2024: TMT Project Operational Update: Geological Mapping Supports the Porphyry Potential at Toro</li><li>○ 28<sup>th</sup> May 2024: TMT Project: Malambo 3D Geochemical Interpretation Confirms Copper Porphyry Style Targets</li></ul> <ul style="list-style-type: none"><li>● The information on the drone survey conducted by DAMS is as follows:<ul style="list-style-type: none"><li>○ Sensor:<ul style="list-style-type: none"><li>● Light Weight Potassium Magnetometer GEM GSMP-35U/25U</li><li>● GEMDAS Data Acquisition Module</li><li>● Cable for PixHawk integration</li></ul></li><li>○ Data Collection:<ul style="list-style-type: none"><li>● Line Spacing: 100m</li><li>● Flight Line Azimuth: 90°</li><li>● Tie Line Azimuth: 0°</li><li>● Nominal Magnetic Sensor Altitude (AGL): 80m</li><li>● Terrain Following: Utilized SRTM data for terrain following to minimize topographic effects.</li><li>● Groundspeed: 3-6 m/s (dependent on terrain and environmental conditions)</li></ul></li></ul></li></ul>
<p><i>Further work</i></p>	<ul style="list-style-type: none"><li>● The nature and scale of planned further work (eg tests for lateralextensions or, depth extensions or large-scale step-out drilling).</li><li>● Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li></ul>	<ul style="list-style-type: none"><li>● Regional mapping and sampling are ongoing at TMT. Exploration is focused on the spectral targets discussed in this JORC Table 1 and the presentation as well as the new targets discovered in field activities including Lola-2, Emilia Vein and a new spectral zone of interest.</li></ul>