



ASX RELEASE: 03 September 2025

Yundamindra Gold Project, WA – Exploration Update

## LANDED AT LAST CONTINUES TO GROW WITH BONANZA GRADES FROM RE-SPLITS AT THE F1 PROSPECT

Plus, strike extensions confirmed in initial drilling at nearby Great Bonaparte East Prospect

### KEY HIGHLIGHTS

#### F1 Prospect, Landed at Last

- **Exceptional grades returned** from final single metre re-splits of previously reported composite samples. Final significant intercepts now include:
  - **3m @ 47.1g/t Au from 53m (25AYRC007), including:**
    - **1m @ 130g/t Au from 53m (junction of F1 and Landed at Last)**
  - **22m @ 1.34g/t Au from 20m (25AYRC017), including:**
    - **1m @ 8.98g/t Au from 27m**
  - **6m @ 2.02g/t Au from 30m (25AYRC012), including:**
    - **4m @ 2.92g/t Au from 31m, and**
    - **1m @ 9.40g/t Au from 33m**
- The results confirm the quality of mineralisation at F1 and highlight the opportunity for bonanza grades to occur at the junction of gold-bearing structures throughout the Yundamindra Project.
- F1 is one of several structures which cross-cut the Landed at Last lode in the Western Corridor at Yundamindra towards the northern end of the 'Yellow Brick Road' – a **+16km long structural corridor with numerous high-grade historical workings**.

#### Great Bonaparte East (GBE)

- **New significant intercepts** returned from step-out drilling at GBE, located 600m south of Landed at Last, include:
  - **26m @ 1.19g/t Au from 88m (25AYRC022), including:**
    - **11m @ 2.44g/t Au from 98m; and**
    - **1m @ 21.95g/t Au from 103m**
  - **10m @ 0.53g/t Au from 33m (25AYRC019)**
  - **1m @ 2.29g/t Au from 17m (25AYRC018)**
  - **16m @ 0.36g/t Au from 52m (25AYRC020)**
  - **7m @ 0.53g/t Au from 101m (25AYRC023)**
- The GBE ore-hosting structure shows increasing thickness and grade at depth and may represent a strike extension of the mineralisation discovered at Landed at Last.
- Drilling continues to test multiple targets at Yundamindra, including Banjo's Camp, Queen of Poland and Golden Treasure Deeps.

For personal use only

Arika Resources Limited (ASX: ARI) (“Arika” or “Company”) is pleased to provide an update on exploration results and drilling activities at the **Yundamindra Gold JV Project**, located 65km south-west of Laverton in the world-class Northeastern Goldfields mining district of WA

Arika launched a ~10,000m drilling campaign in June following the Company’s successful ~\$5 million capital raise in May 2025. The aim of this program is to test and define the depth and strike extents of the multiple known gold occurrences and newly defined targets throughout the project area.

Drilling initially re-commenced within the **Western Corridor** at the **F1 Prospect**, comprising 17 Reverse Circulation (RC) holes for 1,856m of drilling (25AYRC001-25AYRC017). Step-out exploration drilling was then undertaken at Great Bonaparte East, located 600m south of F1, comprising seven RC holes for 680m of drilling (25AYRC018-25AYRC024).

Preliminary assays for the F1 drilling were reported in early August<sup>1</sup> and included numerous intervals sampled as 4 metre composites while the results from several holes remained pending at that time.

All of the 4 metre composite samples were re-split into single 1 metre samples and re-submitted for analysis. This release provides a full summary of the final assays for all samples relevant to the F1 program (25AYRC001-25AYRC017) and for seven holes drilled to test strike and depth extensions at Great Bonaparte East (25AYRC018-25AYRC024).

The F1 and Great Bonaparte East Prospects are both located towards the northern end of the ‘Yellow Brick Road’ – a strongly mineralised structural corridor which extends for more than 16km along the western flank of the Yundamindra Syncline.

F1 is the first to be drill tested of a series of structures identified from aeromagnetic geophysical data that cross-cut the Landed at Last lode. Preparations for systematic first pass drill testing of structures F2, F3 and F4 are currently underway.

Great Bonaparte East (GBE) is defined by a cluster of old underground workings centred on the interpreted southern strike extension of the Landed at Last host structure. The drilling described in this release at GBE focussed on testing for depth and strike extensions in the immediate vicinity of the old workings. The company has also commenced wide spaced drill testing of the area between Landed at Last and Great Bonaparte East. This part of the structural trend has never been previously drilled and represents a high priority target area for Arika.

The Western Corridor is defined by two major NW-SE trending structures, with numerous NE- SW linking faults. Both the NW-SE and NE- SW fault orientations carry significant gold mineralisation and can be traced continuously under areas of cover for hundreds of metres. However, previous work has only focused on shallow oxide ore around the known historical workings with limited to no drilling having ever been undertaken to test for depth or strike extensions.

Arika’s current campaign is designed to test for depth and strike extensions beyond the known limits of the previously reported intersections and to provide a first pass test of a number of new high priority targets defined by a combination of geological/geophysical/geochemical characteristics.

**Arika’s Managing Director, Justin Barton, said:**

***“The Landed at Last-F1 gold system already has considerable scale and is getting bigger. Our drilling continues to identify multiple gold lodes with significant widths and impressive high-grade zones, as evidenced by these latest results from the 1m re-splits at F1.***

***“The mineralisation at Landed at Last is continuous over at least 800m of strike and 200m down-dip and remains open. F1 is the first of several cross-cutting structures that we have tested and these impressive results demonstrate the quality of the mineralisation and significant endowment of the system there.***




**“Meanwhile, Great Bonaparte East is one of multiple historical workings which sit on the same structure that hosts Landed at Last, or parallel structures to it, and which have never been tested at depth or along strike. Drilling is continuing at pace to test new targets and to extend and expand beyond previous results.**

**“We look forward to providing further updates as this exciting phase of our exploration continues.”**

A summary of drill-hole collar locations and final results for all holes are presented in Appendix 1, Tables 1 and 2.


Figures 1 to 6 present Prospect Location Plans, Drill-hole Collar Plans, Vertical Longitudinal Projections and schematic Cross-Sections (X-S).

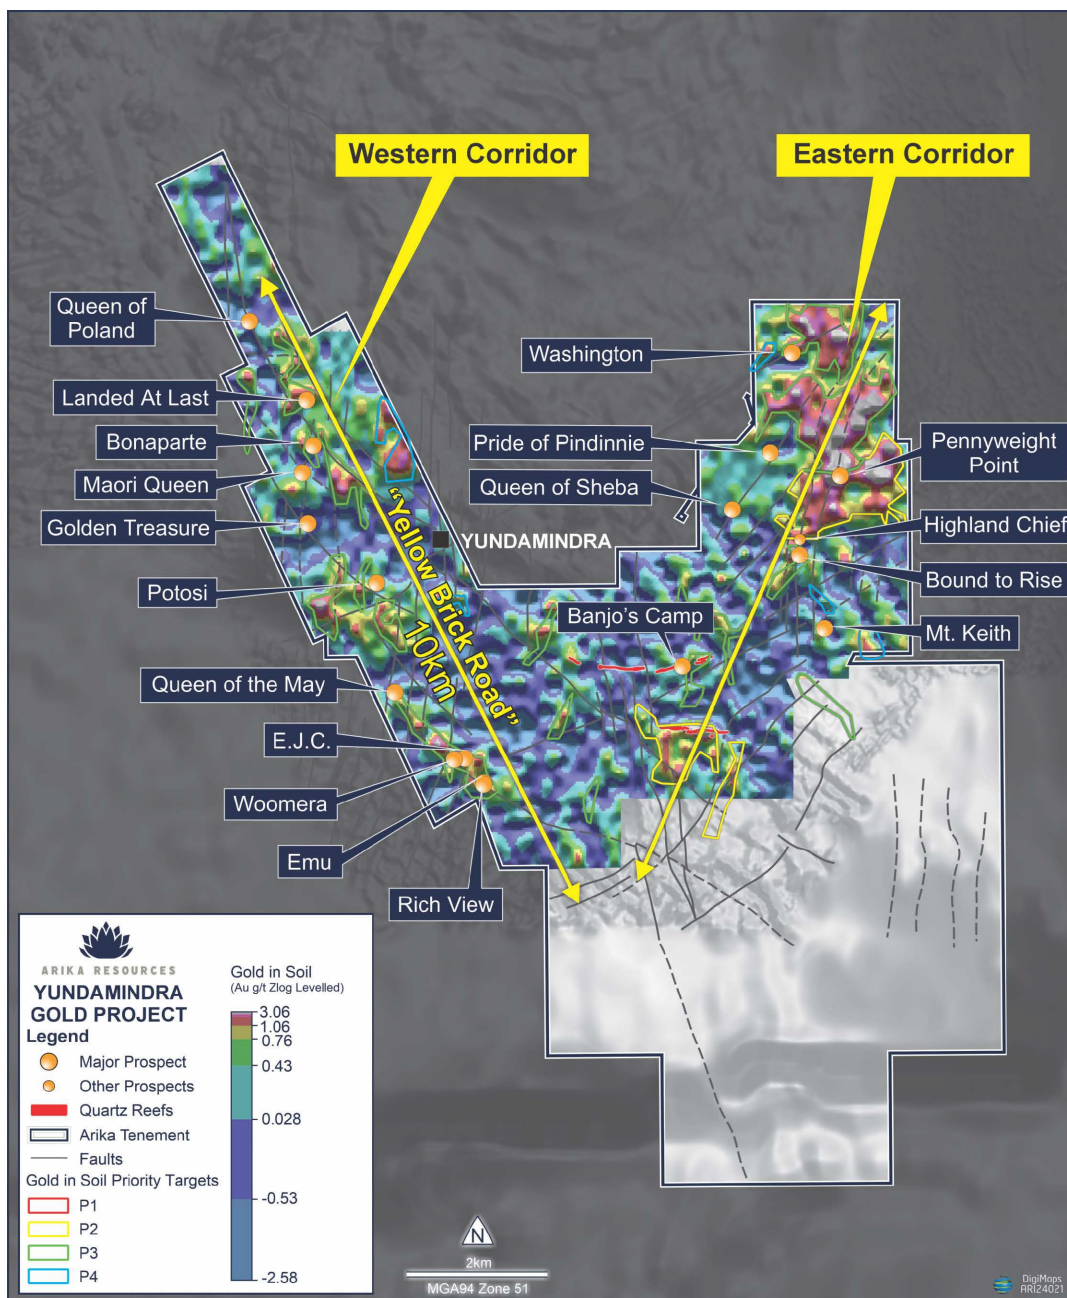

**Figure 1:** Yundamindra Gold Project showing key prospect locations. The F1 Prospect is located within the Landed at Last area towards the northern end of the ‘Yellow Brick Road’ – Western Corridor.



For personal use only

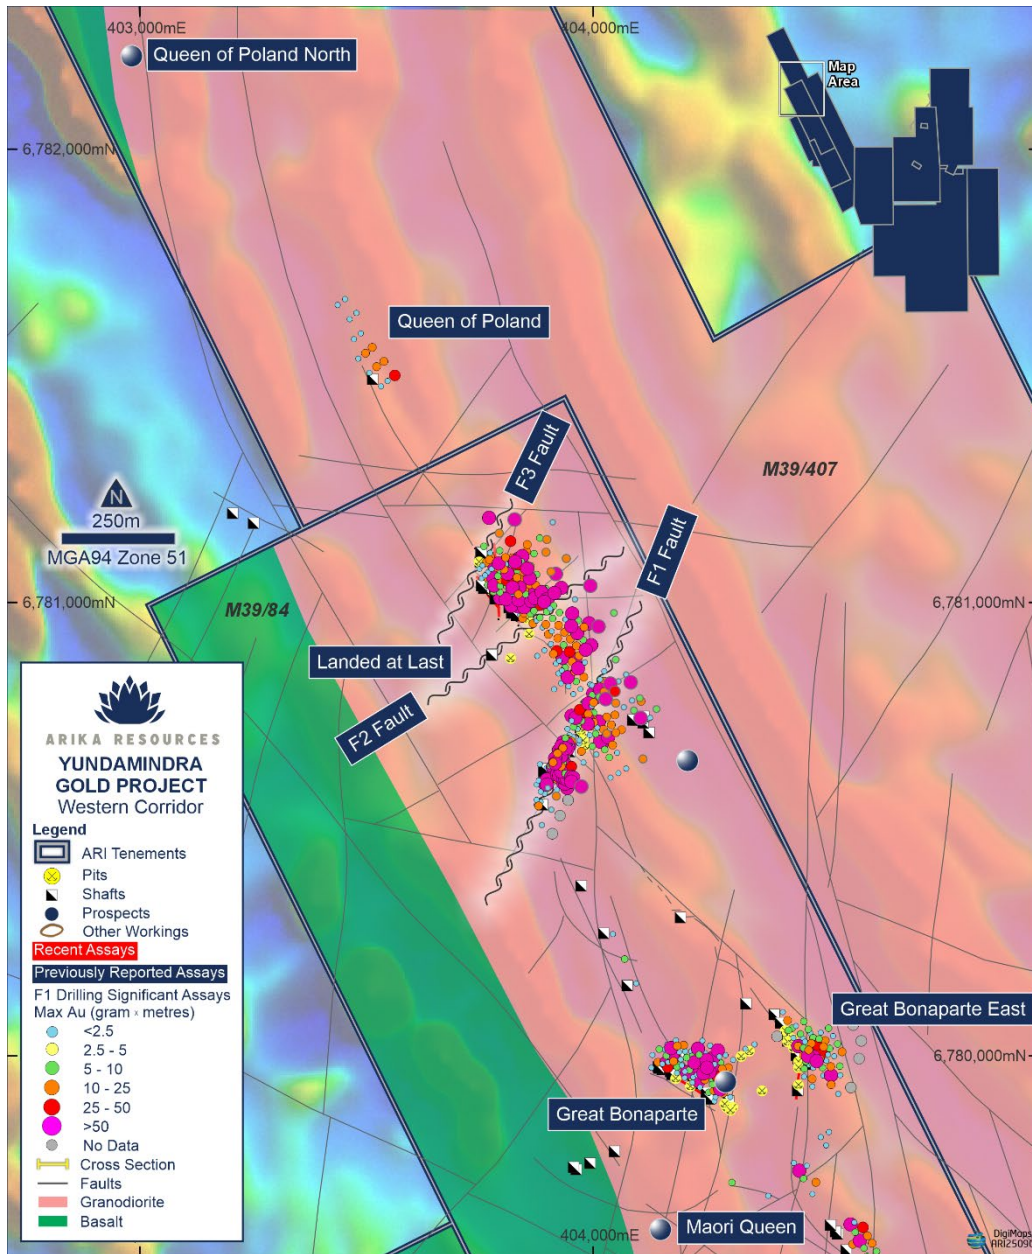


**Figure 2: Zoom in of the northern section of 'The Yellow Brick Road', Western Corridor. Prospect Location plan showing recent drilling and proposed holes over simplified geology and TMI.**

### Drilling Results Summary – F1

A detailed summary of the geology and mineralisation of the F1 Prospect was presented in Arika's ASX Announcements dated 08 April and 11 August 2025. Figure 3-4 and Table 1 present a drillhole location plan, Vertical Longitudinal Projection and Summary of Significant Intersections now updated with final assay results.

For personal use only

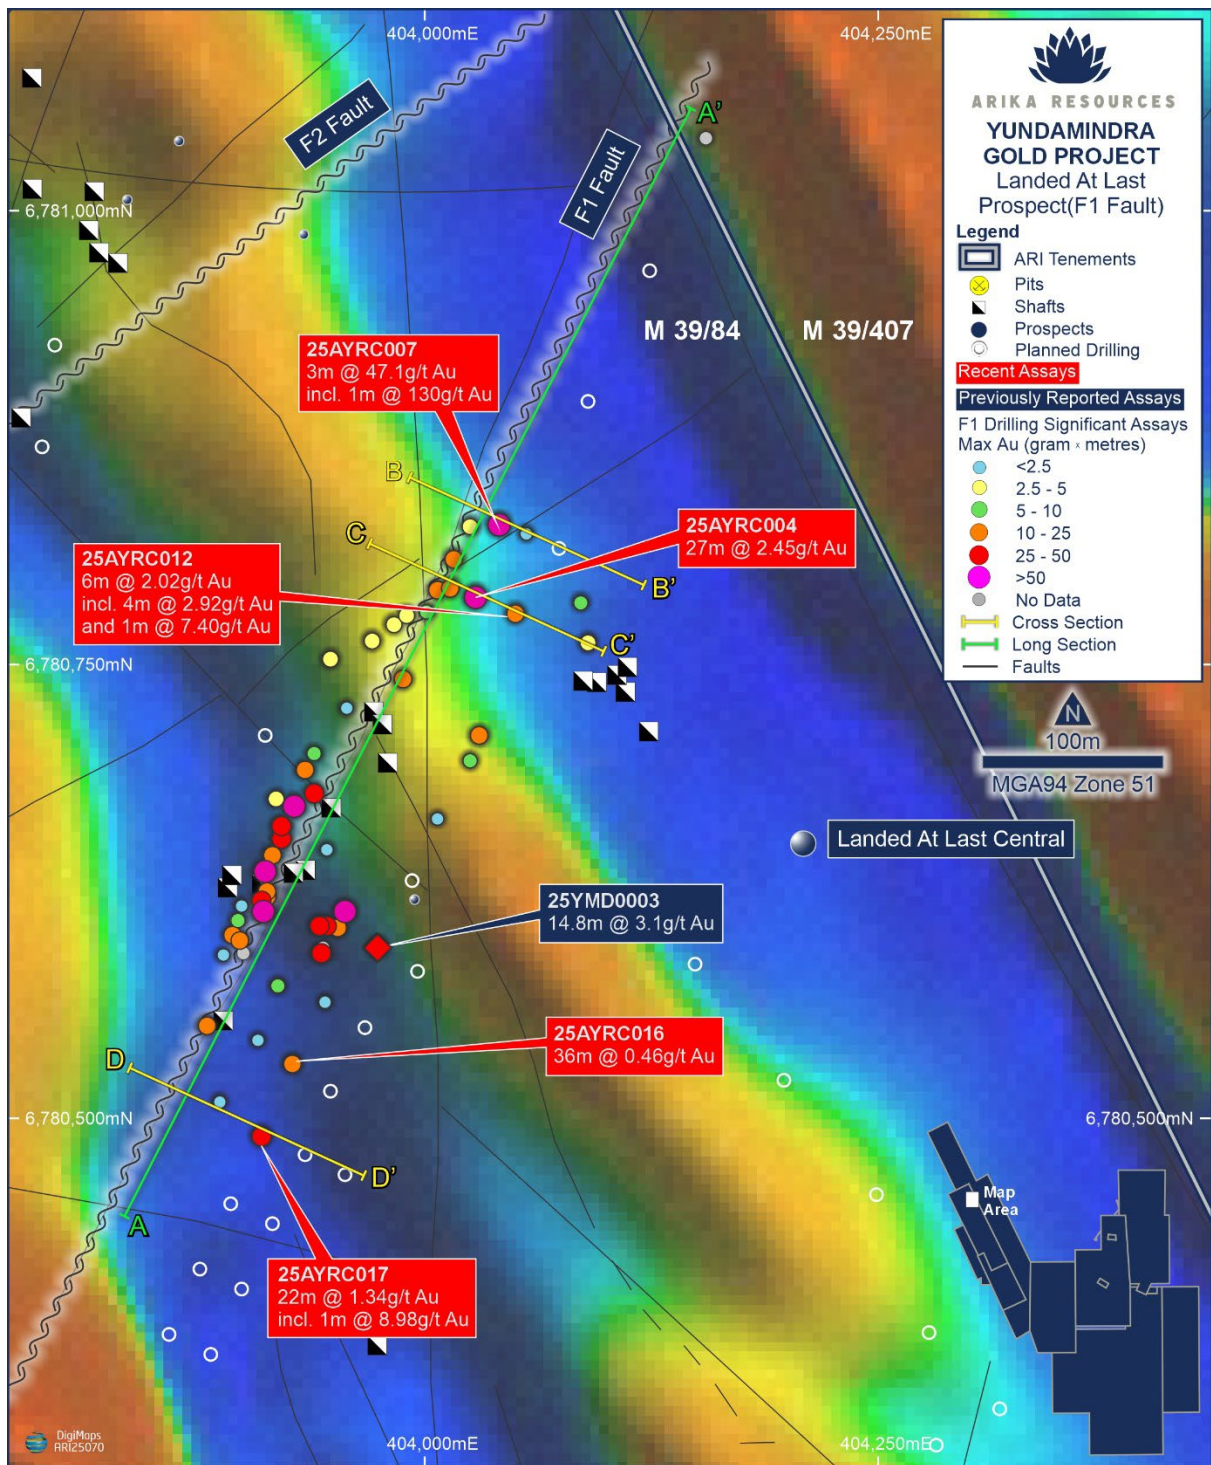

**Figure 3:** F1 with recent drill collars, significant intercept summaries and proposed holes over TMI.

Note: Details of all holes completed to date are presented in Table 1.

Note: All intersections represent down-hole lengths. The holes were designed to test the targeted primary structures orthogonal to strike and based on current interpretation true widths are estimated to be approximately 60% of the down-hole intercepts for most of the holes noting local variations in dip and strike.



ASX: ARI

# ARIKA RESOURCES

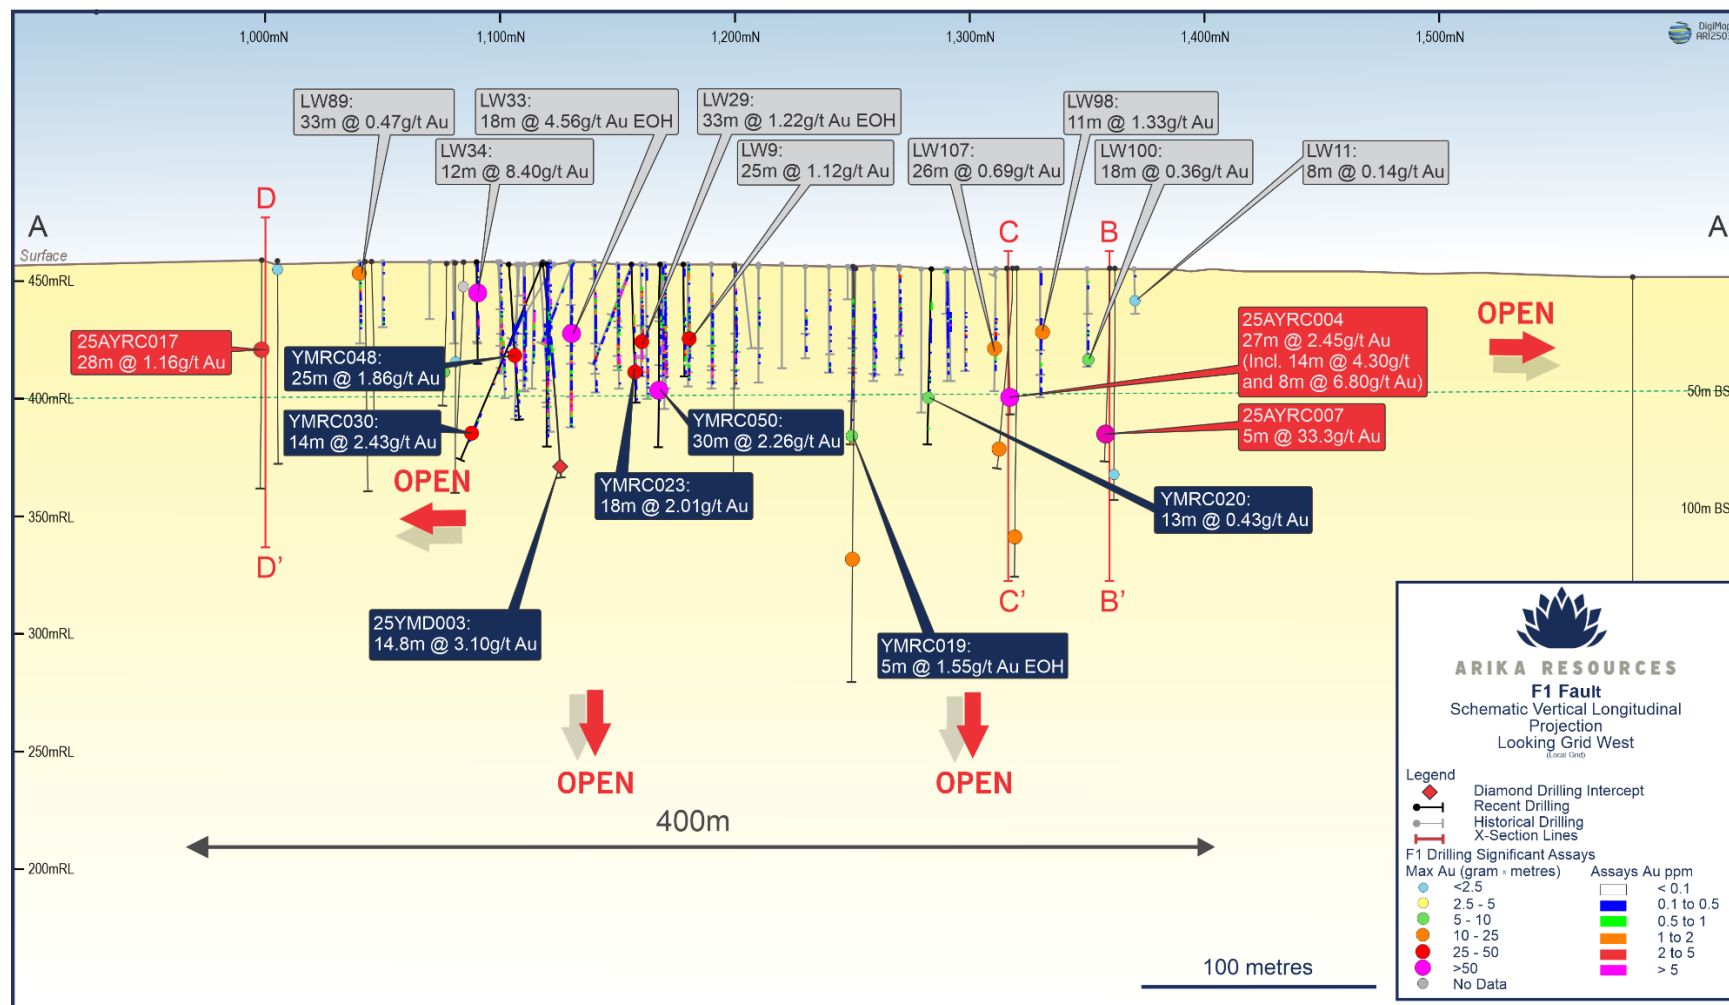


Figure 4: Schematic Vertical Longitudinal Projection (F1-Fault local grid) with recent assay results and historical drilling.

Note the lack of drilling beneath 50m vertical depth

personal use only



### Drilling Results – Great Bonaparte East (GBE)

Seven holes were drilled at Great Bonaparte East along six sections spaced 40m apart and were designed to test for extensions to the known mineralisation at least 40-80m beyond the historical intercepts over a strike length of about 180m.

Most holes completed to date have reported wide zones of moderate gold mineralisation with narrow higher grade internal zones and/or gold anomalism within the targeted intervals.

As has been observed elsewhere along the Western Corridor, gold mineralisation is typically hosted within strongly hematite and potassic altered quartz monzodiorite, commonly associated with thin quartz veins and magnetite destruction.


The country rock at GBE is completely to highly weathered medium to coarse grained equigranular biotite rich granitoid. Variations in the country rock occur through deformation and alteration within and proximal to shear zones.

Drilling to date at GBE has confirmed the presence of a single gold-bearing shear zone displaying a moderately arcuate shape in plan view dipping gently at about 45 degrees towards the Northeast. Arika's latest drilling at GBE has now confirmed the presence of gold mineralisation continuously over a strike length of at least 180m and to at least 120m down-dip below surface.

The zone of mineralisation remains open along strike and at depth.

Figures 5, 6 and 7 present a Drillhole Location Plan, Schematic Vertical Longitudinal projection and Schematic Cross-Section respectively.

For personal use only

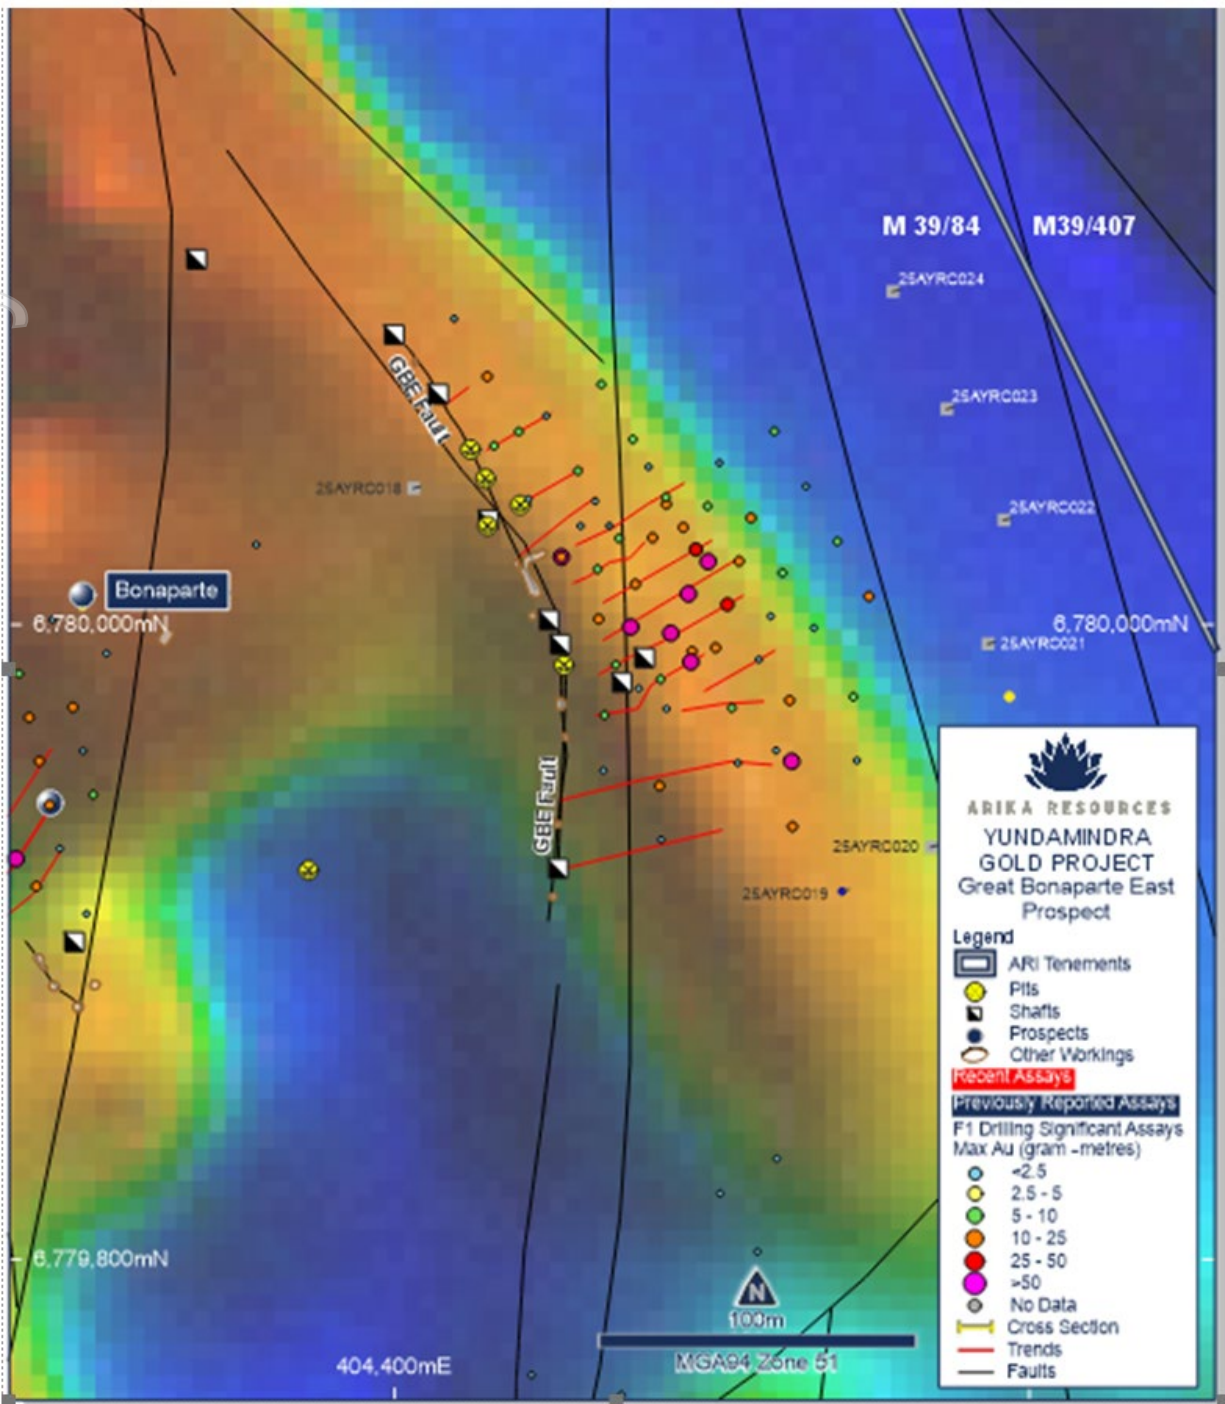

**Figure 5:** Great Bonaparte East with recent drill collars, significant intercept summaries and proposed holes over TMI.

Note: Details of all holes completed to date are presented in Table 1.



For personal use only


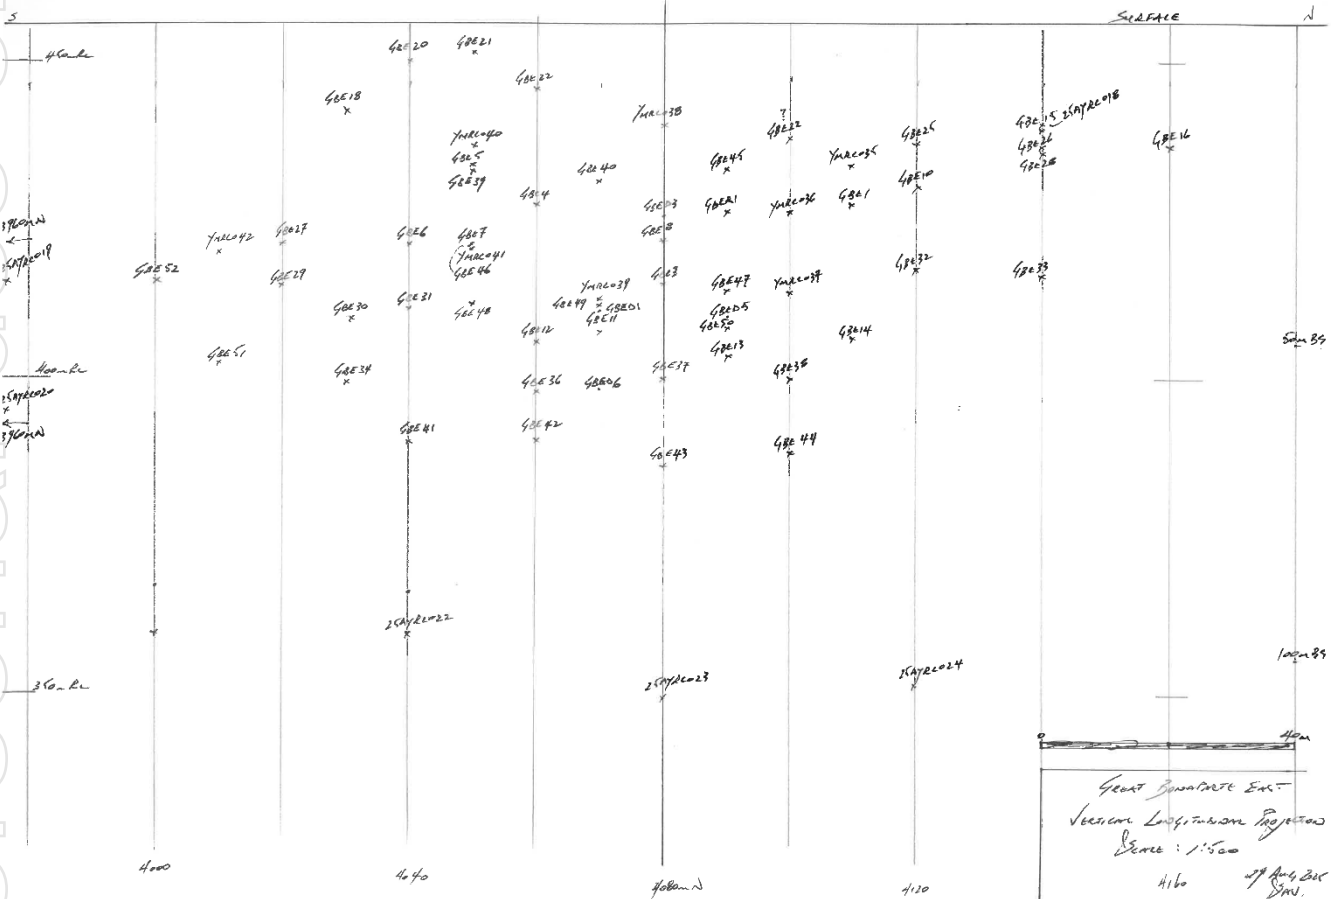


Figure 6: Schematic Vertical Longitudinal Projection (GBE local grid) with recent assay results and historical drilling.

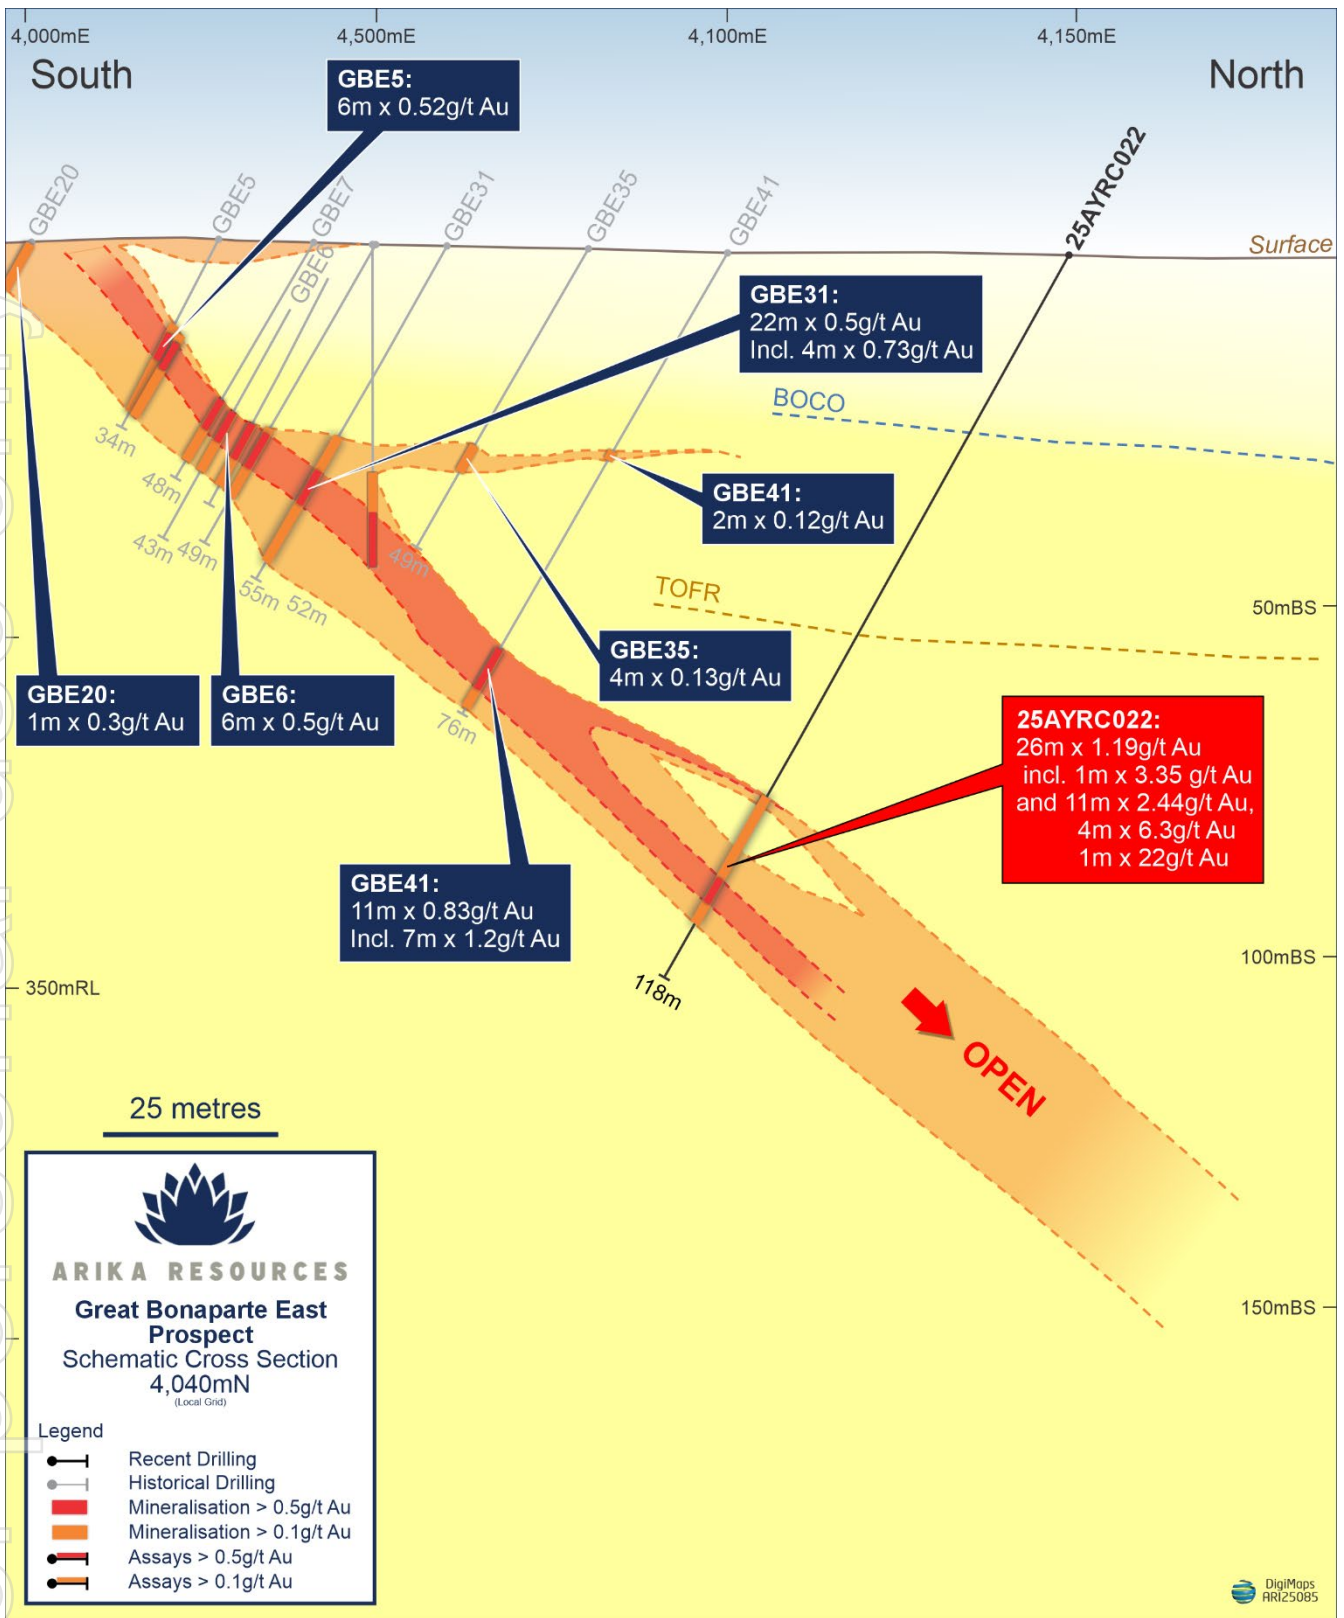

**Figure 7: Schematic Cross-Section Line 1000mN (F1 local grid) with recent assay results.**  
Note width and grade of the mineralised structure improving at depth at this location.

### Next Steps

#### Yundamindra

- RC drill testing of new targets across the Yundamindra Project area is continuing.

- Wide-spaced sectional drilling is currently in progress at Banjo's Camp/Queen of Poland/Golden Treasure Deeps.
- Results will be released continuously once data is received and interpreted.
- Data collected from a drone-supported aeromagnetic survey recently completed over the southern half of the Yundamindra Project area, along with results from ultra-detailed aeromagnetic and ground gravity surveys undertaken at Pennyweight Point, are currently being assessed by the Company's geophysical consultants, Core Geophysics.
- The results from this work will be used to further refine target selection prior to drilling.

### **Kookynie**

- Data from a drone-supported aeromagnetic survey completed at the Ithaca Prospect adjacent to Genesis Minerals' Ulysses Gold Project is currently being assessed by Core Geophysics.
- DHEM surveys of purpose drilled RC holes at McTavish is in progress to assess the electrical signature of iron sulphides associated with gold mineralisation. Possible direct ore finding technique in areas of surficial cover if electrical continuity is confirmed.
- The results from this work will be used to further refine and prioritise targets for planned drill testing in the coming weeks.

### **Yundamindra Gold Project**

The Yundamindra Gold JV Project is located 65km south-west of Laverton, 250km north of Kalgoorlie, Western Australia (Figure5). The Project is a Joint Venture between Arika Resources Ltd (ASX: ARI) and Nex Metals (ASX: NME), where Arika holds 80% and NME holds 20% with Arika acting as Project manager.

Regionally, it is situated toward the westernmost margin of the Laverton Greenstone Belt (LGB) in the Yilgarn Craton of Western Australia.

The Laverton Greenstone Belt is one of the best endowed gold regions in Australia. It hosts two world-class producing mines, namely Sunrise Dam at 8 million oz contained Gold and Wallaby at 7 million oz contained gold (Standing 2008; Austin, 2022)<sup>1</sup>, which are located just ~20-30km east of Arika's Yundamindra Gold Project. Total gold production from the belt is estimated to be in excess of 28 million ounces.

The Laverton Greenstone Belt is one of a number of greenstone belts that collectively define the Kurnalpi tectonostratigraphic terrane of the Northeastern Goldfields 'Superterrane'.

The Kurnalpi Terrane is bounded by the regionally recognisable Hootanui Shear Zone to the east and the Ockerburry Shear Zone to the west – long-lived, deep crustal/mantle penetrating structures which, along with their related second order faults, are considered responsible for the development of many of the region's most significant gold deposits.

At the local scale, the Yundamindra Project covers both the south-western and south-eastern flanks and the southern nose of a regional scale synformal fold comprising a central hornblende-granodiorite batholith which intruded mafic-felsic and lesser sedimentary lithologies (Figure 1 and 2).

This style of structural setting is commonly associated with the development of many of the region's most significant gold deposits. Although the area has had a long history of prospect-scale mining, it has not been

<sup>1</sup> Refer ARI ASX Announcement dated 11 August 2025

<sup>2</sup> Refer ARI ASX Announcement dated 8 April 2025

on: Evidence from tectonostratigraphic studies of the Laverton Greenstone Belt. Precambrian Research, V161, Issues 1-2, 15 February 2008, pages 114-134.. Austin, Joseph Martin, Testing the 'terrane-boundary' concept and geodynamics in the NeoArchean: A case study of the stratigraphy from the West and East Laverton Greenstone Belts. Queensland University of Technology 2022.



subjected to systematic modern exploration and remains under-explored, particularly at depth.

This presents ARI with a unique opportunity to discover significant mineralisation near a number of processing facilities.

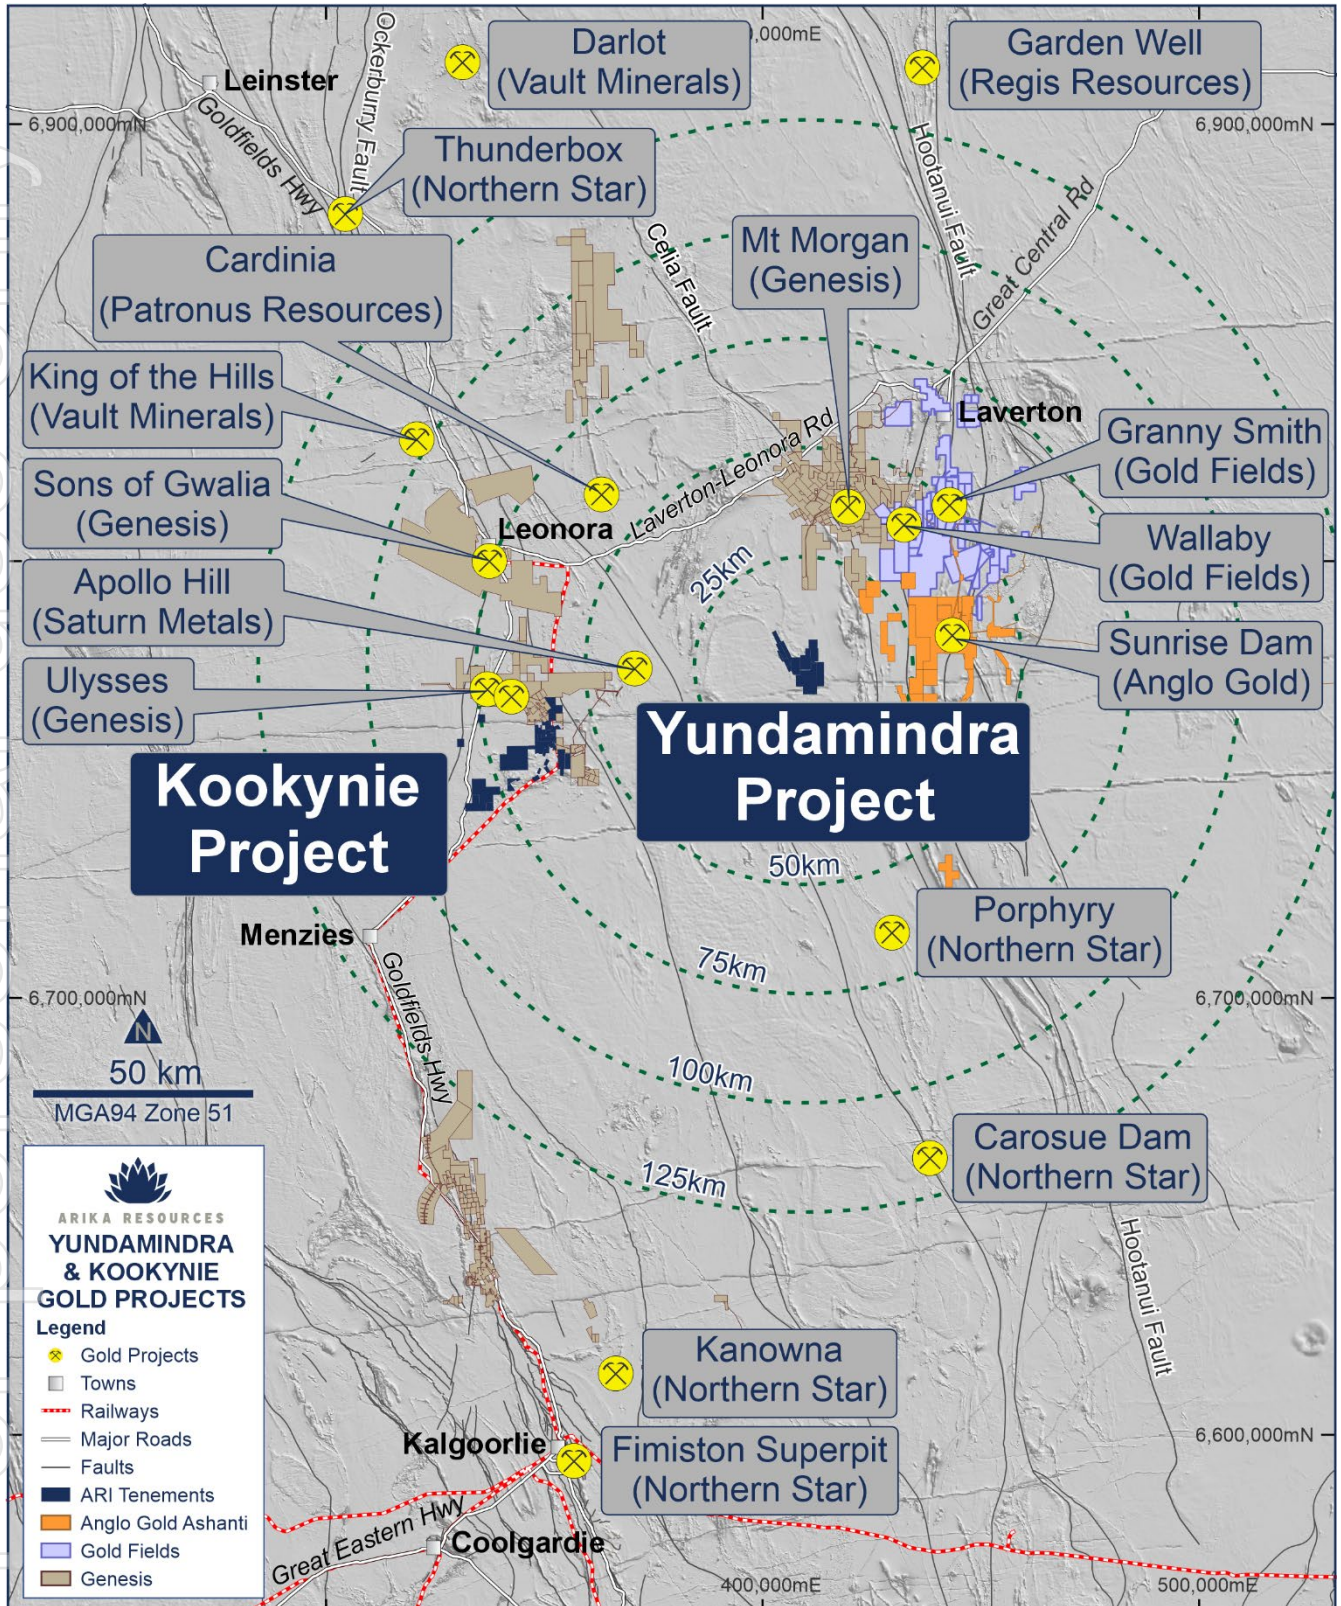


Figure 8: Regional Location Plan showing proximity of Yundamindra to Major Deposits, Mines and Processing Facilities.

## Contributors

- Omni GeoX
- Core Geophysics
- Newexco
- Sugden Geoscience Pty Ltd
- ERM Technical Mining Services
- DigiMaps
- Perenti Group
- Karlkurla Pty Ltd

This announcement is approved by the Board of Arika Resources Limited.

### ENQUIRIES

#### Investors

Justin Barton  
Managing Director  
+61 8 6500 0202  
[enquiries@arika.com.au](mailto:enquiries@arika.com.au)

#### Media

Nicholas Read  
Read Corporate  
+61 8 9388 1474  
[info@readcorporate.com.au](mailto:info@readcorporate.com.au)

#### Competent Person Statement

The information that relates to Exploration Results is based upon information compiled by Mr Steve Vallance, who is a full-time employee of Arika Resources Ltd in the role of General Manager Exploration and Executive Technical Director. Mr Vallance is a Member of The Australian Institute of Geoscientists (AIG). Mr Vallance has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (the JORC Code 2012). Mr Vallance consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

#### Forward-Looking Statements

This announcement may contain certain "forward-looking statements" which may not have been based solely on historical facts but rather may be based on the Company's current expectations about future events and results. Where the Company expresses or implies an expectation or belief as to future events or results, such expectation or belief is expressed in good faith and believed to have reasonable basis. However, forward-looking statements:

(a) are necessarily based upon a number of estimates and assumptions that, while considered reasonable by the Company, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies.

(b) involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements. Such risks include, without limitation, resource risk, metals price volatility, currency fluctuations, increased production costs and variances in ore grade or recovery rates from those assumed in mining plans, as well as political and operational risks in the countries and states in which the Company operates or supplies or sells product to, and governmental regulation and judicial outcomes; and

(c) may include, among other things, statements regarding estimates and assumptions in respect of prices, costs, results and capital expenditure, and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions.

The words "believe", "expect", "anticipate", "indicate", "contemplate", "target", "plan", "intends", "continue",



“budget”, “estimate”, “may”, “will”, “schedule” and similar expressions identify forward-looking statements. All forward-looking statements contained in this presentation are qualified by the foregoing cautionary statements. Recipients are cautioned that forward-looking statements are not guarantees of future performance and accordingly recipients are cautioned not to put undue reliance on forward-looking statements due to the inherent uncertainty therein.

The Company disclaims any intent or obligation to publicly update any forward-looking statements, whether as a result of new information, future events or results or otherwise.


### No New Information

To the extent that this announcement contains references to prior exploration results which have been cross-referenced to previous market announcements made by the Company, unless explicitly stated, no new information is contained. The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcements and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcements continue to apply and have not materially changed.

### About Arika Resources Limited

We are focused on delivering value to shareholders through the development and discovery of high-quality gold assets, including the Kookynie and Yundamindra Gold Projects, in Western Australia.

Arika Resources Limited is continuing to build on the potential large-scale gold footprints at the Yundamindra and Kookynie Gold Projects by expanding on known mineralisation and targeting new discoveries through a pipeline of high priority brownfield and greenfield targets.

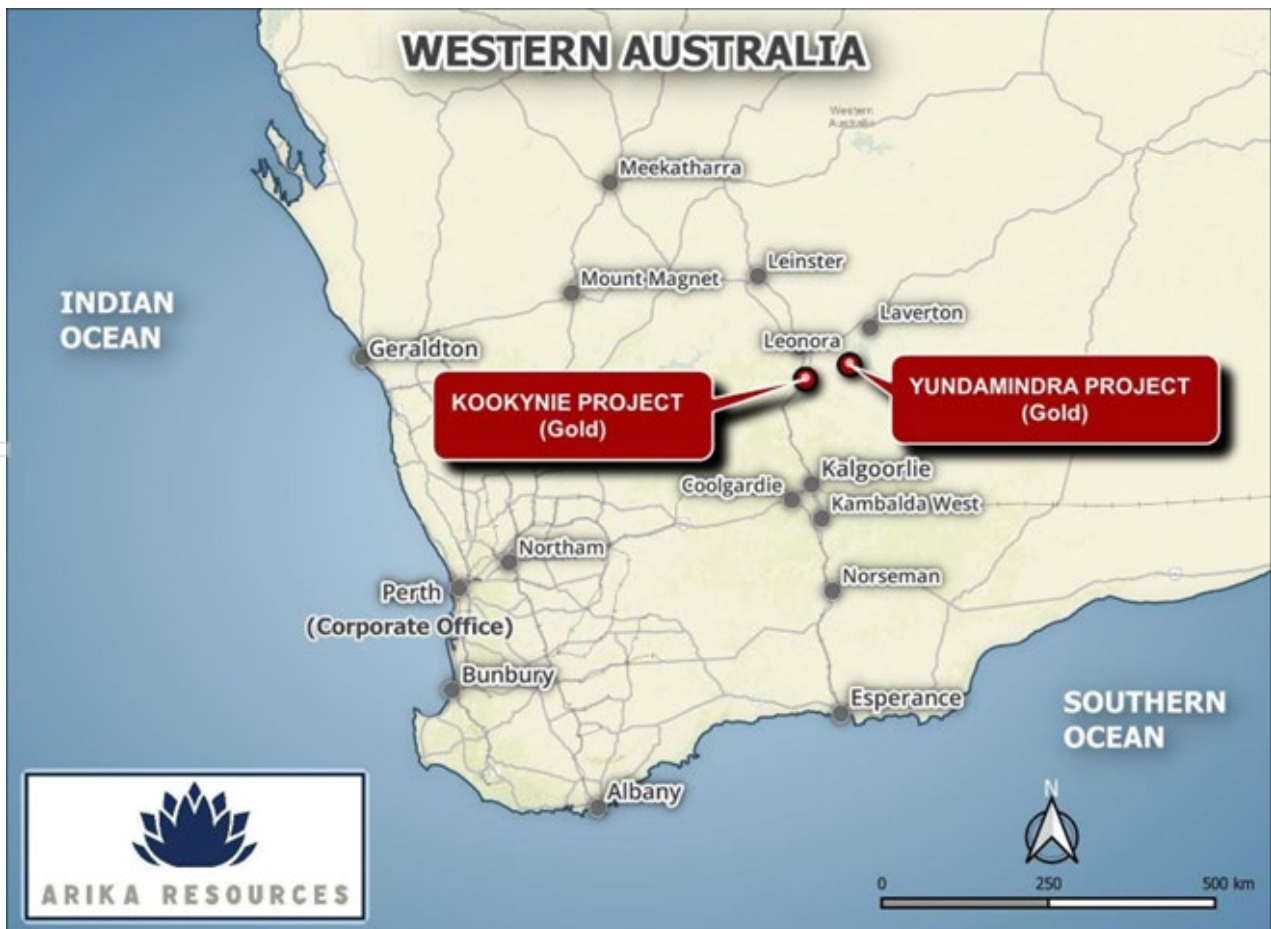

## Appendix One – Significant Intercepts and Collars

Significant intercepts in the table below were calculated on a length weighted average basis.

Each RC hole drilled by Arika was sampled in its entirety from start to finish using a combination of 2m or 4m composites and 1m individual samples. For diamond drillholes the diamond cored section of each hole was sampled in its entirety from the start of each cored section to end of hole with sampling guided by geological observations and maximum sample lengths generally not exceeding 1m.

For the low-grade envelope this was based on a 1m sample returning an assay value of greater than 0.1 g/t Au and for the high-grade zone, based on internal intervals reporting assays greater than 0.5 g/t Au, 5.0g/t Au and 10.0 g/t Au respectively. The maximum width of internal waste was generally 4m however the mineralised intervals are based on geological observations and current interpretation. Consequently, in some instances a broader interval of internal waste, interpreted as a 'horse' of limited dip and strike extent may be carried in order to honour the true nature of the ore hosting structure as defined by adjacent drillholes at that location.

No top cut-off was applied due to the early nature of the assessment.

**TABLE 1: YUNDAMINDRA EXPLORATION DRILLING RESULTS - F1 FAULT (LANDED AT LAST)**

Collar Location and Orientation									Intersection >0.1 g/t Au					Comments
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)	(gram x metres)	
25AYRC001	RC	1000N	403887	6780509	457.6	-60	295	100	0	1	1	0.14	0.1	
25AYRC017	RC	1000N	403910	6780490	458	-60	295	112	16	44	28	1.16	32.5	all 4m Composites
								<i>incl</i>	20	40	20	1.56	31.2	
LW89	RC	1040N	403880	6780551		-60	116	34	0	33	33	0.47	15.5	
								<i>incl</i>	4	15	11	0.79	8.7	
25AYRC002	RC	1040N	403908	6780543	457.6	-60	300	94	5	6	1	0.15	0.2	
									17	20	3	0.13	0.4	
									76	77	1	0.12	0.1	
25AYRC016	RC	1040N	403927	6780530	457.583	-60	295	112	20	56	36	0.46	16.7	all 4m Composites
								<i>incl</i>	44	52	8	1.01	8.1	
													0.0	
YMRC027	RC	1080N	403889	6780590	454	-60	116	60	44	52	8	0.21	1.7	
25AYRC005	RC	1080N	403900	6780591	457.9	-60	295	82						NSI
25AYRC006	RC	1080N	403919	6780573	457	-60	295	70	42	48	6	0.67	4.0	
								<i>incl</i>	44	46	2	1.30	2.6	Qz veining

Collar Location and Orientation									Intersection >0.1 g/t Au					Comments
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)	(gram x metres)	
								<i>and</i>	47	48	1	1.03	1.0	Qz veining
25AYRC015	RC	1080N	403945	6780564	457	-60	295	112	24	40	16	0.12	1.9	2 x 4m Composites
									52	56	4	0.12	0.5	4m Composite
									77	78	1	0.12	0.1	
LW41	RC	1090N	403894	6780601	453	-60	116	40	9	16	7	2.55	17.9	
								<i>incl</i>	10	14	4	4.22	16.9	
								<i>and</i>	10	12	2	7.54	15.1	
LW96A	RC	1090N	403898	6780598	453	-60	116	40	27	36	9	2.17	19.5	
								<i>incl</i>	28	32	4	4.49	18.0	
								<i>and</i>	29	31	2	6.84	13.7	
YMRC030	RC	1090N	403946	6780606	453	-60	239	96	73	87	14	2.43	34.0	
								<i>incl</i>	80	85	5	6.40	32.0	
								<i>and</i>	82	85	3	9.74	29.2	
YMRC028	RC	1100N	403896	6780609	454	-60	239	66				NSR		INEFFECTIVE - incorrect azimuth
YMRC045	RC	1100N	403897	6780609	454	-60	116	66	33	42	9	0.47	4.2	
								<i>incl</i>	38	41	3	1.08	3.2	
									47	56	9	0.66	5.9	
								<i>incl</i>	48	53	5	1.10	5.5	
LW34	RC	1110N	403911	6780614	454	-60	116	34	9	21	12	8.40	100.8	
								<i>incl</i>	10	20	10	9.90	99.0	
								<i>and</i>	13	18	5	16.85	84.3	
YMRC025	RC	1110N	403910	6780615	454	-60	116	54	20	35	15	0.27	4.1	

Collar Location and Orientation									Intersection >0.1 g/t Au					Comments
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)	(gram x metres)	
								<i>incl</i>	28	29	1	0.52	0.5	
YMRC026	RC	1110N	403899	6780617	454	-85	116	66	26	27	1	0.40	0.4	INEFFECTIVE - vertical
YMRC029	RC	1110N	403944	6780594	454	-60	116	84				NSR		INEFFECTIVE - incorrect azimuth
YMRC046	RC	1110N	403910	6780620	454	-60	116	60	22	48	26	1.46	38.0	
								<i>incl</i>	23	32	9	3.61	32.5	
								<i>and</i>	24	26	2	9.40	18.8	
YMRC048	RC	1110N	403943	6780591	452	-60	297	78	30	55	25	1.86	46.5	
								<i>incl</i>	45	52	7	6.19	43.3	
								<i>and</i>	48	52	4	8.93	35.7	
YMRC024	RC	1120N	403913	6780622	454	-60	116	120	8	56	48	0.32	15.4	
								<i>incl</i>	24	28	4	0.82	3.3	
								<i>and</i>	40	44	4	0.56	2.2	
YMRC047	RC	1120N	403913	6780625	454	-60	116	60	37	47	10	1.28	12.8	
								<i>incl</i>	40	46	6	2.03	12.2	
								<i>and</i>	44	45	1	9.15	9.2	
YMRC049	RC	1120N	403942	6780606	454	-60	297	84	30	55	25	1.07	26.8	
								<i>incl</i>	36	42	6	3.53	21.2	
								<i>and</i>	37	38	1	9.70	9.7	
LW97A	RC	1120N	403952	6780605	454	-60	297	90	63	85	22	0.87	19.1	
								<i>incl</i>	64	75	11	1.56	17.2	
								<i>and</i>	71	72	1	5.48	5.5	
25YMD003	DDH	1120N	403974	6780594	454	-60	300	201.80	87	101.8	14.80	3.10	45.9	
								<i>incl</i>	90	92.15	2.15	5.49	11.8	
								<i>and</i>	99	101.25	2.25	9.76	22.0	
LW33	RC	1130N	403912	6780636	454	-60	116	50	32	50	18	4.56	82.1	END OF HOLE

Collar Location and Orientation								Intersection >0.1 g/t Au					Comments	
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)		(gram x metres)
								<i>incl</i>	35	46	11	7.14	78.5	
								<i>and</i>	39	43	4	16.35	65.4	
LW87	RC	1130N	403956	6780614	454	-60	300	80	47	80	33	1.55	51.2	
								<i>incl</i>	62	75	13	3.23	42.0	
								<i>and</i>	64	65	1	8.12	8.1	
									68	69	1	5.74	5.7	
LW90	RC	1140N	403916	6780645	454	-60	116	55	32	39	7	1.72	12.0	
								<i>incl</i>	33	39	6	1.97	11.8	
								<i>and</i>	34	35	1	5.67	5.7	
LW29	RC	1150N	403921	6780654	454	-60	116	52	19	52	33	1.22	40.3	END OF HOLE
								<i>incl</i>	36	52	16	2.20	35.2	
								<i>and</i>	45	46	1	6.15	6.2	
YMRC023	RC	1160N	403921	6780661	453	-60	116	66	42	60	18	2.01	36.2	
								<i>incl</i>	43	55	12	2.93	35.2	
								<i>and</i>	43	45	2	7.22	14.4	
YMRC021	RC	1170N	403917	6780676	453	-60	297	90				NSR		INNEFFECTIVE - incorrect azimuth
YMRC022	RC	1170N	403927	6780671	453	-60	297	66	24	36	12	0.35	4.2	INNEFFECTIVE - incorrect azimuth
								<i>incl</i>	25	30	5	0.66	3.3	
YMRC050	RC	1170N	403928	6780672	450	-60	116	66	26	56	30	2.26	67.8	
								<i>incl</i>	38	49	11	5.24	57.6	
								<i>and</i>	40	44	4	11.72	46.9	

Collar Location and Orientation									Intersection >0.1 g/t Au					Comments
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)	(gram x metres)	
YMRC051	RC	1170N	403918	6780676	452	-60	116	90	60	68	8	0.95	7.6	
								<i>incl</i>	61	63	2	3.31	6.6	
LW9	RC	1180N	403939	6780679	453	-60	116	46	21	46	25	1.12	28.0	
								<i>incl</i>	27	44	17	1.48	25.2	
								<i>and</i>	37	38	1	6.25	6.3	
LW48	RC	1190N	403934	6780692	453	-60	116	61	24	46	22	0.24	5.3	
									51	59	8	2.68	21.4	
								<i>incl</i>	52	58	6	4.18	25.1	
								<i>and</i>	55	56	1	6.17	6.2	
LW53	RC	1200N	403939	6780701	453	-60	116	61	51	59	8	0.47	3.8	
								<i>incl</i>	56	58	2	1.26	2.5	
25AYRC014	RC	1200N	404007	6780665	455.788	-60	295	118	24	28	4	0.23	0.9	4m Composite
									20	28	8	0.16	1.3	4m Composite
									52	56	4	0.12	0.5	4m Composite
									69	70	1	0.26	0.3	
									73	74	1	0.15	0.2	
									79	82	3	0.12	0.4	
									88	89	1	0.12	0.1	
									115	118	3	0.20	0.6	END OF HOLE
LW31	RC	1230N	403957	6780726	452	-60	116	45	24	28	4	0.59	2.4	
								<i>incl</i>	24	26	2	0.96	1.9	
											0			
YMRC031	RC	1240N	404025	6780697	451	-60	116	78	63	71	8	0.55	4.4	

Collar Location and Orientation								Intersection >0.1 g/t Au					Comments	
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)		(gram x metres)
								<i>incl</i>	<b>64</b>	<b>66</b>	<b>2</b>	<b>1.44</b>	2.9	
YMRC019	RC	1250N	403948	6780753	452	-60	116	84	<b>79</b>	<b>84</b>	<b>5</b>	<b>1.55</b>	<b>7.8</b>	<b>END OF HOLE</b>
<b>25AYRC013</b>	RC	1250N	404030	6780711	455	-60	295	202	20	24	4	0.18	0.7	4m Composite
									32	40	8	0.82	6.5	2 x 4m Composites
									44	48	4	0.16	0.6	4m Composite
									32	48	16	0.46	7.4	
									74	80	6	0.22	1.3	
									84	91	7	0.50	3.5	
									74	75	1	0.15	0.2	
									77	80	3	0.37	1.1	
									84	85	1	0.15	0.2	
									87	90	3	1.05	3.1	
									130	193	63	0.31	<b>19.5</b>	
									130	141	11	0.98	10.8	single metres. 5% qz veining 133-141m
									144	146	2	0.20	0.4	
									151	154	3	0.57	1.7	
									161	162	1	0.19	0.2	
									167	176	9	0.47	4.2	single metres.
									179	180	1	0.11	0.1	
									185	186	1	0.27	0.3	
									188	193	5	0.15	0.7	
LW103	RC	1260	403988	6780742	452	-60	300	55	<b>22</b>	<b>39</b>	<b>17</b>	<b>0.74</b>	<b>12.6</b>	
								<i>incl</i>	<b>33</b>	<b>36</b>	<b>3</b>	<b>0.74</b>	2.2	
								<i>and</i>	<b>24</b>	<b>25</b>	<b>1</b>	<b>7.21</b>	7.2	

Collar Location and Orientation									Intersection >0.1 g/t Au					Comments
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)	(gram x metres)	
LW76	RC	1270N	403971	6780763	452	-60	300	45	20	32	12	0.78	9.4	
								<i>incl</i>	27	31	4	1.72	6.9	
									38	45	7	0.37	2.6	
								<i>incl</i>	40	41	1	0.62	0.6	
YMRC020	RC	1280N	403983	6780772	451	-60	116	84	49	62	13	0.43	5.6	
								<i>incl</i>	53	54	1	0.78	0.8	
								<i>and</i>	60	62	2	2.00	4.0	
LW94B	RC	1290N	403990	6780777	451	-60	300	55	21	31	10	0.87	8.7	
								<i>incl</i>	27	28	1	5.90	5.9	
LW96B	RC	1300N	404001	6780779	451	-60	300	50	28	41	13	0.30	3.9	
								<i>incl</i>	32	33	1	2.01	2.0	
								<i>and</i>	40	41	1	1.02	1.0	
											0			
LW107	RC	1310N	404007	6780791	451	-60	300	60	24	50	26	0.69	17.9	
								<i>incl</i>	31	33	2	2.18	4.4	
								<i>and</i>	40	45	5	2.24	11.2	
									41	42	1	5.84	5.8	
25AYRC003	RC	1320N	404014	6780792	454.5	-60	295	70	20	24	4	1.08	4.3	4m Composite
									34	61	27	0.53	14.3	
									24	25	1	0.13	0.1	
									28	30	2	0.25	0.5	
									34	38	4	0.41	1.6	
									43	56	13	0.92	12.0	
									58	61	3	0.14	0.4	

Collar Location and Orientation									Intersection >0.1 g/t Au					Comments
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)	(gram x metres)	
25AYRC004	RC	1320N	404028	6780787	454.5	-60	295	100	24	28	4	1.04	4.2	4m Composite
									24	32	8	0.60	4.8	
									28	32	4	0.16	0.7	4m Composite
									52	56	4	0.17	0.7	4m Composite
									61	88	27	2.45	66.2	all single metres
									64	72	8	6.80	54.4	
									63	77	14	4.30	60.2	
								incl	63	72	9	6.18	55.6	
								96	100	4	0.10	0.4	END OF HOLE 4m Composite	
25AYRC012	RC	1320N	404050	6780778	454.5	-60	295	148	28	36	8	1.44	11.5	4m Composite. 85% qz veining 33-34m
									32	36	4	2.75	11.0	
									88	96	8	0.47	3.8	
									88	130	42	0.34	14.3	
								incl	104	115	11	0.66	7.3	
									103	106	2	0.51	1.0	
									108	117	9	0.72	6.4	
									118	119	1	0.24	0.2	
									122	123	1	1.07	1.1	
									125	126	1	0.21	0.2	
								129	130	1	0.13	0.1	75% qz veining	
												0.0		
LW98	RC	1330N	404016	6780808	451	-60	300	52	26	37	11	1.33	14.6	
								incl	28	32	4	3.33	13.3	
								and	30	31	1	10.50	10.5	
LW100	RC	1350N	404025	6780826	451	-60	300	48	30	48	18	0.36	6.5	

Collar Location and Orientation								Intersection >0.1 g/t Au					Comments	
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)		(gram x metres)
								<i>incl</i>	<b>43</b>	<b>45</b>	<b>2</b>	<b>1.88</b>	3.8	
<b>25AYRC007</b>	RC	1360N	404041	6780827	455.3	-60	295	94	52	57	5	33.30	<b>166.5</b>	
								<i>incl</i>	52	56	4	41.56	166.2	4m Composite; qz veining 53-54m
									57	61	4			ASSAYS PENDING
									64	80	16	0.33	5.3	
								<i>incl</i>	64	72	8	0.50	4.0	single metres
									74	80	6	0.21	1.3	
													0.0	
<b>25AYRC008</b>	RC	1360N	404056	6780822	455.3	-60	295	112	60	64	4	0.35	<b>1.4</b>	4m Composite
									72	80	8	0.18	1.4	
									72	76	4	0.18	0.7	single metres
									78	80	2	0.34	0.7	
									89	90	1	0.15	0.2	
									93	94	1	0.15	0.2	
									96	97	1	0.12	0.1	
									99	100	1	0.12	0.1	
													0.0	
LW11	RC	1370N	403946	6780648	451	-60	300	25	<b>17</b>	<b>25</b>	<b>8</b>	<b>0.14</b>	<b>1.1</b>	
<b>25AYRC011</b>	RC	1600N	404155	6781040	451.9	-60	295	136				NSI		Ineffective - missed structure
<b>25AYRC009</b>	RC	OBLIQUE	404090	6780762	454.7	-60	165	76	16	22	6	1.06	<b>6.4</b>	F1-Splay: 4m Composite,qz veining 19-20m
									20	22	2	1.04	2.1	60% qz veining
									32	33	1	0.10	0.1	
													0.0	

Collar Location and Orientation									Intersection >0.1 g/t Au					Comments
Hole_ID	Type	Section (Local)	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Grade		
								(m)	(m)	(m)	(m)	(g/t)	(gram x metres)	
25AYRC010	RC	OBLIQUE	404086	6780784	454.2	-60	165	118	40	48	8	0.55	4.4	F1 - Splay: 2 x 4m Composites; 40% qz veining 44-45m

personal use only

## Appendix Two – JORC Code, 2012 Edition – Table 1

### Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>• Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>• Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>• Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>• In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>• Reverse circulation (RC) sampling was carried out using a rig mounted cone splitter.</li> <li>• Sampling was conducted by the drill offsideers on the drill rig and checked at the end of each rod (6 metres) to ensure that the sample ID’s matched the interval that was intended to be represented by that sample ID. No issues were seen or noted by the Competent person during the entire drilling campaign. These samples are kept onsite in a secure location available for further analysis if required.</li> <li>• All RC samples were sieved and washed to ensure samples were taken from the appropriate intervals. The presence of quartz veining +/- sulphide presence +/- alteration was used to determine if a zone was interpreted to be mineralised.</li> <li>• Sampling was additionally based on geological observations of interpreted intervals.</li> <li>• The quality of the sampling is industry standard and was completed with the utmost care to ensure that the material being sampled, can be traced back to the interval taken from the drill hole for RC chips.</li> <li>• Samples submitted for analysis weighed on average 3kg.</li> <li>• All samples described in this announcement have been submitted to Intertek Laboratory in Kalgoorlie for initial sample preparation prior to shipment to Intertek Perth for final analysis.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>• Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>• RC drilling used a downhole face sampling hammer with a nominal bit size of 5 inch (125mm) and 3.5inch diameter rod-string</li> <li>• All of the drilling was undertaken by Strike Drilling using an X350 Aircore/Reverse Circulation Drill Rig with a 425psi/1000cfm on board compressor mounted on a VD3000 Marooka track base along with an 8x8 Mercedes truck mounted Atlas Copco B7/1000 Booster and Auxilliary compressor unit.</li> </ul>

<p><i>Drill sample recovery</i></p>	<ul style="list-style-type: none"> <li>● <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></li> <li>● <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></li> <li>● <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></li> </ul>	<ul style="list-style-type: none"> <li>● Sample recovery size and sample conditions (dry, wet, moist) were recorded.</li> <li>● Drilling with care (e.g. clearing hole at start of each rod, regular cyclone cleaning) if water encountered to reduce incidence of wet samples.</li> <li>● No relationship was displayed between recovery and grade nor loss/gain of fine/course material.</li> </ul>
<p><i>Logging</i></p>	<ul style="list-style-type: none"> <li>● <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></li> <li>● <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></li> <li>● <i>The total length and percentage of the relevant intersections logged.</i></li> </ul>	<ul style="list-style-type: none"> <li>● All recovered samples from RC have been geologically logged to a level where it would support an appropriate Mineral Resource Estimate, mining studies and metallurgical test work.</li> <li>● Logging was qualitative based on the 1 metre samples derived from RC drilling. Representative sample was collected in plastic chip trays which are securely stored on-site for future reference.</li> <li>● Logging was qualitative based on geological boundaries observed.</li> <li>● 100 percent of the drillholes were logged to capture all relevant geological units, structures and intersections.</li> </ul>
<p><i>Sub-sampling techniques and sample preparation</i></p>	<ul style="list-style-type: none"> <li>● <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></li> <li>● <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></li> <li>● <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li>● <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></li> <li>● <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></li> <li>● <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	<ul style="list-style-type: none"> <li>● RC chip samples were cone split from the drill rig into individual 1m green sample bags pre-numbered for hole depth and neatly laid out in 20m rows adjacent to the drill collar.</li> <li>● A 1m sample was collected at the cone splitter on the RC rig in a pre-numbered calico bag.</li> <li>● All RC samples were dry. All recoveries were &gt;90%.</li> <li>● Field duplicates, blanks and CRM standards were inserted every 25 samples.</li> <li>● GEOSTATS standards or CRMs of 60 gram charges of G919-3 (Au grade of 0.87ppm Au), 916-2 (Au grade of 1.98ppm Au) and 918-2 (Au grade of 1.43ppm Au) and 919-8 (Au grade of 0.57ppm Au) were used in alternating and sporadic patterns at a ratio of 1 QAQC sample in 25 samples submitted.</li> <li>● Samples are dried (nominal 110 degrees C), crushed and pulverized to produce a homogenous representative sub-sample for analysis. All samples are pulverised utilising Intertek preparation techniques.</li> <li>● The Competent Person is of the opinion RC drilling and sampling method are considered appropriate for the delineation of gold mineralisation.</li> </ul>

<p><i>Quality of assay data and laboratory tests</i></p>	<ul style="list-style-type: none"> <li>• <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></li> <li>• <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></li> <li>• <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Gold and multi-element analyses were undertaken by Intertek Genalysis in Perth, using routine fire assay and multi element analysis by FA50/OE04 and 4A/MS48</li> <li>• This near-full digest is considered sufficient for this stage of exploration and the weathered nature of the samples.</li> <li>• Gold analysis was undertaken with 50-gram Fire Assay with OES finish. The detection limit for gold via this method is 5ppb (0.005ppm).</li> <li>• Laboratory QA/QC involves the use of internal lab standards using certified reference material, blanks, splits and replicates as part of the inhouse procedures. QC results (blanks, duplicates, standards) were in line with commercial procedures, reproducibility and accuracy.</li> <li>• Multi-Element analyses were carried out combining a four-acid digestion with ICP-MS instrumentation. A four-acid digest is performed on 0.25g of sample to quantitatively dissolve most geological materials. Analytical analysis performed with a combination of ICP-OES &amp; ICP-MS. Element analyses include: Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn, and Zr.</li> <li>• The analytical method employed is appropriate for the styles of mineralisation and target commodity present.</li> <li>• No geophysical tools, spectrometers, handheld XRF instruments were used. <ul style="list-style-type: none"> <li>• QAQC analysis shows that the lab performed within the specifications of the QAQC protocols.</li> </ul> </li> <li>• No external laboratory checks have been completed.</li> </ul>
<p><i>Verification of sampling and assaying</i></p>	<ul style="list-style-type: none"> <li>• <i>The verification of significant intersections by either independent or alternative company personnel.</i></li> <li>• <i>The use of twinned holes.</i></li> <li>• <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> <li>• <i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• No umpire analysis has been performed.</li> <li>• Data was collected on to standardised templates in the field and data cross checks were performed verifying field data and assay results.</li> <li>• No adjustment to the available assay data has been made.</li> <li>• For all intercepts, the first received assay result is always reported.</li> </ul>
<p><i>Location of data points</i></p>	<ul style="list-style-type: none"> <li>• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drill hole collars are picked up at the end of each hole by the site supervising geologist using a handheld Garmin GPS. Accuracy is +/-5m.</li> <li>• GDA94 Zone 51 grid system was used.</li> </ul>

	<ul style="list-style-type: none"> <li>● <i>Specification of the grid system used.</i></li> <li>● <i>Quality and adequacy of topographic control.</i></li> </ul>	<ul style="list-style-type: none"> <li>● Collars will be picked up by a qualified surveyor using a DGPS (Trimble S7 or equivalent).</li> <li>● The surveyed collar coordinates are sufficiently accurate and precise to locate the drillholes.</li> </ul>
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> <li>● <i>Data spacing for reporting of Exploration Results.</i></li> <li>● <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li>● <i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>● Drillholes were designed and drilled to test the validity of historical drilling information and not for Mineral Resource estimation and classification purposes.</li> <li>● No mineral classification is applied to the results at this stage.</li> <li>● 2m/4m composite and individual 1m interval samples and results described in this announcement were collected from a rig mounted cone splitter.</li> </ul>
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> <li>● <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li>● <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>● Drilling was designed as perpendicular as possible to the interpreted structure that hosts mineralisation to avoid introducing any bias.</li> <li>● The drilling orientation and the orientation of key mineralised structures has not introduced a bias.</li> <li>● All drillholes were downhole surveyed using a north seeking Gyro survey tool.</li> </ul>
<i>Sample security</i>	<ul style="list-style-type: none"> <li>● <i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>● The chain of supply from rig to the laboratory was overseen by a contract geologist. At no stage has any person or entity outside of the contract geologist, the drilling contractor, contract courier, and the assay laboratory come into contact with the samples.</li> <li>● Samples were delivered by Arika field personnel and/or its contractors to the Intertek laboratory in Kalgoorlie for initial sample preparation then to Maddington for analysis.</li> </ul>
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <li>● <i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>● No external audit of the results, beyond the laboratory internal QAQC measures, has taken place.</li> <li>● QA/QC data is regularly reviewed by MCT, and results provide a high-level of confidence in the assay data.</li> </ul>

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <li>• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></li> <li>• <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></li> </ul>	<p>The drilling being reported on in this announcement was all undertaken within Mining Lease, M39/84.</p> <p>Arika operates within a Joint Venture Agreement with Nex Metals Exploration (NME) and holds 80% with NME holding the remaining 20%. Please refer to announcement “Metalicity Achieves Earn-In On The Kookynie &amp; Yundamindra Gold Projects” dated 21<sup>st</sup> December 2023.</p> <ul style="list-style-type: none"> <li>• No impediments exist to obtaining a license to operate over the listed tenure at the time of reporting.</li> </ul>
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <li>• <i>Acknowledgment and appraisal of exploration by other parties.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Arika Ltd has completed a review of historical data and made corrections to previously supplied data from the JV partner NME.</li> <li>• The Yundamindra areas has been subject to multiple phases of exploration since discovery of gold before 1899. Further small-scale mining occurred until the 1940’s. Exploration activities between the late 1970’s into the early 1980’s was completed by Penzcoil Australia, Kennecott Exploration with Hill Minerals, and Picon Exploration.</li> <li>• Mt Burgess Gold Mining Company undertook significant exploration drilling to generate resource estimates for the western and eastern lines of mineralisation in 1988 and 1989 respectively. Sons of Gwalia entered into a JV with Mt Burgess in the mid 1990’s which lasted until 1999 then held the project tenements outright until 2003 which included exploration activities, a re-optimisation study in 1997 on part of the Western Line of mineralisation, as well as further resources estimates. Saracen Gold held the project tenements from 2006 until 2010 until it entered into a JV with NME. NME controlled the project outright from 2013 until entering into a JV with Arika in 2019.</li> </ul>
<i>Geology</i>	<ul style="list-style-type: none"> <li>• <i>Deposit type, geological setting and style of mineralisation.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Yundamindra: <ul style="list-style-type: none"> <li>• The Yundamindra Project lies within the Murrin-Margaret sector of the Leonora-Laverton area; part of the north-northwest to south-southeast trending Norseman-Wiluna Greenstone Belt of the Eastern Goldfields Province of the Yilgarn Craton.</li> <li>• The Murrin-Margaret sector is dominated by an upright, north to north-northwest</li> </ul> </li> </ul>

		<p>trending asymmetric regional anticline (Eucalyptus Anticline) centred about the Eucalyptus area. The western limb of the regional anticline has been intruded by granitoids (Yundamindra area). Strike-slip faulting is dominant along the eastern limb.</p> <ul style="list-style-type: none"> <li>• The Yundamindra Project encompasses zones of gold mineralisation occurring along the margin of a regional scale hornblende-granodiorite batholith which intruded mafic lithologies. The contact is sub-divided into two 'lines' of mineralisation, western and eastern.</li> <li>• The Western Line consists of a north-northwest trending zone of generally continuous, east dipping quartz reefs and quartz filled shears in granitoids, near the contact between a large hornblende granodiorite pluton and a thin remnant greenstone succession. The lode generally strikes parallel to a regional north-northwest schistosity in the mafic succession immediately to the west. Folding and faulting has dislocated the continuity of the lode in places and produced domal structures.</li> <li>• The Eastern Line encompasses the eastern portion of the arcuate granodiorite/greenstone contact with gold mineralisation associated with quartz veining within the mafic succession and within quartz vein/stockwork within granodiorite.</li> <li>• All exploration targets, prospects and deposits are interpreted as orogenic shear-hosted exploration targets for gold mineralisation.</li> </ul>
<p><i>Drill hole Information</i></p>	<ul style="list-style-type: none"> <li>• <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <li>○ <i>easting and northing of the drill hole collar</i></li> <li>○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i></li> <li>○ <i>dip and azimuth of the hole</i></li> <li>○ <i>down hole length and interception depth</i></li> <li>○ <i>hole length.</i></li> </ul> </li> <li>• <i>If the exclusion of this information is justified on the basis</i></li> </ul>	<ul style="list-style-type: none"> <li>• All discussion points are captured within the announcement above.</li> <li>• For RC drilling, dip and azimuth data is accurate to within +/-5° relative to MGA UTM grid (GDA94 Z51).</li> <li>• For all drilling, down hole depth and end of hole length is accurate to with +/- 0.2m.</li> <li>• All RC and diamond drillholes completed by Arika were surveyed downhole using a north seeking Gyro tool supplied by the drilling contractor.</li> <li>• A collar table is supplied in the appendices.</li> <li>• A summary of significant intercepts table is supplied in the Appendices.</li> </ul>

	<p><i>that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	
<p><i>Data aggregation methods</i></p>	<ul style="list-style-type: none"> <li>● <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></li> <li>● <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></li> <li>● <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></li> </ul>	<ul style="list-style-type: none"> <li>● Intercepts are reported as down-hole length on 2m/4m composites and/or 1 metre individual samples from RC drilling.</li> <li>● Gold intercepts have been calculated using the weighted average method for all intervals reporting &gt;0.1g/t Au.</li> <li>● Intercepts are reported as down-hole lengths and average gold intercepts are calculated with a 0.1 g/t and 0.5 g/t Au lower cut, no upper cut and &lt;4m internal dilution.</li> <li>● Intercepts were defined geologically based on an interpretation of the target zone at a given location.</li> <li>● Length weighted grades were then calculated based on a sample returning an assay value of greater than 0.1 g/t Au for the low-grade envelope and internal zones of greater than 0.5 g/t Au and 5.0 g/t Au. Generally, no more than 4 metres of internal material that graded less than 0.1 g/t Au was included except where a Raft or 'Horse' of lower grade country rock was interpreted as being within the targeted lode zone as defined by adjacent holes.</li> <li>● Intervals were based on geology and no top cut off was applied.</li> <li>● No metal equivalentents are discussed or reported.</li> </ul>
<p><i>Relationship between mineralisation widths and intercept lengths</i></p>	<ul style="list-style-type: none"> <li>● <i>These relationships are particularly important in the reporting of Exploration Results.</i></li> <li>● <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></li> <li>● <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></li> </ul>	<ul style="list-style-type: none"> <li>● All holes reported here are designed to intersect the target zone/mineralisation orthogonal to both strike and dip. The downhole length is therefore close to the true thickness.</li> </ul>
<p><i>Diagrams</i></p>	<ul style="list-style-type: none"> <li>● <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any</i></li> </ul>	<ul style="list-style-type: none"> <li>● A selection of appropriate maps and sections are included within the body of the report.</li> </ul>

	<i>significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	<ul style="list-style-type: none"> <li>● Please see main body of the announcement for the relevant figures showing the drillholes completed.</li> </ul>
<i>Balanced reporting</i>	<ul style="list-style-type: none"> <li>● <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></li> </ul>	<ul style="list-style-type: none"> <li>● All results and all plans are presented in a form that allows for the reasonable understanding and evaluation of the exploration results being announced.</li> </ul>
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <li>● <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></li> </ul>	<ul style="list-style-type: none"> <li>● The area has had significant historical production recorded and is accessible via the MINEDEX database.</li> <li>● All material results from geochemical, geophysical, geological mapping and drilling activities related to prospects across the Yundamindra Gold Project have been disclosed.</li> </ul>
<i>Further work</i>	<ul style="list-style-type: none"> <li>● <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></li> <li>● <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<ul style="list-style-type: none"> <li>● Follow up exploration activities will include, but not limited to RC and diamond drilling and planned for the remainder of 2025 pending outcomes from the drilling results and ongoing interpretation.</li> <li>● Diagrams pertinent to the areas in question are supplied in the body of this announcement.</li> </ul>