

Felix Delivers Very High Grade Drill Intersections, Exposes Massive Stibnite Veins at Surface, and Commences U.S. Smelter Design

Felix Gold Limited (ASX: FXG) reports the exposure of massive stibnite veins at surface within the NW Array prospect, new very high grade antimony drill intersections, and commencement of U.S. smelter engineering and site selection discussions with the U.S. Government. These developments are announced against the backdrop of China's antimony export ban and continuing global supply shortfalls.

Thursday, 18th September 11am (AEST)

Join Executive Director of Felix Gold, Joe Webb, for an online investor briefing

Register here: <https://felixgold.investorportal.com.au/investor-briefing>

Highlights:

- **Very High Grade Drill Assys:** Felix delivers very high grades from shallow drilling including **15.7m @ 5.1% Sb** (incl. **5.0m @ 11.95% Sb** from 41.26, peak **0.79m @ 24.9% Sb** from 43.14m)
- **Surface exposure:** 25-metre (open along strike in both directions and at depth) **massive stibnite vein exposed** at surface at NW Array on the same structure and vicinity that assayed **3m @ 50.26% Sb and 5.29 g/t au** (previously reported 24NWTR004, 23 January 2025) — providing immediate access to high-grade material
- **New discovery:** Felix discovers new breccia zone: 150–200m strike, 4–5m width — shallow mineralisation (open along strike and at depth)
- **Vertically Integrated Supply Chain:** Engineering has commenced on U.S. smelting facilities for antimony metal production, with active site selection discussions underway with the U.S. Government.
- **Near-term catalysts:** Antimony assays pending from 64 drill holes, gold assays pending for 90 holes with drilling, permitting, engineering and Government support initiatives continuing.
- **Fast-track pathway:** Felix's development pathway: Very high grade antimony at surface exposure + exceptional infrastructure = opportunity for modular small scale accelerated timeline to potential production targeting Q4 2025 to Q1 2026*

**No feasibility study completed, production scenarios are conceptual only and subject to completion of appropriate technical studies, feasibility work, permitting and Board approval.*

Felix Gold’s Executive Director, Joe Webb, commented:

“These results reinforce our strategy of assessing the viability of near-term antimony production targeting Q4 2025 to Q1 2026. The exposure of very high grade stibnite veins at surface — including the same structure where we previously on the 12 February 2025 3m @ 50.26% Sb and 5.29 g/t Au — together with very high grade antimony drill intercepts, highlights the potential for rapid, small-scale development. Metallurgical testwork previously reported met Class 1 and Class 2 Military Grade specifications for all parameters tested and further testwork is being completed to test for full compliance, further strengthening the development case.

With antimony assays pending from 64 additional drill holes (with drilling continuing) and gold assays pending for 90 holes, we are well-positioned to build momentum. This follows the recent visit by senior U.S. federal officials to our site and U.S. Government funding submissions currently under assessment. In parallel, engineering has commenced on U.S. smelting facilities with site selection discussions with the U.S. Government underway. Against the backdrop of China’s export ban and tightening global supply, the strategic nature of this asset is clearly evident.”

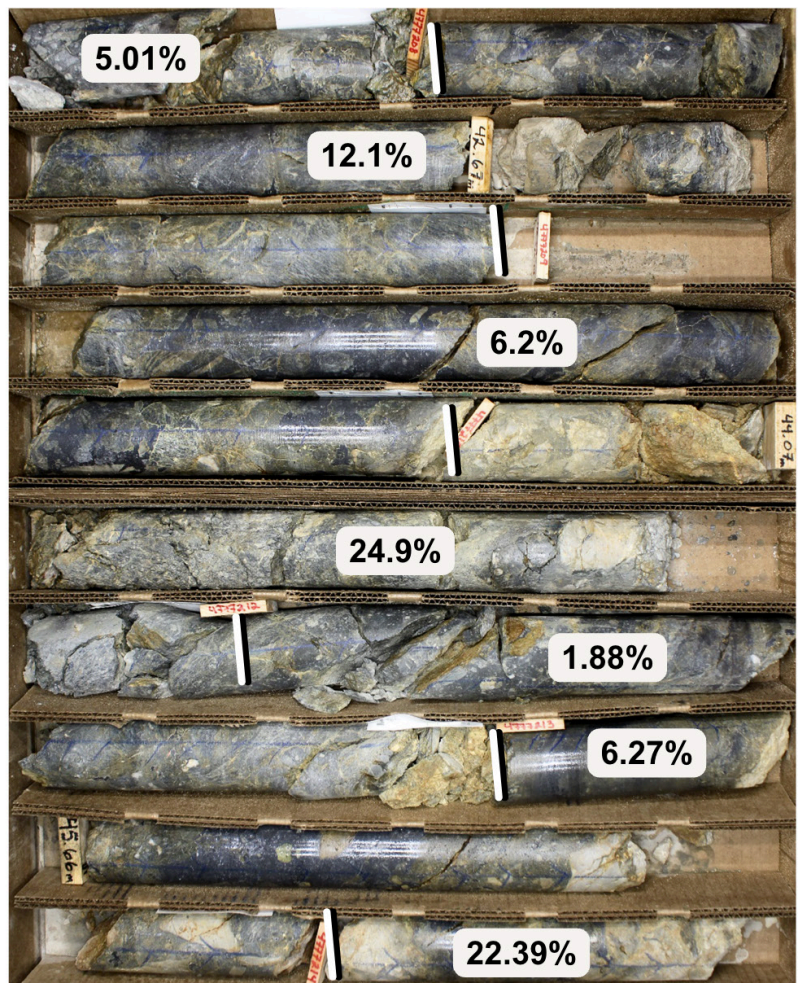
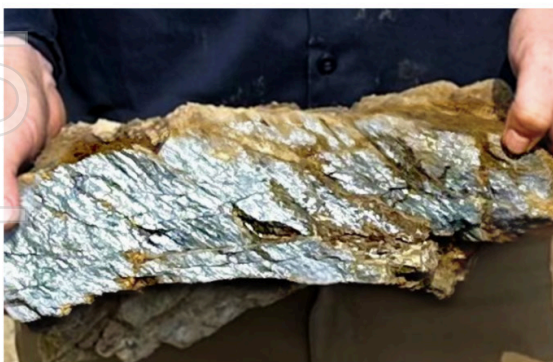


Fig 1. Samples of f NW Array mineralisation from trench 24NWTR004. Samples assayed 50.26% Sb and 5.29 g/t Au over 3m (ASX announcement 12 February 2025).

Fig 2. Typical “black breccia” in hole 25TCDC004, 41.82m-46.6m. A newly discovered style of high grade antimony mineralisation.

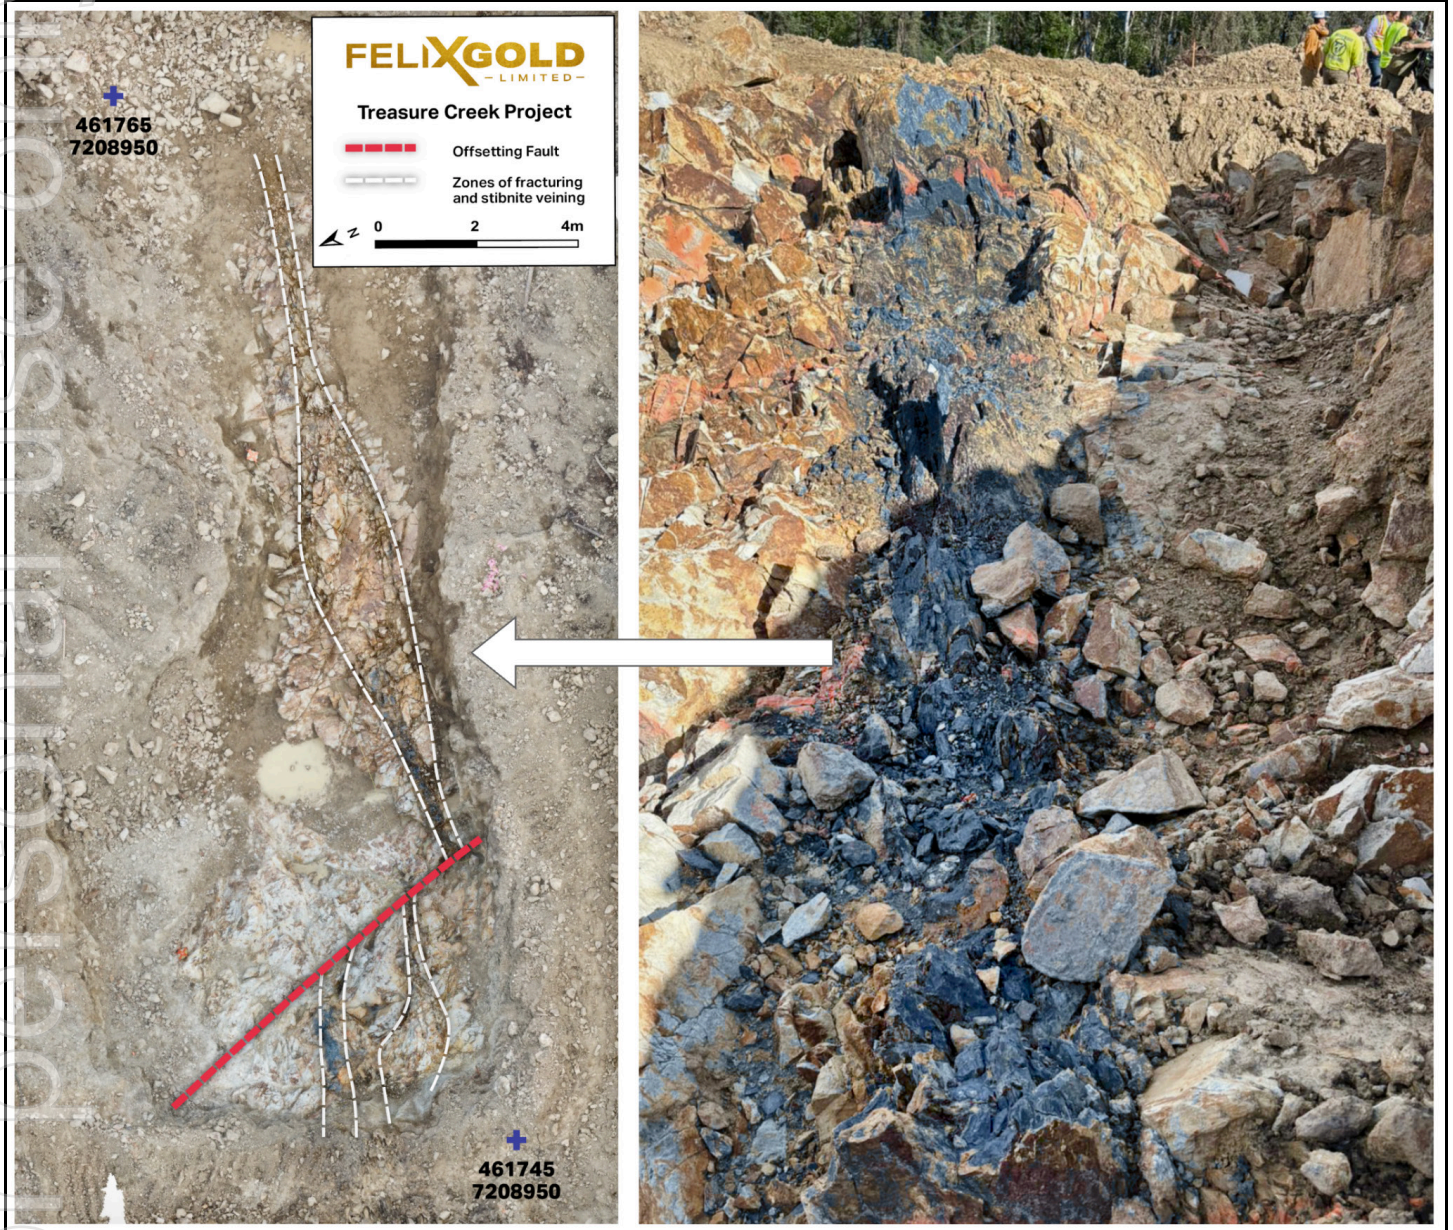


Fig 3. Surface Expression of NW Array Mineralisation - Trench 25NWTR005

Left: Zones of east-west trending fracturing, stibnite veining and offsetting fault in trench 25NWTR005. Vertical view of trench from drone image, UTM coordinates of survey points shown.

Right: Exposures of NW Array mineralization within trench 25NWTR005 (assays pending); note high grade stibnite vein in the excavation. View looking west along strike of main vein. Surface expression of NW Array mineralisation from trench 24NWTR004. Samples assayed 50.26% Sb and 5.29 g/t Au over 3 m (ASX announcement 12 February 2025). The massive stibnite observed in this trench is visually consistent with the previously assayed material.

Cautionary Statement: Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.

Treasure Creek Antimony Project

The Treasure Creek Project (Fig. 4) hosts significant antimony mineralisation across multiple antimony and gold prospects, with NW Array and Scrafford representing the most advanced prospects. Antimony mineralisation occurs primarily as stibnite (Sb_2S_3) and oxidised forms, including stibiconite and some valentinite, hosted within vein and breccia zones in felsic porphyry and quartz-mica schist and associated with gold mineralisation.

The project benefits from excellent infrastructure access, being located within 20 minutes of Fairbanks, with established roads, power, and a skilled workforce. This proximity to infrastructure significantly de-risks any future development scenarios.

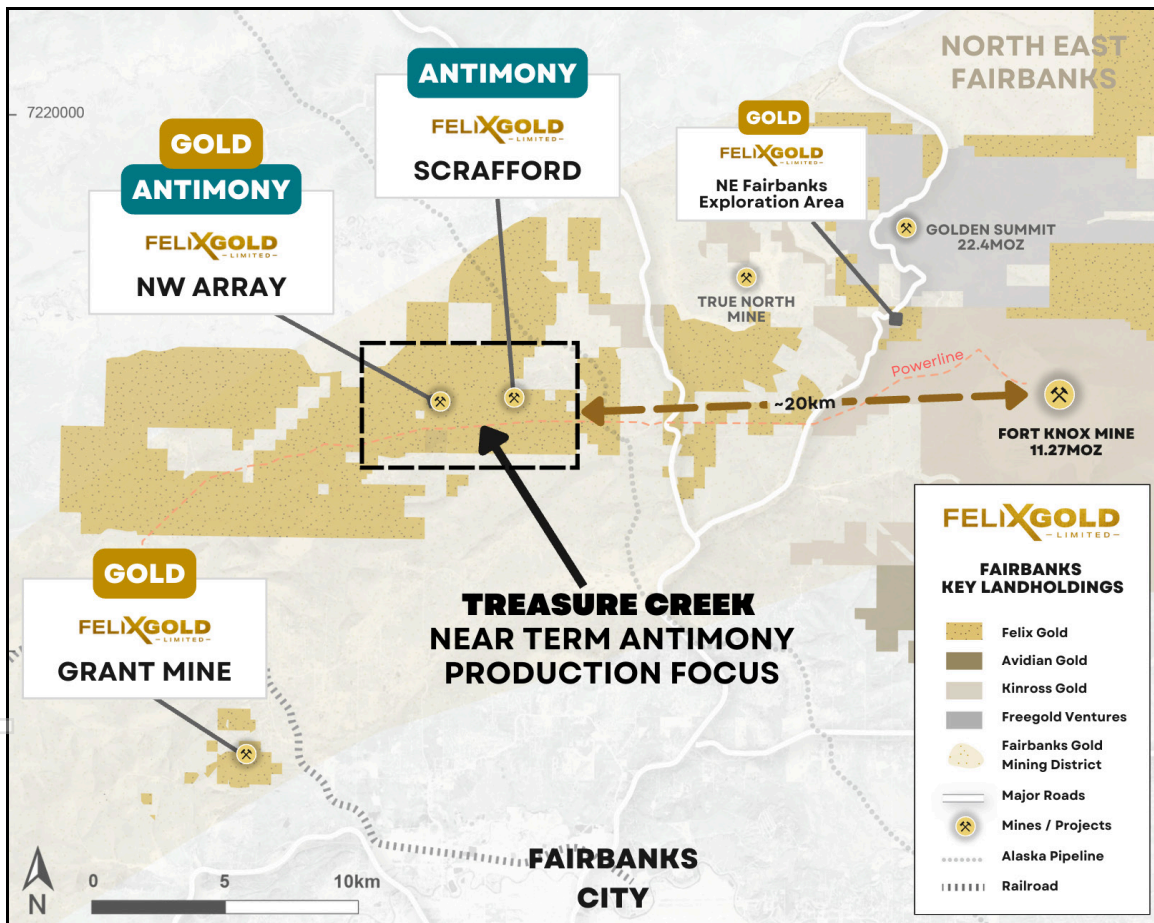


Fig 4. Location of Treasure Creek with near-term antimony production focus

Assessing the Viability of Near-Term Production

With very high antimony grades exposed at surface and strong existing infrastructure, Felix is advancing a streamlined development pathway targeting potential production commencement in Q4 2025–Q1 2026. *No feasibility study completed, production scenarios are conceptual only and subject to completion of appropriate technical studies, feasibility work, permitting and Board approval.*

Felix's Strategy: Start Small, Start Fast.

- **Direct access to high-grade mineralisation**— up to 3m @ 50.26% Sb at surface, with a 25m outcropping stibnite vein (open along strike and at depth) and multiple additional veins identified.
- **Low-capex, modular approach** – assessing the viability of simple crushing, screening, and concentration rather than complex large-scale builds.
- **Accelerated pathway** – assessing the viability of small-scale surface mining to reduce geological risk, eliminating underground development, and minimising environmental footprint.

Strategic Significance – Small-Scale Solution to a Big Supply Gap

- **For U.S. supply chain security:** Rapid-response production, aligned with federal priorities, potentially addressing a meaningful portion of U.S. demand.
- **For global markets:** Premium positioning in a tight market, first-mover advantage
- **For Felix and investors:** Low capital intensity, rapid payback potential, and multiple funding pathways*

**No feasibility study completed, production scenarios are conceptual only and subject to completion of appropriate technical studies, feasibility work, permitting and Board approval.*

The Strategic Opportunity: Perfect Timing Meets Perfect Geology

China's Export Ban Creates Supply Crisis

In December 2024, China formally banned antimony exports to the United States, severing America's primary supply chain for a metal essential across multiple critical industries. With China controlling 85% of global antimony processing and the U.S. importing 100% of its antimony needs, this represents an unprecedented threat to American industrial supply chains.

The vulnerability in numbers:

- U.S. antimony import dependence: nearly **100%**
- China + Russia control of global antimony production: **+90%**
- U.S. defense stockpile status: **Critical shortfall** (Department of War assessment)
- Time since last U.S. mining production: **30+ years**

Critical Applications Drive Urgent Demand

Antimony is irreplaceable across America's key industrial sectors:

- **Defense & National Security:** Military munitions and defense systems, night vision systems and infrared sensors, nuclear weapons production, advanced semiconductors (indium antimonide for surveillance and space applications)
- **Clean Energy Transition:** Solar panel glass production — antimony trioxide essential for PV glass manufacturing (fastest-growing antimony market), energy storage systems, power grid infrastructure
- **Industrial & Consumer Applications:** Electronics manufacturing, automotive industry components, building materials, lead-acid batteries
- **Market impact:** Antimony prices have rocketed from US\$11,000/tonne to over US\$60,000/tonne through 2024 to 2025 (<https://www.coreconsultantsgroup.com/antimony-from-niche-metal-to-global-frenzy> May 2025), with limited substitution options creating extended deficit conditions.

Washington Mobilizes Funding

The U.S. government response has been swift and unprecedented:

- **Executive Order 14156** (January 20, 2025): "Declaring a National Energy Emergency" — Formal emergency declaration covering energy and critical minerals with streamlined permitting and emergency authorities
- **Executive Order 14241** (March 20, 2025): "Immediate Measures to Increase American Mineral Production" — Invokes Defense Production Act for critical minerals with 10-day deadlines for agencies to identify priority projects for immediate approval

Federal Funding and Offtake Mechanisms including but not limited to:

- **Defense Production Act Title III:** Direct funding for domestic critical mineral production capabilities
- **CHIPS and Science Act:** US\$280 billion program includes funding for antimony semiconductor applications
- **National Energy Dominance Council:** Fast-track permitting for strategic mineral projects
- **National Defense Stockpile:** Defense Logistics Agency manages strategic reserves with antimony identified as critical shortfall requiring replenishment
- **Government Offtake Options:** Multi-year purchase agreements, pre-purchase mechanisms, and stockpile procurement similar to DoD contracts with MP Materials for rare earths

Economic reality: The US Government is investing heavily on emergency antimony stockpiling — an approach the Department of War acknowledges as unsustainable. With nearly 100% import reliance and antimony identified as one of the most critical materials in strategic shortfall, the federal strategy has shifted to supporting the development of domestic supply chains.


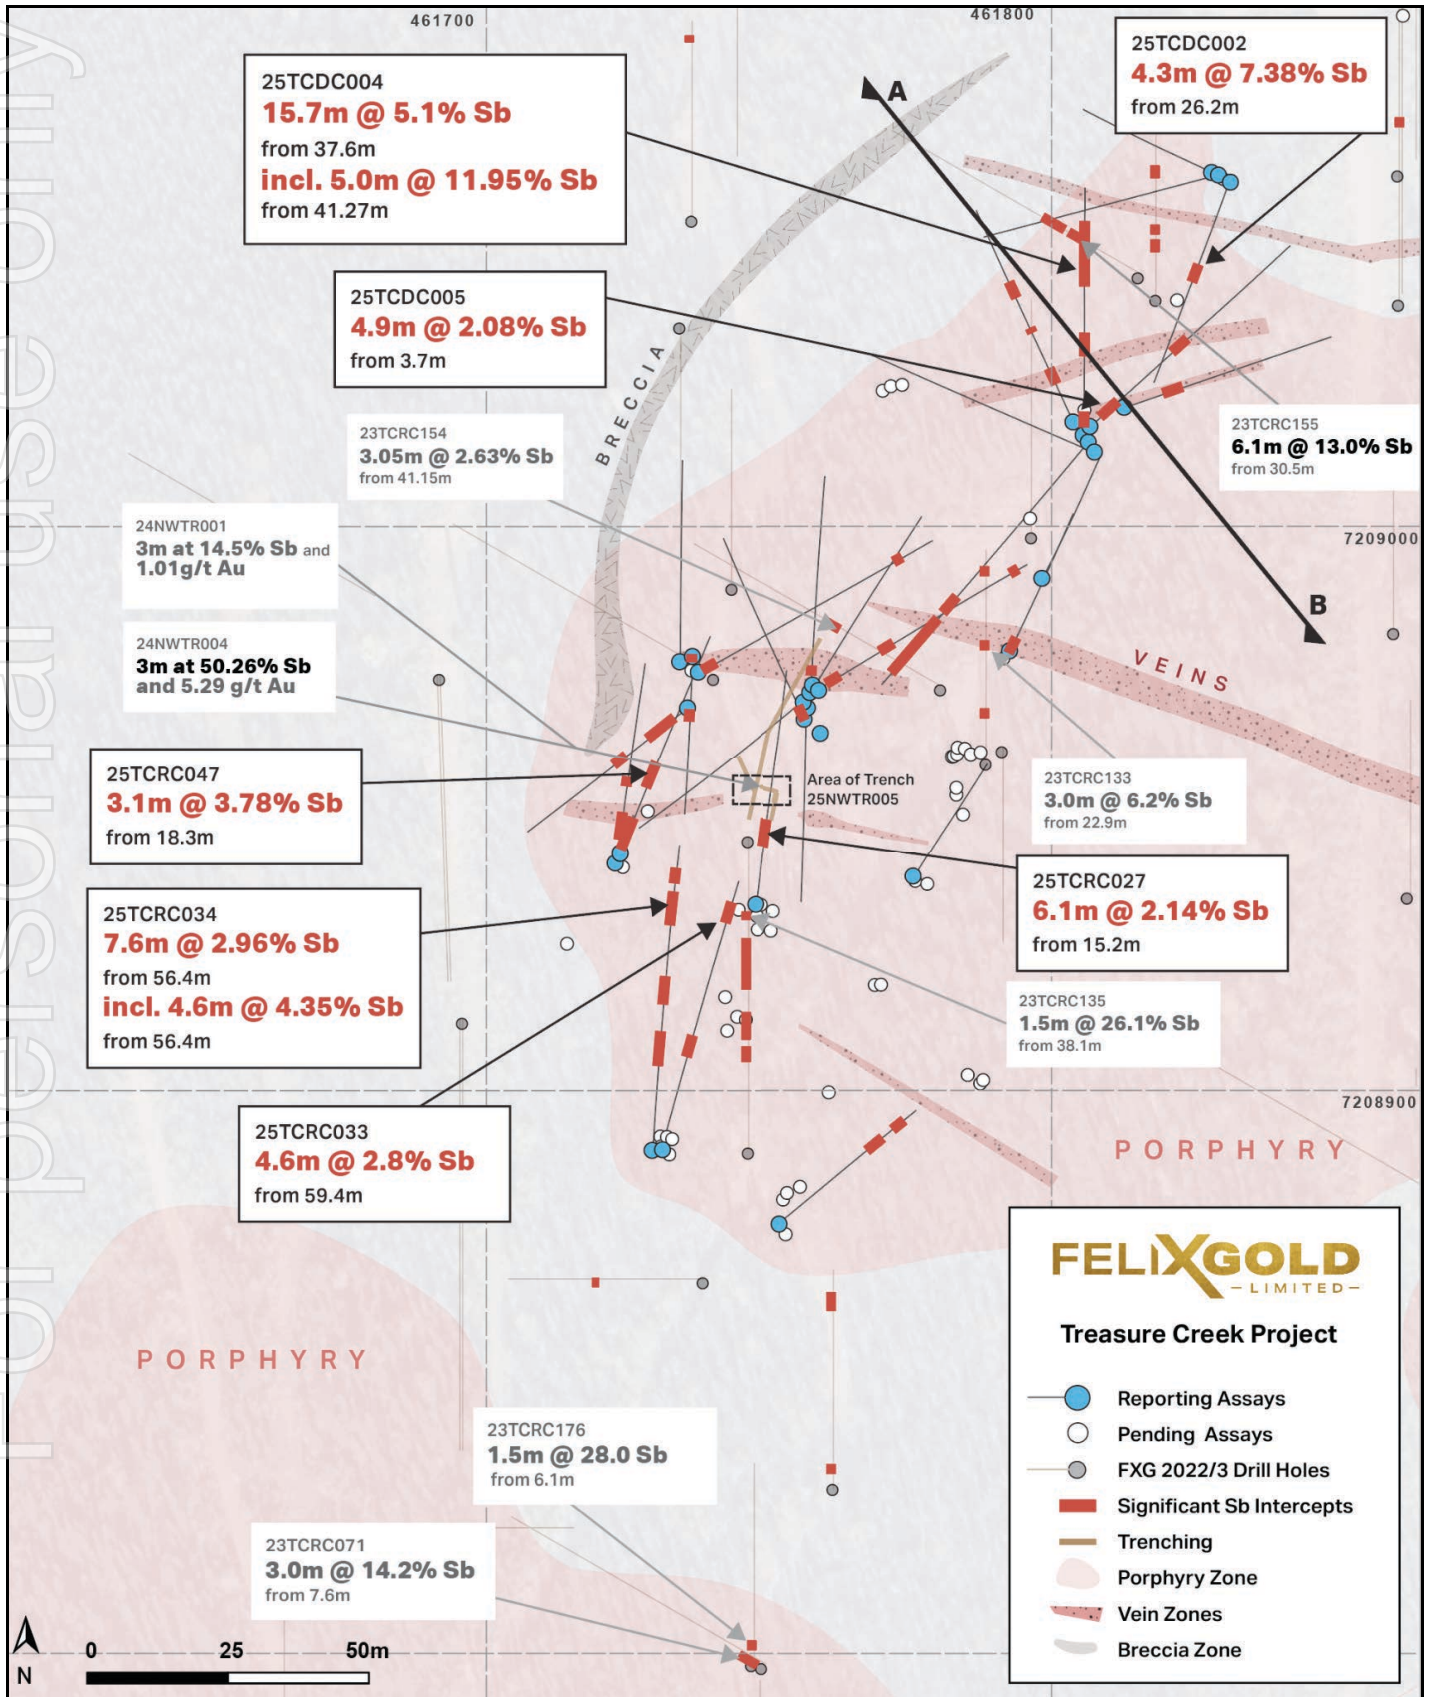


Fig 5. NW Array drilling results showing locations of drill holes and selected significant intersections.

For personal use only

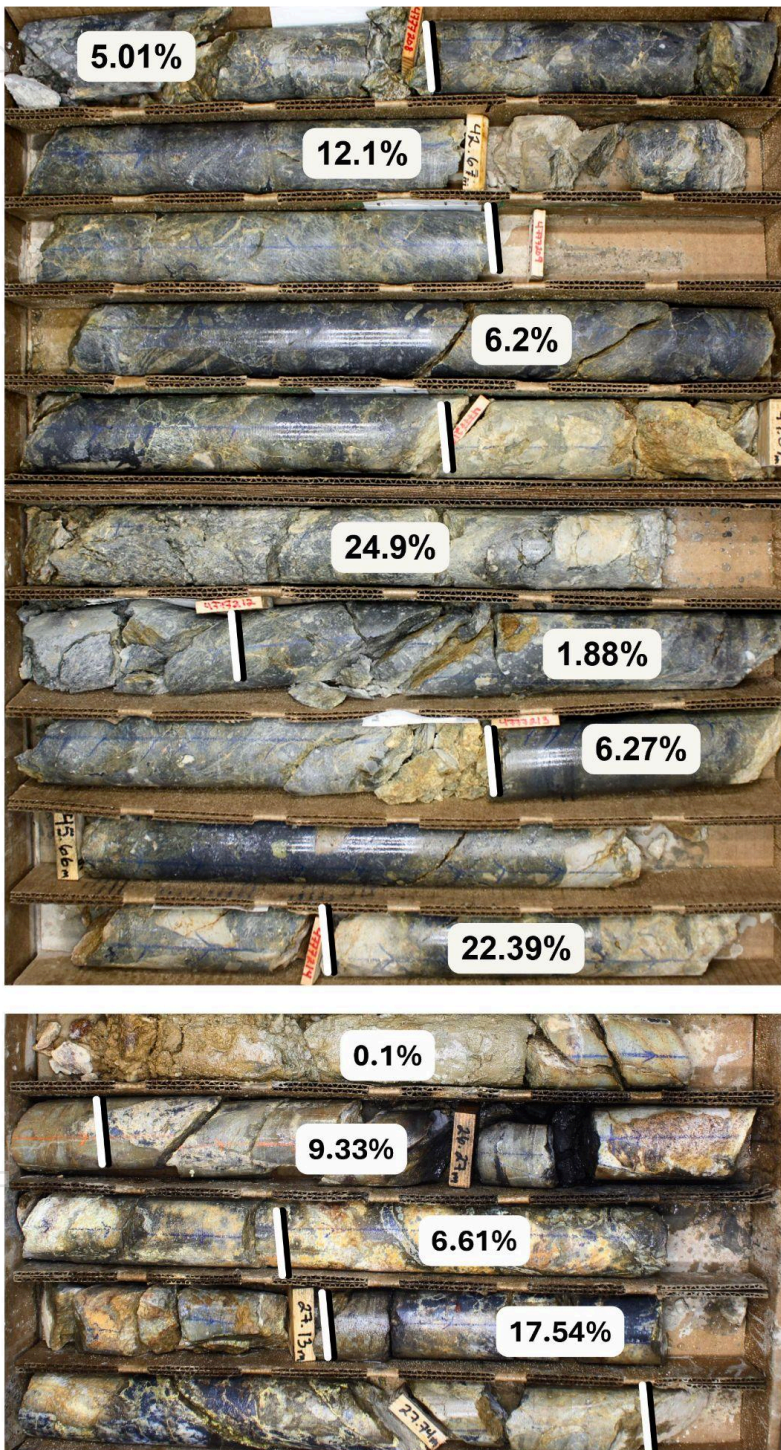

40.0-41.27m 5.01% Sb

41.27m-42.09m 12.1% Sb

42.09m-43.14m 6.2% Sb

43.14m-43.87m 24.9% Sb

43.87m-44.62m 1.88% Sb

44.62m-45.46m 6.27% Sb

45.46m-46.3m 6.27% Sb

25.24m-26.17m 0.1% Sb

26.17m-26.62m 9.33% Sb

26.62m-27.13m 6.61% Sb

27.13m-27.92m 17.54% Sb

Fig 6. Examples of different styles of high grade antimony mineralisation in core.

Top: Typical “black breccia” in hole **25TCDC004**, 41.82 m-46.6 m

Bottom: East-trending vein zone in **25TCDC002**, 25.85 m-27.92 m, note irregular shape of many veins. Vertical white lines bars indicate sample boundaries with antimony assay results shown: details of results in Appendix 1. HQ size core, approximately 6.3 cm diameter.

2025 NW Array Drilling Program

Program Overview

Felix Gold is currently conducting an extensive program of drilling and trenching at the NW Array gold-antimony prospect. To date, a total of 52 RC holes for 2889.5 m (including 4 water monitoring bores) and 38 diamond holes for 2719.9 m have been completed. Drilling is targeted at better defining the extents and grade of high-grade antimony and gold mineralisation intersected in previous drilling and trenching campaigns. All drill widths are downhole, true widths vary.

Drill Results

Significant intersections are summarised in Table 1, with drill hole details in Table 2 and full sampling details presented in Appendix 1.

The best intersection in 25TCDC004 of **15.71 m @ 5.1% Sb from 37.61 m** is hosted within a distinctive black breccia unit (Fig. 6 and Fig. 7) currently interpreted as a mineralised fault zone dipping approximately 50° to the southeast. Estimated true width of the breccia unit in the vicinity of 25TCDC004 between 4 m and 9 m. A similar breccia was intersected in hole 25TCDC006 (3.67 m @ 2.5% Sb from 35.74m) and holes 25TCDC003 and 25TCDC012 (assays pending). Holes 25TCRC034 and 25TCRC033 are interpreted to have intersected a similar breccia zone based on Sb grades, logging of RC chips and nearby un-assayed diamond drill holes.

High grade antimony in 25TCDC002 (4.25 m @ 7.4% Sb from 26.17 m) is related to a zone of massive stibnite and minor quartz veining interpreted to be part of an east-west trending and steeply south dipping vein/vein zone between 1 m and 2 m true width (Fig. 6).



Fig 7. Typical “black breccia” in hole 25TCDC004, from 45.8 m. Metallic grey colour is massive stibnite breccia fill. HQ core, width of sample is 6.35cm. Part of sample 477214 from 45.46-46.3m that assayed 22.39% Sb.

Other significant intersections reported are also interpreted to be east-northeast to east-southeast trending and south dipping vein zones of varying thickness.

2025 Trenching Program

Limited trenching in 2025 (assays pending) included following up stibnite vein style mineralisation exposed in trenches during the previous year. Trench 25NWTR005 was excavated to better expose veining and gain further insights into structures and mineralisation that were originally uncovered in trenches 24NWTR001, 002 and 004. A drone image of the trench is presented in Fig. 3 and the main zone of stibnite veining can be seen in the floor. Mineralisation style varies greatly over a short strike distance, from a single massive stibnite-quartz vein up to 3m wide to a bifurcated vein and intensely fractured zone about 2m wide within felsic porphyry. A NNW to NW trending fault offsets the veining in an apparent dextral strike-slip sense by about 4 m.

This trench highlights the complexity of the mineralisation and shows how much variability in style and thickness can be expected in drilling.

Geological Setting

Geology of the NW Array project comprises metasedimentary schists of the Devonian-age Fairbanks Schist that were intruded by a gently east-dipping sill of Cretaceous porphyritic felsic rock with a granitic composition. Metasedimentary rocks include mainly meta-siltstone and mudstone with minor graphitic bands. Foliation in the metasediments predominantly dips gently south and its formation predates felsic porphyry intrusion. A regional scale set of NE trending strike-slip faults transect all rock units.

Regionally, gold and antimony mineralisation is interpreted to be related to Cretaceous granitic intrusions and synchronous fault structures as part of a 'reduced intrusion-related' system.

Antimony Mineralisation

Drilling and trenching at NW Array has revealed two main styles of antimony mineralisation:

1. Individual veins or close spaced zones of veining, fracturing and brecciation with quartz and coarse stibnite fill (eg Fig. 6 bottom)
2. Breccia zones with dominantly angular clasts of silicified wallrock and quartz veining where stibnite is present as fine-grained disseminations in breccia matrix and coarser, patchy breccia fill. Fine-grained siliceous alteration and disseminated stibnite produces a characteristic black colour and these zones are referred to as "black breccia" in holes 25TCDC004 etc (eg Fig. 6 top).

Breccias are interpreted to be related to faulting and are highly variable in width and antimony content. Felix geologists are currently refining the geological model, which includes late northwest-trending faulting offsetting both vein and breccia style mineralisation zones. The current understanding is that breccia zones dip on average 50° towards the southeast to east and veins dip about 60°-70° towards the south to south-southwest.

A simplified interpretation of the distribution of the two different styles of mineralisation is provided in plan view in Fig. 5 and an example cross-section is provided in Fig. 8. Widths of east-west trending veins may not

be accurate as in many cases they are interpreted from RC assays with a minimum sample length of 1.5 m. Offsetting NW trending faults, such as the one exposed in recent trench 25NWTR005, are likely responsible for some of the apparent variation in strike of veins. Further work including surface trenching is planned to better define the width and strike extent of these zones.

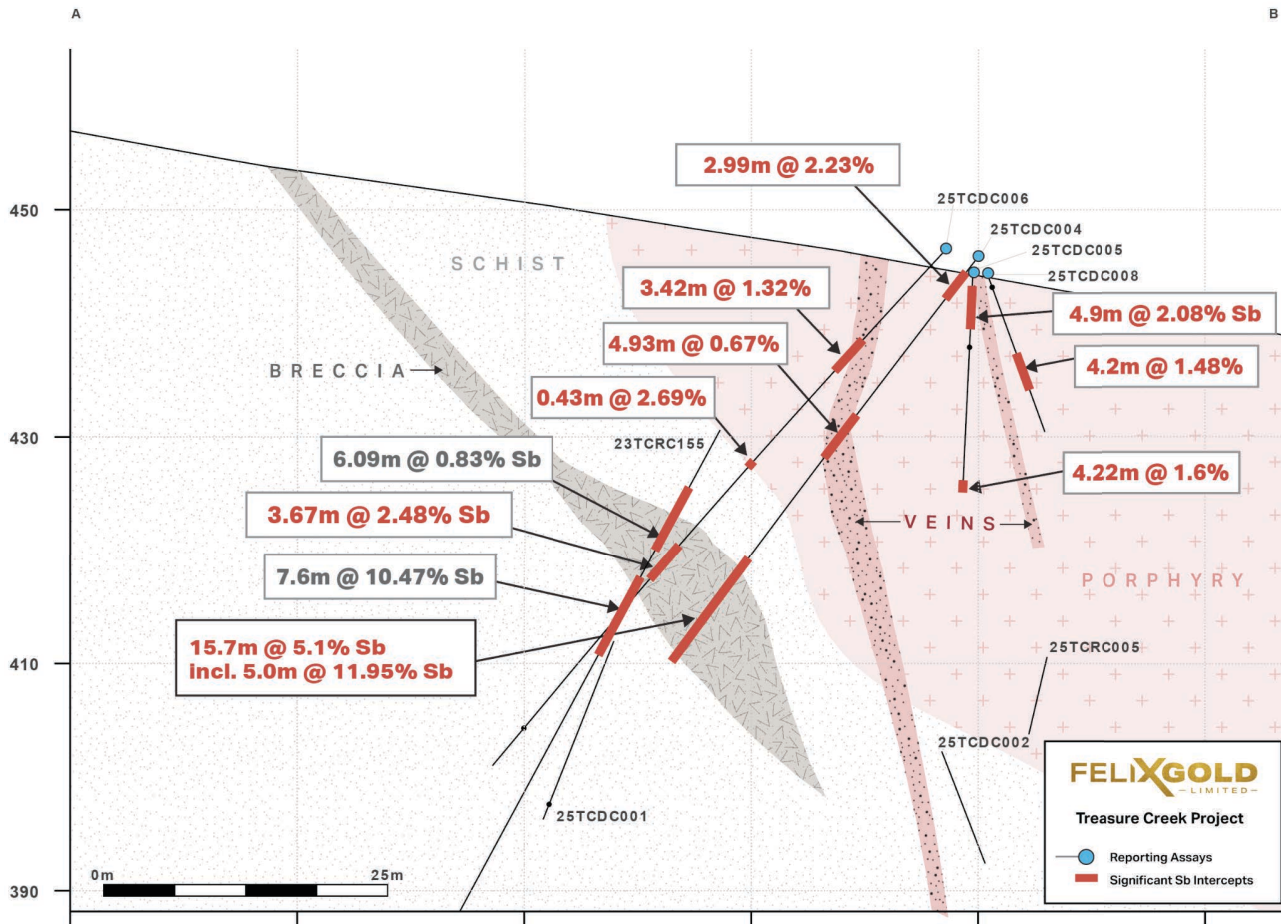


Fig 8. Cross Section A-B on Figure 5 showing relationship between black breccia and east-trending veining zones with all significant intersections. Section width +/- 12.5 m, note that some intersections do not align with zones on section due to distance from section plane and obliquity of zone strike.

Analysis of Antimony

Standard analysis by four-acid digest followed by ICP-MS has an upper detection limit of 10,000 ppm (1%) Sb and over-limit samples must be re-analysed by one of two different methods depending on the expected grade:

1. Sodium peroxide fusion followed by ICP-MS, with a detection limit of 0.05%-10% Sb
2. Titration using cerium sulphate with an upper detection limit of 100% Sb, a quantitative method for determining higher concentrations.

Four-acid ICP does not always record an over-limit result for antimony >1% due to volatile loss and formation of insoluble precipitates in acid digested samples. To accurately analyse higher grades, samples

were initially indicated as high-grade on sample submission sheets through visual estimates or portable XRF results. After a few sample batches, a 3000 ppm (0.3%) limit on 4A-ICP was also applied as an indicator to analyse by peroxide fusion. From studying all results to date it is now apparent that this limit may need to be reduced further to ensure accurate determination of antimony content. Some of the sample analyses below 1% Sb within mineralised zones may need to be re-assayed and may be upgraded as a result.

Further Work

The drill program at NW Array is ongoing, targeted at extending and better defining the grade, thickness and geometry of zones of mineralisation. Shallow trenching over the expected surface position of the breccia zone and east-trending vein zones is currently being planned. More assay results are anticipated in the coming weeks and will be released when they are available.

Table 1: Significant Antimony Intercepts (>0.2% Sb cut-off):

Hole ID		From (m)	To (m)	Interval (m)	Sb_pct	As_ppm
25TCDC004		37.61	53.32	15.71	5.055	2207
	Incl.	37.61	47.41	9.8	7.764	2452
	Incl.	41.27	46.3	5.03	11.951	1707
	And	2.21	5.2	2.99	2.232	3095
	Incl.	3.58	4.29	0.71	7.68	1228
	And	19.98	24.91	4.93	0.667	2877
25TCDC002		26.17	30.42	4.25	7.386	892
	Incl.	27.13	29.22	2.09	10.784	428
25TCRC034		56.39	64.01	7.62	2.968	456
	Incl.	56.39	60.96	4.57	4.354	497
	Incl.	56.39	57.91	1.52	11.8	582.9
	And	67.06	70.1	3.04	1.93	806
	And	36.58	42.67	6.09	0.61	980
	And	21.34	28.96	7.62	0.46	855
25TCRC027		15.24	21.34	6.1	2.141	455
25TCRC033		59.44	64.01	4.57	2.823	1071
	And	24.38	28.96	4.58	0.395	1227
25TCRC047		18.29	24.38	6.09	2.016	727
	Incl.	18.29	21.34	3.05	3.785	745
	And	1.52	9.14	7.62	0.52	1413
25TCDC005		3.69	8.63	4.94	2.083	682

Hole ID		From (m)	To (m)	Interval (m)	Sb_pct	As_ppm
	And	27.84	32.06	4.22	1.594	1547
25TCDC007		60.53	72.5	11.97	0.789	748
	<i>Incl.</i>	69.4	74.14	4.74	1.045	1722
	And	53.01	57.59	4.58	1.098	3045
	And	73.49	78.07	4.58	0.781	3097
25TCDC006		35.74	39.41	3.67	2.486	6907
	And	11.09	14.51	3.42	1.323	616
	And	0	4.57	4.57	0.36	996
	And	25.67	26.1	0.43	2.69	289
25TCRC046		6.1	12.19	6.09	1.335	777
	<i>Incl.</i>	9.14	10.67	1.53	3.27	391
	And	19.81	21.34	1.53	2.87	384
25TCDC008		10.3	14.5	4.2	1.484	1569
	<i>Incl.</i>	10.3	10.82	0.52	10.78	557
25TCRC044		19.81	22.86	3.05	1.187	596
	And	0	1.52	1.52	1.1	618
25TCRC045		4.57	12.19	7.62	0.436	754
	And	19.81	22.86	3.05	0.42	307
25TCRC035		18.29	21.34	3.05	0.929	1232
25TCRC038		0	3.05	3.05	0.879	587
25TCRC037		4.57	6.1	1.53	1.48	2078
25TCRC035		56.39	57.91	1.52	1.08	1184
	And	56.39	6.1	3.05	0.471	1038
25TCRC041		1.52	4.57	3.05	0.4	964
	And	56.39	57.91	1.52	0.67	1458
25TCRC020		32	36.58	4.58	0.242	892
	And	41.15	44.2	3.05	0.22	1535

Table 2: Hole Locations Treasure Creek Tenement, NW Array Target Area

HoleID	Hole Type	UTM_NAD83_Zone 06N			EOH (m)	UTM Azimuth	Dip
		East	North	RL (m)			
25TCDC001	DC	461829.21	7209062.17	440.723	61.78	254.5	-46.3
25TCDC002	DC	461831.33	7209061.05	440.789	61.26	199.5	-51.5
25TCDC004	DC	461805.58	7209016.09	443.865	62.83	359.6	-44.4
25TCDC005	DC	461806.73	7209017.66	444.201	68.49	47.6	-44.7
25TCDC006	DC	461803.76	7209018.39	444.035	61.39	334.6	-46
25TCDC007	DC	461806.65	7209015.23	444.059	82.3	216.4	-45.2
25TCDC008	DC	461812.78	7209020.99	443.622	53.77	70	-43.7
25TCDC009	DC	461807.32	7209013.14	444.411	60.81	292.8	-44.5
25TCRC001_MW	RC	461759.13	7208963.34	454.861	64.01	0	-90
25TCRC002	RC	461828.5	7209062.55	440.856	50.29	294.2	-59.6
25TCRC005	RC	461798.22	7208990.69	447.253	50.29	26.3	-59.8
25TCRC006	RC	461792.45	7208977.79	447.324	51.82	25.5	58.6
25TCRC011	RC	461775.47	7208937.8	450.859	50.29	31.7	-60.3
25TCRC020	RC	461751.49	7208876.39	452.21	48.77	49	-49.8
25TCRC027	RC	461747.63	7208932.86	457.334	60.96	5.9	-45.4
25TCRC033	RC	461730.83	7208889.58	459.315	70.1	14.6	-44.23
25TCRC034	RC	461729.31	7208889.48	459.73	76.2	2.6	-44.4
25TCRC035	RC	461758.45	7208971.13	456.319	60.96	58.5	-43.6
25TCRC036	RC	461757.98	7208971.74	456.511	51.82	30.4	-46.3
25TCRC037	RC	461757.32	7208970.66	456.657	54.86	1.8	-44.8
25TCRC038	RC	461756.16	7208965.92	456.77	50.29	334.4	-45.1
25TCRC039	RC	461755.74	7208969.05	456.859	51.82	229	-44.8
25TCRC040	RC	461756.48	7208968.03	456.865	50.29	180.2	-44.8
25TCRC041	RC	461737.52	7208974.15	461.178	67.06	59.6	-44.5
25TCRC043	RC	461734.18	7208976.19	462.101	50.29	359.4	-45.5
25TCRC044	RC	461736.31	7208977.04	461.717	57.91	181.1	-60.6
25TCRC045	RC	461735.5	7208968	461.461	50.29	230.7	-44.8
25TCRC046	RC	461722.99	7208940.48	464.366	51.82	6.6	-45.5
25TCRC047	RC	461723.52	7208941.92	463.924	60.96	21	-44.65

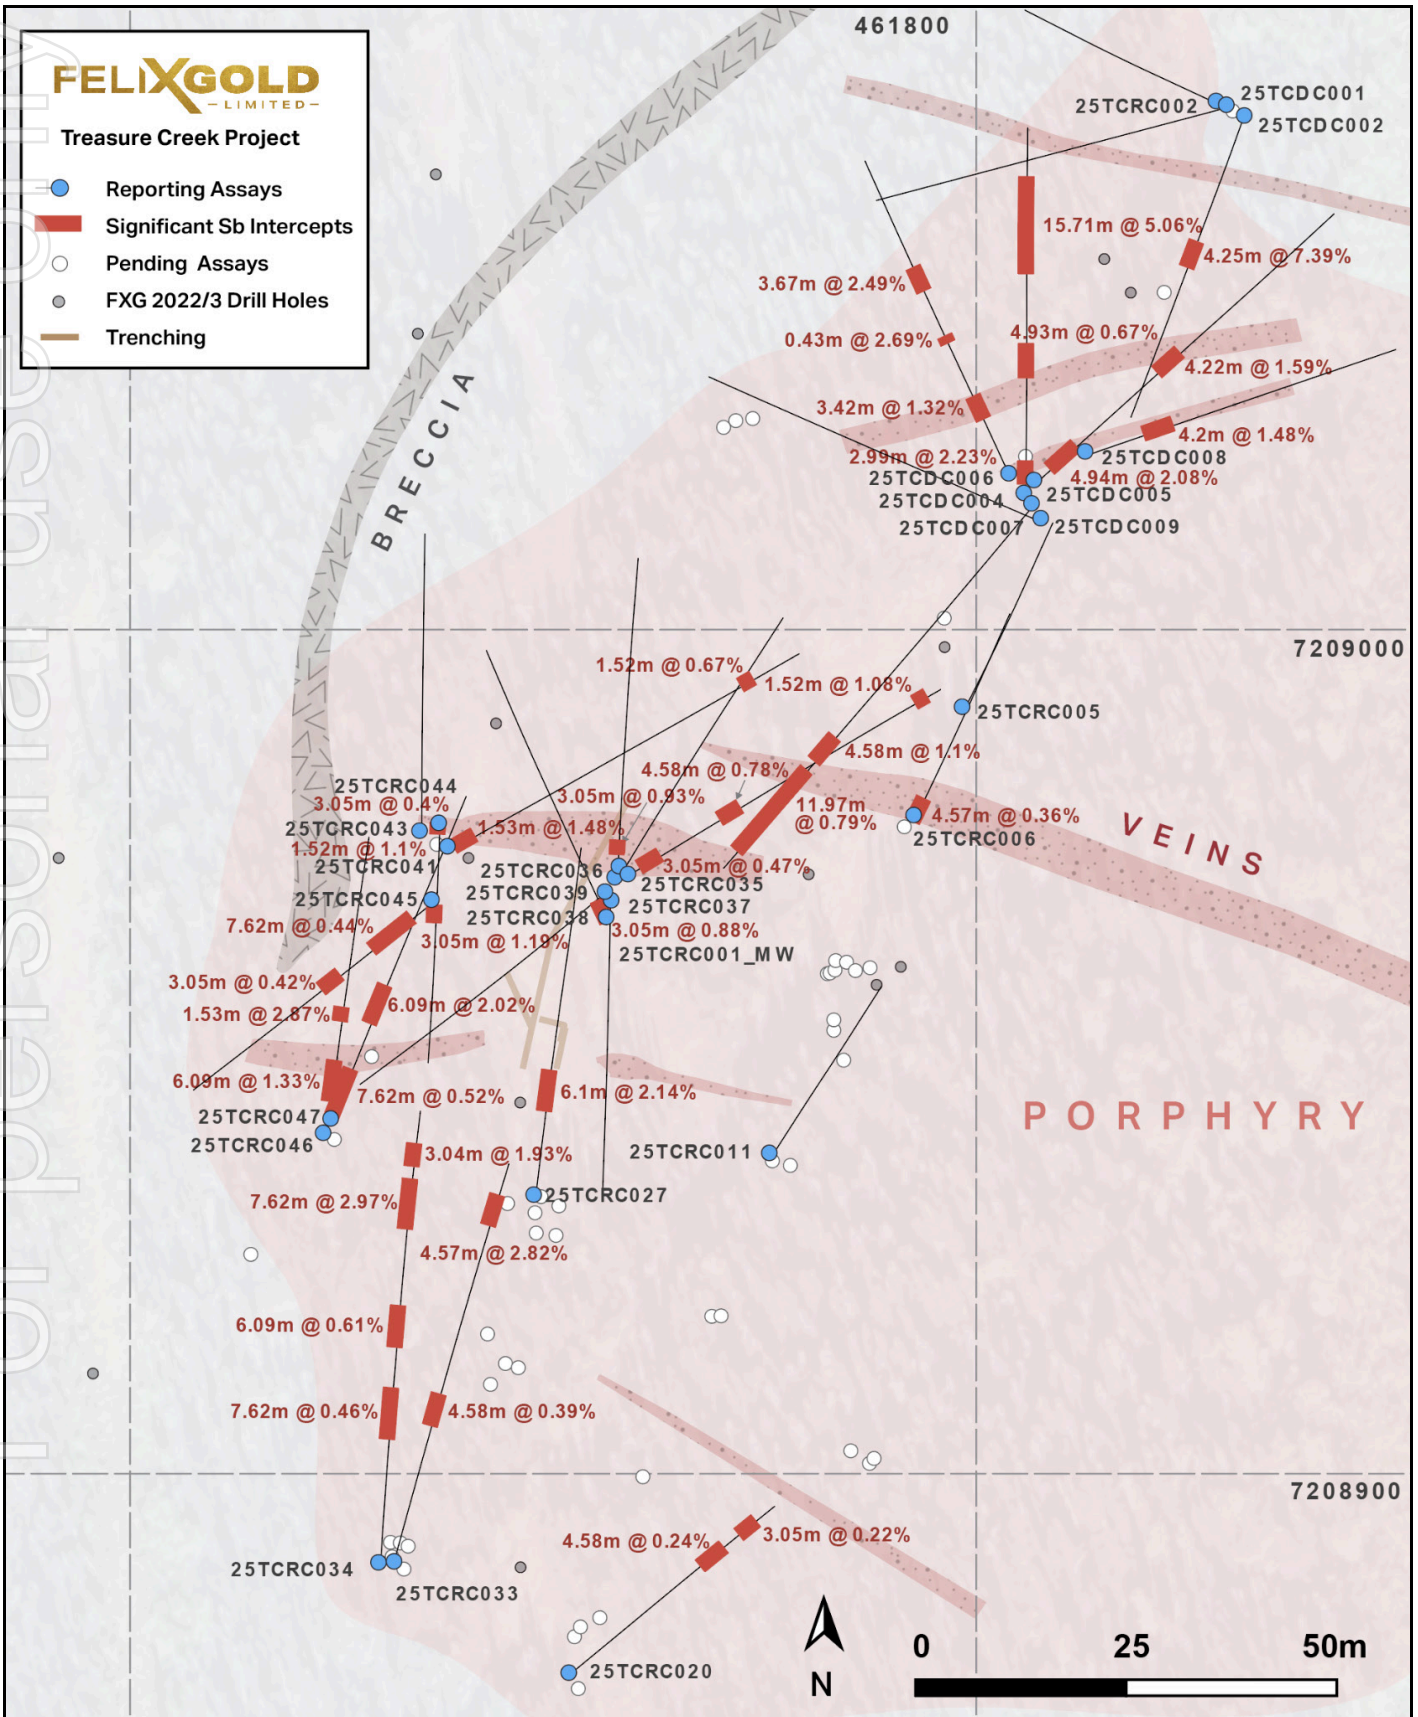


Fig 9. Drill hole location map with all reported intersections shown.

This ASX release was approved for release by the Board.

ENDS

Enquiries

Joseph Webb

Executive Director

Felix Gold Limited

Ph: +61 422 955 411

E: joe.webb@felixgold.com.au

Reach Markets

Investor and Media Relations

Ph: 1300 805 795

E: ir@reachmarkets.com.au

About Felix Gold

Felix Gold Limited (ASX: FXG) is an ASX-listed gold and critical minerals discovery business operating in the highly endowed Tintina Gold Province of Alaska in the United States.

Our flagship asset is a substantial landholding in the world-class Fairbanks Gold District, where historical gold production exceeds 16 Moz and historical antimony production shows grades up to 58% Sb from the Scrafford Mine at Treasure Creek, Alaska's second-largest historical antimony producer. In Fairbanks, our tenements sit within one of the largest gold production centres in the entire Tintina belt and lie in close proximity to both Kinross Gold's Tier 1 gold mine, Fort Knox, and the rapidly growing Freegold Ventures' discovery, Golden Summit.

Felix's key projects are located only 20 minutes from our operational base in the central mining services hub of Fairbanks City, Alaska. This base is a huge advantage for Felix with its existing infrastructure, low-cost power, skilled workforce and long history of gold and antimony production. It allows us to explore year-round and delivers genuine potential development pathways for our assets.

Felix's value proposition is simple: we are striving to be the premier gold and critical minerals exploration business in the Tintina Province through the aggressive pursuit and realisation of Tier 1 gold discoveries.

Visit the [Felix Gold website](#) for more information.

Competent Person Statements

The information in this report that relates to Exploration Results is based on information compiled by Dr James Lally, a Competent Person who is a Member of The Australian Institute of Geoscientists. Dr Lally is an independent consultant to Felix Gold Limited and has sufficient experience which is relevant to the style of mineralization and type of deposit under consideration and to the activity which is being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves.' Dr Lally consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Forward-Looking Statements

Various statements in this release constitute statements relating to intentions, future acts and events. Such statements are generally classified as “forward-looking statements” and involve known and unknown risks, uncertainties and other important factors that could cause those future acts, events and circumstances to differ materially from what is presented or implicitly portrayed herein. Words such as “anticipates”, “expects”, “intends”, “plans”, “believes”, “seeks”, “estimates” and similar expressions are intended to identify forward-looking statements. Felix cautions shareholders and prospective shareholders not to place undue reliance on these forward-looking statements and references to what events have transpired for other entities, which reflect the view of Felix only as of the date of this release. The forward-looking statements made in this release relate only to events as of the date on which the statements are made. Various statements in this release may also be based on the circumstances of other entities. Felix gives no assurance that the anticipated results, performance or achievements expressed or implied in those statements will be achieved. This release details some important factors and risks that could cause the actual results to differ from the forward-looking statements and circumstances of other entities in this release.

Previous Disclosure – 2012 JORC Code

The information in this release that relates to Exploration Results, Mineral Resources and Exploration Targets for Felix’s Fairbanks Gold Projects was extracted from the following ASX Announcements:

11 June 2025	Drilling/Studies Underway at High-Grade Antimony Project
29 May 2025	High-Grade Antimony Concentrate Results from Met Test Work
12 Feb 2025	High-Grade Antimony True Width of 3m at 50.26%
23 Jan 2025	High-grade Antimony and Gold Results from Trenching
28 Aug 2024	High Grade Antimony Assay Results up to 15.99% Sb
20 Jun 2024	Maiden NW Array Inferred Mineral Resource
19 Oct 2023	High Grade Antimony Assays up to 28% Sb
17 Jul 2023	High-Grade Critical Mineral Discovery at NW Array
09 Dec 2022	Scrafford Shear Potential Grows and High-Grade Antimony Initiatives Commenced
28 Jan 2022	Felix Gold Prospectus

A copy of such announcements is available to view on the Felix Gold Limited website felixgold.investorportal.com.au. **These previous reports were issued in accordance with the 2012 Edition of the JORC Code.** The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

JORC REPORTING TABLES

Section 1: Sampling Techniques and Data

Criteria	Explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Reverse Circulation drilling was sampled on 1.52 m (5 feet) intervals from which 2-3kg was split and pulverised / crushed to produce samples for ICP multi-element analysis, high grade Sb analysis and gold analysis by PhotonAssay™ Diamond drill core was sampled over downhole lengths between 0.3m and 2.5m (average 1m) to produce samples for ICP multi-element analysis, high grade Sb analysis and gold analysis by PhotonAssay™ . Diamond drill-core sample intervals were based on changes in geology.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Reverse Circulation (RC) holes were drilled with a 76mm (3 inch) face-sampling hammer with 73mm (2.875 inch) drill rods and 102mm (4 inch) casing. Diamond holes were wireline HQ (63.5mm diameter) holes. The diamond drill program reported here was undertaken by C-n-C Drilling LLC utilizing CS 14 skid mounted drill. Core was oriented wherever possible for collection of structural data using a Reflex ACTIII

For personal use only

Criteria	Explanation	Commentary
		<ul style="list-style-type: none"> The core was reconstructed into continuous runs on a cradle for orientation marking before it was laid in the box at the drill.
Drill sample recovery	<ul style="list-style-type: none"> <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> RC samples were visually assessed for recovery and were considered representative of bedrock intersected. Visual inspection of samples estimated no significant loss of sample from each 1.52m interval. No relationship between sample recovery and reported analyses has been established. Diamond core recovery was determined by measuring the total length of core in the barrel over the run length. Hole depths were checked against the drillers core blocks at the time of processing. Inconsistencies between the logging and the driller's depth measurement blocks were investigated. Diamond core samples are considered dry. The recovery and condition are recorded between every core block. Generally, recovery is 98-100% but on very rare occasions in weathered material or very broken material, recovery was down to 50%. For Diamond drilling, contractors adjust the rate of drilling and method of recovery issues arise No significant sample loss or bias has been noticed
Logging	<ul style="list-style-type: none"> <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> RC chips and diamond core were qualitatively logged for lithology and alteration with semi-quantitative logs for oxide and sulphide mineralisation. RC and diamond holes were logged in for their entire lengths. Logging detail is sufficient to support geological modelling and mineral resource estimation. Representative RC chip samples from each 1.52m interval were placed in chip trays and photographed. All drill core was photographed wet using a digital camera and stored on the site server. Core logging included RQD and geotechnical measurements. Structural measurements of veins, fractures and foliation were taken from core using a strip protractor.

For personal use only

Criteria	Explanation	Commentary
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> RC intervals were sub-sampled using a 3-tier dry sample splitter attached to the drill rig cyclone. Two samples were taken from each 1.52m interval, collecting ~12.5% each of the total sample, ranging in volume from 2-3kg. One sample was retained for archival purposes while the other was sent to the analytical laboratory. Diamond core sampling intervals were determined by the logging geologist, with sampling breaks at major changes in lithology/alteration or mineralisation. Sub-samples were taken by sawing the HQ core in half along its axis using a Dewalt tile saw on-site. One half of the core was bagged for analysis and the other half retained in the core tray. Sample sizes for RC and core samples are considered appropriate for both gold and antimony mineralisation. Quality control procedures for ensuring sample representivity in RC sampling comprised the use of field duplicates and pulp duplicates at a rate of 1 in 20, alternating between the two duplicate types. Quality control procedures for ensuring sample representivity in core sampling comprised the use of coarse crush duplicate splits from half core samples and pulp duplicates at a rate of 1 in 20, alternating between the two duplicate types. Duplicate results show that for RC and diamond drilling sampling is representative for antimony, with variability in results linked to assay methods rather than sampling (see below).
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg</i> 	<ul style="list-style-type: none"> All samples were submitted to MSA Laboratories in Vancouver, Canada for analysis. 4 acid digest with ICP-MS finish was used to analyse for a full suite of trace elements: Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn, Zr. 4-Acid ICP-MS has an upper detection limit (UDL) of 1% for antimony. Suspected very high-grade (>10% Sb) samples were flagged in sample submission sheets and

For personal use only

Criteria	Explanation	Commentary
	<p><i>standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></p>	<p>analysed using a wet titration method. Samples not flagged as high grade, but which returned above UDL assays for ICP were re-analysed using a peroxide fusion with ICP finish. The cut-off ICP Sb assay for re-analysis by peroxide fusion was changed to 3000ppm after results indicated that volatile loss and insoluble precipitate formation was causing some ICP results to severely under-call the Sb grade.</p> <ul style="list-style-type: none"> No gold assay results are reported in this announcement, although gold is being analysed using the PhotonAssay™ method due to suspected coarse gold effects noted in earlier drilling programs. 5% of samples are also being cross-checked by screen fire assay. Quality control procedures include the insertion of certified reference materials, coarse blanks (locally source basalt) and field and pulp duplicates. Acceptable levels of accuracy and precision have been established, notwithstanding the issues with some Sb analyses described above.
<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> All significant and anomalous intersections are verified by a senior manager during the drill hole validation process. All primary data was collected in the field by Felix Gold contract staff and supplied in digital format to Felix Gold. No twinned holes were drilled for this data set. All data is stored and validated within a Plexer relational database managed by Gad Solutions in Brisbane, Australia. Data undergoes QA/QC validation prior to being accepted and loaded in the database. Assay results are merged when received electronically from the laboratory. A senior geologist reviews the dataset checking for the correct merging of results and that all data has been received and entered. Any adjustments to this data are recorded permanently in the database. Digital records of assays are stored electronically. No adjustments have been made to the final assay data reported by the laboratory

For personal use only

Criteria	Explanation	Commentary
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> RC and diamond hole collar locations are initially located by handheld GPS to an accuracy of 3m. After completion of drilling, all drill collars are located with a differential GPS system to an accuracy of 10 cm. Locations are given in NAD83/UTM Zone 6N projection. Diagrams and location table are provided in the report. Topographic control is by detailed airphoto, DTM file, and differential GPD Downhole surveys were conducted using an Axis Champ north-seeking gyro tool which collected data points approximately every 3 m downhole. True north azimuths supplied from the gyro were corrected to UTM grid north.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Variable drill hole spacings were used to adequately test targets and are determined from geochemical, geophysical and geological data with historical drilling information. Data spacing is sufficient to establish geological and grade continuity to a level appropriate for a future update of the current mineral resource estimate at NW Array. Reported intersections have been composited using a cut-off grade of 0.2% Sb.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Drill holes are oriented at various angles to mineralised structures, in part due to access restrictions for drill pad locations and also due to the interpreted difference in strike and dip of the main mineralised structures. Although individual holes may not be oriented optimally for sampling some structures, there is no overall sampling bias introduced.

For personal use only

Criteria	Explanation	Commentary
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples were collected by company personnel on site, to the company logging and cutting office and delivered direct to the preparation laboratory via company personnel. A transport contractor takes the prepared samples to Vancouver.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> No audits or reviews have been completed at this early stage of the drilling program.

Section 2: Reporting of Exploration Results

Criteria	Explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area. 	<ul style="list-style-type: none"> The Treasure Creek Project is located in the Fairbanks Gold Mining District in central Alaska. The Treasure Creek Project area consists of 238 active Alaska State Mining Claims (MCs) and 2 Upland Mining Leases (UMLs) for a total of 11687.31 hectares. There are also 4 pending MCs for a total of 64.75 hectares. The Treasure Creek Project is a consolidation of mining claims and upland mining leases held by Oro Grande Mining Claims LLC (10 MCs and 1 UML), Goldstone Resources LLC (19 MCs and 1 UML), Wally Trudeau (5 MCs), and Felix Gold Ltd (204 MCs). Felix has acquired the mining claims or the exclusive rights to explore and an option to purchase the mining claims. Felix has acquired all requisite operating permits to conduct the current exploration program.

Criteria	Explanation	Commentary
Exploration done by other parties	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> Gold was first discovered at Fairbanks in 1902, since then the wider area has been the subject of an enormous amount of exploration and placer mining by companies and individual prospectors. Since 1969, the Treasure Creek area has been explored by companies including Cantu Minerals, Mohawk Oil, Aalenian Resources/Silverado Mines, American Copper and Nickel Company (ACNC), Amax, Goldstone/Our Creek (OCMC), Canex Resources, Tri-Con Mining and BHP-Utah. Most of the work was focused on Au-Sb mines at and around Scrafford, and in the eastern third of Felix's current tenure. Several diamond holes were completed in the NW Array prospect area.
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> Hard-rock gold mineralisation styles in Felix's Treasure Creek prospect are currently dominated by shear- and fault-vein hosted gold ± antimony deposits, including historic mines at Scrafford (Sb). Broad zones of disseminated and stockwork gold mineralisation are also found within Cretaceous age intrusive rocks, such as at Fort Knox (operated by Kinross) and Golden Summit (Freegold Ventures). Gold mineralisation is linked to a causative intrusion of Cretaceous- Tertiary felsic to intermediated composition. Proximity to the intrusion, structural setting and host rock all control the specific style of deposit produced. Antimony mineralisation is also associated with these felsic sill-like bodies. Post-mineralisation cover in the Fairbanks area comprises valley-fill gravels plus locally thick accumulations of wind-blown silt (loess).

For personal use only

Criteria	Explanation	Commentary
Drill hole information	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> • Refer to the body of the text of the announcement for all drill hole information. • No material information has been excluded.
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • Significant Antimony intercepts are regarded as those having minimum continuous mineralisation of 3.0m @ >0.20% Sb. Assays were aggregated by length-weighted averaging with no top-cutting applied. • No metal equivalents have been reported.

For personal use only

Criteria	Explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> • All intercepts quoted are downhole widths. • The geometry of mineralisation with respect to the hole angle varies due to the wide range of drilling azimuths and variable strike and dip of mineralised zones. In general the east-trending vein zones are between 1 and 3 m true width, and the 'black breccia' zone averages about 4-5m true width. • Further drill results should verify the orientations of mineralisation as presented in this announcements
Diagrams	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • Refer to figures in the body of the text.
Balanced reporting	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • Antimony assays for all samples in the reported drill holes are included as an appendix to this announcement.
Other substantive exploration data	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • Trenching completed earlier this year and in 2024 confirmed the presence of east-striking and south dipping zones of complex stibnite veining that vary in width and tenor over short strike lengths. • A maiden Mineral Resource estimate was reported on 20th June 2024 for gold mineralisation at NW Array (FXG announcement 20 June 2024). Antimony was not included in the estimate due to lack of assay data • Metallurgical testwork on bulk samples was completed earlier in 2025 on bulk samples from trenching (FXG Announcement 29 May 2025). Testwork achieved 85% Sb recovery, producing 69% Sb grade

Criteria	Explanation	Commentary
		<p>concentrates via gravity and flotation processes.</p> <ul style="list-style-type: none"> • Bulk density has been determined by the water immersion method on drill core samples, giving a density for porphyry of 2.59 g/cm³ and schist of 2.7 g/cm³. • Four water monitoring bore holes were drilled as part of the 2025 drilling program and data on groundwater levels has been collected over 2 quarters.
Further work	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • The 2025 drill program at NW array is ongoing, mainly targeted at better definition of the known mineralised zones, in particular the high-grade “black breccia” • The mineralised system remains open at depth and along strike to the north and south.

For personal use only

APPENDIX: Drillhole Assay Results

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC001	3.29	4.45	1.16	0.021	1241.3
25TCDC001	4.45	6.03	1.58	0.042	598
25TCDC001	6.03	7.8	1.77	0.012	263.2
25TCDC001	7.8	9.26	1.46	0.009	243.5
25TCDC001	9.26	10.97	1.71	0.016	306.8
25TCDC001	10.97	12.15	1.18	0.006	187.6
25TCDC001	12.15	13.9	1.75	0.03	1423.6
25TCDC001	13.9	15.76	1.86	0.069	1205
25TCDC001	15.76	17.04	1.28	0.016	1175.3
25TCDC001	17.04	18.03	0.99	0.011	763
25TCDC001	18.03	19.54	1.51	0.009	651
25TCDC001	19.54	22.1	2.56	0.005	420.5
25TCDC001	22.1	22.7	0.6	0.005	211.8
25TCDC001	22.7	24.08	1.38	0.004	379.8
25TCDC001	24.08	25.36	1.28	0.01	637.7
25TCDC001	25.36	26.94	1.58	0.004	408.6
25TCDC001	26.94	27.8	0.86	0.009	1453.2
25TCDC001	27.8	28.4	0.6	0.009	696.7
25TCDC001	28.4	29.38	0.98	0.009	951.9
25TCDC001	29.38	30.52	1.14	0.012	1458.9
25TCDC001	30.52	32.13	1.61	0.037	965.5
25TCDC001	32.13	33.04	0.91	0.011	449.2
25TCDC001	33.04	33.83	0.79	0.01	329.9
25TCDC001	33.83	34.87	1.04	0.003	97.1
25TCDC001	34.87	35.47	0.6	0.005	291.1
25TCDC001	35.47	36.87	1.4	0.01	156
25TCDC001	36.87	37.8	0.93	0.017	329.5
25TCDC001	37.8	39.32	1.52	0.022	3946.9
25TCDC001	39.32	40.11	0.79	0.069	10000
25TCDC001	40.11	40.74	0.63	0.119	10000
25TCDC001	40.74	41.1	0.36	0.258	4036
25TCDC001	41.1	42.34	1.24	0.028	1215
25TCDC001	42.34	43.29	0.95	0.073	1350.3
25TCDC001	43.29	43.92	0.63	0.027	499
25TCDC001	43.92	45.35	1.43	0.007	236.7
25TCDC001	45.35	46.88	1.53	0.012	159.5
25TCDC001	46.88	48.01	1.13	0.007	100.7
25TCDC001	48.01	49.1	1.09	0.021	305
25TCDC001	49.1	50.06	0.96	0.02	556.8
25TCDC001	50.06	51.55	1.49	0.026	525.7
25TCDC001	51.55	53.2	1.65	0.008	304.7

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC001	53.2	54.44	1.24	0.003	107.1
25TCDC001	54.44	55.65	1.21	0.005	286.4
25TCDC001	55.65	56.88	1.23	0.003	176.1
25TCDC001	56.88	58.31	1.43	0.005	177.8
25TCDC001	58.31	59.2	0.89	0.005	713
25TCDC001	59.2	60.66	1.46	0.006	110.2
25TCDC001	60.66	61.78	1.12	0.003	46.6
25TCDC002	1.95	3.78	1.83	0.01	821.1
25TCDC002	3.78	4.94	1.16	0.016	1124
25TCDC002	4.94	6.22	1.28	0.011	996.6
25TCDC002	6.22	7.62	1.4	0.014	1666.3
25TCDC002	7.62	9.11	1.49	0.011	2603.3
25TCDC002	9.11	10.39	1.28	0.021	1327.3
25TCDC002	10.39	11.34	0.95	0.025	1600.9
25TCDC002	11.34	12.17	0.83	0.02	1502.2
25TCDC002	12.17	13.36	1.19	0.015	610.8
25TCDC002	13.36	14.85	1.49	0.008	850.3
25TCDC002	14.85	16.07	1.22	0.026	927
25TCDC002	16.07	17.38	1.31	0.028	486.2
25TCDC002	17.38	18.17	0.79	0.016	331.6
25TCDC002	18.17	19.3	1.13	0.036	347.4
25TCDC002	19.3	20.77	1.47	0.04	618.1
25TCDC002	20.77	21.77	1	0.006	211.7
25TCDC002	21.77	22.89	1.12	0.248	2195.3
25TCDC002	22.89	23.84	0.95	0.022	840.4
25TCDC002	23.84	25.24	1.4	0.031	1532.5
25TCDC002	25.24	26.17	0.93	0.1	1113.9
25TCDC002	26.17	26.62	0.45	9.33	281.1
25TCDC002	26.62	27.13	0.51	6.61	411.9
25TCDC002	27.13	27.92	0.79	17.54	359.7
25TCDC002	27.92	28.65	0.73	0.54	306.9
25TCDC002	28.65	29.22	0.57	14.54	679.3
25TCDC002	29.22	30.42	1.2	1.07	2132.2
25TCDC002	30.42	31.79	1.37	0.055	765.9
25TCDC002	31.79	33.07	1.28	0.031	1118.8
25TCDC002	33.07	34.28	1.21	0.03	1958.1
25TCDC002	34.28	35.37	1.09	0.031	2762.1
25TCDC002	35.37	36.58	1.21	0.018	5180.8
25TCDC002	36.58	38.04	1.46	0.015	5266.6
25TCDC002	38.04	39.03	0.99	0.013	1534
25TCDC002	39.03	40.34	1.31	0.035	1322.4
25TCDC002	40.34	41.48	1.14	0.014	1011.9
25TCDC002	41.48	42.9	1.42	0.014	846.6
25TCDC002	42.9	44.05	1.15	0.011	616.4
25TCDC002	44.05	45.24	1.19	0.009	518

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC002	45.24	46.48	1.24	0.016	913
25TCDC002	46.48	48.01	1.53	0.015	553.7
25TCDC002	48.01	49.04	1.03	0.026	2860.4
25TCDC002	49.04	50.38	1.34	0.017	1434.4
25TCDC002	50.38	51.47	1.09	0.03	1620
25TCDC002	51.47	52.47	1	0.026	1456.2
25TCDC002	52.47	53.7	1.23	0.041	1355.8
25TCDC002	53.7	55.02	1.32	0.025	692.1
25TCDC002	55.02	56.48	1.46	0.032	1009.9
25TCDC002	56.48	57.45	0.97	0.032	696.9
25TCDC002	57.45	58.76	1.31	0.128	1833.7
25TCDC002	58.76	59.95	1.19	0.056	1301.8
25TCDC002	59.95	61.26	1.31	0.044	1430.3
25TCDC004	1.26	2.21	0.95	0.1	2155.8
25TCDC004	2.21	2.7	0.49	0.76	5869.8
25TCDC004	2.7	3.58	0.88	0.272	2670.5
25TCDC004	3.58	4.29	0.71	7.68	1228.1
25TCDC004	4.29	5.2	0.91	0.67	3469
25TCDC004	5.2	6.15	0.95	0.162	1817.9
25TCDC004	6.15	7.47	1.32	0.058	1515.1
25TCDC004	7.47	8.67	1.2	0.031	771.1
25TCDC004	8.67	9.94	1.27	0.029	778.4
25TCDC004	9.94	11.07	1.13	0.024	749.2
25TCDC004	11.07	12.8	1.73	0.026	2178.6
25TCDC004	12.8	14.14	1.34	0.017	4369.9
25TCDC004	14.14	15.43	1.29	0.023	5234.5
25TCDC004	15.43	16.76	1.33	0.018	2782.3
25TCDC004	16.76	18	1.24	0.028	1579.4
25TCDC004	18	19.18	1.18	0.043	2800.4
25TCDC004	19.18	19.98	0.8	0.067	802.8
25TCDC004	19.98	21.1	1.12	0.229	1672.1
25TCDC004	21.1	22.3	1.2	1.16	3228.1
25TCDC004	22.3	23.52	1.22	1.11	4333.7
25TCDC004	23.52	24.91	1.39	0.206	2267.5
25TCDC004	24.91	26.11	1.2	0.03	2100.9
25TCDC004	26.11	27.43	1.32	0.02	2468.4
25TCDC004	27.43	28.74	1.31	0.018	2641.8
25TCDC004	28.74	29.63	0.89	0.014	1613.4
25TCDC004	29.63	30.48	0.85	0.017	2466.2
25TCDC004	30.48	31.6	1.12	0.01	5210
25TCDC004	31.6	32.63	1.03	0.011	2217.3
25TCDC004	32.63	33.95	1.32	0.018	5318.6
25TCDC004	33.95	35.4	1.45	0.014	2415.5
25TCDC004	35.4	36.5	1.1	0.056	3121
25TCDC004	36.5	37.61	1.11	0.123	1574.1

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC004	37.61	38.56	0.95	1.56	5313.3
25TCDC004	38.56	39.43	0.87	0.29	6608.1
25TCDC004	39.43	40.4	0.97	3	884.7
25TCDC004	40.4	41.27	0.87	5.01	620.5
25TCDC004	41.27	42.09	0.82	12.1	2245.8
25TCDC004	42.09	43.14	1.05	6.2	1186.5
25TCDC004	43.14	43.87	0.73	24.93	1219.9
25TCDC004	43.87	44.62	0.75	1.88	2187.9
25TCDC004	44.62	45.46	0.84	6.27	958.5
25TCDC004	45.46	46.3	0.84	22.39	2573.7
25TCDC004	46.3	46.97	0.67	9.49	1517
25TCDC004	46.97	47.41	0.44	1.38	5068.9
25TCDC004	47.41	48.62	1.21	0.082	3141.9
25TCDC004	48.62	49.65	1.03	0.58	2092.4
25TCDC004	49.65	50.26	0.61	0.58	1935
25TCDC004	50.26	51.63	1.37	0.088	1259.5
25TCDC004	51.63	53.32	1.69	1.28	1052.6
25TCDC004	53.32	54.47	1.15	0.106	301.7
25TCDC004	54.47	55.48	1.01	0.078	619.3
25TCDC004	55.48	56.89	1.41	0.016	251.4
25TCDC004	56.89	57.9	1.01	0.016	187.5
25TCDC004	57.9	59.18	1.28	0.025	228.4
25TCDC004	59.18	60.8	1.62	0.036	166.3
25TCDC004	60.8	61.75	0.95	0.007	72.8
25TCDC004	61.75	62.83	1.08	0.012	231.3
25TCDC005	1.55	2.72	1.17	0.067	1307.9
25TCDC005	2.72	3.69	0.97	0.07	1941.1
25TCDC005	3.69	4.52	0.83	1.09	2363.8
25TCDC005	4.52	5.49	0.97	0.274	627.7
25TCDC005	5.49	6.15	0.66	5.66	292.2
25TCDC005	6.15	6.74	0.59	7.56	516.4
25TCDC005	6.74	7.5	0.76	0.245	168.7
25TCDC005	7.5	8.02	0.52	1.16	118.6
25TCDC005	8.02	8.63	0.61	0.221	183.2
25TCDC005	8.63	9.2	0.57	0.147	204.9
25TCDC005	9.2	10.16	0.96	0.088	1087.1
25TCDC005	10.16	10.94	0.78	0.148	419.1
25TCDC005	10.94	11.97	1.03	0.058	82
25TCDC005	11.97	13.11	1.14	0.128	185.5
25TCDC005	13.11	14.14	1.03	0.015	113.8
25TCDC005	14.14	14.96	0.82	0.015	232.2
25TCDC005	14.96	16.2	1.24	0.013	188.9
25TCDC005	16.2	17.6	1.4	0.013	330.3
25TCDC005	17.6	18.76	1.16	0.011	565.8
25TCDC005	18.76	19.73	0.97	0.01	384.4

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC005	19.73	20.73	1	0.017	836.2
25TCDC005	20.73	21.55	0.82	0.05	1189.2
25TCDC005	21.55	22.25	0.7	0.024	750.1
25TCDC005	22.25	23.1	0.85	0.03	807.5
25TCDC005	23.1	23.86	0.76	0.022	1319.9
25TCDC005	23.86	24.95	1.09	0.085	4242.2
25TCDC005	24.95	25.71	0.76	0.065	3043.2
25TCDC005	25.71	26.53	0.82	0.034	2541.7
25TCDC005	26.53	27.11	0.58	0.019	1782.2
25TCDC005	27.11	27.84	0.73	0.02	2034.9
25TCDC005	27.84	28.22	0.38	7.73	864.9
25TCDC005	28.22	28.77	0.55	3.93	2181
25TCDC005	28.77	30.02	1.25	0.28	2125.6
25TCDC005	30.02	30.72	0.7	0.052	1585.3
25TCDC005	30.72	31.53	0.81	0.016	1053.4
25TCDC005	31.53	32.06	0.53	2.32	718.4
25TCDC005	32.06	32.62	0.56	0.015	1330.3
25TCDC005	32.62	33.74	1.12	0.021	1528.7
25TCDC005	33.74	34.9	1.16	0.017	1033.2
25TCDC005	34.9	35.9	1	0.016	1363.3
25TCDC005	35.9	37	1.1	0.021	1898.4
25TCDC005	37	38.2	1.2	0.025	2210.8
25TCDC005	38.2	38.96	0.76	0.039	1364.8
25TCDC005	38.96	39.84	0.88	0.031	1840.1
25TCDC005	39.84	40.9	1.06	0.012	2230.4
25TCDC005	40.9	41.5	0.6	0.008	1036.2
25TCDC005	41.5	41.98	0.48	0.98	1260.2
25TCDC005	41.98	42.95	0.97	0.018	715.7
25TCDC005	42.95	43.79	0.84	0.018	393.1
25TCDC005	43.79	44.87	1.08	0.018	786.8
25TCDC005	44.87	45.7	0.83	0.013	1338.6
25TCDC005	45.7	46.94	1.24	0.016	2595.7
25TCDC005	46.94	47.8	0.86	0.021	1209.5
25TCDC005	47.8	48.4	0.6	0.026	4586.8
25TCDC005	48.4	49.41	1.01	0.071	10000
25TCDC005	49.41	50.7	1.29	0.037	4991.6
25TCDC005	50.7	51.4	0.7	0.05	3771.6
25TCDC005	51.4	51.95	0.55	0.051	3433.7
25TCDC005	51.95	53.13	1.18	0.017	2731
25TCDC005	53.13	54.24	1.11	0.011	1097.6
25TCDC005	54.24	55.4	1.16	0.009	680.5
25TCDC005	55.4	56.24	0.84	0.008	885.9
25TCDC005	56.24	57.15	0.91	0.009	856.6
25TCDC005	57.15	57.73	0.58	0.035	1453.7
25TCDC005	57.73	58.6	0.87	0.026	476.8

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC005	58.6	59.6	1	0.014	1658.9
25TCDC005	59.6	60.75	1.15	0.013	1244.5
25TCDC005	60.75	62.14	1.39	0.035	1440.4
25TCDC005	62.14	63.62	1.48	0.039	1423.1
25TCDC005	63.62	64.5	0.88	0.03	913.4
25TCDC005	64.5	65.2	0.7	0.024	1032.1
25TCDC005	65.2	65.95	0.75	0.026	1017.4
25TCDC005	65.95	67.24	1.29	0.017	667.8
25TCDC005	67.24	68.49	1.25	0.042	550.9
25TCDC006	0	1.35	1.35	0.084	729.7
25TCDC006	1.35	2.54	1.19	0.044	728.9
25TCDC006	2.54	3.5	0.96	0.07	742
25TCDC006	3.5	4.76	1.26	0.053	901.1
25TCDC006	4.76	5.95	1.19	0.027	495
25TCDC006	5.95	7.08	1.13	0.072	895.4
25TCDC006	7.08	8.03	0.95	0.116	904.6
25TCDC006	8.03	9.08	1.05	0.077	1171.8
25TCDC006	9.08	11.09	2.01	0.094	2502.2
25TCDC006	11.09	11.59	0.5	0.265	1567.5
25TCDC006	11.59	12.11	0.52	5.14	209.3
25TCDC006	12.11	12.68	0.57	0.18	743.2
25TCDC006	12.68	13.42	0.74	0.045	816.6
25TCDC006	13.42	13.79	0.37	1.48	210.7
25TCDC006	13.79	14.51	0.72	1.44	148.7
25TCDC006	14.51	15.9	1.39	0.037	1092.9
25TCDC006	15.9	16.6	0.7	0.047	1384.9
25TCDC006	16.6	17.35	0.75	0.052	2273
25TCDC006	17.35	18.44	1.09	0.018	2802.4
25TCDC006	18.44	19.15	0.71	0.033	833.9
25TCDC006	19.15	19.85	0.7	0.026	942
25TCDC006	19.85	20.45	0.6	0.016	582.2
25TCDC006	20.45	21.61	1.16	0.045	2080.4
25TCDC006	21.61	22.62	1.01	0.031	1335
25TCDC006	22.62	23.6	0.98	0.034	695.5
25TCDC006	23.6	24.6	1	0.037	455.5
25TCDC006	24.6	25.67	1.07	0.039	430.5
25TCDC006	25.67	26.1	0.43	2.69	289.3
25TCDC006	26.1	26.58	0.48	0.021	381.7
25TCDC006	26.58	27.3	0.72	0.012	905.3
25TCDC006	27.3	27.8	0.5	0.013	982.4
25TCDC006	27.8	28.17	0.37	0.019	3364.7
25TCDC006	28.17	28.68	0.51	0.017	1536.8
25TCDC006	28.68	29.9	1.22	0.01	4397.6
25TCDC006	29.9	31.05	1.15	0.009	4437.7
25TCDC006	31.05	31.55	0.5	0.02	2122.1

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC006	31.55	32.05	0.5	0.051	4793.1
25TCDC006	32.05	32.77	0.72	0.13	3366.7
25TCDC006	32.77	33.57	0.8	0.09	5865.5
25TCDC006	33.57	34.33	0.76	0.13	8318.9
25TCDC006	34.33	35.3	0.97	0.18	10000
25TCDC006	35.3	35.74	0.44	0.18	5059.4
25TCDC006	35.74	36.27	0.53	1.25	5316.9
25TCDC006	36.27	36.83	0.56	5.65	1908.6
25TCDC006	36.83	37.39	0.56	0.49	7071.8
25TCDC006	37.39	37.8	0.41	3.5	6193.9
25TCDC006	37.8	38.37	0.57	5.66	8006.9
25TCDC006	38.37	38.95	0.58	0.45	10000
25TCDC006	38.95	39.41	0.46	0.22	10000
25TCDC006	39.41	39.92	0.51	0.05	3073.9
25TCDC006	39.92	41.05	1.13	0.045	1438.5
25TCDC006	41.05	42.12	1.07	0.034	498.6
25TCDC006	42.12	42.6	0.48	0.033	535.7
25TCDC006	42.6	43.83	1.23	0.045	875
25TCDC006	43.83	44.43	0.6	0.058	1478.7
25TCDC006	44.43	45.41	0.98	0.021	783.6
25TCDC006	45.41	46.45	1.04	0.018	556
25TCDC006	46.45	47.18	0.73	0.011	282.1
25TCDC006	47.18	48.39	1.21	0.005	262.2
25TCDC006	48.39	49.32	0.93	0.011	565.3
25TCDC006	49.32	50.47	1.15	0.006	323.8
25TCDC006	50.47	51.51	1.04	0.004	395.2
25TCDC006	51.51	52.4	0.89	0.007	480.7
25TCDC006	52.4	53.03	0.63	0.009	467.6
25TCDC006	53.03	54.03	1	0.011	489.7
25TCDC006	54.03	54.99	0.96	0.003	269.2
25TCDC006	54.99	56.34	1.35	0.008	393.6
25TCDC006	56.34	56.69	0.35	0.008	723.4
25TCDC006	56.69	57.39	0.7	0.006	451.7
25TCDC006	57.39	57.9	0.51	0.007	194.4
25TCDC006	57.9	58.77	0.87	0.004	221.5
25TCDC006	58.77	59.69	0.92	0.003	375.1
25TCDC006	59.69	60.57	0.88	0.01	106.1
25TCDC006	60.57	61.39	0.82	0.007	885.5
25TCDC007	0	2.06	2.06	0.094	599.2
25TCDC007	2.06	3.05	0.99	0.053	682.1
25TCDC007	3.05	4.15	1.1	0.033	486.6
25TCDC007	4.15	5.21	1.06	0.029	577.5
25TCDC007	5.21	6.1	0.89	0.029	651.6
25TCDC007	6.1	7	0.9	0.01	249.9
25TCDC007	7	7.88	0.88	0.122	1974

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC007	7.88	8.78	0.9	0.009	211.8
25TCDC007	8.78	9.88	1.1	0.007	150.8
25TCDC007	9.88	10.67	0.79	0.07	1167.2
25TCDC007	10.67	11.63	0.96	0.025	386.3
25TCDC007	11.63	12.36	0.73	0.039	737.7
25TCDC007	12.36	13.23	0.87	0.024	443.3
25TCDC007	13.23	13.87	0.64	0.031	509.6
25TCDC007	13.87	15.24	1.37	0.019	291.7
25TCDC007	15.24	16.3	1.06	0.018	201.2
25TCDC007	16.3	17.06	0.76	0.017	146.1
25TCDC007	17.06	17.8	0.74	0.014	156.5
25TCDC007	17.8	18.96	1.16	0.012	119.1
25TCDC007	18.96	19.97	1.01	0.014	159.5
25TCDC007	19.97	20.86	0.89	0.012	86.8
25TCDC007	20.86	21.8	0.94	0.016	331
25TCDC007	21.8	22.61	0.81	0.012	196.6
25TCDC007	22.61	23.59	0.98	0.016	136.4
25TCDC007	23.59	24.71	1.12	0.021	358.1
25TCDC007	24.71	25.82	1.11	0.016	272.2
25TCDC007	25.82	26.61	0.79	0.009	191.8
25TCDC007	26.61	28.16	1.55	0.015	292.7
25TCDC007	28.16	29.44	1.28	0.016	412.2
25TCDC007	29.44	30.55	1.11	0.017	396.9
25TCDC007	30.55	31.46	0.91	0.012	672.4
25TCDC007	31.46	32.02	0.56	0.016	1119.4
25TCDC007	32.02	32.58	0.56	0.029	1483.1
25TCDC007	32.58	33.44	0.86	0.019	883.6
25TCDC007	33.44	34.5	1.06	0.01	996.1
25TCDC007	34.5	35.69	1.19	0.015	986.1
25TCDC007	35.69	37.17	1.48	0.017	683.4
25TCDC007	37.17	38.17	1	0.014	1086
25TCDC007	38.17	39.08	0.91	0.008	1509.5
25TCDC007	39.08	39.67	0.59	0.026	1431.1
25TCDC007	39.67	40.73	1.06	0.03	1233.2
25TCDC007	40.73	41.52	0.79	0.016	715.6
25TCDC007	41.52	42.27	0.75	0.051	1572
25TCDC007	42.27	43.34	1.07	0.031	1447.4
25TCDC007	43.34	44.4	1.06	0.034	1396.9
25TCDC007	44.4	44.87	0.47	0.026	2260.2
25TCDC007	44.87	45.92	1.05	0.009	859.9
25TCDC007	45.92	46.95	1.03	0.008	445.4
25TCDC007	46.95	47.98	1.03	0.009	855.4
25TCDC007	47.98	48.48	0.5	0.023	1591.3
25TCDC007	48.48	49.25	0.77	0.019	1299.7
25TCDC007	49.25	49.85	0.6	0.022	1823.8

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC007	49.85	50.66	0.81	0.055	1682.9
25TCDC007	50.66	51.48	0.82	0.036	1882.4
25TCDC007	51.48	52.28	0.8	0.066	4150.1
25TCDC007	52.28	53.01	0.73	0.058	3058.3
25TCDC007	53.01	53.44	0.43	0.27	2197.7
25TCDC007	53.44	53.87	0.43	0.089	2703.4
25TCDC007	53.87	54.66	0.79	0.279	2598.3
25TCDC007	54.66	55.39	0.73	0.076	2396.4
25TCDC007	55.39	55.97	0.58	0.9	6087.8
25TCDC007	55.97	56.47	0.5	5.53	4189.3
25TCDC007	56.47	57.08	0.61	0.213	2474.6
25TCDC007	57.08	57.59	0.51	2.32	1767.4
25TCDC007	57.59	58.03	0.44	0.059	3706.1
25TCDC007	58.03	59.34	1.31	0.1	10000
25TCDC007	59.34	60.53	1.19	0.159	2523.9
25TCDC007	60.53	61.7	1.17	0.4	1639.3
25TCDC007	61.7	62.18	0.48	0.201	1002.1
25TCDC007	62.18	62.56	0.38	3.04	1427.1
25TCDC007	62.56	63.21	0.65	2.42	428.2
25TCDC007	63.21	64	0.79	0.13	337.4
25TCDC007	64	64.82	0.82	0.71	215.5
25TCDC007	64.82	65.66	0.84	0.23	584.5
25TCDC007	65.66	66.57	0.91	0.76	959.6
25TCDC007	66.57	67.17	0.6	0.039	386.2
25TCDC007	67.17	67.6	0.43	0.31	219.2
25TCDC007	67.6	68.43	0.83	0.044	578.9
25TCDC007	68.43	69	0.57	0.017	1430.7
25TCDC007	69	69.4	0.4	0.45	729
25TCDC007	69.4	70.1	0.7	1.48	457.2
25TCDC007	70.1	70.95	0.85	0.36	369.3
25TCDC007	70.95	71.69	0.74	3.42	1677.9
25TCDC007	71.69	72.5	0.81	0.4	167.1
25TCDC007	72.5	72.93	0.43	0.077	2620.2
25TCDC007	72.93	73.49	0.56	0.1	4867.3
25TCDC007	73.49	74.14	0.65	1.03	3540.1
25TCDC007	74.14	74.74	0.6	0.039	2148.7
25TCDC007	74.74	75.57	0.83	0.039	5963.3
25TCDC007	75.57	76.72	1.15	0.055	4376
25TCDC007	76.72	77.62	0.9	0.76	418.7
25TCDC007	77.62	78.07	0.45	4.68	522.2
25TCDC007	78.07	78.66	0.59	0.185	531.5
25TCDC007	78.66	79.58	0.92	0.038	1702.4
25TCDC007	79.58	80.71	1.13	0.013	863.4
25TCDC007	80.71	82.3	1.59	0.046	955.4
25TCDC008	4.95	6	1.05	0.201	700.7

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC008	6	7.16	1.16	0.077	1504.6
25TCDC008	7.16	8.5	1.34	0.103	1876.6
25TCDC008	8.5	9.74	1.24	0.046	1841.4
25TCDC008	9.74	10.3	0.56	0.04	2224.5
25TCDC008	10.3	10.82	0.52	10.78	557.4
25TCDC008	10.82	11.7	0.88	0.166	1517.3
25TCDC008	11.7	13.11	1.41	0.109	1098.6
25TCDC008	13.11	14.5	1.39	0.235	2456.1
25TCDC008	14.5	15.7	1.2	0.064	1412.2
25TCDC008	15.7	16.68	0.98	0.029	946.5
25TCDC008	16.68	17.38	0.7	0.016	439.9
25TCDC008	17.38	18.58	1.2	0.123	964.8
25TCDC008	18.58	19.65	1.07	0.029	957
25TCDC008	19.65	20.63	0.98	0.046	1323.3
25TCDC008	20.63	21.64	1.01	0.035	672.2
25TCDC008	21.64	22.73	1.09	0.016	314.4
25TCDC008	22.73	23.68	0.95	0.007	231.2
25TCDC008	23.68	24.8	1.12	0.014	624.5
25TCDC008	24.8	25.73	0.93	0.01	236.4
25TCDC008	25.73	26.67	0.94	0.013	302
25TCDC008	26.67	27.83	1.16	0.011	236.6
25TCDC008	27.83	29.07	1.24	0.02	338
25TCDC008	29.07	30.11	1.04	0.037	509.5
25TCDC008	30.11	30.82	0.71	0.051	708.9
25TCDC008	30.82	31.84	1.02	0.023	655.8
25TCDC008	31.84	33.08	1.24	0.015	508
25TCDC008	33.08	34.09	1.01	0.009	1155
25TCDC008	34.09	35.34	1.25	0.007	851.1
25TCDC008	35.34	36.55	1.21	0.006	506.4
25TCDC008	36.55	37.71	1.16	0.011	375.2
25TCDC008	37.71	38.72	1.01	0.016	850
25TCDC008	38.72	40.11	1.39	0.016	629.2
25TCDC008	40.11	41.35	1.24	0.018	752.7
25TCDC008	41.35	42.25	0.9	0.013	1061.7
25TCDC008	42.25	43	0.75	0.025	1331.8
25TCDC008	43	43.77	0.77	0.01	320.9
25TCDC008	43.77	45	1.23	0.009	548.8
25TCDC008	45	46.24	1.24	0.016	653.5
25TCDC008	46.24	47.68	1.44	0.01	379.3
25TCDC008	47.68	48.98	1.3	0.008	389.3
25TCDC008	48.98	50.12	1.14	0.018	475.2
25TCDC008	50.12	51.37	1.25	0.011	423.4
25TCDC008	51.37	52.42	1.05	0.015	360.4
25TCDC008	52.42	53.77	1.35	0.02	260.9
25TCDC009	2.32	3.2	0.88	0.04	408.2

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC009	3.2	4.61	1.41	0.026	427.4
25TCDC009	4.61	5.72	1.11	0.049	729.2
25TCDC009	5.72	6.6	0.88	0.021	478.2
25TCDC009	6.6	7.8	1.2	0.015	241.5
25TCDC009	7.8	8.87	1.07	0.02	230.4
25TCDC009	8.87	10.33	1.46	0.02	487
25TCDC009	10.33	11.7	1.37	0.015	373
25TCDC009	11.7	12.92	1.22	0.027	581.4
25TCDC009	12.92	14.12	1.2	0.029	543.8
25TCDC009	14.12	15.55	1.43	0.03	664.2
25TCDC009	15.55	16.78	1.23	0.02	486.1
25TCDC009	16.78	17.97	1.19	0.022	340.7
25TCDC009	17.97	19.25	1.28	0.021	530.5
25TCDC009	19.25	20.51	1.26	0.027	516.9
25TCDC009	20.51	22.04	1.53	0.037	1117.2
25TCDC009	22.04	23.29	1.25	0.018	311.7
25TCDC009	23.29	24.32	1.03	0.019	450.8
25TCDC009	24.32	25.6	1.28	0.011	196.3
25TCDC009	25.6	26.68	1.08	0.019	316.7
25TCDC009	26.68	27.84	1.16	0.032	905.7
25TCDC009	27.84	29.16	1.32	0.023	589.4
25TCDC009	29.16	30.34	1.18	0.031	754.4
25TCDC009	30.34	31.4	1.06	0.012	499.1
25TCDC009	31.4	32.54	1.14	0.028	648.6
25TCDC009	32.54	33.75	1.21	0.018	382.7
25TCDC009	33.75	34.99	1.24	0.027	711
25TCDC009	34.99	36.28	1.29	0.02	294.1
25TCDC009	36.28	37.59	1.31	0.014	1209.9
25TCDC009	37.59	38.44	0.85	0.017	933
25TCDC009	38.44	39.29	0.85	0.013	761.2
25TCDC009	39.29	40.45	1.16	0.016	1616.1
25TCDC009	40.45	41.7	1.25	0.017	1374.5
25TCDC009	41.7	42.86	1.16	0.015	1180.3
25TCDC009	42.86	43.98	1.12	0.016	848.8
25TCDC009	43.98	45.18	1.2	0.023	1483.4
25TCDC009	45.18	46.55	1.37	0.094	2702.2
25TCDC009	46.55	47.3	0.75	0.036	2751.9
25TCDC009	47.3	47.9	0.6	0.219	3981.4
25TCDC009	47.9	49.05	1.15	0.45	7690.7
25TCDC009	49.05	50.96	1.91	0.043	2536.8
25TCDC009	50.96	52.33	1.37	0.015	2038.3
25TCDC009	52.33	53.53	1.2	0.021	1317.6
25TCDC009	53.53	54.26	0.73	0.005	732.8
25TCDC009	54.26	55.5	1.24	0.003	359.5
25TCDC009	55.5	56.8	1.3	0.007	211.6

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCDC009	56.8	58.16	1.36	0.004	26.7
25TCDC009	58.16	59.59	1.43	0.003	124.5
25TCDC009	59.59	60.81	1.22	0.003	122.9
25TCRC001_MW	0	1.52	1.52	0.109	327.7
25TCRC001_MW	1.52	3.05	1.53	0.03	287
25TCRC001_MW	3.05	4.57	1.52	0.018	189.6
25TCRC001_MW	4.57	6.1	1.53	0.025	383.4
25TCRC001_MW	6.1	7.62	1.52	0.011	165.6
25TCRC001_MW	7.62	9.14	1.52	0.014	221.9
25TCRC001_MW	9.14	10.67	1.53	0.017	423.4
25TCRC001_MW	10.67	12.19	1.52	0.011	349.9
25TCRC001_MW	12.19	13.72	1.53	0.016	1406.2
25TCRC001_MW	13.72	15.24	1.52	0.017	513.7
25TCRC001_MW	15.24	16.76	1.52	0.03	741
25TCRC001_MW	16.76	18.29	1.53	0.017	215.7
25TCRC001_MW	18.29	19.81	1.52	0.027	675.8
25TCRC001_MW	19.81	21.34	1.53	0.036	531.9
25TCRC001_MW	21.34	22.86	1.52	0.02	444.8
25TCRC001_MW	22.86	24.38	1.52	0.023	556.8
25TCRC001_MW	24.38	25.91	1.53	0.025	298.6
25TCRC001_MW	25.91	27.43	1.52	0.026	653.4
25TCRC001_MW	27.43	28.96	1.53	0.024	533.7
25TCRC001_MW	28.96	30.48	1.52	0.02	705.1
25TCRC001_MW	30.48	32	1.52	0.014	543.9
25TCRC001_MW	32	33.53	1.53	0.013	654
25TCRC001_MW	33.53	35.05	1.52	0.01	387.9
25TCRC001_MW	35.05	36.58	1.53	0.011	468.5
25TCRC001_MW	36.58	38.1	1.52	0.069	431
25TCRC001_MW	38.1	39.62	1.52	0.124	881.6
25TCRC001_MW	39.62	41.15	1.53	0.081	881.6
25TCRC001_MW	41.15	42.67	1.52	0.056	1066.7
25TCRC001_MW	42.67	44.2	1.53	0.016	360.4
25TCRC001_MW	44.2	45.72	1.52	0.033	1041.4
25TCRC001_MW	45.72	47.24	1.52	0.01	935.3
25TCRC001_MW	47.24	48.77	1.53	0.006	785.6
25TCRC001_MW	48.77	50.29	1.52	0.009	773.2
25TCRC001_MW	50.29	51.82	1.53	0.009	536.7
25TCRC001_MW	51.82	53.34	1.52	0.007	559.2
25TCRC001_MW	53.34	54.86	1.52	0.009	773.4
25TCRC001_MW	54.86	56.39	1.53	0.005	504.4
25TCRC001_MW	56.39	57.91	1.52	0.028	437.3
25TCRC001_MW	57.91	59.44	1.53	0.005	357.1
25TCRC001_MW	59.44	60.96	1.52	0.003	237
25TCRC001_MW	60.96	62.48	1.52	0.006	323.8
25TCRC001_MW	62.48	64.01	1.53	0.003	253

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC002	0	1.52	1.52	0.003	81
25TCRC002	1.52	3.05	1.53	0.013	818.5
25TCRC002	3.05	4.57	1.52	0.033	1088.9
25TCRC002	4.57	6.1	1.53	0.111	1398.8
25TCRC002	6.1	7.62	1.52	0.05	236.2
25TCRC002	7.62	9.14	1.52	0.055	241.7
25TCRC002	9.14	10.67	1.53	0.037	290.2
25TCRC002	10.67	12.19	1.52	0.064	487
25TCRC002	12.19	13.72	1.53	0.085	174.2
25TCRC002	13.72	15.24	1.52	0.205	959
25TCRC002	15.24	16.76	1.52	0.056	1165.2
25TCRC002	16.76	18.29	1.53	0.013	714.1
25TCRC002	18.29	19.81	1.52	0.005	220.8
25TCRC002	19.81	21.34	1.53	0.006	261
25TCRC002	21.34	22.86	1.52	0.025	493.7
25TCRC002	22.86	24.38	1.52	0.011	300.6
25TCRC002	24.38	25.91	1.53	0.006	347.7
25TCRC002	25.91	27.43	1.52	0.077	615.3
25TCRC002	27.43	28.96	1.53	0.178	669.3
25TCRC002	28.96	30.48	1.52	0.034	629
25TCRC002	30.48	32	1.52	0.111	713.3
25TCRC002	32	33.53	1.53	0.059	503.8
25TCRC002	33.53	35.05	1.52	0.007	845.4
25TCRC002	35.05	36.58	1.53	0.009	527.8
25TCRC002	36.58	38.1	1.52	0.008	430.8
25TCRC002	38.1	39.62	1.52	0.004	355.9
25TCRC002	39.62	41.15	1.53	0.004	315.7
25TCRC002	41.15	42.67	1.52	0.004	278.2
25TCRC002	42.67	44.2	1.53	0.068	191.8
25TCRC002	44.2	45.72	1.52	0.016	211
25TCRC002	45.72	47.24	1.52	0.036	441.5
25TCRC002	47.24	48.77	1.53	0.032	520.6
25TCRC002	48.77	50.29	1.52	0.015	765.2
25TCRC005	0	3.05	3.05	0.035	898.2
25TCRC005	3.05	4.57	1.52	0.039	819.9
25TCRC005	4.57	6.1	1.53	0.028	653.9
25TCRC005	6.1	7.62	1.52	0.018	287.5
25TCRC005	7.62	9.14	1.52	0.014	253
25TCRC005	9.14	10.67	1.53	0.015	415.3
25TCRC005	10.67	12.19	1.52	0.013	261.3
25TCRC005	12.19	13.72	1.53	0.015	373.3
25TCRC005	13.72	15.24	1.52	0.01	165.4
25TCRC005	15.24	16.76	1.52	0.02	321.1
25TCRC005	16.76	18.29	1.53	0.019	169.7
25TCRC005	18.29	19.81	1.52	0.015	280.6

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC005	19.81	21.34	1.53	0.014	168.1
25TCRC005	21.34	22.86	1.52	0.014	144.3
25TCRC005	22.86	24.38	1.52	0.02	303
25TCRC005	24.38	25.91	1.53	0.017	115.6
25TCRC005	25.91	27.43	1.52	0.009	83.2
25TCRC005	27.43	28.96	1.53	0.013	215.5
25TCRC005	28.96	30.48	1.52	0.01	131.2
25TCRC005	30.48	32	1.52	0.017	259.9
25TCRC005	32	33.53	1.53	0.025	344.1
25TCRC005	33.53	35.05	1.52	0.009	755.7
25TCRC005	35.05	36.58	1.53	0.017	400.6
25TCRC005	36.58	38.1	1.52	0.013	570
25TCRC005	38.1	39.62	1.52	0.036	290.4
25TCRC005	39.62	41.15	1.53	0.013	308.3
25TCRC005	41.15	42.67	1.52	0.012	479.3
25TCRC005	42.67	44.2	1.53	0.011	359.7
25TCRC005	44.2	45.72	1.52	0.013	667.2
25TCRC005	45.72	47.24	1.52	0.018	914.9
25TCRC005	47.24	48.77	1.53	0.181	1075.5
25TCRC005	48.77	50.29	1.52	0.08	750.6
25TCRC006	0	1.52	1.52	0.76	651.3
25TCRC006	1.52	3.05	1.53	0.118	1385.5
25TCRC006	3.05	4.57	1.52	0.205	948.6
25TCRC006	4.57	6.1	1.53	0.13	1067.8
25TCRC006	6.1	7.62	1.52	0.135	1379.9
25TCRC006	7.62	9.14	1.52	0.076	849.8
25TCRC006	9.14	10.67	1.53	0.055	1252.4
25TCRC006	10.67	12.19	1.52	0.039	688.8
25TCRC006	12.19	13.72	1.53	0.021	523.4
25TCRC006	13.72	15.24	1.52	0.036	583.8
25TCRC006	15.24	16.76	1.52	0.03	688.9
25TCRC006	16.76	18.29	1.53	0.041	1062
25TCRC006	18.29	19.81	1.52	0.058	558.9
25TCRC006	19.81	21.34	1.53	0.038	771.8
25TCRC006	21.34	22.86	1.52	0.023	453.3
25TCRC006	22.86	24.38	1.52	0.017	640.6
25TCRC006	24.38	25.91	1.53	0.011	418.3
25TCRC006	25.91	27.43	1.52	0.018	420.1
25TCRC006	27.43	28.96	1.53	0.014	497
25TCRC006	28.96	30.48	1.52	0.018	403.4
25TCRC006	30.48	32	1.52	0.015	491
25TCRC006	32	33.53	1.53	0.04	735.6
25TCRC006	33.53	35.05	1.52	0.025	612.6
25TCRC006	35.05	36.58	1.53	0.034	623.7
25TCRC006	36.58	38.1	1.52	0.038	356

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC006	38.1	39.62	1.52	0.031	368.3
25TCRC006	39.62	41.15	1.53	0.032	382.8
25TCRC006	41.15	42.67	1.52	0.014	241.4
25TCRC006	42.67	44.2	1.53	0.021	457.5
25TCRC006	44.2	45.72	1.52	0.021	548.3
25TCRC006	45.72	47.24	1.52	0.015	298
25TCRC006	47.24	48.77	1.53	0.016	650.5
25TCRC006	48.77	50.29	1.52	0.022	568.8
25TCRC006	50.29	51.82	1.53	0.027	636.3
25TCRC011	0	1.52	1.52	0.051	475.7
25TCRC011	1.52	3.05	1.53	0.043	687.8
25TCRC011	3.05	4.57	1.52	0.03	434.6
25TCRC011	4.57	6.1	1.53	0.026	380
25TCRC011	6.1	7.62	1.52	0.019	165.8
25TCRC011	7.62	9.14	1.52	0.021	174.1
25TCRC011	9.14	10.67	1.53	0.035	650.4
25TCRC011	10.67	12.19	1.52	0.068	663.8
25TCRC011	12.19	13.72	1.53	0.029	578.3
25TCRC011	13.72	15.24	1.52	0.058	536.5
25TCRC011	15.24	16.76	1.52	0.064	541.7
25TCRC011	16.76	18.29	1.53	0.016	615.9
25TCRC011	18.29	19.81	1.52	0.02	306.1
25TCRC011	19.81	21.34	1.53	0.052	773.6
25TCRC011	21.34	22.86	1.52	0.05	543.8
25TCRC011	22.86	24.38	1.52	0.039	461.9
25TCRC011	24.38	25.91	1.53	0.007	122.4
25TCRC011	25.91	27.43	1.52	0.011	261.7
25TCRC011	27.43	28.96	1.53	0.009	260.9
25TCRC011	28.96	30.48	1.52	0.026	517.7
25TCRC011	30.48	32	1.52	0.012	285.6
25TCRC011	32	33.53	1.53	0.017	661.4
25TCRC011	33.53	35.05	1.52	0.02	466.3
25TCRC011	35.05	36.58	1.53	0.108	732.6
25TCRC011	36.58	38.1	1.52	0.019	238.9
25TCRC011	38.1	39.62	1.52	0.018	805.8
25TCRC011	39.62	41.15	1.53	0.033	845.8
25TCRC011	41.15	42.67	1.52	0.009	736.8
25TCRC011	42.67	44.2	1.53	0.023	605.1
25TCRC011	44.2	45.72	1.52	0.038	606
25TCRC011	45.72	47.24	1.52	0.022	488.4
25TCRC011	47.24	48.77	1.53	0.025	361.3
25TCRC011	48.77	50.29	1.52	0.022	679.8
25TCRC020	0	1.52	1.52	0.083	2010.5
25TCRC020	1.52	3.05	1.53	0.129	1110.8
25TCRC020	3.05	4.57	1.52	0.046	1350.7

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC020	4.57	6.1	1.53	0.045	1422.4
25TCRC020	6.1	7.62	1.52	0.078	1018.7
25TCRC020	7.62	9.14	1.52	0.042	821.2
25TCRC020	9.14	10.67	1.53	0.022	765.9
25TCRC020	10.67	12.19	1.52	0.03	622.8
25TCRC020	12.19	13.72	1.53	0.019	897.5
25TCRC020	13.72	15.24	1.52	0.017	690.1
25TCRC020	15.24	16.76	1.52	0.028	452.3
25TCRC020	16.76	18.29	1.53	0.009	217.5
25TCRC020	18.29	19.81	1.52	0.037	1054.3
25TCRC020	19.81	21.34	1.53	0.018	338.9
25TCRC020	21.34	22.86	1.52	0.059	944.3
25TCRC020	22.86	24.38	1.52	0.033	758.5
25TCRC020	24.38	25.91	1.53	0.049	1063.9
25TCRC020	25.91	27.43	1.52	0.01	735.4
25TCRC020	27.43	28.96	1.53	0.039	1331.5
25TCRC020	28.96	30.48	1.52	0.016	1100.6
25TCRC020	30.48	32	1.52	0.014	907.6
25TCRC020	32	33.53	1.53	0.223	613.6
25TCRC020	33.53	35.05	1.52	0.041	1354.5
25TCRC020	35.05	36.58	1.53	0.46	709.5
25TCRC020	36.58	38.1	1.52	0.136	1457
25TCRC020	38.1	39.62	1.52	0.126	1153.6
25TCRC020	39.62	41.15	1.53	0.102	1328.3
25TCRC020	41.15	42.67	1.52	0.24	1008.5
25TCRC020	42.67	44.2	1.53	0.2	2058.7
25TCRC020	44.2	45.72	1.52	0.069	1664.7
25TCRC020	45.72	47.24	1.52	0.062	1238.3
25TCRC020	47.24	48.77	1.53	0.32	1293.5
25TCRC027	0	1.52	1.52	0.045	440.5
25TCRC027	1.52	3.05	1.53	0.03	371.9
25TCRC027	3.05	4.57	1.52	0.023	359.8
25TCRC027	4.57	6.1	1.53	0.038	494
25TCRC027	6.1	7.62	1.52	0.018	414.6
25TCRC027	7.62	9.14	1.52	0.025	393.6
25TCRC027	9.14	10.67	1.53	0.009	372.9
25TCRC027	10.67	12.19	1.52	0.011	330.3
25TCRC027	12.19	13.72	1.53	0.022	742.5
25TCRC027	13.72	15.24	1.52	0.01	224.1
25TCRC027	15.24	16.76	1.52	6.26	353.4
25TCRC027	16.76	18.29	1.53	0.061	457.5
25TCRC027	18.29	19.81	1.52	0.108	672.3
25TCRC027	19.81	21.34	1.53	2.15	338.9
25TCRC027	21.34	22.86	1.52	0.02	554
25TCRC027	22.86	24.38	1.52	0.015	549.1

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC027	24.38	25.91	1.53	0.027	1169.1
25TCRC027	25.91	27.43	1.52	0.024	1101.3
25TCRC027	27.43	28.96	1.53	0.021	856.3
25TCRC027	28.96	30.48	1.52	0.025	787
25TCRC027	30.48	32	1.52	0.02	1006.3
25TCRC027	32	33.53	1.53	0.044	1699.8
25TCRC027	33.53	35.05	1.52	0.016	1159.6
25TCRC027	35.05	36.58	1.53	0.022	686.3
25TCRC027	36.58	38.1	1.52	0.025	575.6
25TCRC027	38.1	39.62	1.52	0.03	470.9
25TCRC027	39.62	41.15	1.53	0.025	414
25TCRC027	41.15	42.67	1.52	0.005	261.5
25TCRC027	42.67	44.2	1.53	0.214	656.7
25TCRC027	44.2	45.72	1.52	0.171	248.2
25TCRC027	45.72	47.24	1.52	0.174	548.8
25TCRC027	47.24	48.77	1.53	0.102	728.8
25TCRC027	48.77	50.29	1.52	0.084	783.3
25TCRC027	50.29	51.82	1.53	0.06	324.3
25TCRC027	51.82	53.34	1.52	0.062	627
25TCRC027	53.34	54.86	1.52	0.028	578.6
25TCRC027	54.86	56.39	1.53	0.012	394.1
25TCRC027	56.39	57.91	1.52	0.012	245.6
25TCRC027	57.91	59.44	1.53	0.008	519.5
25TCRC027	59.44	60.96	1.52	0.006	405.2
25TCRC033	0	1.52	1.52	0.172	973.3
25TCRC033	1.52	3.05	1.53	0.063	997.5
25TCRC033	3.05	4.57	1.52	0.063	1034.8
25TCRC033	4.57	6.1	1.53	0.028	565.3
25TCRC033	6.1	7.62	1.52	0.04	988
25TCRC033	7.62	9.14	1.52	0.027	1273.6
25TCRC033	9.14	10.67	1.53	0.067	800
25TCRC033	10.67	12.19	1.52	0.058	431.6
25TCRC033	12.19	13.72	1.53	0.021	486.4
25TCRC033	13.72	15.24	1.52	0.02	601.5
25TCRC033	15.24	16.76	1.52	0.012	245.3
25TCRC033	16.76	18.29	1.53	0.027	573
25TCRC033	18.29	19.81	1.52	0.082	593.2
25TCRC033	19.81	21.34	1.53	0.097	1253.4
25TCRC033	21.34	22.86	1.52	0.085	1622.2
25TCRC033	22.86	24.38	1.52	0.022	1119.3
25TCRC033	24.38	25.91	1.53	0.32	1322.9
25TCRC033	25.91	27.43	1.52	0.142	2119.5
25TCRC033	27.43	28.96	1.53	0.72	244
25TCRC033	28.96	30.48	1.52	0.126	277.9
25TCRC033	30.48	32	1.52	0.131	494.5

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC033	32	33.53	1.53	0.07	533.2
25TCRC033	33.53	35.05	1.52	0.206	1205.4
25TCRC033	35.05	36.58	1.53	0.103	1328.8
25TCRC033	36.58	38.1	1.52	0.107	1530.4
25TCRC033	38.1	39.62	1.52	0.045	1683.5
25TCRC033	39.62	41.15	1.53	0.105	2850.7
25TCRC033	41.15	42.67	1.52	0.119	2750
25TCRC033	42.67	44.2	1.53	0.034	1141.5
25TCRC033	44.2	45.72	1.52	0.134	1338.1
25TCRC033	45.72	47.24	1.52	0.182	2128.4
25TCRC033	47.24	48.77	1.53	0.207	3107.6
25TCRC033	48.77	50.29	1.52	0.012	1189.3
25TCRC033	50.29	51.82	1.53	0.018	1275.8
25TCRC033	51.82	53.34	1.52	0.014	1326.9
25TCRC033	53.34	54.86	1.52	0.015	1341.6
25TCRC033	54.86	56.39	1.53	0.04	2405.7
25TCRC033	56.39	57.91	1.52	0.058	1258.9
25TCRC033	57.91	59.44	1.53	0.11	1245.2
25TCRC033	59.44	60.96	1.52	4.85	267.7
25TCRC033	60.96	62.48	1.52	1.03	1375.6
25TCRC033	62.48	64.01	1.53	2.59	1565.3
25TCRC033	64.01	65.53	1.52	0.046	1234.1
25TCRC033	65.53	67.06	1.53	0.015	578.8
25TCRC033	67.06	68.58	1.52	0.049	1087
25TCRC033	68.58	70.1	1.52	0.015	663.5
25TCRC034	0	1.52	1.52	0.074	1285.7
25TCRC034	1.52	3.05	1.53	0.059	1900
25TCRC034	3.05	4.57	1.52	0.08	1608.4
25TCRC034	4.57	6.1	1.53	0.05	944
25TCRC034	6.1	7.62	1.52	0.033	436.8
25TCRC034	7.62	9.14	1.52	0.051	784
25TCRC034	9.14	10.67	1.53	0.026	1627.5
25TCRC034	10.67	12.19	1.52	0.024	1159
25TCRC034	12.19	13.72	1.53	0.067	479.9
25TCRC034	13.72	15.24	1.52	0.015	361.2
25TCRC034	15.24	16.76	1.52	0.011	414.5
25TCRC034	16.76	18.29	1.53	0.035	354.7
25TCRC034	18.29	19.81	1.52	0.057	517
25TCRC034	19.81	21.34	1.53	0.04	671.5
25TCRC034	21.34	22.86	1.52	0.224	785.2
25TCRC034	22.86	24.38	1.52	0.61	503.5
25TCRC034	24.38	25.91	1.53	1.07	720.6
25TCRC034	25.91	27.43	1.52	0.043	686
25TCRC034	27.43	28.96	1.53	0.35	1576.7
25TCRC034	28.96	30.48	1.52	0.094	2657.7

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC034	30.48	32	1.52	0.192	1196.1
25TCRC034	32	33.53	1.53	0.107	1017.9
25TCRC034	33.53	35.05	1.52	0.194	1087.5
25TCRC034	35.05	36.58	1.53	0.033	1442.8
25TCRC034	36.58	38.1	1.52	1.5	772.8
25TCRC034	38.1	39.62	1.52	0.239	1772.3
25TCRC034	39.62	41.15	1.53	0.036	707.5
25TCRC034	41.15	42.67	1.52	0.67	668.3
25TCRC034	42.67	44.2	1.53	0.142	1091.2
25TCRC034	44.2	45.72	1.52	0.043	1310.4
25TCRC034	45.72	47.24	1.52	0.01	668
25TCRC034	47.24	48.77	1.53	0.075	1119
25TCRC034	48.77	50.29	1.52	0.022	1128.2
25TCRC034	50.29	51.82	1.53	0.041	687.8
25TCRC034	51.82	53.34	1.52	0.032	503.7
25TCRC034	53.34	54.86	1.52	0.057	702.3
25TCRC034	54.86	56.39	1.53	0.11	1039.2
25TCRC034	56.39	57.91	1.52	11.8	582.9
25TCRC034	57.91	59.44	1.53	0.17	527.6
25TCRC034	59.44	60.96	1.52	1.12	380.8
25TCRC034	60.96	62.48	1.52	0.8	418.2
25TCRC034	62.48	64.01	1.53	0.98	370
25TCRC034	64.01	65.53	1.52	0.192	1598.9
25TCRC034	65.53	67.06	1.53	0.054	2467.2
25TCRC034	67.06	68.58	1.52	3.06	1159.7
25TCRC034	68.58	70.1	1.52	0.8	451.6
25TCRC034	70.1	71.63	1.53	0.095	355.9
25TCRC034	71.63	73.15	1.52	0.075	274.4
25TCRC034	73.15	74.68	1.53	0.036	855.9
25TCRC034	74.68	76.2	1.52	0.016	1278.1
25TCRC035	0	1.52	1.52	0.157	770.6
25TCRC035	1.52	3.05	1.53	0.18	743.8
25TCRC035	3.05	4.57	1.52	0.281	520.2
25TCRC035	4.57	6.1	1.53	0.66	1552.6
25TCRC035	6.1	7.62	1.52	0.16	2518.2
25TCRC035	7.62	9.14	1.52	0.112	2189.5
25TCRC035	9.14	10.67	1.53	0.056	1411.5
25TCRC035	10.67	12.19	1.52	0.076	2002.5
25TCRC035	12.19	13.72	1.53	0.181	2020.2
25TCRC035	13.72	15.24	1.52	0.137	1834.1
25TCRC035	15.24	16.76	1.52	0.099	2220.2
25TCRC035	16.76	18.29	1.53	0.145	1500
25TCRC035	18.29	19.81	1.52	1.25	824.5
25TCRC035	19.81	21.34	1.53	0.61	1637.3
25TCRC035	21.34	22.86	1.52	0.198	1685.2

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC035	22.86	24.38	1.52	0.156	2335.2
25TCRC035	24.38	25.91	1.53	0.083	2161.1
25TCRC035	25.91	27.43	1.52	0.044	1378.8
25TCRC035	27.43	28.96	1.53	0.042	1976.4
25TCRC035	28.96	30.48	1.52	0.063	1311.8
25TCRC035	30.48	32	1.52	0.097	1525.1
25TCRC035	32	33.53	1.53	0.054	1166.5
25TCRC035	33.53	35.05	1.52	0.032	1645.2
25TCRC035	35.05	36.58	1.53	0.038	1301.6
25TCRC035	36.58	38.1	1.52	0.112	1349.7
25TCRC035	38.1	39.62	1.52	0.056	1103.3
25TCRC035	39.62	41.15	1.53	0.069	1152.4
25TCRC035	41.15	42.67	1.52	0.041	1572.9
25TCRC035	42.67	44.2	1.53	0.045	1972.8
25TCRC035	44.2	45.72	1.52	0.031	632.7
25TCRC035	45.72	47.24	1.52	0.036	1213.6
25TCRC035	47.24	48.77	1.53	0.021	784.3
25TCRC035	48.77	50.29	1.52	0.035	1123.7
25TCRC035	50.29	51.82	1.53	0.024	1084.2
25TCRC035	51.82	53.34	1.52	0.016	918.9
25TCRC035	53.34	54.86	1.52	0.165	691.6
25TCRC035	54.86	56.39	1.53	0.04	1369.2
25TCRC035	56.39	57.91	1.52	1.08	1184.3
25TCRC035	57.91	59.44	1.53	0.077	1262.7
25TCRC035	59.44	60.96	1.52	0.024	339.5
25TCRC036	0	1.52	1.52	0.138	674.2
25TCRC036	1.52	3.05	1.53	0.084	1378.2
25TCRC036	3.05	4.57	1.52	0.061	1349.4
25TCRC036	4.57	6.1	1.53	0.32	1300.7
25TCRC036	6.1	7.62	1.52	0.024	2223.4
25TCRC036	7.62	9.14	1.52	0.022	1602.3
25TCRC036	9.14	10.67	1.53	0.014	1217.8
25TCRC036	10.67	12.19	1.52	0.016	1366.4
25TCRC036	12.19	13.72	1.53	0.02	514.6
25TCRC036	13.72	15.24	1.52	0.096	1350.6
25TCRC036	15.24	16.76	1.52	0.039	477.9
25TCRC036	16.76	18.29	1.53	0.016	346.7
25TCRC036	18.29	19.81	1.52	0.014	560.1
25TCRC036	19.81	21.34	1.53	0.012	669
25TCRC036	21.34	22.86	1.52	0.014	1144.5
25TCRC036	22.86	24.38	1.52	0.096	942.1
25TCRC036	24.38	25.91	1.53	0.016	1168.7
25TCRC036	25.91	27.43	1.52	0.014	985.4
25TCRC036	27.43	28.96	1.53	0.013	900.6
25TCRC036	28.96	30.48	1.52	0.046	1176.2

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC036	30.48	32	1.52	0.027	702.8
25TCRC036	32	33.53	1.53	0.232	441
25TCRC036	33.53	35.05	1.52	0.015	890
25TCRC036	35.05	36.58	1.53	0.013	1563.1
25TCRC036	36.58	38.1	1.52	0.016	835.8
25TCRC036	38.1	39.62	1.52	0.017	823.2
25TCRC036	39.62	41.15	1.53	0.039	1189.9
25TCRC036	41.15	42.67	1.52	0.019	1585.3
25TCRC036	42.67	44.2	1.53	0.017	969.5
25TCRC036	44.2	45.72	1.52	0.045	1401.6
25TCRC036	45.72	47.24	1.52	0.034	1291.6
25TCRC036	47.24	48.77	1.53	0.022	1169.3
25TCRC036	48.77	50.29	1.52	0.021	805.9
25TCRC036	50.29	51.82	1.53	0.022	1524.7
25TCRC037	0	1.52	1.52	0.106	797.5
25TCRC037	1.52	3.05	1.53	0.075	1676.1
25TCRC037	3.05	4.57	1.52	0.064	1815.2
25TCRC037	4.57	6.1	1.53	1.48	2077.6
25TCRC037	6.1	7.62	1.52	0.049	1386.4
25TCRC037	7.62	9.14	1.52	0.006	1105.6
25TCRC037	9.14	10.67	1.53	0.026	2129
25TCRC037	10.67	12.19	1.52	0.021	1294.7
25TCRC037	12.19	13.72	1.53	0.02	1248.8
25TCRC037	13.72	15.24	1.52	0.04	824.4
25TCRC037	15.24	16.76	1.52	0.042	982.7
25TCRC037	16.76	18.29	1.53	0.077	761.6
25TCRC037	18.29	19.81	1.52	0.021	535.1
25TCRC037	19.81	21.34	1.53	0.018	975.6
25TCRC037	21.34	22.86	1.52	0.014	1107
25TCRC037	22.86	24.38	1.52	0.013	632.2
25TCRC037	24.38	25.91	1.53	0.015	997.7
25TCRC037	25.91	27.43	1.52	0.016	1321.8
25TCRC037	27.43	28.96	1.53	0.037	1011.7
25TCRC037	28.96	30.48	1.52	0.018	691.2
25TCRC037	30.48	32	1.52	0.021	972.1
25TCRC037	32	33.53	1.53	0.013	1170
25TCRC037	33.53	35.05	1.52	0.013	1262.8
25TCRC037	35.05	36.58	1.53	0.014	591.5
25TCRC037	36.58	38.1	1.52	0.012	301.6
25TCRC037	38.1	39.62	1.52	0.011	407.8
25TCRC037	39.62	41.15	1.53	0.106	1251.3
25TCRC037	41.15	42.67	1.52	0.114	1196.7
25TCRC037	42.67	44.2	1.53	0.022	2428.4
25TCRC037	44.2	45.72	1.52	0.062	1545.1
25TCRC037	45.72	47.24	1.52	0.078	1228.1

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC037	47.24	48.77	1.53	0.044	775.5
25TCRC037	48.77	50.29	1.52	0.025	376.2
25TCRC037	50.29	51.82	1.53	0.044	818.3
25TCRC037	51.82	53.34	1.52	0.052	1369.9
25TCRC037	53.34	54.86	1.52	0.36	2543.2
25TCRC038	0	1.52	1.52	1.21	376
25TCRC038	1.52	3.05	1.53	0.55	796.2
25TCRC038	3.05	4.57	1.52	0.048	645.3
25TCRC038	4.57	6.1	1.53	0.038	981.7
25TCRC038	6.1	7.62	1.52	0.194	2615.3
25TCRC038	7.62	9.14	1.52	0.12	1005
25TCRC038	9.14	10.67	1.53	0.187	621.8
25TCRC038	10.67	12.19	1.52	0.059	770.7
25TCRC038	12.19	13.72	1.53	0.043	979.8
25TCRC038	13.72	15.24	1.52	0.057	485.2
25TCRC038	15.24	16.76	1.52	0.051	189
25TCRC038	16.76	18.29	1.53	0.109	306.3
25TCRC038	18.29	19.81	1.52	0.051	234.5
25TCRC038	19.81	21.34	1.53	0.047	328.1
25TCRC038	21.34	22.86	1.52	0.038	604.8
25TCRC038	22.86	24.38	1.52	0.02	467.6
25TCRC038	24.38	25.91	1.53	0.028	248.5
25TCRC038	25.91	27.43	1.52	0.046	431.2
25TCRC038	27.43	28.96	1.53	0.027	235.9
25TCRC038	28.96	30.48	1.52	0.023	215.8
25TCRC038	30.48	32	1.52	0.082	371.5
25TCRC038	32	33.53	1.53	0.044	1582.6
25TCRC038	33.53	35.05	1.52	0.019	1078.7
25TCRC038	35.05	36.58	1.53	0.025	742.3
25TCRC038	36.58	38.1	1.52	0.033	412.3
25TCRC038	38.1	39.62	1.52	0.18	1633.3
25TCRC038	39.62	41.15	1.53	0.015	177.3
25TCRC038	41.15	42.67	1.52	0.016	438.1
25TCRC038	42.67	44.2	1.53	0.004	180.3
25TCRC038	44.2	45.72	1.52	0.02	1011.6
25TCRC038	45.72	47.24	1.52	0.014	747.5
25TCRC038	47.24	48.77	1.53	0.007	616.4
25TCRC038	48.77	50.29	1.52	0.006	559.3
25TCRC039	0	1.52	1.52	soil not assayed	
25TCRC039	1.52	3.05	1.53	soil not assayed	
25TCRC039	3.05	4.57	1.52	0.029	297.1
25TCRC039	4.57	6.1	1.53	0.038	982
25TCRC039	6.1	7.62	1.52	0.049	1006.2
25TCRC039	7.62	9.14	1.52	0.048	487.7

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC039	9.14	10.67	1.53	0.043	513.7
25TCRC039	10.67	12.19	1.52	0.016	500.7
25TCRC039	12.19	13.72	1.53	0.014	324.7
25TCRC039	13.72	15.24	1.52	0.016	426.1
25TCRC039	15.24	16.76	1.52	0.017	622.5
25TCRC039	16.76	18.29	1.53	0.016	603.9
25TCRC039	18.29	19.81	1.52	0.023	1796.9
25TCRC039	19.81	21.34	1.53	0.035	1572.7
25TCRC039	21.34	22.86	1.52	0.054	2805.3
25TCRC039	22.86	24.38	1.52	0.031	1877.1
25TCRC039	24.38	25.91	1.53	0.048	1112.4
25TCRC039	25.91	27.43	1.52	0.027	985.7
25TCRC039	27.43	28.96	1.53	0.053	1153.6
25TCRC039	28.96	30.48	1.52	0.021	574.4
25TCRC039	30.48	32	1.52	0.025	570.7
25TCRC039	32	33.53	1.53	0.022	691.4
25TCRC039	33.53	35.05	1.52	0.029	674.7
25TCRC039	35.05	36.58	1.53	0.019	448.3
25TCRC039	36.58	38.1	1.52	0.016	653.5
25TCRC039	38.1	39.62	1.52	0.017	1353.9
25TCRC039	39.62	41.15	1.53	0.013	1380.4
25TCRC039	41.15	42.67	1.52	0.058	1899.2
25TCRC039	42.67	44.2	1.53	0.04	959.9
25TCRC039	44.2	45.72	1.52	0.049	511.2
25TCRC039	45.72	47.24	1.52	0.25	383.2
25TCRC039	47.24	48.77	1.53	0.091	765.5
25TCRC039	48.77	50.29	1.52	0.107	3640.6
25TCRC039	50.29	51.82	1.53	0.01	1332.6
25TCRC040	0	1.52	1.52	soil not assayed	
25TCRC040	1.52	3.05	1.53	0.095	700
25TCRC040	3.05	4.57	1.52	0.054	553
25TCRC040	4.57	6.1	1.53	0.033	571
25TCRC040	6.1	7.62	1.52	0.037	432.6
25TCRC040	7.62	9.14	1.52	0.053	809.2
25TCRC040	9.14	10.67	1.53	0.009	221.1
25TCRC040	10.67	12.19	1.52	0.041	485
25TCRC040	12.19	13.72	1.53	0.063	703.1
25TCRC040	13.72	15.24	1.52	0.051	1459.7
25TCRC040	15.24	16.76	1.52	0.029	1007.2
25TCRC040	16.76	18.29	1.53	0.023	1490.7
25TCRC040	18.29	19.81	1.52	0.022	2334.1
25TCRC040	19.81	21.34	1.53	0.022	1686.7
25TCRC040	21.34	22.86	1.52	0.03	1467.6
25TCRC040	22.86	24.38	1.52	0.015	1537.6

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC040	24.38	25.91	1.53	0.042	1605.6
25TCRC040	25.91	27.43	1.52	0.031	881.8
25TCRC040	27.43	28.96	1.53	0.044	1040.3
25TCRC040	28.96	30.48	1.52	0.022	778.6
25TCRC040	30.48	32	1.52	0.038	824.1
25TCRC040	32	33.53	1.53	0.038	734.1
25TCRC040	33.53	35.05	1.52	0.015	592.6
25TCRC040	35.05	36.58	1.53	0.019	1005.3
25TCRC040	36.58	38.1	1.52	0.013	1057.5
25TCRC040	38.1	39.62	1.52	0.028	507.3
25TCRC040	39.62	41.15	1.53	0.058	416.9
25TCRC040	41.15	42.67	1.52	0.09	508.7
25TCRC040	42.67	44.2	1.53	0.027	406
25TCRC040	44.2	45.72	1.52	0.054	390.2
25TCRC040	45.72	47.24	1.52	0.043	647.4
25TCRC040	47.24	48.77	1.53	0.201	1547.8
25TCRC040	48.77	50.29	1.52	0.026	1615.8
25TCRC041	0	1.52	1.52	soil not assayed	
25TCRC041	1.52	3.05	1.53	0.36	718.6
25TCRC041	3.05	4.57	1.52	0.44	1210.8
25TCRC041	4.57	6.1	1.53	0.096	1528.1
25TCRC041	6.1	7.62	1.52	0.156	863.2
25TCRC041	7.62	9.14	1.52	0.089	2465.5
25TCRC041	9.14	10.67	1.53	0.132	1276
25TCRC041	10.67	12.19	1.52	0.037	899
25TCRC041	12.19	13.72	1.53	0.037	615
25TCRC041	13.72	15.24	1.52	0.019	242.9
25TCRC041	15.24	16.76	1.52	0.018	449.1
25TCRC041	16.76	18.29	1.53	0.082	1234.4
25TCRC041	18.29	19.81	1.52	0.015	264.3
25TCRC041	19.81	21.34	1.53	0.025	284.5
25TCRC041	21.34	22.86	1.52	0.029	711.4
25TCRC041	22.86	24.38	1.52	0.026	736.5
25TCRC041	24.38	25.91	1.53	0.034	614.8
25TCRC041	25.91	27.43	1.52	0.016	214.8
25TCRC041	27.43	28.96	1.53	0.016	453.2
25TCRC041	28.96	30.48	1.52	0.016	455.3
25TCRC041	30.48	32	1.52	0.018	769.4
25TCRC041	32	33.53	1.53	0.015	698
25TCRC041	33.53	35.05	1.52	0.011	807.7
25TCRC041	35.05	36.58	1.53	0.019	797.2
25TCRC041	36.58	38.1	1.52	0.011	937.4
25TCRC041	38.1	39.62	1.52	0.019	797.3
25TCRC041	39.62	41.15	1.53	0.014	1118.2

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC041	41.15	42.67	1.52	0.021	1163.3
25TCRC041	42.67	44.2	1.53	0.11	827.1
25TCRC041	44.2	45.72	1.52	0.039	597.9
25TCRC041	45.72	47.24	1.52	0.011	66.5
25TCRC041	47.24	48.77	1.53	0.011	685.8
25TCRC041	48.77	50.29	1.52	0.012	736.3
25TCRC041	50.29	51.82	1.53	0.017	1362.1
25TCRC041	51.82	53.34	1.52	0.012	775.5
25TCRC041	53.34	54.86	1.52	0.016	1095.8
25TCRC041	54.86	56.39	1.53	0.041	1274.2
25TCRC041	56.39	57.91	1.52	0.67	1457.9
25TCRC041	57.91	59.44	1.53	0.04	1612.1
25TCRC041	59.44	60.96	1.52	0.015	749
25TCRC041	60.96	62.48	1.52	0.044	1267.6
25TCRC041	62.48	64.01	1.53	0.141	3545.6
25TCRC041	64.01	65.53	1.52	0.041	2649.1
25TCRC041	65.53	67.06	1.53	0.039	2491.6
25TCRC043	0	1.52	1.52	soil not assayed	
25TCRC043	1.52	3.05	1.53	0.062	1419.8
25TCRC043	3.05	4.57	1.52	0.06	1501.6
25TCRC043	4.57	6.1	1.53	0.106	2348.3
25TCRC043	6.1	7.62	1.52	0.046	1812.1
25TCRC043	7.62	9.14	1.52	0.033	998.5
25TCRC043	9.14	10.67	1.53	0.011	997.6
25TCRC043	10.67	12.19	1.52	0.044	2615.8
25TCRC043	12.19	13.72	1.53	0.039	1518.8
25TCRC043	13.72	15.24	1.52	0.029	1184.9
25TCRC043	15.24	16.76	1.52	0.024	1132.1
25TCRC043	16.76	18.29	1.53	0.024	1369.6
25TCRC043	18.29	19.81	1.52	0.033	975.4
25TCRC043	19.81	21.34	1.53	0.066	1334.2
25TCRC043	21.34	22.86	1.52	0.058	2710.1
25TCRC043	22.86	24.38	1.52	0.031	1033.6
25TCRC043	24.38	25.91	1.53	0.055	1503.6
25TCRC043	25.91	27.43	1.52	0.083	3671.2
25TCRC043	27.43	28.96	1.53	0.111	3094
25TCRC043	28.96	30.48	1.52	0.071	1352.9
25TCRC043	30.48	32	1.52	0.031	2080.9
25TCRC043	32	33.53	1.53	0.023	731.6
25TCRC043	33.53	35.05	1.52	0.066	1115.1
25TCRC043	35.05	36.58	1.53	0.03	1263.6
25TCRC043	36.58	38.1	1.52	0.015	835.1
25TCRC043	38.1	39.62	1.52	0.064	993.2
25TCRC043	39.62	41.15	1.53	0.055	1034.7

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC043	41.15	42.67	1.52	0.01	778.8
25TCRC043	42.67	44.2	1.53	0.04	1095.6
25TCRC043	44.2	45.72	1.52	0.021	1533.9
25TCRC043	45.72	47.24	1.52	0.006	796.1
25TCRC043	47.24	48.77	1.53	0.005	295.1
25TCRC043	48.77	50.29	1.52	0.004	216.5
25TCRC044	0	1.52	1.52	1.1	617.6
25TCRC044	1.52	3.05	1.53	0.077	763
25TCRC044	3.05	4.57	1.52	0.109	995.3
25TCRC044	4.57	6.1	1.53	0.04	582
25TCRC044	6.1	7.62	1.52	0.042	337.5
25TCRC044	7.62	9.14	1.52	0.059	967.7
25TCRC044	9.14	10.67	1.53	0.044	935.3
25TCRC044	10.67	12.19	1.52	0.039	424.2
25TCRC044	12.19	13.72	1.53	0.03	129.1
25TCRC044	13.72	15.24	1.52	0.025	278.1
25TCRC044	15.24	16.76	1.52	0.013	381.3
25TCRC044	16.76	18.29	1.53	0.037	450.5
25TCRC044	18.29	19.81	1.52	0.15	1611.4
25TCRC044	19.81	21.34	1.53	1.83	811.9
25TCRC044	21.34	22.86	1.52	0.54	377.9
25TCRC044	22.86	24.38	1.52	0.086	295.4
25TCRC044	24.38	25.91	1.53	0.111	690.1
25TCRC044	25.91	27.43	1.52	0.056	482.7
25TCRC044	27.43	28.96	1.53	0.071	538.9
25TCRC044	28.96	30.48	1.52	0.039	547.5
25TCRC044	30.48	32	1.52	0.037	707.6
25TCRC044	32	33.53	1.53	0.048	880.2
25TCRC044	33.53	35.05	1.52	0.044	482.6
25TCRC044	35.05	36.58	1.53	0.048	652.8
25TCRC044	36.58	38.1	1.52	0.024	209.4
25TCRC044	38.1	39.62	1.52	0.014	271.5
25TCRC044	39.62	41.15	1.53	0.017	145.1
25TCRC044	41.15	42.67	1.52	0.014	197.4
25TCRC044	42.67	44.2	1.53	0.041	190
25TCRC044	44.2	45.72	1.52	0.047	149.3
25TCRC044	45.72	47.24	1.52	0.023	274.5
25TCRC044	47.24	48.77	1.53	0.021	520.5
25TCRC044	48.77	50.29	1.52	0.024	635.6
25TCRC044	50.29	51.82	1.53	0.025	457.5
25TCRC044	51.82	53.34	1.52	0.009	219.6
25TCRC044	53.34	54.86	1.52	0.033	540.1
25TCRC044	54.86	56.39	1.53	0.017	380.2
25TCRC044	56.39	57.91	1.52	0.021	289.7
25TCRC045	0	1.52	1.52	0.096	954

For personal use only

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC045	1.52	3.05	1.53	0.071	1554.1
25TCRC045	3.05	4.57	1.52	0.074	1726
25TCRC045	4.57	6.1	1.53	0.47	1200.8
25TCRC045	6.1	7.62	1.52	1.3	439.6
25TCRC045	7.62	9.14	1.52	0.08	285.9
25TCRC045	9.14	10.67	1.53	0.05	824.7
25TCRC045	10.67	12.19	1.52	0.28	1015.3
25TCRC045	12.19	13.72	1.53	0.152	650.3
25TCRC045	13.72	15.24	1.52	0.046	668.4
25TCRC045	15.24	16.76	1.52	0.064	528.3
25TCRC045	16.76	18.29	1.53	0.032	575
25TCRC045	18.29	19.81	1.52	0.025	288.1
25TCRC045	19.81	21.34	1.53	0.35	332.7
25TCRC045	21.34	22.86	1.52	0.49	281.8
25TCRC045	22.86	24.38	1.52	0.028	465.1
25TCRC045	24.38	25.91	1.53	0.031	482.2
25TCRC045	25.91	27.43	1.52	0.017	339.4
25TCRC045	27.43	28.96	1.53	0.018	360.6
25TCRC045	28.96	30.48	1.52	0.031	372.5
25TCRC045	30.48	32	1.52	0.048	713.8
25TCRC045	32	33.53	1.53	0.03	585.5
25TCRC045	33.53	35.05	1.52	0.038	1066.3
25TCRC045	35.05	36.58	1.53	0.02	607
25TCRC045	36.58	38.1	1.52	0.014	554.8
25TCRC045	38.1	39.62	1.52	0.012	591.1
25TCRC045	39.62	41.15	1.53	0.014	613.7
25TCRC045	41.15	42.67	1.52	0.018	1130.5
25TCRC045	42.67	44.2	1.53	0.015	765.4
25TCRC045	44.2	45.72	1.52	0.01	402.4
25TCRC045	45.72	47.24	1.52	0.051	510.1
25TCRC045	47.24	48.77	1.53	0.026	333.8
25TCRC045	48.77	50.29	1.52	0.028	242.1
25TCRC046	0	1.52	1.52	soil not assayed	
25TCRC046	1.52	3.05	1.53	0.048	622.5
25TCRC046	3.05	4.57	1.52	0.119	1872.2
25TCRC046	4.57	6.1	1.53	0.111	2138.9
25TCRC046	6.1	7.62	1.52	0.266	1495.1
25TCRC046	7.62	9.14	1.52	0.85	669.8
25TCRC046	9.14	10.67	1.53	3.27	391.2
25TCRC046	10.67	12.19	1.52	0.94	555
25TCRC046	12.19	13.72	1.53	0.053	817.6
25TCRC046	13.72	15.24	1.52	0.026	698.9
25TCRC046	15.24	16.76	1.52	0.026	800.1
25TCRC046	16.76	18.29	1.53	0.101	1630.6

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC046	18.29	19.81	1.52	0.037	1571.1
25TCRC046	19.81	21.34	1.53	2.87	383.6
25TCRC046	21.34	22.86	1.52	0.043	408.1
25TCRC046	22.86	24.38	1.52	0.059	1081.6
25TCRC046	24.38	25.91	1.53	0.023	567.5
25TCRC046	25.91	27.43	1.52	0.028	377.4
25TCRC046	27.43	28.96	1.53	0.043	538.6
25TCRC046	28.96	30.48	1.52	0.021	480.8
25TCRC046	30.48	32	1.52	0.021	416.9
25TCRC046	32	33.53	1.53	0.01	250.3
25TCRC046	33.53	35.05	1.52	0.02	707.1
25TCRC046	35.05	36.58	1.53	0.027	1212.5
25TCRC046	36.58	38.1	1.52	0.01	246.1
25TCRC046	38.1	39.62	1.52	0.008	177.8
25TCRC046	39.62	41.15	1.53	0.006	91.8
25TCRC046	41.15	42.67	1.52	0.005	149.9
25TCRC046	42.67	44.2	1.53	0.007	134.4
25TCRC046	44.2	45.72	1.52	0.006	398.7
25TCRC046	45.72	47.24	1.52	0.006	481.4
25TCRC046	47.24	48.77	1.53	0.004	233.1
25TCRC046	48.77	50.29	1.52	0.004	197
25TCRC046	50.29	51.82	1.53	0.004	380.6
25TCRC047	0	1.52	1.52	soil not assayed	
25TCRC047	1.52	3.05	1.53	0.224	1289
25TCRC047	3.05	4.57	1.52	0.111	846.1
25TCRC047	4.57	6.1	1.53	0.226	1608.1
25TCRC047	6.1	7.62	1.52	0.242	2188.4
25TCRC047	7.62	9.14	1.52	1.8	1131
25TCRC047	9.14	10.67	1.53	0.162	619.5
25TCRC047	10.67	12.19	1.52	0.063	833.4
25TCRC047	12.19	13.72	1.53	0.056	511.9
25TCRC047	13.72	15.24	1.52	0.025	479.6
25TCRC047	15.24	16.76	1.52	0.126	2369.8
25TCRC047	16.76	18.29	1.53	0.062	2432.3
25TCRC047	18.29	19.81	1.52	3.9	1128.2
25TCRC047	19.81	21.34	1.53	3.67	364
25TCRC047	21.34	22.86	1.52	0.145	526.8
25TCRC047	22.86	24.38	1.52	0.34	891.5
25TCRC047	24.38	25.91	1.53	0.063	641.5
25TCRC047	25.91	27.43	1.52	0.068	381.2
25TCRC047	27.43	28.96	1.53	0.024	437.1
25TCRC047	28.96	30.48	1.52	0.017	471.5
25TCRC047	30.48	32	1.52	0.022	260.8
25TCRC047	32	33.53	1.53	0.03	463.3

Hole ID	Depth From (m)	Depth To (m)	Interval (m)	Sb %	As ppm
25TCRC047	33.53	35.05	1.52	0.065	538.8
25TCRC047	35.05	36.58	1.53	0.031	270.6
25TCRC047	36.58	38.1	1.52	0.012	113.1
25TCRC047	38.1	39.62	1.52	0.019	435.7
25TCRC047	39.62	41.15	1.53	0.02	936.5
25TCRC047	41.15	42.67	1.52	0.019	1555.1
25TCRC047	42.67	44.2	1.53	0.01	360.9
25TCRC047	44.2	45.72	1.52	0.006	204.3
25TCRC047	45.72	47.24	1.52	0.008	223.5
25TCRC047	47.24	48.77	1.53	0.01	182.4
25TCRC047	48.77	50.29	1.52	0.009	187.9
25TCRC047	50.29	51.82	1.53	0.02	203.9
25TCRC047	51.82	53.34	1.52	0.008	449.4
25TCRC047	53.34	54.86	1.52	0.007	349.3
25TCRC047	54.86	56.39	1.53	0.016	416.9
25TCRC047	56.39	57.91	1.52	0.012	419
25TCRC047	57.91	59.44	1.53	0.015	659.9
25TCRC047	59.44	60.96	1.52	0.006	264.1

For personal use only