

▲ ASX ANNOUNCEMENT

RELEASED 9 OCTOBER 2025

ASX: WCN; OTCQB: WCMLF

Drilling Intersects Further High-Grade Copper Mineralisation

23m @ 5.2% Cu & 16.4g/t Ag from 82m within a broader intersection of 87m @ 2.4% Cu in DAN25012

White Cliff Minerals Limited (“WCN” or the “Company”) (ASX: WCN; OTCQB: WCMLF) is pleased to announce further assay results from the summer 2025 reverse circulation (RC) drilling at Danvers at the Rae Copper Project, Nunavut, Canada.

Key Highlights

- **Drilling intersects 23m @ 5.2%Cu & 16.4g/t Ag from 82m within a broader intersection of 87m @ 2.4% Cu** in DAN25012
- DAN25012 **expands the drilled mineralisation 100m to the SW** from DAN25007 that returned 105m @ 2.25%¹
- **DAN25011**, intersected **37m @ 0.49% Cu** from 5m, including **5m @ 1.91% Cu and 13.4g/t Ag** from 30m. Hole 11 is ~100m to the northeast of DAN25002.
- Assays now provide results that **expand mineralisation outside the historic estimates** across a mineralised strike of **>500m**, which is **>35% greater** than the historic footprint that hosts a non JORC compliant, historic resource estimate of **4.16mt at 2.96% Cu at a 2% cut-off Cu²**.
- Assays to date confirm continuity of high-grade copper mineralisation over significant distance and, near surface which supports typical open pit mining activities.
- 60% of assays still yet to be received from Danver’s drilling. Assays to date confirm continuity of high-grade copper mineralisation over significant distance at shallow depth.

“We are now seeing regular releases from the laboratory, with these latest very encouraging results on par with the Spring Campaign. With more than 6,400m of drilling now completed across the Project, we anticipate significant and ongoing results now through to Q1 2026. During the Spring Campaign, results showed extensive high grade Copper mineralisation from near surface that may add significantly to the historical resource. Our goal for the summer campaign was to continue to step out our drilling outside of the existing footprint to demonstrate the true scale at Danvers. Assays received now show a clear expansion to the lateral strike when compared to the historic footprint.

Troy Whittaker - Managing Director

This announcement has been approved by the Board of White Cliff Minerals Limited

¹ See ASX announcement 5 June 2025

² See ASX announcement 26 November 2024

DANVERS DRILLING UPDATE

Assay results from the Company's Rae Copper project continue to affirm the continuity of shallow, high grade copper mineralisation at the Danvers prospect.

- **Drilling intersects 23m @ 5.2%Cu & 16.4g/t Ag from 82m within broader 87m @ 2.4% Cu** in DAN25012.
- DAN25012 **expands the drilled mineralisation 100m to the SW** from DAN25007 that returned 105m @ 2.25%³.
- **DAN25011**, intersected **37m @ 0.49% Cu** from 5m, including **5m @ 1.91% Cu and 13.4g/t Ag** from 30m. Hole 11 is ±100m to the northeast of DAN25002 (DAN25002 returned 63m@2.2% Cu⁴) showing continuity at depth.
- **DAN25014**, intersected **5m @ 1.26% Cu from 44.20m and 0.51% Cu over 9.14m from 132.59m**. Hole 14 is 65m southwest of the historic resource.
- Assays now provide results that **expand mineralisation outside the historic estimates** across a mineralised strike of **>500m**, which is **>35% greater** than the historic footprint that hosts a non JORC compliant, historic resource estimate of **4.16mt at 2.96% Cu at a 2% cut-off Cu⁵**.
- 60% of assays still yet to be received from Danver's drilling - all assays remain outstanding for Sedimentary targets. Assays to date confirm continuity of high-grade copper mineralisation over significant distance, near surface which supports typical open pit mining activities.
- Mineralogical studies and metallurgical testwork will commence imminently to confirm copper recovery and the high grade Danvers ore is suitable for direct ship operations.

³ See ASX announcement 5 June 2025

⁴ See ASX announcement 13 May 2025

⁵ See ASX announcement 26 November 2024

For personal use only

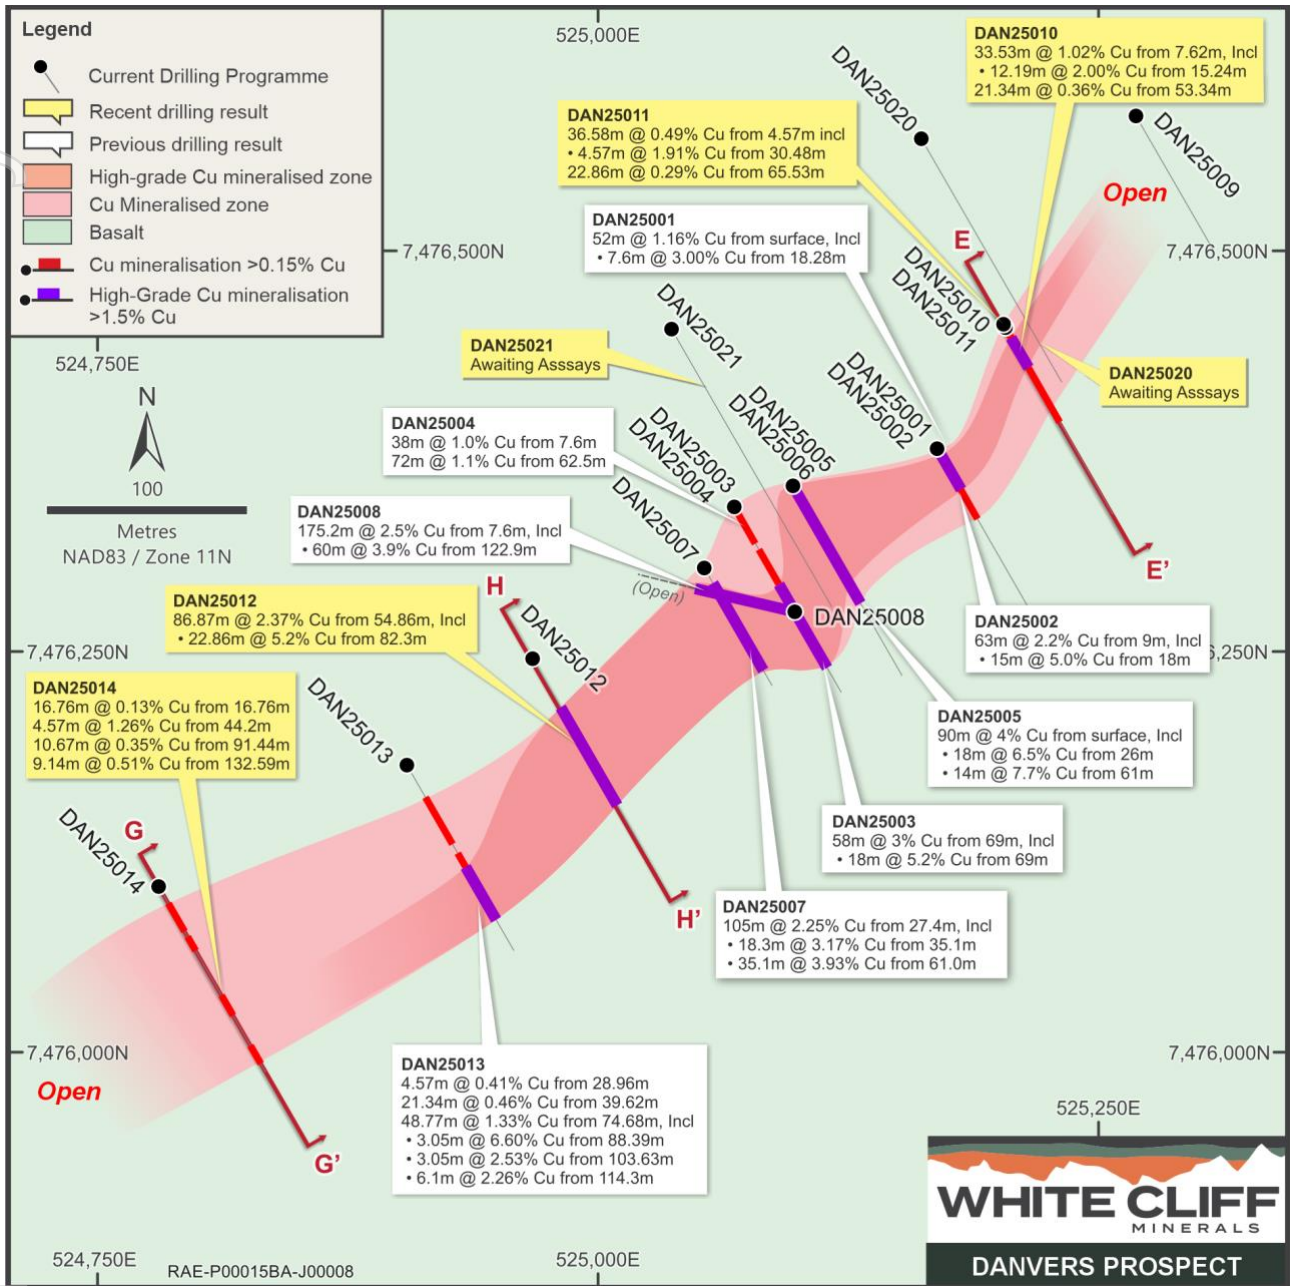


Figure 1 - Plan view of 2025 Spring and Summer RC drillholes at the Danvers Breccia System showing surface projection of intercepted mineralisation. Assay results included in this announcement are shown at E (DAN25010, DAN25011 Figure 3) and G (DAN25014, Figure 2).

For personal use only

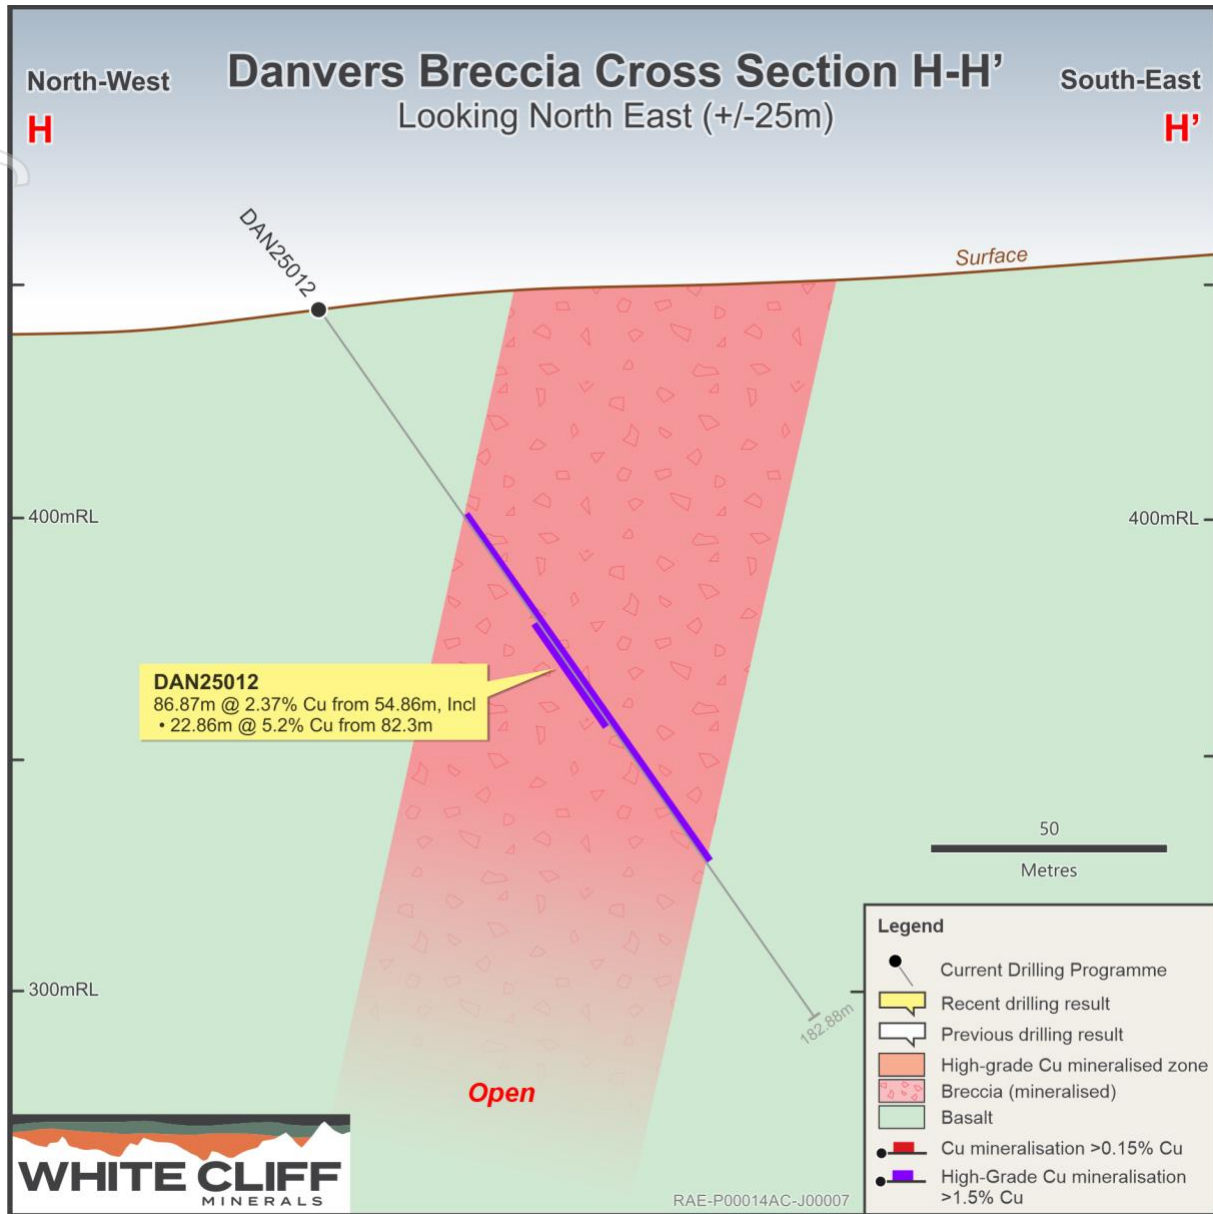


Figure 2 - Cross Section of drillhole DAN25012 which intercepted a shallow and thick high grade zone of copper mineralisation.

For personal use only

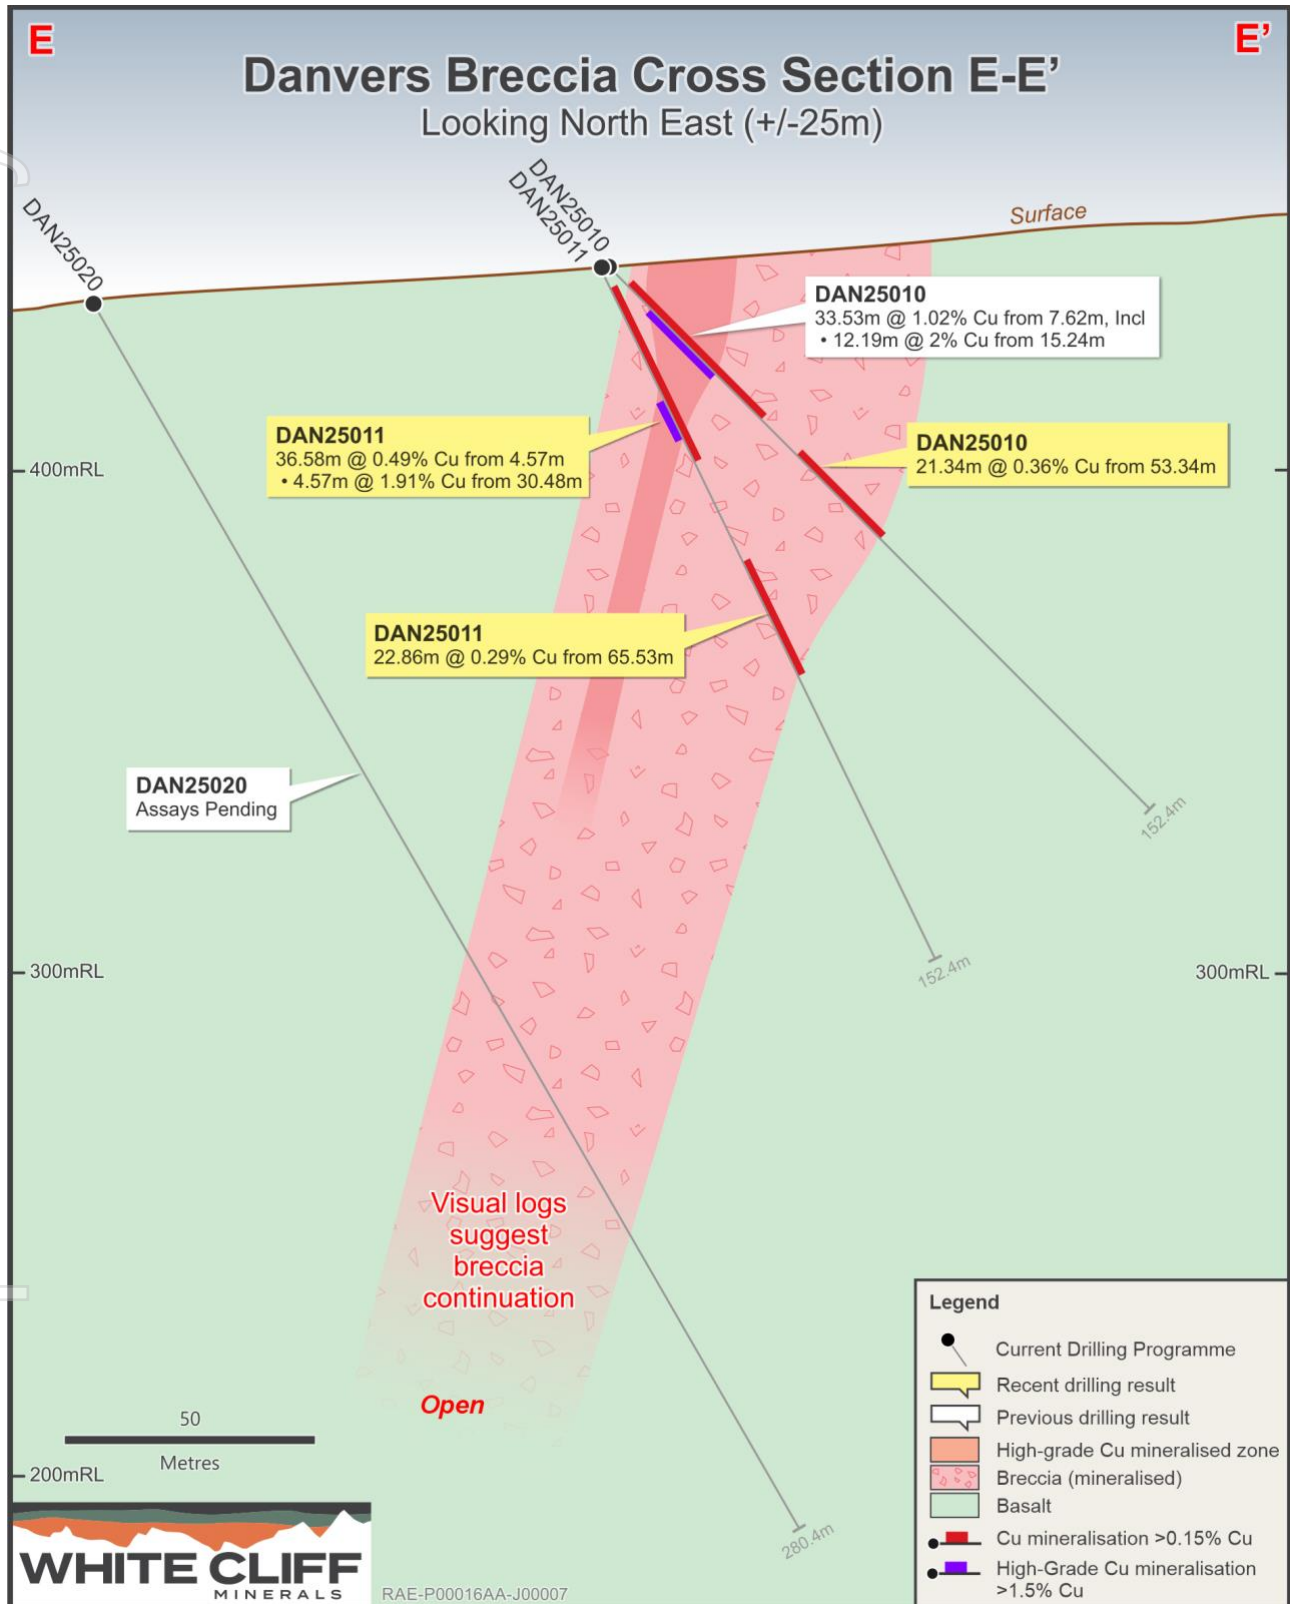


Figure 3 - Cross Section of drillholes DAN25010 and DAN25011 which intercepted a shallow zone of copper mineralisation. Assays are pending for drillhole DAN25020 which undercuts both drillholes, testing deep extensions to the known mineralisation.

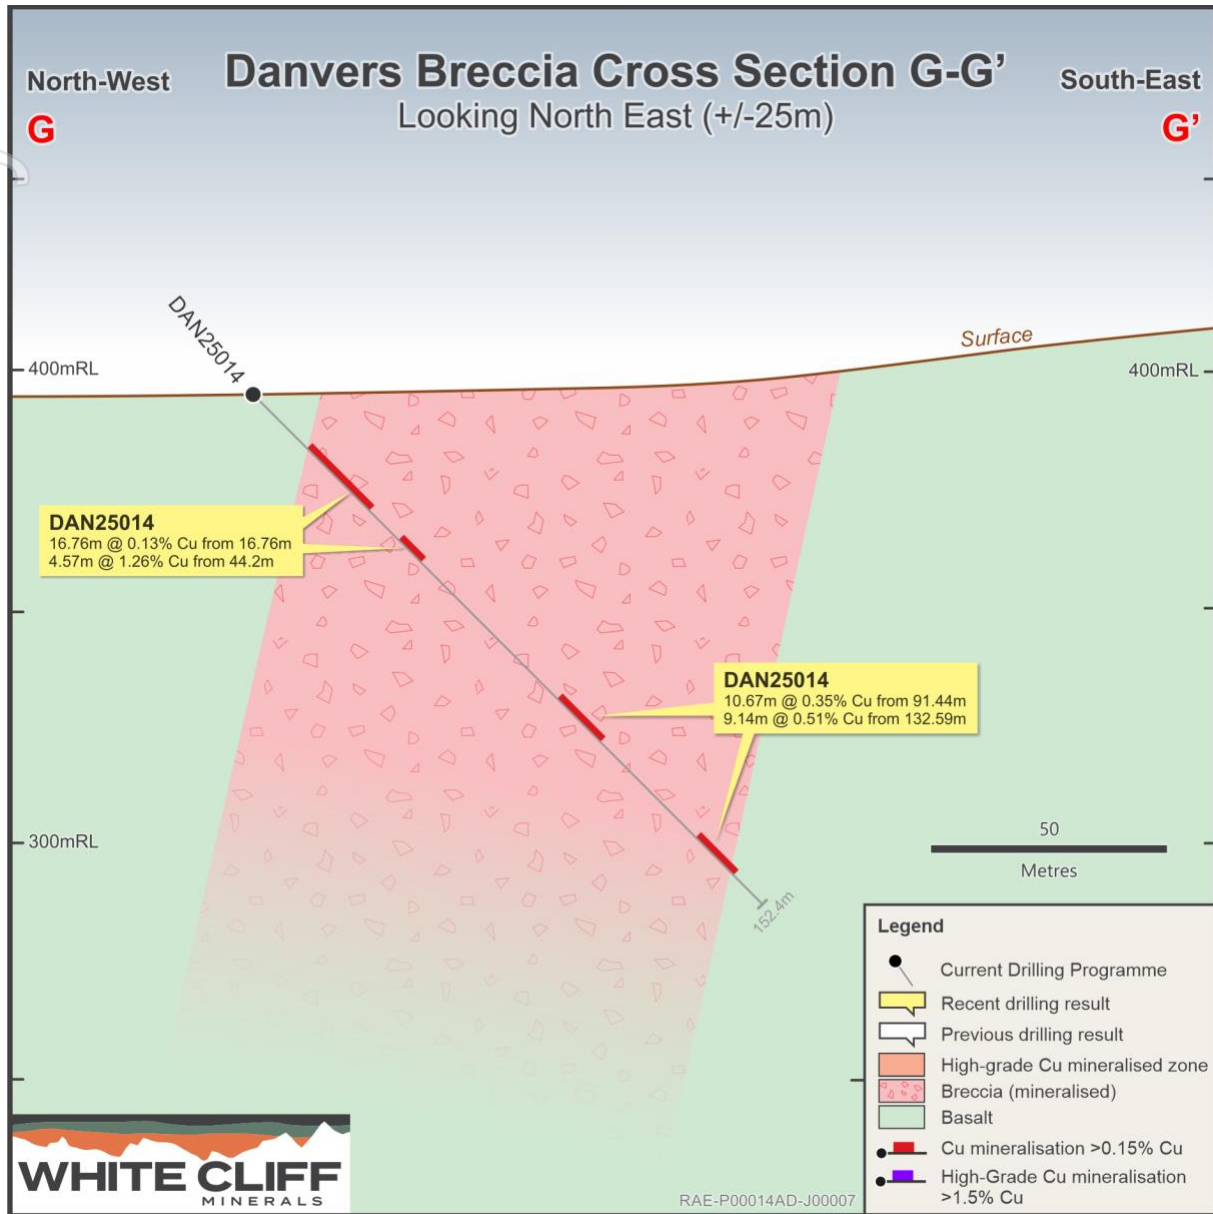


Figure 4 - Cross section of Drillhole DAN25014 which is 65m SW outside of the historic estimate footprint.

For personal use only

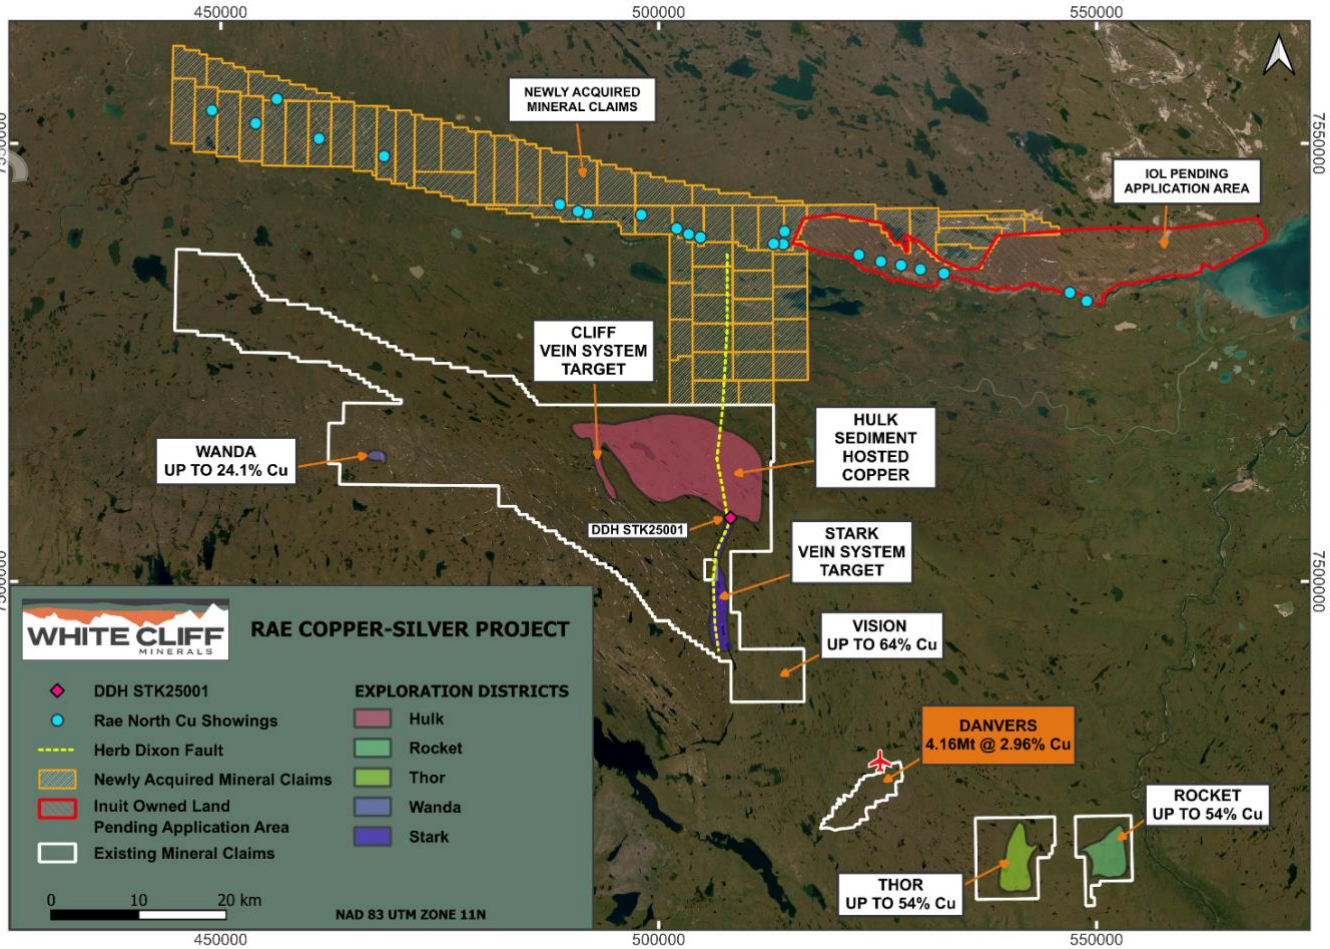


Figure 5 - White Cliff Minerals Rae Copper Project Area

For personal use only



For personal use only

ABOUT WHITE CLIFF MINERALS

The **Great Bear Lake** area is identified as having Canada’s highest probability for the hosting of iron-oxide-copper-gold uranium plus silver-style mineralisation in the Country. Results from the Company’s maiden exploration include **42.6% Cu**, **39.5% Cu** and **38.2g/t Au** from the Phoenix prospect and the **highest-grade silver rock chip** assays in recent history **7.54% Ag** and **5.35% Ag** from Slider

The **Rae Cu-Ag project** contains numerous high grade Cu mineralisation occurrences and hosts all first-order controls for a sediment-hosted copper deposit and includes a historic resource estimate of **4.16 million tons at a grade of 2.96% Cu⁶**. Highlights from the maiden drilling campaign include **175m @ 2.5% Cu & 8.66g/t Ag, 90m @ 4% Cu & 7.5g/t Ag, 58m @ 3.08% Cu & 13.3g/t Ag, 105m @ 2.25% Cu, 63m @ 2.23% Cu, and 75m @ 2% Cu.**

The historic resource estimate at the Danvers Prospect, is a historic estimate and not in accordance with the JORC Code. The Company notes that the estimate and historic drilling results dated 1967 and 1968 are not reported in accordance with the NI 43-101 or JORC Code 2012. A competent person has not done sufficient work to disclose the estimate/results in accordance with the JORC Code 2012. It is possible that following further evaluation and/or exploration work that the confidence in the estimate and reported exploration results may be reduced when reported under the JORC Code 2012. The supporting information provided in the announcement dated 26 November 2024 continues to apply and has not materially changed.

For further information, please contact:

Troy Whittaker - Managing Director
 E: info@wcminerals.com.au

White Cliff Minerals
 T: +61 8 9486 4036

⁶ See ASX Announcement dated 26 November 2024 “WCN Acquires Highly Prospective and Proven Copper Project”

COMPETENT PERSONS STATEMENT

The information in this report that relates to exploration results, mineral resources or ore reserves is based on information compiled by Roderick McIlree, who is a Fellow of the Australasian Institute of Mining and Metallurgy. Mr McIlree is an employee of White Cliff Minerals. Mr McIlree has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity that he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (the JORC Code). Mr McIlree consents to the inclusion of this information in the form and context in which it appears in this report.

JORC COMPLIANCE STATEMENT

Where statement in this announcement refer to exploration results which previously been reported, the Company confirms that it is not aware of any new information or data that materially affects the information included in the original announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not materially modified from the original market announcements.

CAUTION REGARDING FORWARD-LOOKING STATEMENTS

This document may contain forward-looking statements concerning White Cliff Minerals. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward-looking statements because of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information by White Cliff Minerals, or, on behalf of the Company.

Forward-looking statements in this document are based on White Cliff Minerals' beliefs, opinions and estimates of the Company as of the dates the forward-looking statements are made, and no obligation is assured to update forward-looking statements if these beliefs, opinions and estimates should change or to reflect future developments.

For personal use only

APPENDIX A.

The following Tables are provided to ensure compliance with the JORC Code (2012 Edition) requirements for the reporting of Exploration Results at the Rae Copper Project.

Table 1.

Table 1 - Assay results from RC drillholes DAN25009, 010, 014. Depth intervals (from-to) are displayed in metres after conversion from feet. Sample intervals are recorded in feet, as per the 5ft rod intervals used whilst drilling. (5ft interval equals 1.524m)

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25010	0.00	3.05	<0.5	0.104
DAN25010	3.05	4.57	<0.5	0.112
DAN25010	4.57	6.10	<0.5	0.054
DAN25010	6.10	7.62	<0.5	0.085
DAN25010	7.62	9.14	0.7	0.191
DAN25010	9.14	10.67	<0.5	0.128
DAN25010	10.67	12.19	0.7	0.198
DAN25010	12.19	13.72	1.6	0.596
DAN25010	13.72	15.24	0.5	0.269
DAN25010	15.24	16.76	8.9	1.865
DAN25010	16.76	18.29	24.2	3.730
DAN25010	18.29	19.81	7.9	2.990
DAN25010	19.81	21.34	3.3	1.490
DAN25010	21.34	22.86	7	2.950
DAN25010	22.86	24.38	1.7	0.728
DAN25010	24.38	25.91	2.9	1.275
DAN25010	25.91	27.43	2.3	1.030
DAN25010	27.43	28.96	0.9	0.363
DAN25010	28.96	30.48	4.6	1.875
DAN25010	30.48	32.00	3.6	1.135
DAN25010	32.00	33.53	2	0.542
DAN25010	33.53	35.05	0.9	0.242
DAN25010	35.05	36.58	<0.5	0.045
DAN25010	36.58	38.10	<0.5	0.144
DAN25010	38.10	39.62	1	0.370
DAN25010	39.62	41.15	<0.5	0.251
DAN25010	41.15	42.67	<0.5	0.051
DAN25010	42.67	44.20	<0.5	0.044
DAN25010	44.20	45.72	<0.5	0.087
DAN25010	45.72	47.24	<0.5	0.039
DAN25010	47.24	48.77	<0.5	0.041

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25010	48.77	50.29	<0.5	0.036
DAN25010	50.29	51.82	<0.5	0.041
DAN25010	51.82	53.34	<0.5	0.076
DAN25010	53.34	54.86	0.8	0.381
DAN25010	54.86	56.39	0.8	0.374
DAN25010	56.39	57.91	0.9	0.306
DAN25010	57.91	59.44	2.4	0.901
DAN25010	59.44	60.96	3.5	1.220
DAN25010	60.96	62.48	<0.5	0.104
DAN25010	62.48	64.01	0.5	0.263
DAN25010	64.01	65.53	<0.5	0.086
DAN25010	65.53	67.06	<0.5	0.071
DAN25010	67.06	68.58	<0.5	0.067
DAN25010	68.58	70.10	<0.5	0.070
DAN25010	70.10	71.63	1.7	0.630
DAN25010	71.63	73.15	0.9	0.360
DAN25010	73.15	74.68	<0.5	0.163
DAN25010	74.68	76.20	0.7	0.081
DAN25010	76.20	77.72	<0.5	0.053
DAN25010	77.72	79.25	<0.5	0.017
DAN25010	79.25	80.77	<0.5	0.015
DAN25010	80.77	82.30	<0.5	0.014
DAN25010	82.30	83.82	<0.5	0.008
DAN25010	83.82	85.34	<0.5	0.053
DAN25010	85.34	86.87	<0.5	0.011
DAN25010	86.87	88.39	<0.5	0.007
DAN25010	88.39	89.92	<0.5	0.008
DAN25010	89.92	91.44	<0.5	0.017
DAN25010	91.44	92.96	<0.5	0.008
DAN25010	92.96	94.49	<0.5	0.005
DAN25010	94.49	96.01	<0.5	0.002
DAN25010	96.01	97.54	<0.5	0.003
DAN25010	97.54	99.06	<0.5	0.007
DAN25010	99.06	100.58	<0.5	0.006
DAN25010	100.58	102.11	<0.5	0.004
DAN25010	102.11	103.63	<0.5	0.009
DAN25010	103.63	105.16	<0.5	0.007
DAN25010	105.16	106.68	<0.5	0.003
DAN25010	106.68	108.20	<0.5	0.003
DAN25010	108.20	109.73	<0.5	0.031
DAN25010	109.73	111.25	<0.5	0.141
DAN25010	111.25	112.78	<0.5	0.012

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25010	112.78	114.30	<0.5	0.017
DAN25010	114.30	115.82	<0.5	0.024
DAN25010	115.82	117.35	<0.5	0.008
DAN25010	117.35	118.87	<0.5	0.012
DAN25010	118.87	120.40	<0.5	0.021
DAN25010	120.40	121.92	<0.5	0.008
DAN25010	121.92	123.44	<0.5	0.005
DAN25010	123.44	124.97	<0.5	0.004
DAN25010	124.97	126.49	<0.5	0.005
DAN25010	126.49	128.02	<0.5	0.003
DAN25010	128.02	129.54	<0.5	0.004
DAN25010	129.54	131.06	<0.5	0.008
DAN25010	131.06	132.59	<0.5	0.004
DAN25010	132.59	134.11	<0.5	0.004
DAN25010	134.11	135.64	<0.5	0.006
DAN25010	135.64	137.16	<0.5	0.007
DAN25010	137.16	138.68	<0.5	0.006
DAN25010	138.68	140.21	<0.5	0.005
DAN25010	140.21	141.73	<0.5	0.005
DAN25010	141.73	143.26	<0.5	0.007
DAN25010	143.26	144.78	<0.5	0.006
DAN25010	144.78	146.30	<0.5	0.004
DAN25010	146.30	147.83	<0.5	0.004
DAN25010	147.83	149.35	<0.5	0.009
DAN25010	149.35	150.88	<0.5	0.013
DAN25010	150.88	152.40	<0.5	0.014
DAN25011	0.00	1.52	<0.5	0.036
DAN25011	1.52	3.05	<0.5	0.081
DAN25011	3.05	4.57	0.6	0.090
DAN25011	4.57	6.10	0.7	0.215
DAN25011	6.10	7.62	0.8	0.224
DAN25011	7.62	9.14	1.5	0.474
DAN25011	9.14	10.67	1.1	0.332
DAN25011	10.67	12.19	<0.5	0.131
DAN25011	12.19	13.72	<0.5	0.204
DAN25011	13.72	15.24	<0.5	0.182
DAN25011	15.24	16.76	<0.5	0.165
DAN25011	16.76	18.29	<0.5	0.239
DAN25011	18.29	19.81	0.9	0.271
DAN25011	19.81	21.34	0.6	0.154
DAN25011	21.34	22.86	0.6	0.331
DAN25011	22.86	24.38	2.2	0.916

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25011	24.38	25.91	<0.5	0.059
DAN25011	25.91	27.43	1	0.304
DAN25011	27.43	28.96	2.3	0.369
DAN25011	28.96	30.48	1.3	0.232
DAN25011	30.48	32.00	16	2.750
DAN25011	32.00	33.53	16.1	1.960
DAN25011	33.53	35.05	8.1	1.005
DAN25011	35.05	36.58	4.6	0.677
DAN25011	36.58	38.10	1	0.188
DAN25011	38.10	39.62	0.5	0.130
DAN25011	39.62	41.15	<0.5	0.159
DAN25011	41.15	42.67	<0.5	0.056
DAN25011	42.67	44.20	<0.5	0.052
DAN25011	44.20	45.72	<0.5	0.025
DAN25011	45.72	47.24	<0.5	0.022
DAN25011	47.24	48.77	<0.5	0.032
DAN25011	48.77	50.29	<0.5	0.084
DAN25011	50.29	51.82	<0.5	0.060
DAN25011	51.82	53.34	<0.5	0.034
DAN25011	53.34	54.86	<0.5	0.045
DAN25011	54.86	56.39	0.7	0.091
DAN25011	56.39	57.91	<0.5	0.074
DAN25011	57.91	59.44	<0.5	0.073
DAN25011	59.44	60.96	<0.5	0.041
DAN25011	60.96	62.48	<0.5	0.029
DAN25011	62.48	64.01	<0.5	0.076
DAN25011	64.01	65.53	<0.5	0.096
DAN25011	65.53	67.06	<0.5	0.104
DAN25011	67.06	68.58	<0.5	0.278
DAN25011	68.58	70.10	1.4	0.868
DAN25011	70.10	71.63	0.5	0.232
DAN25011	71.63	73.15	<0.5	0.174
DAN25011	73.15	74.68	1.1	0.319
DAN25011	74.68	76.20	0.6	0.237
DAN25011	76.20	77.72	0.7	0.218
DAN25011	77.72	79.25	2.1	0.744
DAN25011	79.25	80.77	1.5	0.569
DAN25011	80.77	82.30	<0.5	0.182
DAN25011	82.30	83.82	<0.5	0.015
DAN25011	83.82	85.34	<0.5	0.057
DAN25011	85.34	86.87	<0.5	0.186
DAN25011	86.87	88.39	<0.5	0.204

For personal use only

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25011	88.39	89.92	<0.5	0.047
DAN25011	89.92	91.44	<0.5	0.020
DAN25011	91.44	92.96	<0.5	0.041
DAN25011	92.96	94.49	<0.5	0.070
DAN25011	94.49	96.01	<0.5	0.048
DAN25011	96.01	97.54	<0.5	0.040
DAN25011	97.54	99.06	<0.5	0.017
DAN25011	99.06	100.58	<0.5	0.064
DAN25011	100.58	102.11	<0.5	0.095
DAN25011	102.11	103.63	<0.5	0.015
DAN25011	103.63	105.16	<0.5	0.011
DAN25011	105.16	106.68	<0.5	0.019
DAN25011	106.68	108.20	<0.5	0.016
DAN25011	108.20	109.73	<0.5	0.022
DAN25011	109.73	111.25	<0.5	0.020
DAN25011	111.25	112.78	<0.5	0.035
DAN25011	112.78	114.30	<0.5	0.038
DAN25011	114.30	115.82	<0.5	0.068
DAN25011	115.82	117.35	<0.5	0.021
DAN25011	117.35	118.87	<0.5	0.012
DAN25011	118.87	120.40	<0.5	0.004
DAN25011	120.40	121.92	<i>Sample contaminated</i>	
DAN25011	121.92	123.44	<0.5	0.008
DAN25011	123.44	124.97	0.5	0.266
DAN25011	124.97	126.49	<0.5	0.090
DAN25011	126.49	128.02	<0.5	0.022
DAN25011	128.02	129.54	<0.5	0.010
DAN25011	129.54	131.06	<0.5	0.020
DAN25011	131.06	132.59	<0.5	0.017
DAN25011	132.59	134.11	<0.5	0.009
DAN25011	134.11	135.64	<0.5	0.084
DAN25011	135.64	137.16	<0.5	0.071
DAN25011	137.16	138.68	<0.5	0.028
DAN25011	138.68	140.21	<0.5	0.079
DAN25011	140.21	141.73	<0.5	0.027
DAN25011	141.73	143.26	<0.5	0.066
DAN25011	143.26	144.78	<0.5	0.026
DAN25011	144.78	146.30	<0.5	0.006
DAN25011	146.30	147.83	<0.5	0.004
DAN25011	147.83	149.35	<0.5	0.003
DAN25011	149.35	150.88	<0.5	0.006
DAN25011	150.88	152.40	<0.5	0.006

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25014	0.00	1.52	<0.5	0.010
DAN25014	1.52	3.05	<0.5	0.031
DAN25014	3.05	4.57	<0.5	0.047
DAN25014	4.57	6.10	<0.5	0.033
DAN25014	6.10	7.62	<0.5	0.028
DAN25014	7.62	9.14	<0.5	0.033
DAN25014	9.14	10.67	<0.5	0.030
DAN25014	10.67	12.19	<0.5	0.041
DAN25014	12.19	13.72	<0.5	0.024
DAN25014	13.72	15.24	<0.5	0.041
DAN25014	15.24	16.76	<0.5	0.021
DAN25014	16.76	18.29	1.5	0.236
DAN25014	18.29	19.81	1	0.213
DAN25014	19.81	21.34	<0.5	0.051
DAN25014	21.34	22.86	<0.5	0.109
DAN25014	22.86	24.38	0.5	0.132
DAN25014	24.38	25.91	<0.5	0.051
DAN25014	25.91	27.43	1	0.163
DAN25014	27.43	28.96	<0.5	0.076
DAN25014	28.96	30.48	<0.5	0.049
DAN25014	30.48	32.00	0.8	0.109
DAN25014	32.00	33.53	1.9	0.219
DAN25014	33.53	35.05	<0.5	0.030
DAN25014	35.05	36.58	<0.5	0.020
DAN25014	36.58	38.10	<0.5	0.016
DAN25014	38.10	39.62	<0.5	0.014
DAN25014	39.62	41.15	<0.5	0.007
DAN25014	41.15	42.67	<0.5	0.010
DAN25014	42.67	44.20	<0.5	0.008
DAN25014	44.20	45.72	2.1	0.798
DAN25014	45.72	47.24	4.9	2.090
DAN25014	47.24	48.77	4.7	0.887
DAN25014	48.77	50.29	<0.5	0.034
DAN25014	50.29	51.82	<0.5	0.022
DAN25014	51.82	53.34	<0.5	0.045
DAN25014	53.34	54.86	<0.5	0.009
DAN25014	54.86	56.39	<0.5	0.019
DAN25014	56.39	57.91	<0.5	0.004
DAN25014	57.91	59.44	<0.5	0.002
DAN25014	59.44	60.96	<0.5	0.026
DAN25014	60.96	62.48	<0.5	0.002
DAN25014	62.48	64.01	<0.5	0.002

For personal use only

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25014	64.01	65.53	<0.5	0.003
DAN25014	65.53	67.06	<0.5	0.002
DAN25014	67.06	68.58	<0.5	0.003
DAN25014	68.58	70.10	<0.5	0.003
DAN25014	70.10	71.63	<0.5	0.001
DAN25014	71.63	73.15	<0.5	0.004
DAN25014	73.15	74.68	<0.5	0.005
DAN25014	74.68	76.20	<0.5	0.004
DAN25014	76.20	77.72	<0.5	0.007
DAN25014	77.72	79.25	<0.5	0.007
DAN25014	79.25	80.77	<0.5	0.012
DAN25014	80.77	82.30	<0.5	0.004
DAN25014	82.30	83.82	<0.5	0.003
DAN25014	83.82	85.34	<0.5	0.010
DAN25014	85.34	86.87	<0.5	0.005
DAN25014	86.87	88.39	<0.5	0.018
DAN25014	88.39	89.92	<0.5	0.014
DAN25014	89.92	91.44	<0.5	0.007
DAN25014	91.44	92.96	7.6	1.725
DAN25014	92.96	94.49	0.6	0.164
DAN25014	94.49	96.01	<0.5	0.078
DAN25014	96.01	97.54	<0.5	0.046
DAN25014	97.54	99.06	<0.5	0.020
DAN25014	99.06	100.58	<0.5	0.125
DAN25014	100.58	102.11	<0.5	0.295
DAN25014	102.11	103.63	0.7	0.072
DAN25014	103.63	105.16	1.1	0.087
DAN25014	105.16	106.68	1.2	0.118
DAN25014	106.68	108.20	<0.5	0.117
DAN25014	108.20	109.73	1.6	0.115
DAN25014	109.73	111.25	1.5	0.072
DAN25014	111.25	112.78	2.8	0.071
DAN25014	112.78	114.30	1	0.053
DAN25014	114.30	115.82	0.6	0.041
DAN25014	115.82	117.35	1.8	0.041
DAN25014	117.35	118.87	0.5	0.048
DAN25014	118.87	120.40	1.8	0.061
DAN25014	120.40	121.92	<0.5	0.039
DAN25014	121.92	123.44	<0.5	0.033
DAN25014	123.44	124.97	<0.5	0.043
DAN25014	124.97	126.49	<0.5	0.036
DAN25014	126.49	128.02	<0.5	0.091

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25014	128.02	129.54	<0.5	0.078
DAN25014	129.54	131.06	<0.5	0.046
DAN25014	131.06	132.59	<0.5	0.049
DAN25014	132.59	134.11	<0.5	0.149
DAN25014	134.11	135.64	<0.5	0.096
DAN25014	135.64	137.16	0.8	0.228
DAN25014	137.16	138.68	6.1	2.010
DAN25014	138.68	140.21	2.2	0.421
DAN25014	140.21	141.73	1.2	0.172
DAN25014	141.73	143.26	<0.5	0.046
DAN25014	143.26	144.78	<0.5	0.039
DAN25014	144.78	146.30	<0.5	0.026
DAN25014	146.30	147.83	<0.5	0.051
DAN25014	147.83	149.35	<0.5	0.006
DAN25014	149.35	150.88	<0.5	0.006
DAN25014	150.88	152.40	<0.5	0.029
DAN25012	0.00	1.52	0.5	0.100
DAN25012	1.52	3.05	<0.5	0.085
DAN25012	3.05	4.57	0.7	0.246
DAN25012	4.57	6.10	0.6	0.184
DAN25012	6.10	7.62	<0.5	0.076
DAN25012	7.62	9.14	<0.5	0.067
DAN25012	9.14	10.67	<0.5	0.058
DAN25012	10.67	12.19	<0.5	0.016
DAN25012	12.19	13.72	<0.5	0.010
DAN25012	13.72	15.24	<0.5	0.012
DAN25012	15.24	16.76	<0.5	0.010
DAN25012	16.76	18.29	<0.5	0.005
DAN25012	18.29	19.81	<0.5	0.007
DAN25012	19.81	21.34	<0.5	0.008
DAN25012	21.34	22.86	<0.5	0.010
DAN25012	22.86	24.38	<0.5	0.011
DAN25012	24.38	25.91	<0.5	0.006
DAN25012	25.91	27.43	<0.5	0.009
DAN25012	27.43	28.96	<0.5	0.013
DAN25012	28.96	30.48	<0.5	0.012
DAN25012	30.48	32.00	<0.5	0.011
DAN25012	32.00	33.53	<0.5	0.006
DAN25012	33.53	35.05	<0.5	0.007
DAN25012	35.05	36.58	<0.5	0.006
DAN25012	36.58	38.10	<0.5	0.009
DAN25012	38.10	39.62	<0.5	0.015

For personal use only

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25012	39.62	41.15	<0.5	0.009
DAN25012	41.15	42.67	<0.5	0.008
DAN25012	42.67	44.20	<0.5	0.008
DAN25012	44.20	45.72	<0.5	0.018
DAN25012	45.72	47.24	<0.5	0.009
DAN25012	47.24	48.77	<0.5	0.004
DAN25012	48.77	50.29	<0.5	0.009
DAN25012	50.29	51.82	<0.5	0.013
DAN25012	51.82	53.34	<0.5	0.005
DAN25012	53.34	54.86	<0.5	0.022
DAN25012	54.86	56.39	1.3	0.417
DAN25012	56.39	57.91	3.5	2.360
DAN25012	57.91	59.44	2.6	1.465
DAN25012	59.44	60.96	4	2.800
DAN25012	60.96	62.48	4.2	3.010
DAN25012	62.48	64.01	1.9	1.095
DAN25012	64.01	65.53	2.9	0.876
DAN25012	65.53	67.06	0.6	0.099
DAN25012	67.06	68.58	1.8	0.508
DAN25012	68.58	70.10	4.7	1.755
DAN25012	70.10	71.63	3.7	1.145
DAN25012	71.63	73.15	2	0.480
DAN25012	73.15	74.68	0.5	0.114
DAN25012	74.68	76.20	2.1	0.692
DAN25012	76.20	77.72	2.3	0.683
DAN25012	77.72	79.25	10.5	3.330
DAN25012	79.25	80.77	3.4	0.981
DAN25012	80.77	82.30	1.1	0.364
DAN25012	82.30	83.82	6.7	2.680
DAN25012	83.82	85.34	6.8	2.790
DAN25012	85.34	86.87	42	16.150
DAN25012	86.87	88.39	35.3	10.500
DAN25012	88.39	89.92	9.9	2.970
DAN25012	89.92	91.44	18.1	5.530
DAN25012	91.44	92.96	13.1	3.700
DAN25012	92.96	94.49	17.1	5.050
DAN25012	94.49	96.01	6.1	1.745
DAN25012	96.01	97.54	16	4.410
DAN25012	97.54	99.06	19.7	5.120
DAN25012	99.06	100.58	20.5	6.130
DAN25012	100.58	102.11	15.8	4.540
DAN25012	102.11	103.63	8.9	3.000

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25012	103.63	105.16	10.1	3.620
DAN25012	105.16	106.68	1.6	0.424
DAN25012	106.68	108.20	8.2	2.410
DAN25012	108.20	109.73	5.7	1.805
DAN25012	109.73	111.25	2.7	0.743
DAN25012	111.25	112.78	1.5	0.470
DAN25012	112.78	114.30	1.7	0.373
DAN25012	114.30	115.82	35.4	8.860
DAN25012	115.82	117.35	6.2	1.880
DAN25012	117.35	118.87	1.4	0.343
DAN25012	118.87	120.40	1.9	0.526
DAN25012	120.40	121.92	2.8	0.775
DAN25012	121.92	123.44	13.9	4.090
DAN25012	123.44	124.97	1.8	0.523
DAN25012	124.97	126.49	1.7	0.449
DAN25012	126.49	128.02	1.4	0.418
DAN25012	128.02	129.54	3.5	0.877
DAN25012	129.54	131.06	4	0.970
DAN25012	131.06	132.59	4.8	1.165
DAN25012	132.59	134.11	3.3	0.854
DAN25012	134.11	135.64	3.8	1.045
DAN25012	135.64	137.16	13	3.500
DAN25012	137.16	138.68	6.8	1.885
DAN25012	138.68	140.21	1.8	0.366
DAN25012	140.21	141.73	1.2	0.228
DAN25012	141.73	143.26	<0.5	0.028
DAN25012	143.26	144.78	0.5	0.033
DAN25012	144.78	146.30	<0.5	0.037
DAN25012	146.30	147.83	<0.5	0.055
DAN25012	147.83	149.35	<0.5	0.018
DAN25012	149.35	150.88	<0.5	0.014
DAN25012	150.88	152.40	<0.5	0.003
DAN25012	152.40	153.92	<0.5	0.002
DAN25012	153.92	155.45	<0.5	0.003
DAN25012	155.45	156.97	<0.5	0.002
DAN25012	156.97	158.50	<0.5	0.015
DAN25012	158.50	160.02	<0.5	0.007
DAN25012	160.02	161.54	<0.5	0.032
DAN25012	161.54	163.07	<0.5	0.111
DAN25012	163.07	164.59	<0.5	0.003
DAN25012	164.59	166.12	<0.5	0.007
DAN25012	166.12	167.64	<0.5	0.006

For personal use only

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25012	167.64	169.16	<0.5	0.006
DAN25012	169.16	170.69	<0.5	0.006
DAN25012	170.69	172.21	<0.5	0.007
DAN25012	172.21	173.74	<0.5	0.008
DAN25012	173.74	175.26	<0.5	0.004

Hole ID	From (m)	To (m)	Ag (g/t)	Cu (%)
DAN25012	175.26	176.78	<0.5	0.029
DAN25012	176.78	178.31	<0.5	0.003
DAN25012	178.31	179.83	<0.5	0.024
DAN25012	179.83	181.36	<0.5	0.009
DAN25012	181.36	182.88	<0.5	0.003

Table 2 - Rock chip information for samples included in Figure 1.

Sample ID	Easting	Northing	District	Ag (g/t)	Cu (%)
F005965	512291	7486880	Vision	152	64.02
F005950	552872	7466464	Rocket	14	54.12
F005921	541649	7468525	Thor	34	54.02
F005996	468678	7514161	Wanda	4	24.1

Table 3 – Collar location information for reported drillholes

Hole ID	Datum	CRS	Easting	Northing	Elevation	Dip	Azimuth	Depth (m)
DAN25010	NAD83	UTM Zone 11N	525203	7476500	420	-45	150	152.4
DAN25011	NAD83	UTM Zone 11N	525202	7476502	420	-65	150	152.4
DAN25012	NAD83	UTM Zone 11N	524967	7476335	425	-55	150	182.8
DAN25014	NAD83	UTM Zone 11N	524780	7476221	425	-45	150	152.4

For personal use only

APPENDIX B.

The following Tables are provided to ensure compliance with the JORC Code (2012 Edition) requirements for the reporting of Exploration Results at the Rae Copper Project.

SECTION 1: SAMPLING TECHNIQUES AND DATA

(Criteria in this section applies to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> 2025 Reverse circulation (RC) drilling by White Cliff Minerals. Drilling completed by Northspan Explorations Ltd. The drillholes were sampled in their entirety on 5-foot (1.52m) intervals. Returned material was passed through a level 3-tier riffle splitter, producing a 12.5% sample split and a retention sample. Representative chips for logging were taken from the retention sample by sieving from the retention sample. Chips are washed at the camp location, prior to storage in chip trays. 2025 Reverse circulation (RC) drilling by White Cliff Minerals - Samples are sent to ALS Yellowknife for preparation under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-MS analysis after 4-acid digestion (ME-MS61) and fire assay gold (Au-ICP21). 2025 diamond drilling (DD) by White Cliff Minerals. Drilling was completed by Northtech Drilling Ltd. Core was sampled after geological logging and sample interval markup by the logging geologist. A standard interval of 1.5m was employed with sample intervals breaking at changes in lithology, alteration or mineralisation. Half core or quarter core (duplicates) were produced for assay samples. 2025 diamond drilling (DD) by White Cliff Minerals – Samples are sent to ALS Yellowknife for preparation under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-AES analysis after 4-acid digestion (ME-ICP61). 2024 rock chip samples from the Nunavut based Rae Copper Project were sent to Yellowknife via secure air freight, and received by an employee of Aurora Geosciences Ltd., who ensured sample security and maintained custody until delivered to ALS laboratories, Yellowknife for preparation. Samples are prepared under code PREP-31D and analysed by ME-ICP-PURE, an analysis package designed for massive sulphides. Overassay (>40% Cu) are undertaken by Cu-VOL61. Samples with visible native copper were analysed by Cu-SCR21. All samples from Danvers target area underwent gold analysis by 30g fire assay and ICP-AES under code Au-ICP21, samples from Hulk undergo the same process however, without Au-ICP21. Final assay results and certificates are sent by ALS directly to both the WCN senior geologist and country manager to undertake independent quality control before release of results. 2025 rock chip samples from the Nunavut based Rae Copper Project will be shipped to Yellowknife via secure air freight, and received by an employee of Aurora Geosciences Ltd., who ensures sample security and maintains custody until delivered to ALS laboratories, Yellowknife for preparation. Samples will be prepared under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85%

passing 75 microns. Followed by multi-element ICP-MS analysis after 4-acid digestion (ME-MS61) and fire assay gold (Au-ICP21).

- Historic drilling completed by Kaizen Discovery Corp. Diamond drillhole CP15-DD009, half core samples were sent to ALS Minerals preparatory lab in Yellowknife, N.T., followed by secure transport to and multi element assay at ALS's laboratory in North Vancouver, B.C. Analytical procedures consisted of 33 Element Four Acid ICP-AES, followed by automatic Ore Grade Four Acid ICP-AES for all copper over limits.
- 2003/2005 diamond drilling completed by Coronation Minerals produced half core samples which were flown to Loring Laboratories Inc. of Calgary for assay in the 2005 campaign, 2003 samples were sent to ALS Chemex (Vancouver). The entire sample was crushed to 2mm using a primary jaw and secondary cone crusher. The sample was homogenized and a split of 250-350 grams is taken and pulverized using a TM ring and puck pulverizer to 95 % - 150 mesh. The pulp is then rolled 100 times to ensure complete homogenization placed in a sample bag ready for analysis. 0.5 g was digested by HCl, HNO3 and HClO4 and analysed for copper and nickel by ICP. Silver was analysed after HNO3 and HCl digestion followed by atomic absorption, with samples greater than 30 ppm silver re-analysed with fire assay with gravimetric finish. Gold and PGMs were analysed by a 30 g split by fire assay followed by ICP analysis.

Drilling techniques

- Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic etc.) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is orientated and if so, by what method, etc.).
- 2025 Reverse circulation (RC) drilling by White Cliff Minerals - drilling was completed by reverse circulation (RC) drilling methods by Northspan Explorations Ltd. utilising a heli-portable hornet machine. 5-foot rod intervals with a 3.5-inch face sampling hammer with inner-tube assembly and 3.5-inch string diameter.
- 2025 diamond drilling (DD) by White Cliff Minerals – drilling was completed by diamond drilling methods by Northtech Drilling Ltd. A heli-portable Zinex A5 rig using standard NQ rod diameter. The core was not oriented.
- Historic drilling completed by Kaizen Discovery Corp. in 2015 utilised a diamond drilling rig operated by Peak Drilling contractors. NQ2 diameter was used. Core-orientation procedure is unknown. Standard or triple tube drilling is unknown.
- 2003/2005 conventional diamond drilling (LY 38 drill model) of NQ core diameter.

Drill sample recovery

- Method of recording and assessing core and chip sample recoveries and results assessed.
- Measures taken to maximise sample recovery and ensure representative nature of the samples.
- Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.
- 2025 RC drilling by White Cliff Minerals changes sample recovery and sample condition at the rig site during drilling operation. An estimation (qualitative) of recovery was completed on the sample returned from the complete drill interval if loss is believed to have occurred. Reasons for loss discussed between rigsite geologist and driller. Wet samples have not been encountered. Sample bias is believed to be negligible due to a preferential loss of fine/coarse material. Riffle splitting of the returned material to generate a sample produces a homogenous sample for the interval, ensuring representative sampling. Field duplicate samples are taken by spearing the homogenised retention sample, post riffle splitting.
- 2025 diamond drilling (DD) by White Cliff Minerals – core recovery and rock quality designation (RQD) are measured by logging geologists and technicians of contractor Aurora Geosciences Ltd on a per drill run basis, of 3m. Recovery is calculated as the relationship between drilled interval and length of recovered core. No relationship between grade and recovery can be determined currently due to no assays received for 2025 diamond drilling.
- 2015 Kaizen Discovery Corp - Core recovery was calculated as the difference between drilled intervals between drillers core blocks and the length of recovered core. Representative core samples were taken by sampling half core,

cutting the core along the long axis with an electric powered core saw. No relationship is observed between recovery and grade for drillhole CP15_DD009 which returned 99.5% core recovery.

- 2003/2005 diamond drilling completed by Coronation Minerals - No note of core recovery within source publication for Coronation Minerals' program. Representative half core samples were taken for assay. No relationship between grade and recovery can be commented on due to lack of recovery information.
- 2025 RC drilling by White Cliff Minerals - All intervals returned are logged for lithology and mineralisation at the camp location.
- 2025 diamond drilling (DD) by White Cliff Minerals – All recovered drillcore is logged for lithology, alteration and mineralisation at the camp location by an Aurora Geosciences contractor. All recovered core is photographed wet and dry.
- 2024 and 2025 rock chip sampling by White Cliff Minerals - sampling was undertaken on surface alongside lithologic, alteration and mineralisation logging. Data input presented in tabulated form alongside coordinates and sample numbers.
- High resolution photographs are available for RC chips and diamond drillcore from the 2025 program.
- 2015 Kaizen Discovery Corp – core was logged for lithology, alteration, mineralisation and structure. All recovered intervals were logged.
- 2015 Kaizen Discovery Corp – core photography is not available. Photographs of select intervals are available.
- 2003/2005 diamond drilling completed by Coronation Minerals - Core intervals were logged within a core shack at the Hope Lake Airstrip. Descriptive notes are recorded including note of rock type, alteration and mineralised intersections. No geotechnical logging is available. The level of detail would not be sufficient for inclusion in a Mineral Resource estimation to JORC standards. All recovered core was logged. No photographs of the drillcore are available.

Logging

- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.
- Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.
- The total length and percentage of the relevant intersections logged.

Sub-sampling techniques and sample preparation

- If core, whether cut or sawn and whether quarter, half or all core taken.
- If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.
- For all sample types, the nature, quality and appropriateness of the sample preparation technique.
- Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.
- Measures taken to ensure that the sampling is representative of the in-situ material collected,
- 2025 RC drilling by White Cliff Minerals – Holes were sampled in full using 1.52m intervals as per the 5-foot rod lengths of the rig. Assay samples were collected as a 12.5% split from a 3-tier riffle splitter used to ensure a homogenous and representative sample of the drilled interval.
- 2025 RC drilling by White Cliff Minerals – sample size is deemed appropriate to the base metal mineralisation which is hosted by fine to medium grained copper sulphides and their associated secondary minerals (malachite, azurite).
- 2025 diamond drilling (DD) by White Cliff Minerals – Drillcore is sampled on a nominal 1.5m interval, breaking at lithology, alteration or mineralisation boundaries. Samples range from 0.34-1.7m length. Half core is sampled for standard sample intervals, cut by a Husqvarna target portasaw ts355g. Quarter core intervals are used for duplicate insertion.
- 2024 and 2025 rock chip sampling by White Cliff Minerals - Rock chip sample sizes are deemed appropriate for the style of mineralisation targeted and able to quantify the precious and base metal content. A range of 0.56-1.96 kg of material was assayed with an average of 1.1kg for 2024 samples.

including for instance results for field duplicate/second-half sampling.

- Whether sample sizes are appropriate to the grain size of the material being sampled.

Quality of assay data and laboratory tests

- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.
- For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.
- Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.
- 2015 Kaizen Discovery Corp – Standard half core intervals were assayed. Quarter core duplicate samples were taken at specified intervals downhole as part of the quality assurance and control protocols. A total of 6 quarter core samples were taken within the reported drillhole.
- 2003/2005 diamond drilling completed by Coronation Minerals - Half core samples taken, split by hand on site. The nature of sample preparation is deemed fit for purpose for the target mineralisation style. No note of field duplicates are recorded by Coronation Minerals. Loring Laboratories conducted lab duplicate analyses. Sampling of half core is deemed appropriate for the mineralization being targeted.
- 2025 RC drilling by White Cliff Minerals – Samples are sent to ALS Yellowknife for preparation under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-MS analysis after 4-acid digestion (ME-MS61) and fire assay gold (Au-ICP21). 4-acid digestion is considered a near-total digestion except for barite, rare earth oxides, columbite-tantalite, and titanium, tin and tungsten minerals, which may not be fully digested. Overassay completed by OG-62 methods.
- A schedule of quality control samples is inserted into the sample stream at a rate of 10%, including field duplicates, coarse blanks (OREAS C26e), and certified reference materials OREAS930 and OREAS922. Field duplicates were taken from the retention sample by spearing the homogenised chips after riffle splitting.
- 2025 diamond drilling (DD) by White Cliff Minerals - Samples are sent to ALS Yellowknife for preparation under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-AES after 4-acid digestion (ME-ICP61). 4-acid digestion is considered a near-total digestion except for barite, rare earth oxides, columbite-tantalite, and titanium, tin and tungsten minerals, which may not be fully digested. Overassay completed by OG-62 methods. A schedule of quality control samples is inserted into the sample stream at a rate of 10%, including field duplicates, coarse blanks (OREAS C26e), and certified reference materials OREAS930 and OREAS922.
- Further to the inserted quality control samples ALS Laboratories conducts their own QC including reference materials during the analyses, matching the element concentrations to those observed in the analysis dataset, ensuring quality in reported assay results.
- 2025 rock chip sampling - will be shipped to Yellowknife via secure air freight, and received by an employee of Aurora Geosciences Ltd., who ensures sample security and maintains custody until delivered to ALS laboratories, Yellowknife for preparation. Samples will be prepared under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-MS analysis after 4-acid digestion (ME-MS61) and fire assay gold (Au-ICP21).
- 2025 rock chip sampling by White Cliff Minerals – Blanks are inserted at a rate of 4% (OREAS C26e), no field duplicates of certified reference materials are inserted into the sample stream.
- 2024 rock chip sampling by White Cliff Minerals - Sent to Yellowknife via secure air freight, and received by an employee of Aurora Geosciences Ltd., who ensured sample security and maintained custody until delivered to ALS laboratories, Yellowknife for preparation. Samples are prepared under code PREP-31D and analysed by ME-ICPORE; an analysis package designed for massive sulphides. Overassay (>40% Cu) are undertaken by Cu-VOL61.

Samples with visible native copper were analysed by Cu-SCR21. All samples underwent gold analysis by 30g fire assay and ICP-AES under code Au-ICP21.

- 2024 rock chip sampling by White Cliff Minerals - Blanks (BL-10 CDN Laboratories) were inserted at a rate of 4 %. No field duplicates or certified reference materials were inserted into the sample stream.
- 2015 Kaizen Discovery Corp – Samples were analysed by ALS laboratories Vancouver using prep code PREP-31B which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Analysis by ME-ICP61, a four-acid (near total) digestion followed by multi-element ICP-AES finish. A total of 6 quarter core samples were taken within the reported drillhole.
- 2003/2005 diamond drilling completed by Coronation Minerals -0.5 g was digested by HCl, HNO3 and HClO4 and analysed for copper and nickel by ICP. Silver was analysed after HNO3 and HCl digestion followed by atomic absorption, with samples greater than 30 ppm silver re-analysed with fire assay with gravimetric finish. Gold and PGMs were analysed by a 30 g split by fire assay followed by ICP analysis. Digestion for copper and nickel is noted to be a partial digestion. No geophysical tools were used. No note of insertion of quality control samples, including blanks, standards or duplicates were noted by Coronation Minerals. Loring Laboratories conducted lab duplicate analyses.

Verification of sampling and assaying

- The verification of significant intersections by either independent or alternative company personnel.
- The use of twinned holes.
- Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.
- Discuss any adjustment to assay data.
- 2025 RC and diamond drilling by White Cliff Minerals – Primary data collection is completed by White Cliff Minerals employees or contracting geologists from Aurora Geosciences Ltd. Data is entered into Excel logging templates and reviewed by White Cliff Minerals senior geologist. Data is then stored on a cloud server with 2-factor authorisation. All received results are reviewed by the senior geologist, country manager and designated competent person.
- No independent review of the historic drilling (2003/2005) has been completed by personnel independent to White Cliff Minerals. Documentation of primary data in historic programs is unknown.
- 2015 Kaizen Discovery Corp – Data was entered into Excel logging templates. No information regarding data verification and storage protocols are known.
- No adjustment to assay data, reported intervals are calculated by weighted average accounting for sample length and reported concentration. 2025 RC drilling by White Cliff Minerals – drilled intervals are recorded on site in feet (Imperial) and later converted to metres (metric) as per 1 foot = 0.3048 metres.
- No twin holes are reported.

Location of data points

- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.
- Specification of the grid system used.
- Quality and adequacy of topographic control.
- 2025 RC and diamond drilling by White Cliff Minerals – Collar locations were pegged out using a Garmin GPSMAP 66sr (Multiband) with foresight and backsight stakes demarcating the azimuth.
- 2024 and 2025 rock chip sampling by White Cliff Minerals - Locations of reported rock chip assay results are in NAD83 / UTM Zone 11 N. Positions of samples determined in the field by handheld Garmin GPSMAP 66sr or Garmin GPSMAP 65 units.
- 2015 Kaizen Discovery Corp – No note of collar survey method or method of downhole surveying.
- Coordinates of drillholes from the 2003/2005 Coronation Minerals program are presented in NAD83 UTM Zone 11N. Location of collars was determined by handheld GPS.

Data spacing and distribution

- Data spacing for reporting of Exploration Results.
- Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.
- Whether sample compositing has been applied.
- Topographic control is provided by a DTM created from the Canvec data series, an open-source dataset from the Government of Canada, Natural Resources. Data provided as ESRI shapefile with 10m contours.
- 2025 RC and diamond drilling by White Cliff Minerals – Maiden drilling program spacing of collars between 28 and 60 m at the Danvers target area. Drilling at the Hulk target is planned on a regional scale with kilometres between holes. Additional work will be required at all targets to establish continuity for inclusion in estimation to JORC standards.
- 2024 and 2025 rock chip sampling by White Cliff Minerals - Reported rock chip results are spaced based on locations of prospective lithologies, alterations and visible mineralisation.
- 2015 Kaizen Discovery Corp – Drillhole CP15_DD009 formed part of a regional drilling campaign, with drillhole CP15_DD008 located 10 km east. This drilling does not have sufficient data density to inform geological or grade continuity.
- 2003/2005 diamond drilling completed by Coronation Minerals – drillholes cover 656 m NE/SW dimension with spacing of between 30 and 150m between adjacent drillholes. The drilling completed by Coronation Minerals is not sufficient for a mineral resource estimation to JORC standards.
- No sample compositing applied.

Orientation of data in relation to geological structure

- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.
- If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.
- 2025 RC and diamond drilling by White Cliff Minerals – Mineralisation at Danvers is hosted within a breccia/vein system which strikes NE/SW with a variable dip to the NW inferred. Drilling completed with azimuth towards the SSE, perpendicular to the strike of the inferred mineralisation. Oblique intersections of the hole and the mineralisation is expected, and thus all reported intervals are drilled widths, not true thicknesses. More work will be required to understand the trend of mineralisation at Danvers and report true thicknesses. Drilling at the Hulk target, or other sedimentary hosted copper targets in the Rae Group is conducted by vertical drillholes to intersect the sediments near perpendicular as they dip <5 degrees to the north.
- 2024 and 2025 rock chip sampling by White Cliff Minerals - Grab sampling is conducted where mineralisation or alteration of interest is observed. Sampling is conducted as a composite of the outcrop to produce a representative sample.
- 2015 Kaizen Discovery Corp – Reported drillhole is vertical, this is deemed appropriate to test the shallow north dipping sediments.
- The 2003/2005 drillholes were conducted at inclinations of between -60 and -65. The intersection angle with the known mineralisation is unknown, therefore a drilled interval length is presented, the assay intervals are not treated as true thicknesses. All drillholes were towards 150 azimuth (SSE) to intersect the NE/SW trending zone perpendicular to strike.

Sample security

- The measures taken to ensure sample security.
- 2025 RC drilling by White Cliff Minerals – Samples are bagged at the rig site with the corresponding sample tag placed inside the bag and secured by cable ties. Samples were placed into larger rice sacks, which were labelled and cable tied closed. Samples were stored at the sample farm in a remote field camp before transporting to Yellowknife by chartered flight where the samples are met by an employee of Aurora Geosciences Ltd and delivered directly to ALS preparation laboratory Yellowknife.
- 2025 diamond drilling (DD) by White Cliff Minerals – Samples were bagged in the core cutting shack immediately after cutting by an employee of Aurora Geosciences Ltd. Samples were placed into rice sacks labelled with sample

personal use only

ids and cable tied closed. Samples are then stored in the sample farm of the remote field camp before transporting to Yellowknife by chartered flight where the samples are met by an employee of Aurora Geosciences Ltd and delivered directly to ALS preparation laboratory Yellowknife.

- ALS Laboratory conduct checks to ensure the delivered samples match the list of samples sent for assay as per the submittal form and all are accounted for.
- 2015 Kaizen Discovery Corp – No note of measures taken to ensure sample security.
- 2003/2005 diamond drilling completed by Coronation Minerals - Samples were stored in self-locking, cable tied sample bags, before being batched into rice sacks, which were also cable tied. Transport from the remote field camp to the laboratory was completed by freighting services.

Audits or reviews

- The results of any audits or reviews of sampling techniques and data.
- No independent site visit or audit/review of the procedures/assay results has been conducted.

SECTION 2: REPORTING OF EXPLORATION RESULTS

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> ▪ Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. ▪ The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> ▪ The Rae Copper Project is made up of 93 mineral claims in 3 blocks and 1 mineral lease in the Kitikmeot region of Nunavut, northern Canada. The claims and lease cover a total area of 1228 km². ▪ All mineral claims are in good standing. ▪ In November 2024 White Cliff Minerals acquired mineral lease L-2797 from Victoria Copper Inc. granting 100% ownership of the project. Victoria Copper Inc. retained a 1% net smelter royalty (NSR) over production from the lease. White Cliff Minerals can buy back 50% of the NSR for CAD \$1 million in cash and has right of first refusal with respect to the sale of the remaining 50% of the NSR (0.5% NSR). ▪ White Cliff Minerals is in possession of a type B water license issued by the Nunavut Water Board and a Class A Land Use Permit granted by the Crown-Indigenous Relations and Northern Affairs Canada allowing the completion of exploration drilling and camp establishment. ▪ White Cliff Minerals have obtained permission from the Kitikmeot Inuit Association to conduct exploration on this property.

Exploration done by other parties

- Acknowledgment and appraisal of exploration by other parties.
- Tools and idols, made from native copper found in the Coppermine Region have been worked and traded by the local Inuit population going back centuries.
- The area first came to the attention of European and English explorers in the 17th century. In 1771 Samuel Hearne reported finding a four-pound native copper nugget at surface.
- The Coppermine River area was first staked in 1929 and continued slowly until 1966 when, due to the discovery of several high-grade surface deposits of copper. By late 1967 over 40,000 claims were lodged by more than 70 different companies (E.D. Kindle, 1972). In his report, Kindle locates and gives a brief description of over 80 high grade copper occurrences.
- The largest copper deposit in the area is called Area 47 or the DOT 47 Lode in a vertical, tabular body 1,500 feet long and 35 feet wide along one of the faults of the Teshierpi fault zone (Kindle, 1972). The DOT 47 deposit was estimated to host 4,162,000 tons grading 2.96 % copper remaining open at depth and to the southwest. The definition of this deposit by Coppermine River Limited marked the largest exploration effort to date.
- Mapping and exploration in the area were conducted over several campaigns by regional workers and individual companies until 1970, when the area was mapped in detail by W.A. Barager and J.A. Donaldson. During this time, Barager conducted a litho-geochemical study of the Coppermine River basalts. E.D. Kindle followed this work and produced the first major collaboration of mineralisation, geology, and geologic history in 1972. Following this, Ross and Kerans (1989) mapped Middle Proterozoic sediments of the Hornby Bay and Dismal Lake Groups to the south and west of the region.
- Exploration and development persisted sporadically between 1990 - 2010, when companies started to utilise geophysics at the Area 47 and Muskox Intrusion to the southeast of the project area, the latter of which witnessed drilling for several years.
- Mineral claims in the region continued to lapse because of depressed economic conditions, until most of the Coppermine area was free and available for staking.
- Exploration 2013-2015 was conducted by Tundra Copper Corporation, with work from 2013-2014 detailed in Assessment Report 086024. The work completed included geological mapping, rock chip sampling and later diamond drilling in 2015 consisting of 2060 m.
- Of importance is the result of a regional drilling program, testing the basal portion of the Rae Group Sediments. A series of 7 vertical drillholes tested the Rae Group – Coppermine River Group unconformity, targeting sediment-hosted copper deposits for a total of 1949 m. The final drillhole of the program, furthest to the west, drillhole CP15_DD009 intercepted 29 m at 0.57 % Cu from 197 m depth and noted a zonation of copper sulphides of chalcocite-bornite-chalcopyrite upwards from the unconformity. This interval and zonation of copper sulphides is a significant proof of concept for sediment hosted copper deposits within the Rae Group, possessing similarities with the Central African Copperbelt and Kupferschiefer districts.

Geology

- Deposit type, geological setting and style of mineralisation.
- The Rae Copper Project is located within the north dipping Coppermine Homocline. It unconformably rests on the metamorphic and plutonic rocks of the ca. 1.88-1.84 Ga Wopmay Orogen (Barager et al, 1996). The Hornby Bay Group consists of continental sedimentary and volcanic strata overlain by transitional marine sedimentary rocks of the Dismal Lakes Group. The Coppermine River Group overlies

personal use only

these older sedimentary groups and form a thick sequence of continental flood basalts capped by red bed sandstones. A further unconformity is present where the Rae Group, a sedimentary package sits above the Coppermine River Group, defining a return to marine conditions with a possible age of sedimentation onset of 1070 Ma (Rainbird et al, 2020). Crosscutting the Coppermine River Group and overlying Rae Group are the Coronation Sills, gabbroic composition and believed to have been emplaced at 723 +/- 4Ma (Heaman et al, 1992).

- Mineralisation in the Rae Copper Project comprises a variety of styles within both the Copper Creek Formation basalts and the overlying basal Rae Group sediments. Chalcocite dominant vein and breccia systems, flow top replacements and sedimentary hosted stratiform copper. Specifically, the reduced-facies sub type of sediment hosted copper deposits, akin to the Central African Copperbelt.

Drill hole Information

- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:
 - easting and northing of the drill hole collar
 - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar
 - dip and azimuth of the hole, down hole length and interception depth, hole length.
- If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.
- Collar information for any relevant drillholes are included in table form in this release.

Data aggregation methods

- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated.
- Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.
- Reported copper intervals were calculated using a length weighted average. No cutting of high grades or cut off grades have been used in the reporting of drilled thickness intervals.
- A cut of grade of 2% Cu was utilised for the historic estimate.
- No data aggregation techniques have been applied.
- No metal equivalent values are being used.

personal use only

- The assumptions used for any reporting of metal equivalent values should be clearly stated.

Relationship between mineralisation widths and intercept lengths

- These relationships are particularly important in the reporting of Exploration Results.
- If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.
- If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known').
- 2025 RC and diamond drilling by White Cliff Minerals – Reported results are treated as drilled widths not true thicknesses. Mineralisation at Danvers is hosted within a breccia/vein system which strikes NE/SW with a variable dip to the NW inferred. Drilling completed with azimuth towards the SSE, perpendicular to the strike of the inferred mineralisation. Oblique intersections of the hole and the mineralisation is expected, and thus all reported intervals are drilled widths, not true thicknesses. More work will be required to understand the trend of mineralisation at Danvers and report true thicknesses. Any reported intervals from sedimentary hosted targets are understood to be close to true thickness given the near perpendicular intersection of the sediments in vertical drillholes, unless otherwise stated.
- 2015 Kaizen Discovery Corp – The downhole width is reported for CP15_DD009, which is interpreted to be very close to true width given the near horizontal orientation of sedimentary bedding which is controlling copper mineralisation. The vertical drillhole is fit for purpose.
- 2003/2005 diamond drilling completed by Coronation Minerals - Downhole interval thicknesses are presented. At this stage true widths are not known. Holes drilled in 2003/2005 were inclined between -60 and -65 degrees and have variably oblique intersections with the interpreted mineralisation outline.

Diagrams

- Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views.
- Location maps and sections provided within the release with relevant exploration information contained.

Balanced reporting

- Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.
- All exploration results have been reported.
- The reporting of exploration results is considered balanced by the competent person.

Other substantive exploration data

- Other exploration data, if meaningful, should be reported including geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.
- 2,427 line-km of MobileMT airborne geophysics was completed during the 2024 field program at the Rae Copper Project. The survey was conducted by Expert Geophysics using an AS 350 B2 SD2 helicopter of Capital Helicopters. The survey lines were oriented E/W and spaced at 400m intervals, with tie lines running N/S and spaced 4000m apart. The average survey speed was 23m/s with a helicopter terrain clearance of 152m. The magnetometer was on average 81m above terrain and 62m for the EM sensor. Data was controlled for quality, interpolated and underwent 2D inversion, completed by Expert Geophysics.
- 2025 MobileMTd – A drone based mobile Magneto-Tellurics survey was completed across select parts of the Danvers mineral lease. Lines were oriented NW/SE, roughly perpendicular to the Teshierpi Fault

		<p>Zone. A total of 177 line-km were flown with a line spacing of 100m over the main Danvers deposit and 200m outside this main zone.</p> <ul style="list-style-type: none"> 2025 HeliTEM – A helicopter-borne electromagnetic/magnetic survey was flown by XCalibur Smart Mapping. Lines were NW/SE trending, oriented perpendicular to the Teshierpi Fault Zone which trends NE/SW. Lines were spaced 100m apart.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Awaiting assay results from the summer 2025 drilling campaign and final data from the HTEM survey carried out over the Danvers lease and select lines over the Rae Group Sediments. Drilling data will be integrated with newly acquired geophysics to aid understanding of the subsurface and aid further exploration. Target generation for further sediment hosted copper and volcanic-hosted (Danvers-style) drilling.

SECTION 3: ESTIMATION AND REPORTING OF MINERAL RESOURCES

(Criteria listed in section 1, and where relevant in section 2, also apply to this section)

Criteria	JORC Code explanation	Commentary
Database integrity	<ul style="list-style-type: none"> Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used. 	<ul style="list-style-type: none"> No information is available regarding the transcription of data from data collection to estimation given the historic nature of the estimate. Certain drillhole locations, included in the historic estimate were verified by Coronation Minerals' personnel in 2003/2005.
Site visits	<ul style="list-style-type: none"> Comment on any site visits undertaken by the Competent Person and the outcome of those visits. If no site visits have been undertaken indicate why this is the case. 	<ul style="list-style-type: none"> The JORC Competent Person has not visited the site which hosts the historic estimation as the project has been recently acquired.
Geological interpretation	<ul style="list-style-type: none"> Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. 	<ul style="list-style-type: none"> The project is an epigenetic, fault breccia hosted copper-silver deposit. It also hosts intervals of replacement style mineralization within vesicular flow tops of basalt flows. The deposit style is well recognized within the Copper Creek Basalt Formation.

- Nature of the data used and of any assumptions made.
- The effect, if any, of alternative interpretations on Mineral Resource estimation.
- The use of geology in guiding and controlling Mineral Resource estimation.
- The factors affecting continuity both of grade and geology.
- Due to the historic nature of the estimate and lack of review of drill core or other evidence an assumption is made that the assay and geological interpretation is fit for purpose within the historic estimate.
- Alternative interpretations of the deposit style are not believed to have altering effects on the historic estimation.
- The orientation of the main breccia body, in line with the major NE/SW trending Teshierpi Fault Zone guided the orientation of historic drilling which was used during the historic estimate. Knowledge of the shallow NE dipping basalt flows informed the drilling and estimation of the flow-top replacement style mineralization.
- Continuity in the breccia and host structure depend on the intersection of major and minor faults and fracture zones. Continuity of grade within the flow top replacement bodies is dependent on the primary porosity of the basalt flow tops and their proximity to feeder structures/the main breccia zone.

Dimensions

- The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.
- The historic estimate covers an average of 40 to 45 ft width with local swelling to over 100 ft. The top of the body appears to have a horizontal attitude along strike with the bottom of defined zones gently plunging to the southwest. The estimate covered 1528 ft strike length with a vertical depth of 600 ft.

Estimation and modelling techniques

- The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.
- The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.
- The assumptions made regarding recovery of by-products.
- Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).
- The historic estimate did not use computer software and was completed using plan view and 2D sections along completed drill fences. The estimation technique is deemed appropriate for the historic nature of the estimate.
- The areas within the outlined blocks were calculated by taking 3 measurements of each block with a planimeter and averaging the readings.
- Drill-indicated reserves were computed from specific measurements based on the following:
 - a) The length of copper bearing diamond drill core intersections
 - b) The weighted average grade of the above intersections
 - c) The area of influence of diamond drill core intersections (see No. 5)
 - d) The horizontal projection of the area of influence (see No. 6)
 - e) A calculated tonnage factor (see No. 2)
 - f) A total of 30,337 feet of diamond drilling on the 47 Zone and its southwest extension with the holes on the average 100 feet apart on section
- Inferred reserves were calculated in the same manner as indicated reserves but are based on evidence of continuity as suggested by diamond drilling and/or longitudinal projection
- The area of grade influence of each diamond drill hole intersection on a particular section was extended one halfway to adjacent holes on the same section of 50 feet beyond the top and bottom hole unless geological evidence suggested that longer projections were justified

- In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.
- Any assumptions behind modelling of selective mining units.
- Any assumptions about correlation between variables.
- Description of how the geological interpretation was used to control the resource estimates.
- Discussion of basis for using or not using grade cutting or capping.
- The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.
- The horizontal distance of grade and area projection was taken as half the distance to adjoining sections. The ore was projected beyond the last sections on each end of the deposit a distance equal to half the distance to the last adjoining section
- The grade for the inferred reserve blocks was calculated from the average grade or grades of the adjoining block or blocks
- The elevations to which reserves were projected on each section were determined from a longitudinal projection of the orebody
- On both plan and sections of copper bearing diamond drill holes straight wall ore limits are assumed to prevail between each drill intersection
- There are no available check estimates.
- The by-product silver was estimated for each 10% contained copper there is approximately 1 oz of silver. This was determined by metallurgical testwork on diamond drill core samples conducted by Lakefield Research, silver was not routinely assayed during drilling and thus not included in the estimate.
- The geological model, created in 2D sections along drill fences influenced the estimate through creation of blocks controlled by either the breccia zone or flow top replacement, which correlated to the drillhole intersections. These blocks were then combined per section.
- A 2% copper cut of grade was applied.

Moisture

- Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.
- The moisture content for tonnage calculations is unknown. No note of dry basis estimation is recorded and given the historic nature of the estimate it is assumed a natural moisture basis was used.

Cut-off parameters

- The basis of the adopted cut-off grade(s) or quality parameters applied.
- A 2 % copper cut-off grade was included in the estimate.

Mining factors or assumptions

- Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.
- Mining parameters detailed in this section were taken from the report “A Preliminary Feasibility Report on the Hope Lake Copper Deposit, Mackenzie. Assessment Report INAC (Exploration Report), Bracken, J M; Seasor, R W; Neal, H E; Leslie, C A; Pullen, T C. April 1, 1968”. The report defines a 1000 – 1500 ton per day plant size operating 350 days per year. The mining method is described as consisting of open stope for the vertical breccia body and room and pillar methods through the flow top replacement bodies.
- A dilution of 10% was accounted for in the historic estimate, adding in material calculated to be 0.6% Cu.
- A case for open pit mining was not pursued in any detail.

personal use only

Metallurgical factors or assumptions

- The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made
- The use of the term “ore” in the following section is not taken by White Cliff Minerals to imply economic extraction of metal contents, however, is used to describe the processing outlined in the referenced report. The completion of additional work and evaluation may not define JORC compliant resources/reserves. The report “A Preliminary Feasibility Report on the Hope Lake Copper Deposit, Mackenzie. Assessment Report INAC (Exploration Report), Bracken, J M; Seabor, R W; Neal, H E; Leslie, C A; Pullen, T C. April 1, 1968” defines a mining scenario of a 1500 ton per day mill. The report notes similarities of the “ore” with that treated at Roan Antelope in northern Rhodesia (operated since 1931 to date of 1968 report) with the successful operations at Mufulira and Roan Antelope adding support and confidence to the present preliminary design. Testwork completed by Lakefield Research and detailed in the 1968 Preliminary Feasibility Report conducted 43 bench scale grinding and flotation tests on 5 composites from 1967 drillcore totalling 2462 feet of material and found no other metals apart from copper and silver in significant quantities. Metallurgical testwork outlined 55-66% copper concentrates with copper recoveries of 85-95% depending on the grind and flowsheet. Silver content in the concentrate varies from 4.5 to 5.5 oz/t with recoveries in the range of 82 – 95% Ag. The concentrate is chiefly chalcocite with considerable bornite, minor chalcopyrite, covellite and pyrite. Very little to no pyrrhotite has been detected. An excerpt from the report states “The chalcocite and bornite are readily floated with preliminary indications that a coarse high-grade concentrate can be removed after the rod mill or ball mill. The very low pyrite and pyrrhotite content helps the flotation and does not require a depressant for these sulphides. Flotation time is considered normal to fast for this ore”. A processing flowsheet is presented with the following components, conveying of ore to primary jaw crusher, followed by crushing to a fine ore storage unit, grinding of ore to 50% minus 325 mesh before flotation by ball/rod mills, with possibility of a coarse copper concentrate “scalp off”, 2 banks of floatation equipment each consisting of 4 rougher and 5 scavenger cells before movement into thickening and filtering systems.

Environmental factors or assumptions

- Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfield project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.
- The historic estimate and associated pre-feasibility study notes the use of a tailings thickener, which will allow for recirculation of process water, limiting required extraction from nearby water sources. An area, to the north of the deposit was highlighted for use as a tailings area within a natural depression.
- The deposit is dominated by chalcocite and bornite, zoning outwards to chalcopyrite and pyrite sulphide assemblages. Given the acid generating potential of pyrite when exposed to the atmosphere this should be mitigated when designing waste storage (tailings) facilities.
- The arctic environment, and presence of well-established permafrost will also be accounted for in future studies.

Bulk density

- Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.
- The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.
- Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.
- Bulk density measurements were conducted on historic drill core samples during metallurgical testwork completed by Lakefield Research. The number of drill core samples tested and their locations within the deposit or representativeness is unknown.
- A bulk density of 11 sq ft per ton was used.
- No details are available regarding the method of determination of the bulk density value. It is unknown if vugs, porosity or other void spaces were accounted for.

Classification

- The basis for the classification of the Mineral Resources into varying confidence categories.
- Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).
- Whether the result appropriately reflects the Competent Person's view of the deposit
- The historic estimate was classified as ore reserves comprising indicated and inferred resources. These are non JORC compliant terms and White Cliff Minerals is not treating the estimate as a current JORC compliant resource estimate.
- The estimate is classified as historic, non JORC compliant.

Audits or reviews

- The results of any audits or reviews of Mineral Resource estimates.
- No official/independent audits or reviews of the historic estimate have been completed. White Cliff Minerals has conducted proof reading and cross-referencing data where possible to minimize transcription errors when reporting details of the historic estimate.

Discussion of relative accuracy/ confidence

- Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could
- The method of estimation is deemed appropriate for the historic nature of the estimate.
- The weighted averaging of copper in drillhole intersections is well established and the resulting estimation is constrained by the geology and mineralisation with both the breccia zone and flow top replacements.
- Given the historic nature of the exploration work which informed the historic estimate the drill core has not been viewed by the Competent Person and thus not been re-assayed or validated at this time.
- The assay procedures are also unknown, with details of the detection limits and digestion efficiency (partial or total digestion) unknown, which may influence the copper assay results. No standards, blanks or field duplicates are noted to have been included in the sample stream which generated the assays included in the estimate, however, check assays are noted to have been completed by a second laboratory.

affect the relative accuracy and confidence of the estimate.

- The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.
- These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.

- The historic nature of the estimate can only be deemed accurate through the re-drilling of previously reported holes. Further exploration work would include the industry standard diamond and/or reverse circulation methods with a robust quality control program of blanks, standards and duplicates inserted into the sample stream for assay. Initial work would aim to confirm the geological model outlined in historic sections and through twinned holes understand the difference in historically reported intercepts and modern assay results. Bulk density measurements would be taken during diamond drilling activities, covering both mineralisation and host rock/alteration domains for inclusion in possible future resource estimations. This would increase the confidence in the historic results which informed the historic estimate where a comparison of modern and historic data/results can be completed.
 - Verification work is planned to commence in 2025, and White Cliff Minerals is in possession of the required funding to commence this work.
-