

# ASX ANNOUNCEMENT

29 October 2025



A.B.N. 11 009 341 539

## Quarterly Report for September 2025

### ASX:TBR

#### Board of Directors

Mr Otakar Demis  
Non-Executive Chairman &  
Joint Company Secretary

Mr Anton Billis  
Managing Director and CEO

Mr Gordon Sklenka  
Non-Executive Director

Mr Stephen Buckley  
Company Secretary

#### Highlights

- During the quarter Rand and Tribune processed 78,296 tonnes of ore at 2.89 g/t from the EKJV operations at the joint venture partner Evolution Mining Limited Mungari processing plant, with Tribune's share equating to 58,722 tonnes.
- 6,818 ounces of gold were produced by Rand and Tribune during the quarter.
- Tribune's 75% share of the gold produced was 5,114 oz.
- Exploration Drilling at the Japa Project in Ghana recommenced, with significant intercepts in RC drill holes including:
  - 5m @ 8.06 g/t from 14 metres
  - 5m @ 1.11 g/t from 22 metres
  - 3m @ 2.16 g/t from 37 metres
- Production from the Hornet Open Pit mine at EKJV commenced during the quarter with ore being delivered to the ROM pad and processed at Mungari Processing plant.

For personal use only

## Ore Stockpiles

At the end of the quarter Tribune was entitled to a share of the following stockpiles :

EKJV Stockpiles					
ROM Pad	Ore Source	Ore Tonnes	Grade g/t	Ounces Au	Tribune Entitlement
Rubicon ROM	EKJV RHP MG	9,859	3.31	1,051	36.75%
Rubicon ROM	EKJV RHP LG	133,515	1.02	4,367	36.75%
Mungari ROM	EKJV RHP MG	414	4.52	60	36.75%
Mungari Crushed Stocks	EKJV RHP MG	1,516	3.86	188	36.75%
Hornet ROM	EKJV HOP MG	22,115	1.74	1,235	36.75%
Hornet ROM	EKJV HOP LG	38,698	0.76	945	36.75%
Mungari ROM	EKJV Raleigh LG	1,155	1.71	64	37.50%
Raleigh ROM	EKJV Raleigh MG	193	2.50	16	37.50%
Raleigh ROM	EKJV Raleigh LG	23,745	1.11	844	37.50%
Raleigh T ROM	EKJV Raleigh LG	6,055	0.61	119	36.75%
<b>Tribune Share of EKJV Stockpiles</b>		<b>87,383</b>	<b>1.17</b>	<b>3,274</b>	<b>100%</b>

## Geology and Mining

### EAST KUNDANA JOINT VENTURE

#### Raleigh Underground Mine Development

The development performance for the quarter is summarised in the following table.

ORE BODY	Raleigh				
Month	Capital		Operating Lateral development		
	Decline/Incline	Other	Ore	Waste	Paste
	(m)	(m)	(m)	(m)	(m)
July	66.7	17.8	46.4	-	-
August	103.9	33.5	-	-	-
September	85.8	61.3	-	-	5.0
<b>September 2025 Q</b>	<b>256.4</b>	<b>112.6</b>	<b>46.4</b>	<b>-</b>	<b>5.0</b>

#### Rubicon-Hornet-Pegasus Underground Mine Development

Development performance for the quarter is summarised in the following table.

ORE BODY	Rubicon, Hornet & Pegasus				
Month	Capital		Operating Lateral development		
	Decline	Other	Ore	Waste	Paste
	(m)	(m)	(m)	(m)	(m)
July	19.4	76.9	95.2	59.2	20.0
August	31.2	96.5	85.5	60.1	23.5
September	62.2	99.7	90.2	-	40.0
<b>September 2025 Q</b>	<b>112.8</b>	<b>273.1</b>	<b>270.9</b>	<b>119.3</b>	<b>83.5</b>

## EKJV Mine Production

Contained gold in stopes, development ore and from open pit sources mined during the quarter is tabulated below:

ORE BODY	RHP			Raleigh			Hornet Open Pit			Total EKJV		
Month	Tonnes	Grade	Ounces	Tonnes	Grade	Ounces	Tonnes	Grade	Ounces	Tonnes	Grade	Ounces
July	33,626	2.9	3,135	5,969	2.0	386	8,591	0.7	188	48,186	2.4	3,709
August	16,890	3.8	2,061	1,687	3.5	188	10,415	1.3	421	28,992	2.9	2,670
September	32,920	4.2	4,484	737	2.2	52	60,082	1.3	2,590	93,739	2.4	7,126
<b>September 2025 Q</b>	<b>83,436</b>	<b>3.6</b>	<b>9,680</b>	<b>8,393</b>	<b>2.3</b>	<b>626</b>	<b>79,088</b>	<b>1.3</b>	<b>3,199</b>	<b>170,917</b>	<b>2.5</b>	<b>13,505</b>
June 2025 Q	129,882	3.5	14,528	30,746	3.0	2,931	-	-	-	160,628	3.4	17,459

## Rand and Tribune's Mine Production Entitlement (RHP & Hornet Open Pit - 49%, Raleigh - 50%)

	Rand and Tribune		
Quarter	Ore Tonnes	Grade (g/t)	Ounces troy oz
<b>September 2025 Q</b>	<b>83,833</b>	<b>2.5</b>	<b>6,624</b>
June 2025 Q	79,015	3.4	8,584

## Tribune's Mine Production Entitlement (RHP & Hornet Open Pit- 36.75%, Raleigh - 37.5%)

	Tribune		
Quarter	Ore Tonnes	Grade (g/t)	Ounces troy oz
<b>September 2025 Q</b>	<b>62,875</b>	<b>2.5</b>	<b>4,968</b>
June 2025 Q	59,261	3.4	6,438

## Toll Processing

During the quarter a total of 78,296 tonnes of Rand and Tribune ore at 2.89 g/t was processed at the Mungari processing plant under the EKJV joint venture agreement with Evolution Mining Limited to recover 6,818 oz of gold at 93.8% recovery.

Rand and Tribune gold production for the September 2025 quarter, along with Tribune's share is tabulated below.

Rand and Tribune Ore Processed				
Campaign Location	Tonnes Milled	Head Grade Au (g/t)	Recovery (%)	Fine Au Produced (Oz)
EVN Mungari	78,296	2.89	93.8%	6,818

Tribune Share of Ore Processed				
Campaign Location	Tonnes Milled	Head Grade Au (g/t)	Recovery (%)	Fine Au Produced (Oz)
EVN Mungari	58,722	2.89	93.8%	5,114

### EKJV Exploration

During the first quarter of FY26, a total of 671 metres of drilling was completed for the East Kundana Joint Venture (EKJV). Work completed included Diamond Drilling (DD) for the Sadler underground and Resource targeting RC and DD at Ambition.

*EKJV exploration activity for the September quarter FY26.*

Project	Prospect	Tenement	RAB/AC Metres	RAB/AC Samples	RC Metres	RC Samples	DD Metres	DD Samples	ME Samples
Raleigh	Sadler	M16/309	-	-	-	-	671	97	-
Ambition	Ambition	M16/0326	-	-	-	-	-	13	-
<b>Total</b>				-	-	-	<b>671</b>	<b>110</b>	-


### Work Completed

#### Sadler

During the quarter, surface diamond drilling commenced to test potential southerly extensions of the Sadler mineralisation at Raleigh. This program is targeting additional resource growth beyond the current underground mining area.

Drilling was conducted on an 80m x 80m spacing and intersected a brittle-ductile structure ranging from 0.2m to 0.45m wide, consistent with mineralisation currently being mined at Sadler. These results support the geological model and the potential for resource extension.

A further 1,054 metres of diamond drilling is scheduled for completion in Q2 FY26. No assay results were returned during the quarter; results are expected to inform resource modelling in upcoming periods.

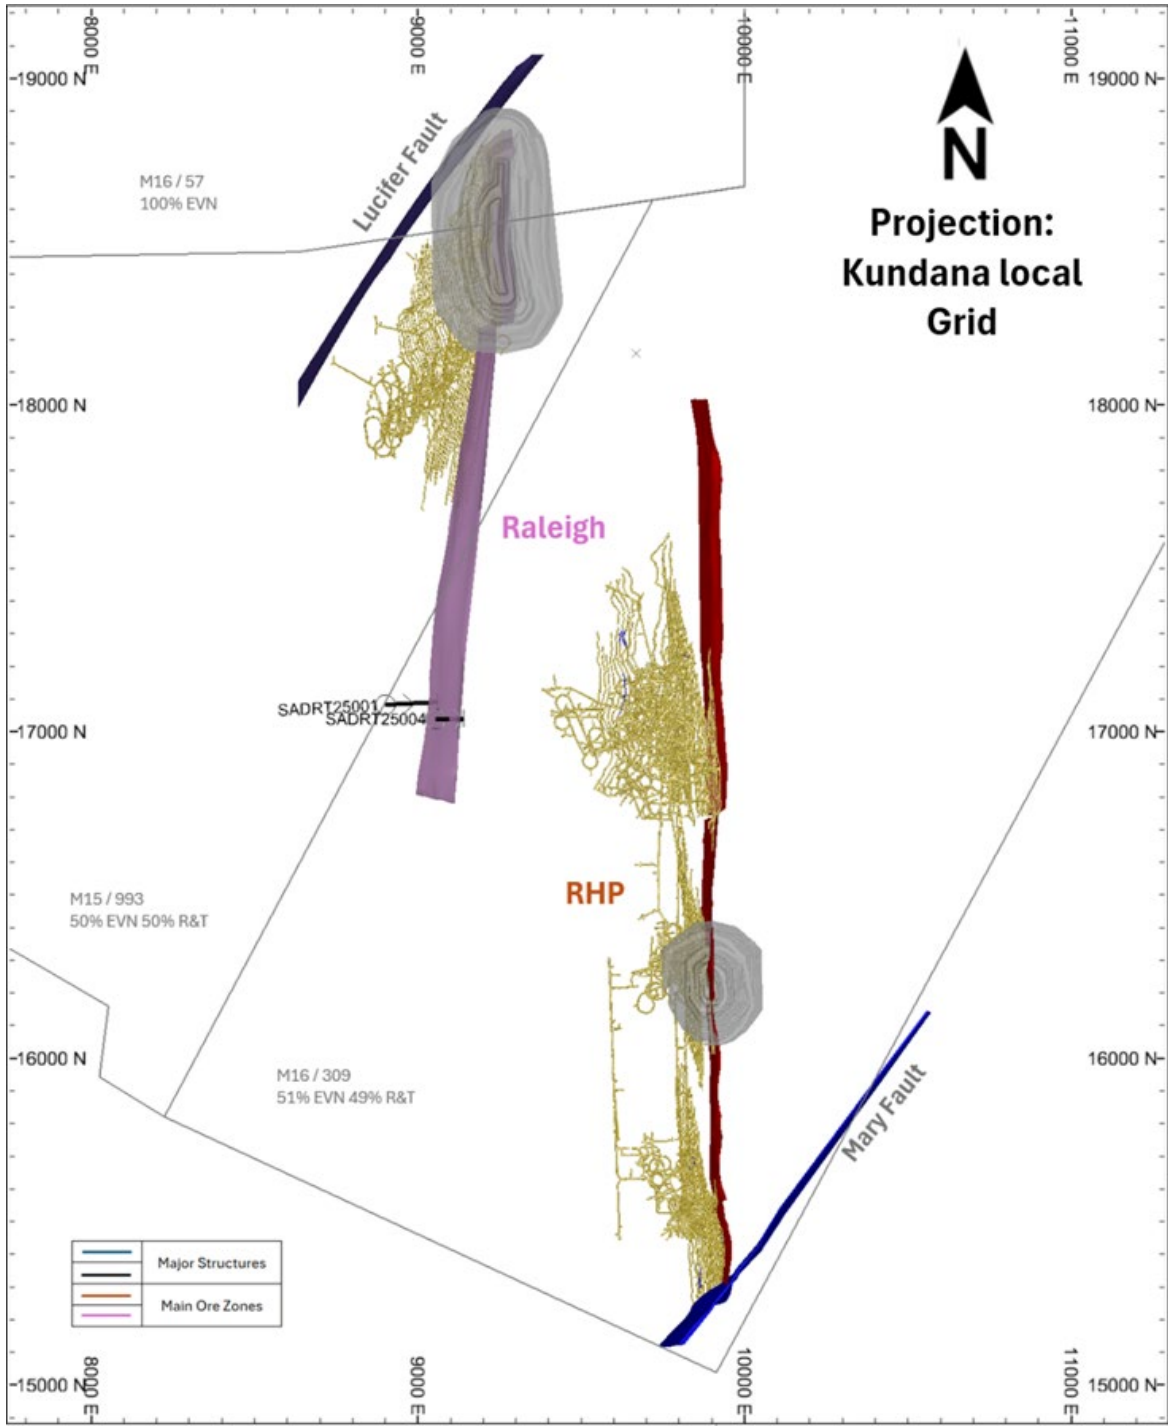

**Figure 1 A Plan view of EKJV area showing Upper Sadler Incline surface diamond drilling drilled in the quarter, holes SADRT25001 and SADRT25004.**

**Ambition**

No drilling was undertaken at Ambition during the quarter. However, all assay results from the previous quarter’s drilling were received and reviewed.

Drilling intersected the Strezlecki lode consistently over a 500-metre strike length, with minimal surface expression. Results suggest the presence of a southward-plunging high-grade zone (see Figure 2), which may represent a new target area for future drilling.

Of the six holes with assay results returned in Q1 FY26, three reported significant intercepts (>3 g/t\*m), including:

- 0.6m @ 15.09g/t Au from 196.7m (AMRD25003A)
- 0.68m @ 8.31g/t Au from 242.35m (AMRD25001)
- 0.4m @ 7.82g/t Au from 406m (AMRD25004)

These results provide early indications of high-grade mineralisation and will inform the next phase of exploration planning at Ambition.

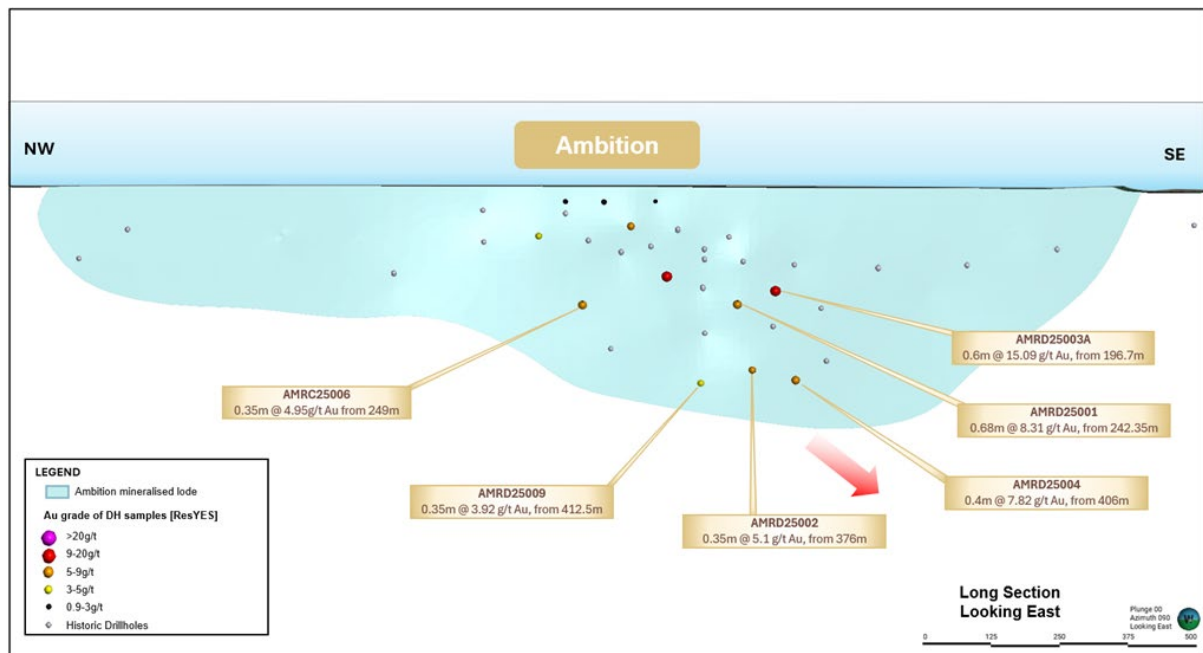


Figure 2 - A Long section view of the Ambition mineralisation showing significant intercepts returned from within the quarter.

These intercepts were calculated based on underground parameters. A full list of the drilling intercepts is listed in Table below.

Hole ID	Hole type	Easting MGA (m)	Northing MGA (m)	Elevation AHD (m)	Dip	Azi MGA	Hole Length (m)	From (m)	DH Width (m)	ETW (m)	Gold grade (g/t Au)
AMRD25003A	RC_DD	328444	6604896	368	-61	59	220	196.7	0.6	0.5	15.09
AMRD25001	RC_DD	328394	6604936	368	-62	59	379	242.35	0.68	0.5	8.31
AMRD25004	RC_DD	328330	6604786	368	-60	60	421	406	0.4	0.3	7.82
AMRD25002	RC_DD	328322	6604878	368	-61	61	506	376	0.35	0.2	5.1
AMRC25006	RC	328276	6605114	368	-59	58	268	249	0.35	0.2	4.95
AMRD25009	RC_DD	328240	6604950	368	-60	60	469	412.5	0.35	0.2	3.92

Full details of the EKJV Exploration Report for the September 2025 quarter will be released to the ASX on 24 October 2025.

## Other Exploration Projects

### Tribune Resources (Ghana) Limited (Tribune's Interest 100%)

The Company commenced drilling in July after a long break. Limited RC drilling and other exploration work were conducted on the northern extension of its mining lease between Adiembra and Japa township, using one RC drilling rig. A total of 89 drillholes is expected to be drilled during this campaign for a total meterage of 10,630m. The Japa stretch has 58 holes planned totalling 5,460m and 31 drillholes with 5,170m expected to be completed at Adiembra.

31 drillholes have been completed as at the end of the quarter for a total of 3301m.


3,386 samples have been prepared and submitted to Intertek laboratory in Tarkwa for gold Photon Assay.

Results received to date are consistent with expectations in terms of mineralisation orientation, thickness and grade and have also yielded robust intersections for the Japa components of the campaign. Selected significant intersections are shown in the following table. A more comprehensive figures are presented at the appendices.

Hole ID	Length	Grade ppm	from depth m
JRC907	8m	0.8	40
JRC908	3m	0.52	34
JRC909	5m	8.06	14
	5m	1.11	22
JRC910	3m	2.16	37
JRC912	5m	0.44	40
JRC915	3m	0.65	42
JRC916	4m	0.8	25
JRC924	4m	1.125	116
JRC931	6m	0.9	130
JRC930	4m	0.615	82
JRC932	5m	0.40	4
JRC933	3m	0.58	9
JRC930	4m	0.615	82
	7m	0.93	100
	6m	0.81	109
JRC935	5m	0.956	56
JRC937	8m	0.40	5


Significant intersection parameters for Japa  $\geq 0.4$ ppm average gold grade with maximum 3 metres internal dilution of  $<0.4$ ppm gold. Table only presents intersections of greater than 3m interval length in metres multiplied by grade in ppm Au.

For personal use only

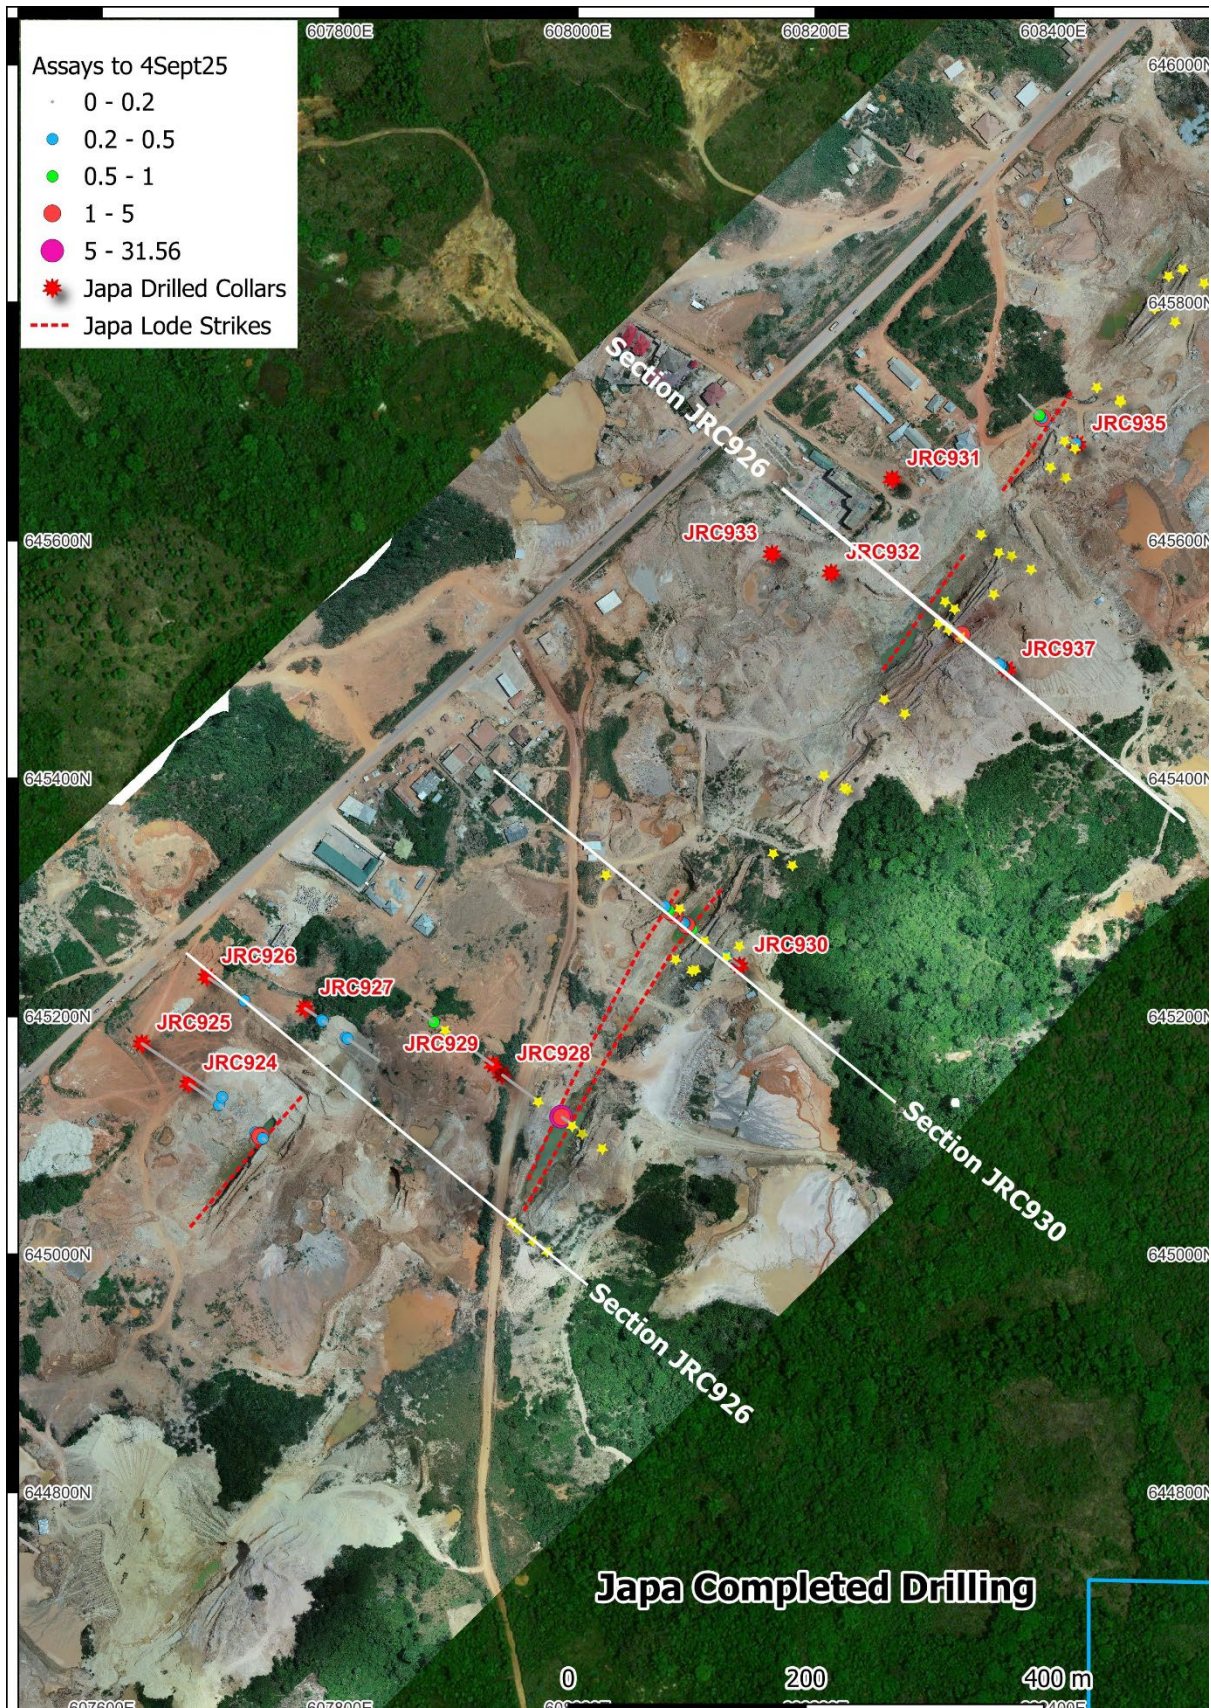


Drill hole collars at Japa showing cross sections


For personal use only

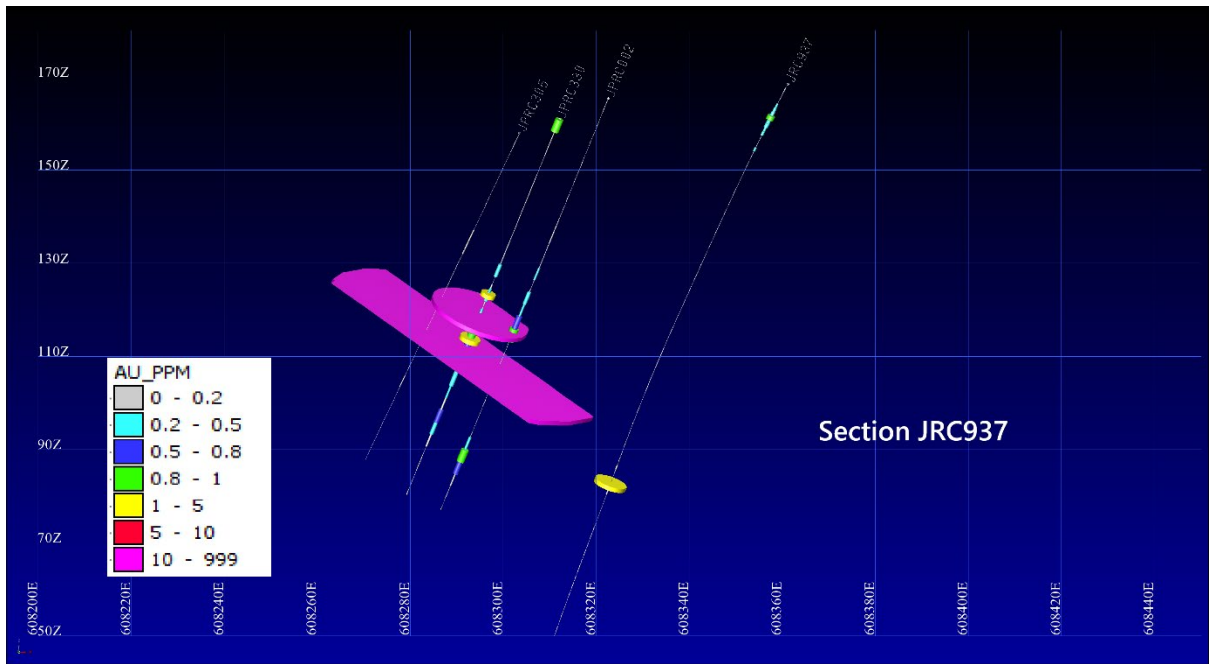

Drill hole cross section for JRC937 with intersections

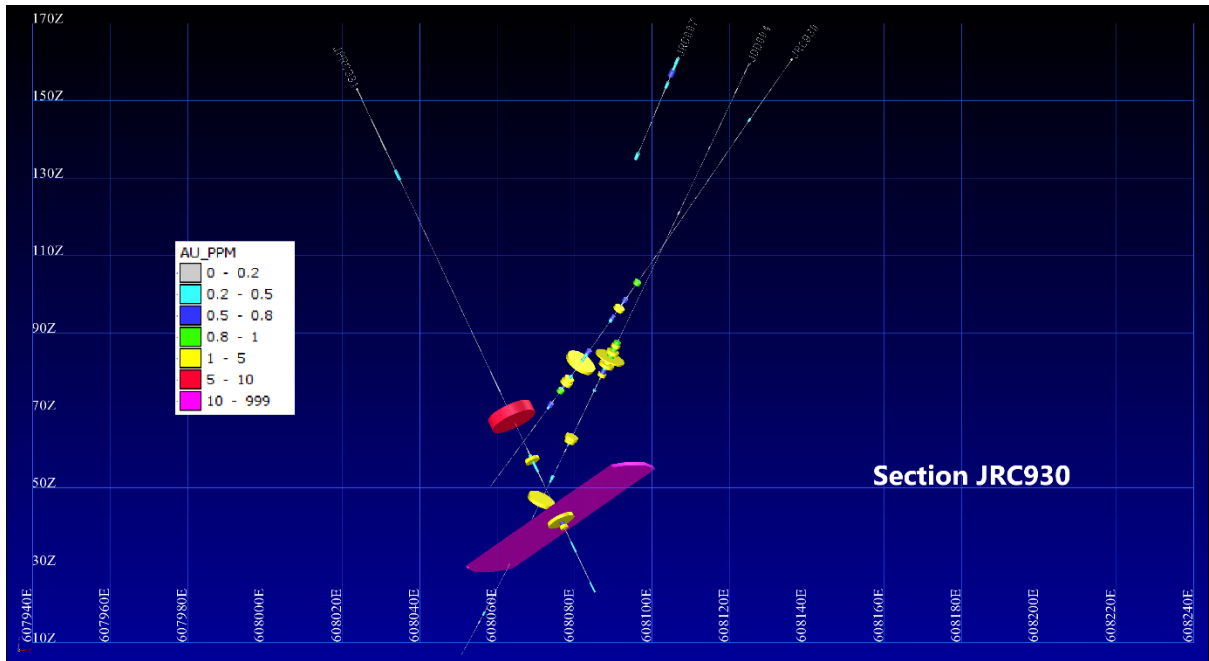

Drill hole cross section for JRC930 with intersections

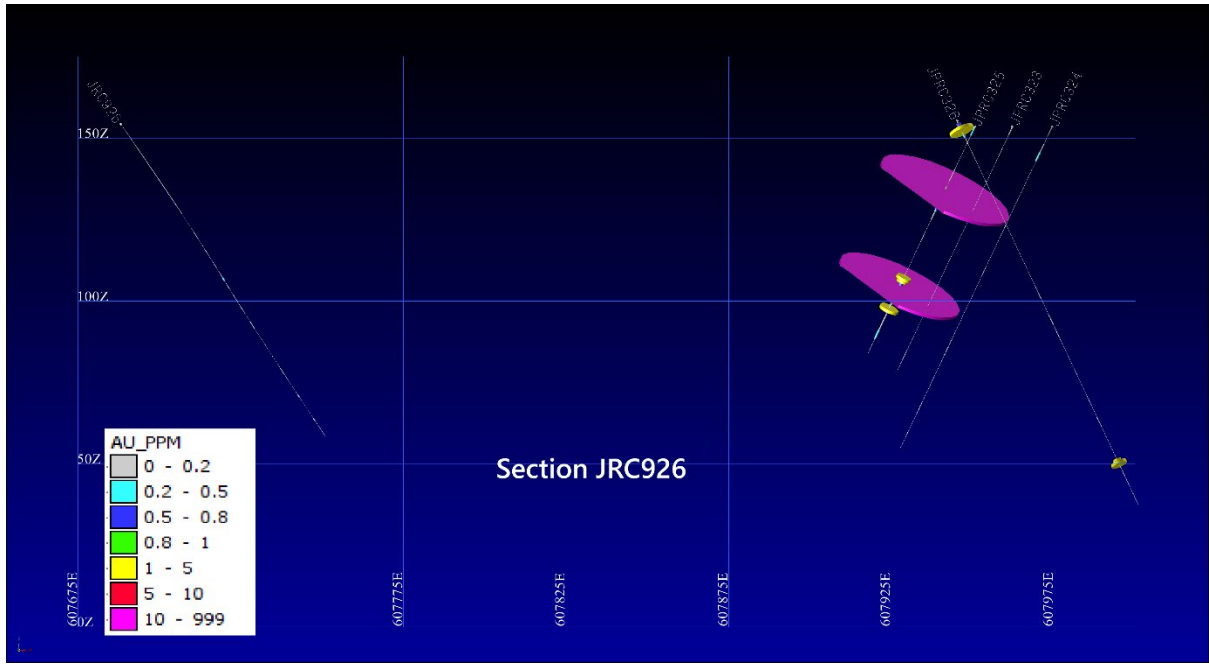

**Drill hole cross section for JRC926 with intersections**

**Diwalwal Gold Project**

**(Philippines) (Tribune’s Interest 40% and a further 20% earned Economic Interest)**

No significant exploration activities were conducted during the quarter on the Upper Ulip and 729-ha tenement in Diwalwal.

No drilling was conducted during the quarter.

**Seven Mile Hill Joint Venture (Tribune’s Interest 50%)**

No drilling was conducted during the quarter.

**Competent Persons Statement**

Information in this report relating to exploration results has been compiled by Mr Andrew Hawker in accordance with the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code). Mr Andrew Hawker is a member of AUSIMM and a consultant to Tribune Resources Ltd and has sufficient relevant experience in the activities undertaken and styles of mineralisation being reported to qualify as a Competent Person under the JORC Code. Mr Andrew Hawker consents to the inclusion in this report of the information compiled by him in the form and context in which it appears.

## Corporate

### Summary of Cashflows

The attached Appendix 5B is prepared on a consolidated basis and includes the cash inflows and cash outflows of its subsidiaries including Rand Mining Limited (Rand)(ASX:RND).

Cash and cash equivalents were \$17.453m at 30 September compared to \$12.449m at 30 June.

Receipts from customers were up by \$3.982m to \$42.792m for the quarter. This was the result of additional sales combined with higher gold prices, with sales made to cover operational expenditure.

Operating cash flows decreased by \$26k during the quarter. Production costs decreased by \$3.086m Development costs increased by \$5.376 in the quarter and Exploration costs increased by \$1.172m of which \$781k related to drilling at the Japa project in Ghana.

Investing cash flows decreased by \$1.794 during the quarter as a result in decreased EKJV Property, Plant and Equipment expenditure.

Staff, administration and corporate costs were \$1.803 which is up \$475k on the previous quarter. The total tax payments remained stable with a \$104k increase on the previous quarter.

### Share Buy-Back

The Company operated a buyback during the quarter, but no shares were bought back during the period. The buyback expires on 20 February 2026 unless it is extended by the Company.

### Payments to related parties of the entity and their associates

In item 6 of the attached Appendix 5B cash flow report for the quarter, payments to related parties of \$246,000 comprised of director fees and superannuation for Anthony Billis of \$47,396, director fees for Gordon Sklenka of \$25,000, payments to related entities of Anthony Billis for rent and outgoings of \$28,733, reimbursement of operating expenses of \$79,604 and royalties of \$3,588 (via the EKJV). It also includes payments to Lyndall Vaughan of \$61,686 in her capacity as Finance Manager of the Company, which are being disclosed in Item 6 due to her being an Alternate Director for Otakar Demis.

**This report and the attached Appendix 5B have been authorised by the Board of Tribune Resources Limited.**

### For Shareholder Enquiries

Stephen Buckley

Joint Company Secretary

E: [stephen.buckley@tribune.com.au](mailto:stephen.buckley@tribune.com.au)

Ph: + 61 8 9474 2113

**INTERESTS IN MINING TENEMENTS**

	<b>Project/Tenements</b>	<b>Location</b>	<b>Held at end of quarter*</b>	<b>Acquired during the quarter</b>	<b>Disposed during the quarter</b>
	<b>Kundana</b>	<b>WA, Australia</b>			
01.	M15/1413		49.00%		
02.	M15/993		49.00%		
03.	M16/181		49.00%		
04.	M16/182		49.00%		
05.	M16/308		49.00%		
06.	M16/309		49.00%		
07.	M16/325		49.00%		
08.	M16/326		49.00%		
09.	M16/421		49.00%		
10.	M16/428		49.00%		
11.	M24/924		49.00%		
	<b>West Kundana</b>	<b>WA, Australia</b>			
01.	M16/213		24.50%		
02.	M16/214		24.50%		
03.	M16/218		24.50%		
04.	M16/310		24.50%		
	<b>Seven Mile Hill</b>	<b>WA, Australia</b>			
01.	E15/1664		100.00%		
02.	M15/1233		100.00%		
03.	M15/1234		100.00%		
04.	M15/1291		100.00%		
05.	M15/1388		100.00%		
06.	M15/1394		100.00%		
07.	M15/1409		100.00%		
08.	M15/1743		100.00%		
09.	M26/563		100.00%		
10.	P15/6370		100.00%		
11.	P15/6398		100.00%		
12.	P15/6399		100.00%		
13.	P15/6400		100.00%		
14.	P26/4173 (Application for conversion to Mining Lease M26/872 was lodged in Dec 2024 - Pending approval)		100.00%		
	<b>West Kimberly</b>	<b>WA, Australia</b>			
01.	E04/2548		100%		
	<b>Japa Concession</b>	<b>Ghana, West Africa</b>	100%		
	<b>Diwalwal Gold Project</b>	<b>Mindanao, Philippines</b>			
	<b>729 Area<sup>1</sup></b>		40%		
	<b>Upper Ulip Area<sup>1</sup></b>		40%		

Note, includes Rand Mining Ltd's, Rand Exploration NL's and Prometheus Developments interests where applicable.  
<sup>1</sup>Prometheus has an Investment Agreement with Paraiso Consolidated Mining Corporation ("Pacomenco").

## Japa Gold Project, Ghana

### JORC Code, 2012 Edition – Table 1

#### Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Reverse Circulation (RC) percussion techniques were employed.</li> <li>RC samples were collected from a cone splitter mounted on the rig cyclone at predominantly one metre intervals. Samples submitted to the laboratory, were single metre samples, were nominally 3 kilograms in weight.</li> <li>All samples submitted for analysis were split PA-R and a 500-gram subsample was split off for Photon assay (PAAU002) determination of gold.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></li> </ul>	<ul style="list-style-type: none"> <li>Face sampling RC Hammer drilling methods were employed.</li> <li>RC hole diameter either 133mm or 140mm.</li> <li>Reflex EZ Gyro downhole survey instrument was used to determine the drill direction( Azimuth) and dip of drillhole</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Visual measure of RC chip sample recoveries was made and recorded where significantly less than expected volume. Monitoring of sample quantity and quality was maintained by geologists and technicians attending the rigs during drilling operations.</li> <li>Sample recovery maximized through use of auxiliary and booster compressors to manage sample return and ground water inflow.</li> <li>Sample system hygiene checked and maintained at rod changes. Sample systems</li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>were purged of groundwater and associated contaminants prior to drilling the next rod.</p> <ul style="list-style-type: none"> <li>No relationship between RC sample recovery and assay grade has been determined. Sample bias has not been detected. RC Drilling was discontinued when dry sampling was no longer achievable.</li> <li>Due to the mineralisation being hosted in quartz veins and interpreted post-mineralisation fracturing of zones within the overall lode, most core loss instances were in heavily veined intervals where veins had been naturally shattered and it is expected that this has downgraded many of these affected intervals although this has not been quantified.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>All RC chip samples were geologically logged on an individual metre basis. Logging is qualitative and captures details of lithology, oxidation, texture, mineralisation, alteration, veining, sample quality and recovery. Representative samples of all individual RC samples were retained in chip trays.</li> <li>The data captured from geological logging is of appropriate standard, focus and detail to support future Mineral Resource estimations, mining studies and metallurgical studies.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>RC samples were collected by cone splitter in one and three metre composites. Where required, samples were riffle split to achieve appropriate weight of sample for laboratory submission. Excessively wet samples were subsampled by grab or tube spear methods where complete drying was not practicable.</li> <li>Field duplicates are collected and submitted for analysis at regular intervals throughout the drilling campaigns. Approximately 5% of RC samples are duplicated and submitted for analysis.</li> <li>Sample weights are such that the entire sample submitted to the laboratory is dried, crushed and Split for Photon Assay analysis. After this samples is retain in their containers and return for storage.</li> <li>Subsampling methods employed throughout the laboratory process are appropriate for the material and deposit type.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make</li> </ul>	<ul style="list-style-type: none"> <li>Drill samples were subject to Photon assay of a 500 gram split subsample giving total gold analysis of a representative sample of the in-situ material determined by Photon Assay (PA-R)analysis to a lower detection limit of 0.02 parts per million gold.</li> <li>Approximately 12% of all samples submitted are for quality control purposes. Field duplicates are collected at regular intervals</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p>and model, reading times, calibrations factors applied and their derivation, etc.</p> <ul style="list-style-type: none"> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<p>throughout the drilling and sampling process and analysed with the primary samples. Approximately 5% of RC samples are duplicated. Commercially prepared Standard Reference Materials, including coarse blank material, are submitted with each batch of samples to monitor potential contamination in the preparation process and accuracy and consistency of the analysis process. Standards and blanks constitute approximately 8% of all samples analysed.</p> <ul style="list-style-type: none"> <li>No geophysical methods were used for elemental determinations.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>All drilling data including significant intersections is verified and validated by other geologists or Competent Persons within the organisation.</li> <li>Dedicated twinning of holes has previously been employed in a limited capacity to verify mineralisation intersected in historic drilling campaigns. The natural sub-surface ground conditions and the extensive recent surface disturbance precludes close spaced duplication of previously drilled holes. Current drilling is infilling the drill spacing for additional Resource evaluation and verifies historic RC and diamond drilling intersections with respect to location, nature and tenor of mineralisation.</li> <li>Drilling data is manually and digitally captured according to written procedures and a library of standard logging codes appropriate to this project and purpose. Manually captured data is transferred to digital templates where it is validated and then loaded to an externally managed and maintained database, again with validation protocols. Original data and reports are stored at the Company's Headquarters.</li> <li>No adjustments to assay data have been made. Raw assay data is provided to the external database managers where it is loaded to the database, securely stored and quarantined.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>All planned drill holes and drilled hole collars are surveyed using Trimble R8 RTK DGPS. Drill hole trajectories are measured using Reflex EZ-Trac or Reflex EZ-Gyro down hole survey tools. Drill rigs are aligned using Reflex TN14 Gyro Compass.</li> <li>Grid is WGS84 Zone 30N and Vertical Datum is referenced to mean sea level.</li> <li>RTK DGPS positioning is calibrated against pre-established primary planimetric survey control with tie-in to the Geodetic Reference Network. Topographic control is a combination of physical survey traverses and unmanned aerial vehicle surveys which is adequate for</li> </ul>

Criteria	JORC Code explanation	Commentary
		the purpose.
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>Drill holes are designed at an irregular spacing in this campaign principally to infill drill coverage for Resource definition and estimation purposes. Earlier work has established the required parameters for Mineral Resource classification.</li> <li>The drilling data will be used in a Mineral Resource estimation.</li> <li>Sample compositing has not been applied as samples were taken a 1m intervals only</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>The primary controls on the gold mineralisation are presently well understood. Drill holes in this campaign were designed to intersect the mineralisation as normal to the primary control orientation as possible to reduce or eliminate any possible sampling bias.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>Chain of custody for samples is managed by Tribune personnel and contractors on site. Samples are stored on site until collection by Intertek Laboratory personnel for transport to the Tarkwa laboratory facility.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li><i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>Data and data collection methods are continuously reviewed for accuracy and adherence to procedures by Tribune and Principal Contractor personnel. No material issues have been noted. No official audits have been undertaken at this stage.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>Work was conducted within Mining Lease P.L.2/310 owned by Tribune Resources (Ghana) Limited. The lease covers an area of 26.2km<sup>2</sup> and is situated in the Wassa Amenfi East District of the Western Region of Ghana approximately 270km west of Accra and 50km north of Tarkwa. The Ghana Government holds a 10% free carried interest in the project.</li> <li>All tenure is secure and in good standing with no known impediments.</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Exploration has been conducted within and adjacent to the tenement over an extended period. Particularly relevant is the work done by Cluff/Anglogold during the 1990's and the information from that work was integral in the target generation and evaluation that resulted in Tribune acquiring its interest in the Project.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>Target is orogenic lode and vein hosted gold mineralisation. The project area straddles the Akropong Belt, a sequence of Proterozoic Birimian volcano-sedimentary rocks that parallels the highly endowed Ashanti Belt.</li> </ul>
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>Details of the location, orientation, and depth of drill holes completed together with significant gold assay results are provided in the body of the report to which this table refers and/or are appended to this table.</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>Significant intersections are reported as length weighted averages of all samples within the composite interval. Criteria used to calculate significant intersections can vary and are presented with each table of results.</li> <li>No top cut of grades has been applied to the results reported.</li> <li>Significant intersections are reported in the context of any likely mining extraction scenario. In the case of the Adiembra deposit, and notwithstanding the outcomes of any future Mineral Resource update or Reserve estimation, the likely mining scenario would be by open pit only and the significant intersections are presented with appropriate grade cut-offs and internal dilution criteria to reflect that method of extraction.</li> </ul>
<b>Relationship between mineralisation</b>	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the</li> </ul>	<ul style="list-style-type: none"> <li>Primary gold mineralisation occurs within steeply dipping quartz veins. Holes are drilled normal to the dominant mineralised quartz vein orientation, and hence normal to the mineralised zones, at nominally -55° dip.</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>widths and intercept lengths</b>	<p>drill hole angle is known, its nature should be reported.</p> <ul style="list-style-type: none"> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<p>Intersection widths reported are down hole aggregate widths and vary between 120% to 170% of the true width of the mineralised intervals.</p>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>This document is not reporting a significant discovery. The exploration results reported are from infill drilling designed to enable an update to the Adiembra Mineral Resource Estimate to be undertaken.</li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>All significant intersections from the relevant drilling campaign and the interpretation of those results is reported.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>Geological observations are reported. Specific gravity determinations from core samples have been completed. Metallurgical test work is ongoing from samples collected during the previous campaign.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>A Mineral Resource estimation for the Adiembra deposit has been published. The outcomes of this infill drill campaign are anticipated to allow an update to the Mineral Resource and subsequent Reserve estimation to be undertaken. Further metallurgical and geotechnical studies and sterilisation drilling for future infrastructure is anticipated.</li> <li>Exploration drilling at other prospects within the Japa Mining Lease has commenced.</li> </ul>

**Table of Japa Project drilling intersections received during the Sept 2025 quarter.**

Intervals calculated at  $\geq 0.3$  metre down hole length,  $\geq 0.4$ ppm Au,  $\leq 3$  metres internal dilution of  $<0.4$ ppm Au. Table presents only those intersections of 1 interval length and above in metres multiplied by grade in ppm Au.

**Significant Intercepts**

Hole ID	Length	Grade ppm	from depth m	Comments
JRC907	8m	0.8	40	
	2m	0.8	57	
	1m	0.57	61	
JRC908	3m	0.52	34	
JRC909	2m	0.34	11	
	5m	8.06	14	
	5m	1.11	22	
	1m	2.15	39	
	1m	0.3	58	
	2m	0.3	107	
JRC910	3m	2.16	37	
JRC910A	1m	0.88	9	
	1m	1.29	77	
	1m	0.7	93	
JRC912	2m	0.32	29	
	1m	0.32	34	
	5m	0.44	40	
	1m	0.36	93	
JRC913	1m	0.3	5	
	2m	0.26	27	
	2m	0.78	80	
JRC914	1m	0.57	4	
JRC915	3m	0.65	42	
	1m	0.54	50	
JRC918	1m	0.75	38	
JRC916	4m	0.8	25	
	1m	1.63	73	
	1m	0.37	85	
JRC921	2m	0.33	14	
JRC922	1m	1.88	69	
JRC923	1m	0.47	114	
JRC924	1m	0.33	109	
	4m	1.125	116	
JRC927	1m	0.34	27	
JRC928	2m	5.9	97	
JRC929	1m	0.34	49	

For personal use only

For personal use only

	1m	0.74	94	
JRC931	6m	0.9	130	
JRC930	1m	0.98	76	
	4m	0.615	82	
	2m	0.5	88	
JRC932	1m	0.3	0	
	5m	0.366	4	
JRC933	3m	0.58	9	
JRC930	1m	0.98	76	
	4m	0.615	82	
	2m	0.5	88	
	7m	0.93	100	
	6m	0.81	109	
	2m	0.54	119	
JRC935	5m	0.956	56	
	2m	0.795	64	
JRC937	8m	0.385	5	
	1m	3.58	96	

JORC Code, 2012 Edition – Table 1

Mungari – Ambition

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

**Mungari – Ambition Section 1 Sampling Techniques and Data**

Criteria	Explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>• Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>• Include reference to measures taken to ensure sample representation and the appropriate calibration of any measurement tools or systems used.</li> <li>• Aspects of the determination of mineralisation that are material to the Public Report.</li> <li>• In cases where 'industry standard' work has been completed this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems, or unusual commodities/mineralisation types (e.g. submarine nodules).</li> </ul>	<ul style="list-style-type: none"> <li>• Two sample types were used to collect material for analysis: surface diamond drilling (DD) and surface reverse circulation drilling (RC).</li> <li>• RC samples were split using a rig-mounted cone splitter on 1 m intervals to obtain a sample for assay.</li> <li>• Diamond core was placed in core trays for logging and sampling. Half core samples were nominated by the geologist from the diamond core with a minimum sample width of 30 cm.</li> <li>• Sample procedures followed by historic operators are assumed to be in line with RC sampling was split using a rig mounted cone splitter to deliver a sample of approximately 3 kg.</li> <li>• Surface diamond drill holes were completed using HQ (63.5 mm) core. DD drill core was cut in half using an automated core saw, the mass of material collected will vary on the hole diameter and sampling interval.</li> <li>• All samples were delivered to a commercial laboratory where they were assayed via photon analyses. Samples were dried, crushed to 3 mm for photon, at this point, large samples may be split using a rotary splitter, pulverisation to 90% passing 75 µm for fire assays. ~500g is selected for photon analyses or a 40g charge was selected for fire assay. industry standards at the time.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>• Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</li> </ul>	<ul style="list-style-type: none"> <li>• RC sampling was completed using a 4.5" to 5.5" diameter face sampling hammer. Diamond holes from surface were predominantly HQ (63.5mm) holes.</li> <li>• All diamond core was orientated where possible using the reflex (act II or ezi-ori) tool.</li> <li>• In many cases, RC pre-collars were drilled, followed by diamond tails. Pre-collar depth was determined in the drill design phase depending on the target being drilled and production constraints.</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>• Method of recording and assessing core and chip sample recoveries and results assessed.</li> </ul>	<ul style="list-style-type: none"> <li>• RC drilling sample weights were recorded for selected sample intervals and monitored for fluctuations against the expected sample weight. If samples were below the expected weight, feedback was</li> </ul>

## Mungari – Ambition Section 1 Sampling Techniques and Data

Criteria	Explanation	Commentary
	<ul style="list-style-type: none"> <li>• <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></li> <li>• <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></li> </ul>	<p>given promptly to the RC driller to modify drilling practices to achieve the expected weights.</p> <ul style="list-style-type: none"> <li>• All diamond core was orientated and measured during processing and the recovery recorded into the drill-hole database. The core where possible was reconstructed into continuous runs on a cradle for orientation marking. Hole depths were checked against the driller's core blocks.</li> <li>• Inconsistencies between the logging and the driller's core depth measurement blocks are investigated. Core recovery has been acceptable. Surface drilling recoveries were generally excellent except oxide zones; however, these rarely fell below 90%.</li> <li>• Measures taken to maximise sample recovery include instructions to drillers to slow down drilling rates or reduce the coring run length in less competent ground.</li> <li>• Recovery of RC samples was continuously monitored. Duplicate sampling (e.g., field splits) was performed for every meter to assess reproducibility and identify heterogeneity or size-related segregation.</li> <li>• Recovery was excellent for diamond core, and no relationship between grade and recovery was observed.</li> </ul>
Logging	<ul style="list-style-type: none"> <li>• <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></li> <li>• <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i></li> </ul> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<ul style="list-style-type: none"> <li>• RC drill chips and diamond core have been geologically logged to the level of detail required for the Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>• All logging is both qualitative and quantitative in nature, recording features such as structural data, RQD, sample recovery, lithology, mineralogy, alteration, mineralisation types, vein density, oxidation state, weathering, colour, etc. All holes are photographed wet.</li> <li>• All RC and diamond holes were logged in entirety from collar to end of hole.</li> </ul>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li>• <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></li> <li>• <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></li> <li>• <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li>• <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></li> <li>• <i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Diamond core was half-core sampled, and the remaining half was retained in the EVN core farm.</li> <li>• All RC samples were split by a cone or a riffle splitter and collected into a sequenced calico bag. Any wet samples that could not be appropriately split were dried, then riffle split.</li> <li>• Sample preparation of RC and diamond samples was undertaken by external laboratories according to the sample preparation and assaying protocol established to maximise the representation of the mineralisation. Samples are sorted for processing. The material jaw crushed to a nominal 3mm particle size, and a 500g subsample was prepared for analysis. Grind checks are performed at the crushing stage (3mm) for Photon Assay samples. This 500g subsample was sealed into a plastic jar, weighed and labelled with a unique identifier and reference disk. Laboratory's performance was monitored as part of EVN's QAQC procedure. Laboratory inspections were undertaken to monitor the laboratory's compliance with the EVN sampling and sample preparation protocol.</li> <li>• Quality control procedures adopted to maximise sample representation for all sub-sampling stages include the collection of field and laboratory duplicates and the insertion of certified reference material as assay standards (1 in 20) and the insertion of blank samples (1 in 20) or at the geologist's discretion. Coarse blank material is routinely submitted for assay and is inserted into each mineralised zone where possible. The quality control performance was monitored as part of EVN's QAQC procedure.</li> <li>• Umpire sampling is performed monthly, where 3% of the samples are sent to the umpire laboratory for processing.</li> </ul>

## Mungari – Ambition Section 1 Sampling Techniques and Data

Criteria	Explanation	Commentary
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>• Whether sample sizes are appropriate to the grain size of the material being sampled.</li> <li>• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>• For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis, including instrument make and model, reading times, calibration factors applied and their derivation, etc.</li> <li>• Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>• The sample sizes are considered appropriate for the laboratory test-work being conducted. In-situ grain sizes of the sampled materials have not been measured and most likely vary considerably.</li> <li>• The sampling preparation and assaying protocol used by EVN was developed to ensure the quality and suitability of the assaying and laboratory procedures relative to the mineralisation types. Fire assay and photon assay are tests designed to measure the total gold within a sample. Both methods have been confirmed as suitable technique for orogenic-type mineralisation. It has been extensively used throughout the Goldfields region.</li> <li>• No geophysical tools or other remote sensing instruments were utilised for reporting or interpretation of gold mineralisation, although aeromagnetic interpretation was used to build the structural model, which does constrain the mineralised envelope.</li> <li>• Quality control samples were routinely inserted into the sampling sequence and were also inserted either inside or around the expected zones of mineralisation. The intent of the procedure for reviewing the performance of certified standard reference material is to examine for any erroneous results (a result outside of the expected statistically derived tolerance limits) and to validate, if required, the acceptable levels of accuracy and precision for all stages of the sampling and analytical process. Typically, batches which fail quality control checks are re-analysed.</li> </ul>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>• The verification of significant intersections by either independent or alternative company personnel.</li> <li>• The use of twinned holes.</li> <li>• Documentation of primary data, data entry procedures, data verification and data storage (physical and electronic) protocols.</li> <li>• Discuss any adjustment to assay data</li> </ul>	<p>Independent internal or external verification of significant intercepts is not routinely completed. The quality control/quality assurance (QAQC) process ensures the intercepts are representative of the orogenic gold systems. Half core is retained at Mungari if further verification is required, and field duplicates used for verification of any assay value where required.</p> <p>The twinning of holes is not a common practice undertaken. Data which is inconsistent with the known geology undergoes further verification to ensure its quality.</p> <p>All sample and assay information are stored utilising the acQuire database software system. Data undergoes QAQC validation prior to being accepted and loaded into the database. Assay results are merged when received electronically from the laboratory. The geologist reviews the database, checking for the correct merging of results and that all data has been received and entered. Any adjustments to this data are recorded permanently in the database. Historical paper records (where available) are retained in the exploration and mining offices.</p> <p>No adjustments or calibrations have been made to the final assay data reported by the laboratory.</p>
Location of data points	<ul style="list-style-type: none"> <li>• Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>• Specification of the grid system used.</li> <li>• Quality and adequacy of topographic control.</li> </ul>	<p>All drill holes have been surveyed for easting, northing and reduced level.</p> <p>Resource drill hole collar positions are surveyed by the site-based survey department or contract surveyors (utilising a differential GPS or conventional surveying techniques, with reference to a known base station) with a precision of less than 0.2m variability. Holes drilled prior to 2019 had downhole gyroscopic surveys completed at distance between 40 and 80 metres downhole, and again at end of hole. Holes drilled post 2019 had downhole gyroscopic surveys completed at an average of 10 m spacing downhole.</p>


## Mungari – Ambition Section 1 Sampling Techniques and Data

Criteria	Explanation	Commentary
		<p>Recent data is collected and stored in MGA 20 Zone 51.</p> <p>Topographic control was generated from aerial surveys and detailed Lidar surveys to 0.2m accuracy.</p>
Data spacing and distribution	<ul style="list-style-type: none"> <li>• Data spacing for reporting of Exploration Results.</li> <li>• Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>• Whether sample compositing has been applied.</li> </ul>	<p>Resource definition drilling spacing was typically 40m x 40m, to allow for classification as Indicated Resource for an Underground resource, or 20m x 20m for an Open Pit resource. Outside of the Indicated Resource, drill spacing is highly variable with Resource classifications applied appropriately.</p> <p>Data spacing and distribution is considered sufficient for establishing geological continuity and grade variability appropriate for classifying a Mineral Resource.</p> <p>Sample data is composited before grade estimation is undertaken.</p>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>• If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<p>Drilling is planned to intersect the mineralisation in an orientation that does not introduce sample bias.</p> <p>The relationship between the drilling orientation and the orientation of key mineralised structures at Ambition is not considered to have introduced a sampling bias and is not considered to be material.</p>
Sample security	<ul style="list-style-type: none"> <li>• The measures taken to ensure sample security.</li> </ul>	<p>Chain of custody protocols to ensure the security of samples are followed. Prior to submission, samples are retained on site and access to the samples is restricted. Collected samples are dropped off at the respective commercial laboratories in Kalgoorlie. The laboratories are contained within a secured/fenced compound. Access into the laboratory is restricted and movements of personnel and the samples are tracked under supervision of the laboratory staff. During some drill campaigns, some samples are collected directly from site by the commercial laboratory. While various laboratories have been used, the chain of custody and sample security protocols have remained similar.</p>
Audits or reviews	<ul style="list-style-type: none"> <li>• The results of any audits or reviews of sampling techniques and data.</li> </ul>	<p>No audits have been undertaken for the drill holes at this stage.</p>

## Section 2 Reporting of Resource Development Results

(Criteria in this section apply to all succeeding sections.)

Mungari – Ambition Section 2 Reporting of Resource Development Results		
Criteria	Explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <li>• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></li> <li>• <i>The security of the tenure held at the time of reporting, along with any known impediments to obtaining a licence to operate in the area.</i></li> </ul>	<ul style="list-style-type: none"> <li>• All holes mentioned in this report are located on the M16/326. Mining lease held by the East Kundana Joint Venture (EKJV). The EKJV is majority owned and managed by Evolution Mining Limited (51%). The minority holding in the EKJV is held by Tribune Resources Ltd (36.75%) and Rand Mining Ltd (12.25%). There are no private royalty agreements applicable to M16/326.</li> <li>• No known impediments exist, and the tenements are in good standing.</li> </ul>
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <li>• <i>Acknowledgment and appraisal of exploration by other parties.</i></li> </ul>	<ul style="list-style-type: none"> <li>• The Ambition target was originally defined in 2001 from magnetic 'anomalies' as "a continuation of the Arctic Structure mined in the Arctic Pit to the south". A small drill program of four RC holes targeted the mineralised structure at Ambition in 2003. These holes failed to intersect the structure, presumably due to an offset of the aeromagnetic lineament. Other drilling in the area has absent or poor-quality geological logging. The 2003 drillholes assisted in successfully intersecting the target in this drill program, but beyond that, historical drilling provides little value in appraisal of the structure at Ambition.</li> </ul>
<i>Geology</i>	<ul style="list-style-type: none"> <li>• <i>Deposit type, geological setting and style of mineralisation.</i></li> </ul>	<ul style="list-style-type: none"> <li>• The Kundana camp is situated within the Norseman-Wiluna Greenstone Belt, in an area dominated by the Zuleika shear zone, which separates the Coolgardie Domain from the Ora Banda Domain. K2-style mineralisation consists of narrow vein deposits hosted by shear zones located along steeply dipping overturned hangingwall basalts. The K2 structure defines the contact between a black shale unit (Centenary shale) and intermediate volcanics (Sparogville formation). In the northern part of the Ambition target, the hangingwall basalts are absent and the structure separates a gabbro and lithic gabbro from Sparogville Volcanic rocks. Although it is unclear at this stage, the current interpretation is that the target structure in the northern part of the Ambition prospect is actually the confluence of the Strzelecki and K2 structures thus the basalt sequences are faulted out where the two structures converge.</li> </ul>
<i>Drill Hole Information</i>	<ul style="list-style-type: none"> <li>• <i>A summary of all information material to the understanding of the exploration results, including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <li>o <i>easting and northing of the drillhole collar</i></li> <li>o <i>elevation or RL of the drillhole collar</i></li> <li>o <i>dip and azimuth of the hole</i></li> <li>o <i>downhole length and interception depth</i></li> <li>o <i>hole length.</i></li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• See Table 1 for a table of results.</li> <li>• All holes in this FY program are listed in the table. No drill holes are excluded from this report or from Table 1.</li> </ul>
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> <li>• <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades)</i></li> </ul>	<ul style="list-style-type: none"> <li>• All reported assay results have been length weighted to provide an intersection width. Barren material between mineralised samples has been permitted in the calculation of these widths where the resultant average composite grade of</li> </ul>

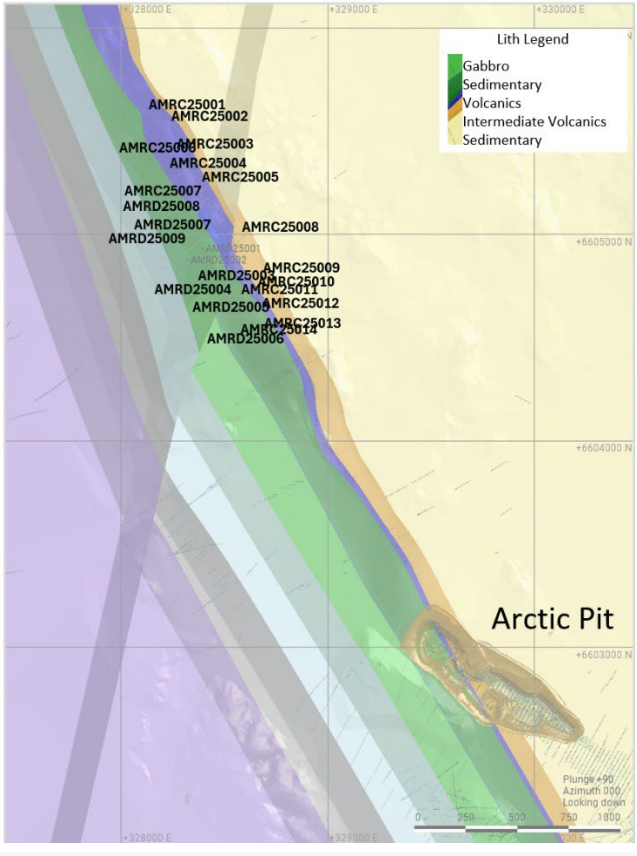Mungari – Ambition Section 2 Reporting of Resource Development Results		
Criteria	Explanation	Commentary
	<p>and cut-off grades are usually material and should be stated.</p> <ul style="list-style-type: none"> <li>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<p>samples beyond (and not including) the core mineralised zone exceeds the 1 g/t cut-off grade used for intercept calculation.</p> <ul style="list-style-type: none"> <li>No assay results have been top cut for the purpose of this report. A lower cut-off of 1g/t has been used to identify significant results. Where the target zone does not exceed the 1g/t cut-off, NSI (no significant intercept) has been declared.</li> <li>No metal equivalent values have been used for the reporting of these exploration results.</li> </ul>
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. 'downhole length, true width not known')</li> </ul>	<ul style="list-style-type: none"> <li>The target structure undulates, but its general orientation is well constrained, allowing reliable calculations of true widths. True widths have been calculated for all reported intersections.</li> <li>Both the downhole width and true width have been clearly specified when used.</li> </ul>
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plan view of drill hole.</li> </ul>	<ul style="list-style-type: none"> <li>The diagram below shows the location of the Ambition drilling relative to the geological model and historic Arctic open pit</li> </ul>  <p>The diagram is a geological map of the Ambition area. It shows a series of drill holes labeled with IDs such as AMRC25001, AMRD25007, and AMRC25008. The map is overlaid with a grid showing Easting (E) and Northing (N) coordinates. A legend titled 'Lith Legend' identifies geological units: Gabbro (green), Sedimentary (yellow), Volcanics (orange), Intermediate Volcanics (purple), and Sedimentary (light blue). A large feature labeled 'Arctic Pit' is shown in the lower right. A scale bar at the bottom right indicates distances up to 1000 meters. Text at the bottom right specifies 'Plunge +90, Azimuth 000, Looking down'.</p>
Balanced reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable,</li> </ul>	<ul style="list-style-type: none"> <li>Both high and low grades have been reported accurately, clearly identified with the drillhole attributes and 'From' and 'To'</li> </ul>

Mungari – Ambition Section 2 Reporting of Resource Development Results		
Criteria	Explanation	Commentary
	<i>representative reporting of both low and high grades and/or widths should be practised to avoid misleading reporting of Exploration Results.</i>	depths. All target zone intercepts for all eighteen holes have been reported for this drill program, regardless of grade. Drill holes with outstanding assays have not been included in the table.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <li>• <i>Other exploration data, if meaningful and material, should be reported, including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></li> </ul>	<ul style="list-style-type: none"> <li>• No other material exploration data has been collected for this drill program.</li> </ul>
<i>Further work</i>	<ul style="list-style-type: none"> <li>• <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></li> <li>• <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Further Reverse Circulation and Diamond drilling is planned to infill the higher-grade zones of the structure intersected to date and to better define the exact position and orientation of the structure, especially in the northern half of the prospective trend. Diamond drilling is planned to test the south plunging high-grade zone at depths exceeding 400m from the surface.</li> <li>• Appropriate Diagrams accompany this report.</li> </ul>

## Appendix 5B

### Mining exploration entity or oil and gas exploration entity quarterly cash flow report

Name of entity

Tribune Resources Ltd (ASX:TBR)

ABN

11 009 341 539

Quarter ended ("current quarter")

30 September 2025

Consolidated statement of cash flows	Current quarter \$A'000	Year to date (3 months) \$A'000
<b>1. Cash flows from operating activities</b>		
1.1 Receipts from customers	42,792	42,792
1.2 Payments for		
(a) exploration & evaluation	(1,768)	(1,768)
(b) development	(13,268)	(13,268)
(c) production	(16,645)	(16,645)
(d) staff costs	(436)	(436)
(e) administration and corporate costs	(1,367)	(1,367)
1.3 Dividends received (see note 3)	-	-
1.4 Interest received	136	136
1.5 Interest and other costs of finance paid	-	-
1.6 Income taxes paid	(3,544)	(3,544)
1.7 Government grants and tax incentives	-	-
1.8 Other (provide details if material)	-	-
<b>1.9 Net cash from / (used in) operating activities</b>	<b>5,900</b>	<b>5,900</b>

<b>2. Cash flows from investing activities</b>		
2.1 Payments to acquire or for:		
(a) entities	-	-
(b) tenements	-	-
(c) property, plant and equipment	(529)	(529)
(d) exploration & evaluation	(390)	(390)
(e) investments	-	-
(f) other non-current assets	-	-

## Mining exploration entity or oil and gas exploration entity quarterly cash flow report

Consolidated statement of cash flows		Current quarter \$A'000	Year to date (3 months) \$A'000
2.2	Proceeds from the disposal of:		
	(a) entities	-	-
	(b) tenements	-	-
	(c) property, plant and equipment	39	39
	(d) investments	-	-
	(e) other non-current assets	-	-
2.3	Cash flows from loans to other entities	-	-
2.4	Dividends received (see note 3)	-	-
2.5	Other (provide details if material)	-	-
<b>2.6</b>	<b>Net cash from / (used in) investing activities</b>	<b>(880)</b>	<b>(880)</b>
<b>3.</b>	<b>Cash flows from financing activities</b>		
3.1	Proceeds from issues of equity securities (excluding convertible debt securities)	-	-
3.2	Proceeds from issue of convertible debt securities	-	-
3.3	Proceeds from exercise of options	-	-
3.4	Transaction costs related to issues of equity securities or convertible debt securities	-	-
3.5	Proceeds from borrowings	-	-
3.6	Repayment of borrowings	-	-
3.7	Transaction costs related to loans and borrowings	-	-
3.8	Dividends paid	-	-
3.9	Other (provide details if material)	-	-
<b>3.10</b>	<b>Net cash from / (used in) financing activities</b>	<b>-</b>	<b>-</b>
<b>4.</b>	<b>Net increase / (decrease) in cash and cash equivalents for the period</b>		
4.1	Cash and cash equivalents at beginning of period	12,449	12,449
4.2	Net cash from / (used in) operating activities (item 1.9 above)	5,900	5,900
4.3	Net cash from / (used in) investing activities (item 2.6 above)	(880)	(880)
4.4	Net cash from / (used in) financing activities (item 3.10 above)	-	-

## Mining exploration entity or oil and gas exploration entity quarterly cash flow report

Consolidated statement of cash flows		Current quarter \$A'000	Year to date (3 months) \$A'000
4.5	Effect of movement in exchange rates on cash held	(16)	(16)
<b>4.6</b>	<b>Cash and cash equivalents at end of period</b>	<b>17,453</b>	<b>17,453</b>

5. Reconciliation of cash and cash equivalents at the end of the quarter (as shown in the consolidated statement of cash flows) to the related items in the accounts		Current quarter \$A'000	Previous quarter \$A'000
5.1	Bank balances	17,403	11,399
5.2	Call deposits	50	50
5.3	Bank overdrafts	-	-
5.4	Other (provide details)	-	-
<b>5.5</b>	<b>Cash and cash equivalents at end of quarter (should equal item 4.6 above)</b>	<b>17,453</b>	<b>12,449</b>

6. Payments to related parties of the entity and their associates		Current quarter \$A'000
6.1	Aggregate amount of payments to related parties and their associates included in item 1	246
6.2	Aggregate amount of payments to related parties and their associates included in item 2	-

*Note: if any amounts are shown in items 6.1 or 6.2, your quarterly activity report must include a description of, and an explanation for, such payments.*

7. Financing facilities <i>Note: the term "facility" includes all forms of financing arrangements available to the entity. Add notes as necessary for an understanding of the sources of finance available to the entity.</i>		Total facility amount at quarter end \$A'000	Amount drawn at quarter end \$A'000
7.1	Loan facilities	-	-
7.2	Credit standby arrangements	-	-
7.3	Other (please specify)	-	-
7.4	<b>Total financing facilities</b>	-	-
7.5	<b>Unused financing facilities available at quarter end</b>		-
7.6	Include in the box below a description of each facility above, including the lender, interest rate, maturity date and whether it is secured or unsecured. If any additional financing facilities have been entered into or are proposed to be entered into after quarter end, include a note providing details of those facilities as well.		

For personal use only

## Mining exploration entity or oil and gas exploration entity quarterly cash flow report

<b>8. Estimated cash available for future operating activities</b>	<b>\$A'000</b>
8.1 Net cash from / (used in) operating activities (item 1.9)	5,900
8.2 (Payments for exploration & evaluation classified as investing activities) (item 2.1(d))	(390)
8.3 Total relevant outgoings (item 8.1 + item 8.2)	5,510
8.4 Cash and cash equivalents at quarter end (item 4.6)	17,453
8.5 Unused finance facilities available at quarter end (item 7.5)	-
8.6 Total available funding (item 8.4 + item 8.5)	17,453
8.7 <b>Estimated quarters of funding available (item 8.6 divided by item 8.3)</b>	N/A
<i>Note: if the entity has reported positive relevant outgoings (ie a net cash inflow) in item 8.3, answer item 8.7 as "N/A". Otherwise, a figure for the estimated quarters of funding available must be included in item 8.7.</i>	
8.8 If item 8.7 is less than 2 quarters, please provide answers to the following questions:	
8.8.1 Does the entity expect that it will continue to have the current level of net operating cash flows for the time being and, if not, why not?	
Answer: N/A	
8.8.2 Has the entity taken any steps, or does it propose to take any steps, to raise further cash to fund its operations and, if so, what are those steps and how likely does it believe that they will be successful?	
Answer: N/A	
8.8.3 Does the entity expect to be able to continue its operations and to meet its business objectives and, if so, on what basis?	
Answer: N/A	
<i>Note: where item 8.7 is less than 2 quarters, all of questions 8.8.1, 8.8.2 and 8.8.3 above must be answered.</i>	

**Compliance statement**

- 1 This statement has been prepared in accordance with accounting standards and policies which comply with Listing Rule 19.11A.
- 2 This statement gives a true and fair view of the matters disclosed.

Date: 29 October 2025

Authorised by: By the Board  
(Name of body or officer authorising release – see note 4)

**Notes**

1. This quarterly cash flow report and the accompanying activity report provide a basis for informing the market about the entity's activities for the past quarter, how they have been financed and the effect this has had on its cash position. An

**Mining exploration entity or oil and gas exploration entity quarterly cash flow report**

---

entity that wishes to disclose additional information over and above the minimum required under the Listing Rules is encouraged to do so.

2. If this quarterly cash flow report has been prepared in accordance with Australian Accounting Standards, the definitions in, and provisions of, *AASB 6: Exploration for and Evaluation of Mineral Resources* and *AASB 107: Statement of Cash Flows* apply to this report. If this quarterly cash flow report has been prepared in accordance with other accounting standards agreed by ASX pursuant to Listing Rule 19.11A, the corresponding equivalent standards apply to this report.
3. Dividends received may be classified either as cash flows from operating activities or cash flows from investing activities, depending on the accounting policy of the entity.
4. If this report has been authorised for release to the market by your board of directors, you can insert here: "By the board". If it has been authorised for release to the market by a committee of your board of directors, you can insert here: "By the [name of board committee – eg Audit and Risk Committee]". If it has been authorised for release to the market by a disclosure committee, you can insert here: "By the Disclosure Committee".
5. If this report has been authorised for release to the market by your board of directors and you wish to hold yourself out as complying with recommendation 4.2 of the ASX Corporate Governance Council's *Corporate Governance Principles and Recommendations*, the board should have received a declaration from its CEO and CFO that, in their opinion, the financial records of the entity have been properly maintained, that this report complies with the appropriate accounting standards and gives a true and fair view of the cash flows of the entity, and that their opinion has been formed on the basis of a sound system of risk management and internal control which is operating effectively.