

Visit [Investor Hub](#) for a video update

November 12<sup>th</sup>, 2025

### DIAMOND DRILLING MORE THAN DOUBLES DEPTH EXTENT OF COPPER MINERALISATION AT CANGALLO

- *Diamond drilling extends copper mineralisation in stockwork veins to depths beyond 800m, confirming the large-scale nature of the porphyry system.*
- *Mineralised porphyry indicators including hypogene copper (chalcopyrite and bornite) within stockwork veins is strong evidence of a mineralised porphyry centre nearby.*
- *Broad, +300m zone of copper oxide mineralisation intersected from surface, includes evidence of supergene enrichment with potential for significantly higher copper grades near surface.*
- *Diamond drilling to be completed in coming weeks with final assays expected by end of December.*
- *Stage 3 RC drilling expected to commence shortly and will test the extent of the porphyry system to the south, where surface geological and geochemical data indicates the centre of the porphyry system is most likely to occur.*

AusQuest Limited (“AusQuest” or the “Company”) (ASX: AQD) is pleased to advise that diamond drilling has significantly expanded the scale of the porphyry copper-gold system at its 100%-owned Cangallo Porphyry Copper-Gold discovery in Peru, more than doubling the known depth extent of the mineralisation.

Preliminary visual assessment of core from the first diamond drill hole (CANDD01) indicates the stockwork vein system cutting the host volcanics is at least double the vertical depth of the current Reverse Circulation (RC) drilling, with chalcopyrite (copper sulphide) mineralisation intersected in veins at depths around 800m (down-hole) (*Figure 1*).



*Figure 1: Core photo from CANDD01 showing copper sulphide (chalcopyrite – brassy yellow colour) and pyrite mineralisation within a quartz vein at down-hole depth of 729m. Visual estimates of sulphide percentages are provided in Table 1)*



JOIN AUSQUEST'S INTERACTIVE INVESTOR HUB.

Visit [AUSQUEST.COM.AU](https://ausquest.com.au) for AusQuest's interactive Investor Hub

AusQuest Limited ABN 35 091 542 451 | 8 Kearns Crescent Ardress WA 6153

The presence of hypogene copper (sulphide mineralisation) within stockwork veins and fractures, accompanied by a variety of mineral assemblages associated with porphyry systems, provides evidence that a strongly mineralised porphyry stock should occur nearby.

The second diamond drill-hole (CANDD02) which is currently in progress, has intersected a broad zone of copper oxide mineralisation from surface to depths in excess of 300m (Figure 2). Within this zone there is strong evidence that supergene processes are active in the area, which could result in copper enrichment within the upper parts of the profile.



Figure 2: Core photos from CANDD02 showing copper oxides (chrysocolla, atacamite and malachite) within stockwork veins at depths of 78m (upper photo) and 305m (bottom left). Bornite mineralisation (purple mineral) with chlorite (green mineral) from 360m is shown in bottom right photo.

(Cautionary Statement: Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic

interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations. A summary log of visual estimates of mineralisation for drill-holes CANDD01 and CANDD02 (in progress) is provided in Table 1 below.)

Copper mineralisation in drill-hole CANDD02 occurs within an extensive stockwork vein system that is cutting the host volcanics, with chalcopyrite and bornite visually identified in veins within the volcanics, reflecting the mineralised nature of the hypogene fluids related to the porphyry system (Figure 2).

The diamond drilling program is designed to test the extent of the stockwork vein system that reflects the size and scale of the causative porphyry system, and the depth of hypogene copper (sulphide mineralisation) below the current level of drilling. This program is also providing valuable insight into the geological relationships and controls on the mineralisation intersected by the first two stages of RC drilling.

The diamond drilling program should be completed during the second half of November with final assays from the program expected before the end of December 2025.

For personal use only

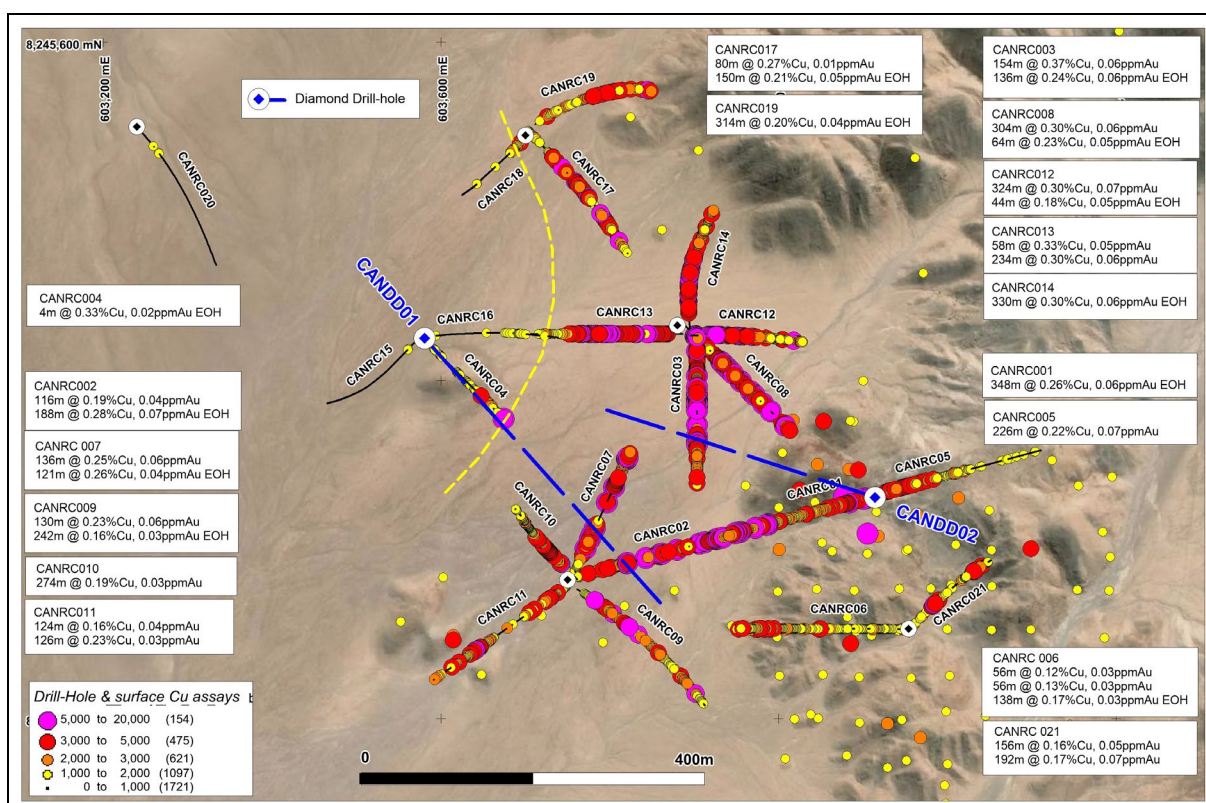


Figure 3: Cangallo Porphyry Copper Prospect showing RC and diamond drill-hole locations and significant intersections.

The Stage 3 RC program is expected to commence around the end of November and will test the extent of the porphyry system to the south where surface geological and geochemical data indicates the centre of the porphyry system is most likely to occur.

Commenting on progress being made at Cangallo, AusQuest's Managing Director, Graeme Drew, said:

"We are very pleased with what we are seeing in the diamond core which is giving us our first real look at the mineralisation that was intersected in our RC drilling programs.

*“The presence of visible copper sulphides within veins at depths around 800m, suggests a very large, robust porphyry system capable of injecting significant amounts of copper into the host rocks.*

*“Encouragingly, the broad zone of visible copper oxide that extends over +300m from surface highlights the potential for supergene enrichment and higher copper grades to be found near surface.*

*“We are excited to shortly commence Stage 3 RC drilling, focussing on the southern extent of the Cangallo discovery, where surface geological and geochemical evidence indicates the centre of the porphyry system is most likely to occur.*

*“We look forward to keeping the market updated on the results from our drilling as they become available.”*

### **Cangallo Exploration Results:**

The vast majority of copper and gold mineralisation intersected by the maiden RC drilling programs occurs within the volcanic host rocks (andesites and dacites). Copper mineralisation occurs within veins and fractures as well as tonalite dykes intruding the volcanics and is associated with late-stage sericite alteration.

Tonalite dykes that were recognised at surface and in the RC drill-holes are considered to reflect the source of the hydrothermal fluids and copper, however the small volume of dykes is not considered sufficient to explain the amount of alteration and widespread copper distribution that is evident in the area.

This highlights the excellent potential for a large-scale intrusive porphyry stock to occur nearby.

The presence of higher copper grades often found within or proximal to the tonalite dykes suggests that there is also excellent potential for the nearby porphyry stock to be strongly mineralised.

The broad zones of copper mineralisation (such as **324m @ 0.30% Cu including 160m @ 0.45% Cu and 330m @ 0.30% Cu including 178m @ 0.40% Cu**) that have been intersected in many drill-holes, occur within the oxide zone (malachite, atacamite, chrysocolla and brochantite) and could be recoverable by heap leach methods.

These copper oxides and, in places, secondary copper sulphides, are extensive both laterally and vertically, and occur from near surface (<20m) to depths well over 250m.

In some drill-holes there is strong evidence for supergene processes being active in the area, raising the possibility of an enriched supergene blanket with higher copper grades occurring somewhere beneath the shallow cover.

Recent geological mapping and rock chip sampling in the south of the prospect has identified highly anomalous copper (>0.5% Cu) and molybdenum values (>20ppm Mo) within veins and dykes intruding the volcanics. This association and the recognition of sericite alteration, suggests that the porphyry system that has been intersected in the north, extends for at least a further 1,200m south of the current drilling.

### **Context:**

Peru is the second largest copper producer in the world behind Chile, with around 2.8Mt of copper being mined and processed per annum. The bulk of this production comes from

around 10 large copper projects, mainly porphyries, that are located along the Andean Belt that extends from Chile in the south to Ecuador in the north.

Porphyry deposits are typically large (often over 1 billion tonnes of ore) and usually open-cuttable with low waste to ore ratios. The shallower parts of these ore bodies are usually oxide ores that can be processed using heap leach methods, resulting in lower development and operational costs.

There are a number of profitable large-scale operations (Cerro Verde, Cuajone, Toquepala, Quellaveco and new approved developments at Zafranal) located within the Arequipa District where Cangallo is situated, using head grades between 0.20% and 0.40% Cu. These mines have multi-decade mine-lives and are long-lived assets.

The economic viability of the Peruvian resources is often affected by a range of issues including location, altitude, proximity to infrastructure and water, as well as land usage conflicts with local communities.

The Cangallo Project is particularly well located with respect to the above, being close to significant infrastructure, 25km east of the town of Chala and within 10km of the coast. Community consultation has formed part of the Company's exploration process, with no critical issues identified to date.

Peru is a stable country and the government is supportive of new mine developments as they add significantly to the Peruvian economy and the communities where they are located.



Graeme Drew  
Managing Director

Visit [Investor Hub](#) for further updates

#### **COMPETENT PERSON'S STATEMENT**

*The details contained in this report that pertain to exploration results are based upon information compiled by Mr Graeme Drew, a full-time employee of AusQuest Limited. Mr Drew is a Fellow of the Australasian Institute of Mining and Metallurgy (AUSIMM) and has sufficient experience in the activity which he is undertaking to qualify as a Competent Person as defined in the December 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" (JORC Code). Mr Drew consents to the inclusion in the report of the matters based upon his information in the form and context in which it appears.*

#### **FORWARD-LOOKING STATEMENT**

*This report contains forward looking statements concerning the projects owned by AusQuest Limited. Statements concerning mining reserves and resources may also be deemed to be forward looking statements in that they involve estimates based on specific assumptions. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward looking statements as a result of a variety of risks, uncertainties and other factors. Forward looking statements are based on management's beliefs, opinions and estimates as of the dates the forward looking statements are made and no obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.*

\* Announcements to ASX for the Cangallo Project

2023 – 2025 Quarterly Activities and Cashflow Reports

30/09/2025      Diamond Drilling Commences at Cangallo

28/08/2025 Cangallo Porphyry Copper Discovery continues to grow  
 21/07/2025 Cangallo Drilling Progress Report  
 12/06/2025 Drilling Commences at Cangallo  
 24/04/2025 Drilling set to commence at Cangallo  
 05/03/2025 Drilling to extend Cangallo Cu-Au discovery  
 06/02/2025 Cangallo Discovery Confirmed  
 23/01/2025 Significant Porphyry Copper Discovery at Cangallo  
 17/12/2024 Drilling commences at Cangallo in Peru  
 09/11/2023 Cangallo Porphyry Copper Prospect Upgraded

**Table 1: Summary Drill Log of Mineralisation**

Drill-hole	From (m)	To (m)	Interval (m)	Mineralisation Modes	Oxide Minerals	Oxide % (Visual estimate)	Sulphide Minerals	Sulphide % (Visual Estimate)
<b>CANDD02 In Progress</b>	5	173	168	fractures, microveinlets & veins plus disseminated	Mixture of chrysacolla, atacamite, malachite	0.4% to 0.7%		
	173	304	131	fractures, microveinlets & veins			mixture of chalcopyrite, chalcocite, rare bornite	0.3% to 0.5%
	304	360	56	fractures, microveinlets & veins	atacamite & trace bornite	0.2% to 1.0%		
<b>CANDD01</b>	15	198	183	veins, veinlets & fractures	hematite, jarasite, geothite	1% to 3%		
	198	271	73	veins, veinlets & fractures			chalcopyrite, pyrite, traces of bornite, chalcocite	Pyrite 2% Chalcopyrite 0.1%
	271	830	559	veins, veinlets & fractures			chalcopyrite, pyrite	Pyrite 1.5 to 2% to Chalcopyrite 0.1 to 0.3% - ratio increasing down hole

# JORC Code, 2012 Edition – Table 1 report, Diamond Drilling at Cangallo in Peru

## Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>The entire cored hole is sampled (except for Quaternary cover sequence). Composite samples are being collected over 2 metre intervals</li> <li>Core is cut in half with half sent for analysis and half retained for geological and quality control purposes</li> <li>Sample intervals are measured by tape from depth intervals shown on core blocks labeled by the drillers, as per standard industry practice.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>Diamond Drilling to produce continuous core.</li> <li>HQ3 and NQ3 drill rods used to produce 60.1mm and 45.3mm diameter core respectively. The hole starts with HQ core and changes to NQ at the appropriate depth depending on drilling conditions.</li> <li>Down-hole surveys will be read at ~ 50m intervals using gyro downhole survey system.</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Core recovery is determined by comparing core lengths measured against drilled intervals shown on core blocks and recorded on the logs.</li> <li>Experienced diamond drillers are engaged to ensure maximum core recovery.</li> <li>Sample recovery is expected to be high negating any sample bias due to recovery.</li> </ul>
Logging	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> </ul>	<ul style="list-style-type: none"> <li>Drill core and sample chips are logged by experienced geologists to identify key rock types, alteration and mineralisation styles.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>• <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></li> <li>• <i>The total length and percentage of the relevant intersections logged.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Core logging is qualitative with visual estimates of mineralisation made for later comparison with assay results.</li> <li>• All core will be oriented using Core master system to enable structural measurements to be made on veins, fractures and dykes where appropriate.</li> <li>• All structural elements of the core are logged by a geotechnician and Alpha and Beta angles are recorded with a Kenometer. These are then entered into the structural data base</li> <li>• All core will be logged and photographed wet and dry.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>• <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></li> <li>• <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></li> <li>• <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li>• <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></li> <li>• <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></li> <li>• <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Samples are collected by cutting the core in half along its length and sampling over 2 metre intervals. In sections where core cannot be cut, representative core chips are collected for assay.</li> <li>• Duplicate samples are collected from the core every 113th sample for quality control. The duplicated sample is from the same length and a quarter of the core is used as the original sample with 30% of the core used as the original and 30% used as the “duplicate”. 40% is retained in the core box.</li> <li>• The sample sizes are appropriate for the geological materials being sampled.</li> <li>• Specific Gravity readings are collected every 10 metres and in changes of lithology. Readings are collected from a 10cm cut length of whole core that is measured in calibrated beaker for water displacement</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>• <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></li> <li>• <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></li> <li>• <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Assaying of the drill samples is by standard industry practice.</li> <li>• The samples are sorted, dried, crushed then split to obtain a representative sub-sample which is then pulverized.</li> <li>• A portion of the pulverized sample is digested using a four acid digest (Hydrofluoric, Nitric, Hydrochloric and Perchloric) which approximates a total digest for most elements. Some refractory minerals are not completely dissolved.</li> </ul>

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>Inductively Coupled Plasma Mass Spectroscopy (ICP-MS) will be used to measure Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn, Zr,</li> <li>Au assays will be provided by 30g fire assay with AA finish.</li> <li>Every 2 metre composite sample is also submitted for Hyperspectral analysis using a TerraSpec instrument and uploaded into the aiSIRIS™ software for mineral identification and spectral output.</li> <li>Assays are provided by ALS del Peru in Lima which is a certified laboratory for mineral analyses. Analytical data is transferred to the company via email.</li> <li>Data from the laboratory's internal quality procedures (standards, repeats and blanks) are provided to check data quality.</li> <li>The Company has a QA/QC system allocated randomly to a percentage of every 100 samples with the following ratios: duplicate samples 6% (~ every 15), coarse blanks 3% basis (~every 30), fine blanks 3%, and ore standards 3%.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li><i>The verification of significant intersections by either independent or alternative company personnel.</i></li> <li><i>The use of twinned holes.</i></li> <li><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> <li><i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>N/A for this report.</li> <li>All primary sample data will be recorded onto a printed sheet on site and uploaded to a site laptop, all geological data is recorded at the logging area on a site laptop and downloaded daily onto an external backup.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> <li><i>Specification of the grid system used.</i></li> <li><i>Quality and adequacy of topographic control.</i></li> </ul>	<ul style="list-style-type: none"> <li>Drill hole collars including elevation are located by hand held GPS to an accuracy of approximately 5m.</li> <li>Collars are then located on completion of the program with centimetre scale precision using a differential GPS system calibrated to the on-site registered surveyed datum points</li> <li>Down hole surveys on angled holes are carried out every 50m down hole, and at the end of the hole.</li> <li>All surface location data are in WGS 84 datum, UTM</li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>zone 18S.</p> <ul style="list-style-type: none"> <li>Two registered surveyed datum points have been established at site and these points are registered in the Peruvian national grid system by a registered survey group GEOM</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li><i>Data spacing for reporting of Exploration Results.</i></li> <li><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li><i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>Diamond drill-holes are positioned to test for hypogene mineralization beneath previous RC drill-holes. No systematic diamond drilling has been undertaken.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>Any bias due to the orientation of the drilling is unknown at this early stage of exploration.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li><i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>Sample security is managed by the operator of the Project. Procedures match with Industry best practice.</li> <li>Samples are collected into securely tied bags and placed into cable-tied plastic bags for transport to the laboratory. Each sample batch has a sample submission sheet that lists the sample numbers and the work required to be done on each sample.</li> <li>Samples will be transported to the laboratory by company vehicle using trusted company personnel.</li> <li>Sample pulps (after assay) are held by the laboratory and returned to the company after 90 days.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li><i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>No reviews or audits of the sampling techniques or data have been carried out to date.</li> </ul>

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The Cangallo project is located approximately 25 km east of the town of Chala in the south of Peru.</li> <li>The Cangallo project comprises 14 granted mineral concessions. The tenements are held by Questdor which is a 100% subsidiary of AusQuest Limited.</li> <li>There are no major heritage issues to prevent access to the tenements. A drill permit (FTA) has been provided by INGEMMET for the drilling program following environmental, and community approvals.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>No historic exploration data is available.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The Cangallo project is targeting Porphyry deposits along the coastal belt of southern Peru. These are large scale disseminated copper (and gold) deposits found within orogenic belts that surround the Pacific Rim. The deposits can be really large requiring significant drilling to evaluate.</li> </ul>
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>All relevant drill hole data and information are provided below.</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> </ul>	<ul style="list-style-type: none"> <li>N/A for this report.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>N/A for this report.</li> </ul>
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>All drill holes are shown on appropriate plans and included in the ASX release.</li> </ul>
Balanced reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>N/A for this report – no assay data reported.</li> </ul>
Other substantive exploration data	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>The relationship between current drilling and previously reported exploration data is shown in the ASX release.</li> </ul>
Further work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>Future diamond drilling will be dependent on current drilling results.</li> </ul>

#### PLANNED DRILL HOLE LOCATIONS

Planned Hole ID	Easting	Northing	RL	Azimuth	Dip	Depth (m)
CANDD001	604116	8245077	1183	290	-65	830
CANDD002	603582	8245242	1164	140	-70	360 (in progress)

Projection: WGS84, Zone 18S