



25 November 2025

### Iltani receives final assay results from Orient VTEM drilling, QLD.

Silver and base metals explorer **Iltani Resources Limited** (ASX: ILT, "Iltani" or "the Company") is pleased to report assay results from drillholes ORR130 to ORR137, completed as part of a VTEM (Versatile Time Domain Electromagnetic) target drilling program at its Orient Silver-Indium Project in Herberton, North Queensland.

#### HIGHLIGHTS:

---

- Iltani has received the final assay results from a ten-hole RC drilling program targeting multiple shallow VTEM anomalies at Orient. Material intercepts include:
  - ORR131: **20m @ 93.8 g/t Ag Eq.** from 4m inc. **6m @ 132.0 g/t Ag Eq.** from 18m downhole.
  - ORR135: **3m @ 130.9 g/t Ag Eq.** from 170m inc. **1m @ 279.3 g/t Ag Eq.** from 171m downhole.
  - ORR136: **22m @ 155.1 g/t Ag Eq.** from 127m inc. **10m @ 280.0 g/t Ag Eq.** from 136m inc. **4m @ 519.4 g/t Ag Eq.** from 142m downhole.
  - ORR137: **28m @ 164.6 g/t Ag Eq.** from 48m inc. **11m @ 328.7 g/t Ag Eq.** from 65m inc. **1m @ 1104.5 g/t Ag Eq.** from 71m downhole.
  - ORR136 and ORR137 were drilled in the 'gap zone' between the Orient West and East Mineral Resources, demonstrating the potential to link these resources and confirming the prospective nature of this zone.
  - Ground EM program is underway, aiming to better define targets for accurate drill testing where the current VTEM data has generated targets which are overlapping, of poor resolution or too deep to be modelled for accurate drill testing.
  - Subject to the weather conditions, Iltani will shortly commence further drilling, comprising 10 RC holes for 1,600m to follow up results of recent drilling and several shallow drill holes to test Vein 1.
-

**Ilteni Managing Director Donald Garner commented:**

*"We have received assay results from the remaining drill holes (ORR130 to ORR137) in the shallow VTEM target drilling program.*

*The drilling delivered material results in ORR136, which intersected **22m @ 155.1 g/t Ag Eq.** from 127m inc. **10m @ 280.0 g/t Ag Eq.** from 136m inc. **4m @ 519.4 g/t Ag Eq.** from 142m, plus ORR137 which returned **28m @ 164.6 g/t Ag Eq.** from 48m inc. **11m @ 328.7 g/t Ag Eq.** from 65m inc. **1m @ 1104.5 g/t Ag Eq.** from 71m.*

*These two holes were drilled in the 'gap zone' between the Orient West and East Mineral Resources, demonstrating the potential to link the two Mineral Resources. The 'gap zone' remains a high-priority target area and we will be drill testing this area after the wet season. This will be part of a larger drilling program planned to expand the current Orient West and Orient East resources and to follow up results from the geophysical surveys.*

Figure 1 Surface EM Survey Program




*A surface EM survey program is underway, targeting multiple deeper anomalies generated by the airborne VTEM survey, enabling the anomaly modelling to be completed with a greater level of accuracy, so we can better target the deeper drillholes.*

*Subject to the weather conditions, we are also going to recommence drilling activities at Orient, with a program of 10 RC holes following up the VTEM drilling results plus shallow holes to test Vein 1, the 800m East-West zone defined by a line of continuous workings immediately north from Orient East. This program will take 2 weeks to complete."*

1.1. 1. Orient VTEM Drilling Program

Iltni has completed a 10-hole RC drilling program (ORR128 to ORR137) targeting multiple shallow VTEM anomalies. Assay results have been received for all drill holes, with results received for drill holes ORR130 to ORR137 reported here.

Figure 2 Orient VTEM Drilling Program

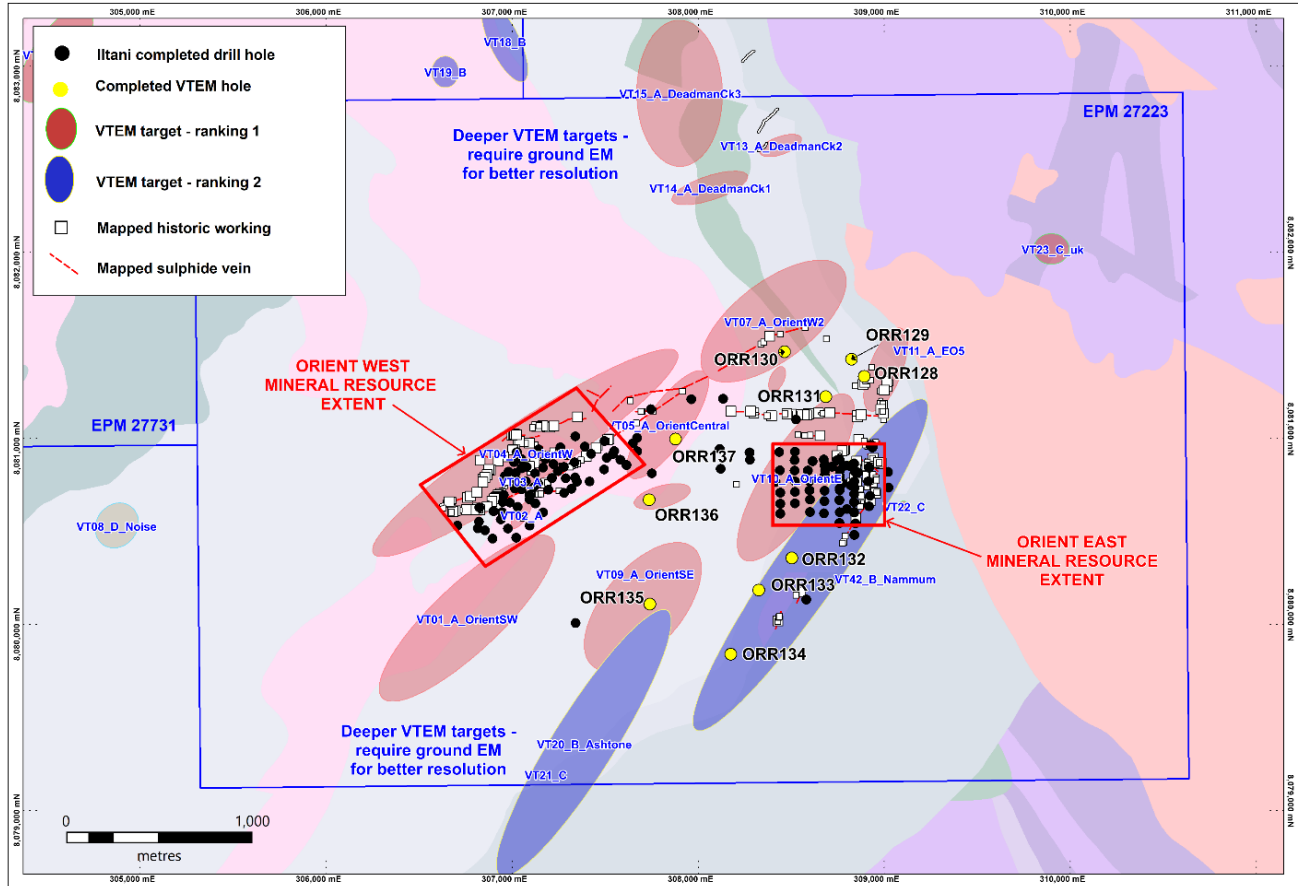

1.1. 1.1. Drillholes ORR130 to ORR137

All drillholes intersected mineralisation, and the following drillholes intersected material mineralisation (refer to Table 1):

- ORR131 intersected 20m @ 93.8 g/t Ag Eq. from 4m inc. 6m @ 132.0 g/t Ag Eq. from 18m downhole.
- ORR135 intersected 3m @ 130.9 g/t Ag Eq. from 170m inc. 1m @ 279.3 g/t Ag Eq. from 171m downhole.
- ORR136 intersected 22m @ 155.1 g/t Ag Eq. from 127m inc. 10m @ 280.0 g/t Ag Eq. from 136m inc. 4m @ 519.4 g/t Ag Eq. from 142m downhole.
- ORR137 intersected 28m @ 164.6 g/t Ag Eq. from 48m inc. 11m @ 328.7 g/t Ag Eq. from 65m inc. 1m @ 1104.5 g/t Ag Eq. from 71m downhole.

For personal use only



Table 1 Orient VTEM Target RC Program: ORR130 to ORR137 Material Intercepts

Hole	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR130	129.0	134.0	5.0	23.3	16.5	0.06%	0.40%	53.6
ORR130	132.0	133.0	1.0	59.0	52.1	0.12%	1.12%	143.8
<b>ORR131</b>	<b>4.0</b>	<b>24.0</b>	<b>20.0</b>	<b>35.6</b>	<b>1.8</b>	<b>0.89%</b>	<b>0.51%</b>	<b>93.8</b>
<b>ORR131</b>	<b>18.0</b>	<b>24.0</b>	<b>6.0</b>	<b>40.3</b>	<b>2.5</b>	<b>1.06%</b>	<b>1.05%</b>	<b>132.0</b>
ORR131	18.0	20.0	2.0	59.1	2.9	1.57%	1.46%	189.5
ORR131	23.0	24.0	1.0	84.2	6.2	2.17%	2.30%	279.4
ORR132	89.0	90.0	1.0	23.1	0.1	0.19%	0.64%	62.1
ORR132	114.0	118.0	4.0	7.4	0.1	0.26%	0.33%	33.2
ORR133	186.0	187.0	1.0	24.3	0.3	0.20%	0.44%	53.5
<b>ORR135</b>	<b>170.0</b>	<b>173.0</b>	<b>3.0</b>	<b>40.9</b>	<b>1.9</b>	<b>0.87%</b>	<b>1.16%</b>	<b>130.9</b>
<b>ORR135</b>	<b>171.0</b>	<b>172.0</b>	<b>1.0</b>	<b>89.1</b>	<b>4.3</b>	<b>1.97%</b>	<b>2.35%</b>	<b>279.3</b>
<b>ORR136</b>	<b>127.0</b>	<b>149.0</b>	<b>22.0</b>	<b>50.7</b>	<b>13.4</b>	<b>1.14%</b>	<b>1.15%</b>	<b>155.1</b>
<b>ORR136</b>	<b>136.0</b>	<b>146.0</b>	<b>10.0</b>	<b>96.0</b>	<b>27.9</b>	<b>2.05%</b>	<b>1.95%</b>	<b>280.0</b>
<b>ORR136</b>	<b>142.0</b>	<b>146.0</b>	<b>4.0</b>	<b>183.1</b>	<b>61.1</b>	<b>3.74%</b>	<b>3.48%</b>	<b>519.4</b>
<b>ORR137</b>	<b>48.0</b>	<b>76.0</b>	<b>28.0</b>	<b>60.6</b>	<b>18.0</b>	<b>1.41%</b>	<b>0.91%</b>	<b>164.6</b>
<b>ORR137</b>	<b>65.0</b>	<b>76.0</b>	<b>11.0</b>	<b>126.6</b>	<b>39.3</b>	<b>2.87%</b>	<b>1.63%</b>	<b>328.7</b>
<b>ORR137</b>	<b>71.0</b>	<b>72.0</b>	<b>1.0</b>	<b>384.5</b>	<b>168.9</b>	<b>8.23%</b>	<b>6.94%</b>	<b>1104.5</b>

*30 g/t Ag Eq. lower cut with no upper cut applied.*

*Intersection width is downhole width only.*


For personal use only

**1.2. Drillhole ORR136**

ORR136 intersected 22m @ 155.1 g/t Ag Eq. from 127m inc. 10m @ 280.0 g/t Ag Eq. from 136m inc. 4m @ 519.4 g/t Ag Eq. from 142m downhole.

ORR136 tested VTEM target VT034 with the intersection coincident with the target depth. VT034 was of interest as it is an east-west, south dipping zone of similar orientation to the Orient East mineralisation however located near Orient West. Hence, it was postulated that the target may represent the western extension of the Orient East mineralisation. There is no surface indication of mineralisation in this area. The drill hole is located 200m east from the nearest Orient West drill hole intersection. Additional drilling, testing up dip and along strike, will commence shortly to more accurately define the geometry of the mineralisation encountered in ORR136.

Figure 3 ORR136 Section

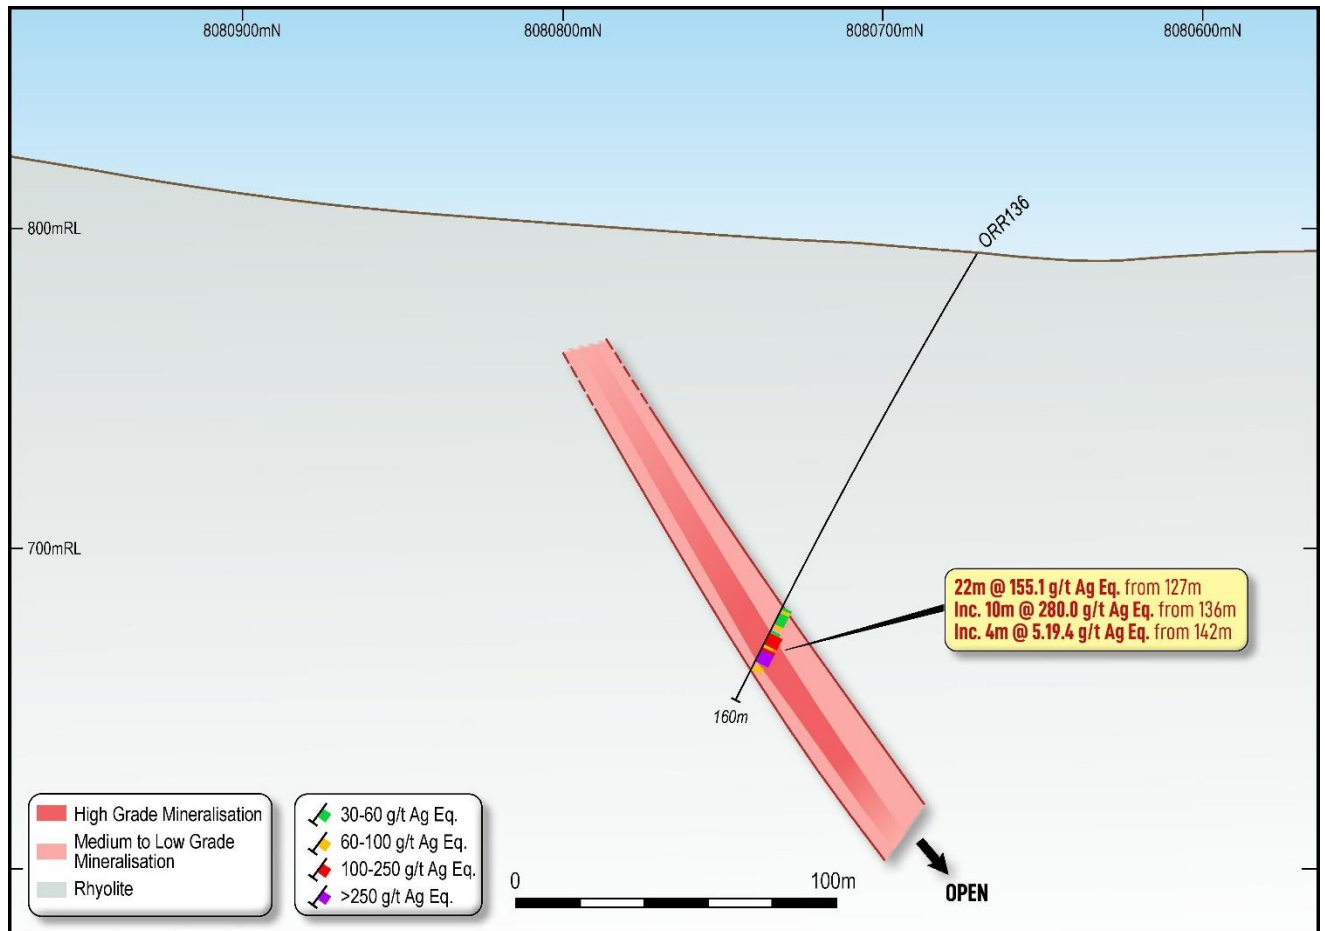


For personal use only

**1.3. Drillhole ORR137**

ORR137 intersected 28m @ 164.6 g/t Ag Eq. from 48m inc. 11m @ 328.7 g/t Ag Eq. from 65m inc. 1m @ 1104.5 g/t Ag Eq. from 71m downhole.


ORR137 was designed to test three plates, the steeply dipping VT05\_L3160\_100S and VT05\_220S & VT05\_L1140\_120S plates, which are oriented parallel to the Orient West veins. ORR137 was collared 260m down dip from the earlier hole ORR026, which intersected several zones of mineralisation. The lower intersection in ORR137 (68m @ 27.4 g/t Ag Eq. from 236m) corresponds with deeper zone in ORR026 (69m @ 45 g/t Ag Eq. from 111m). The intersection in ORR137 of 28m @ 164.6 g/t Ag Eq. from 48m coincides with VT05\_L3160\_100S, however is east of the interpreted Orient West vein set. It is currently unsure whether this zone represents a previously unknown vein subparallel and up-dip to the Orient West veins or possibly an extension of the Orient East mineralisation. This intersection will be tested with infill and extension drilling of the Orient West resource.

Figure 4 ORR137 Section

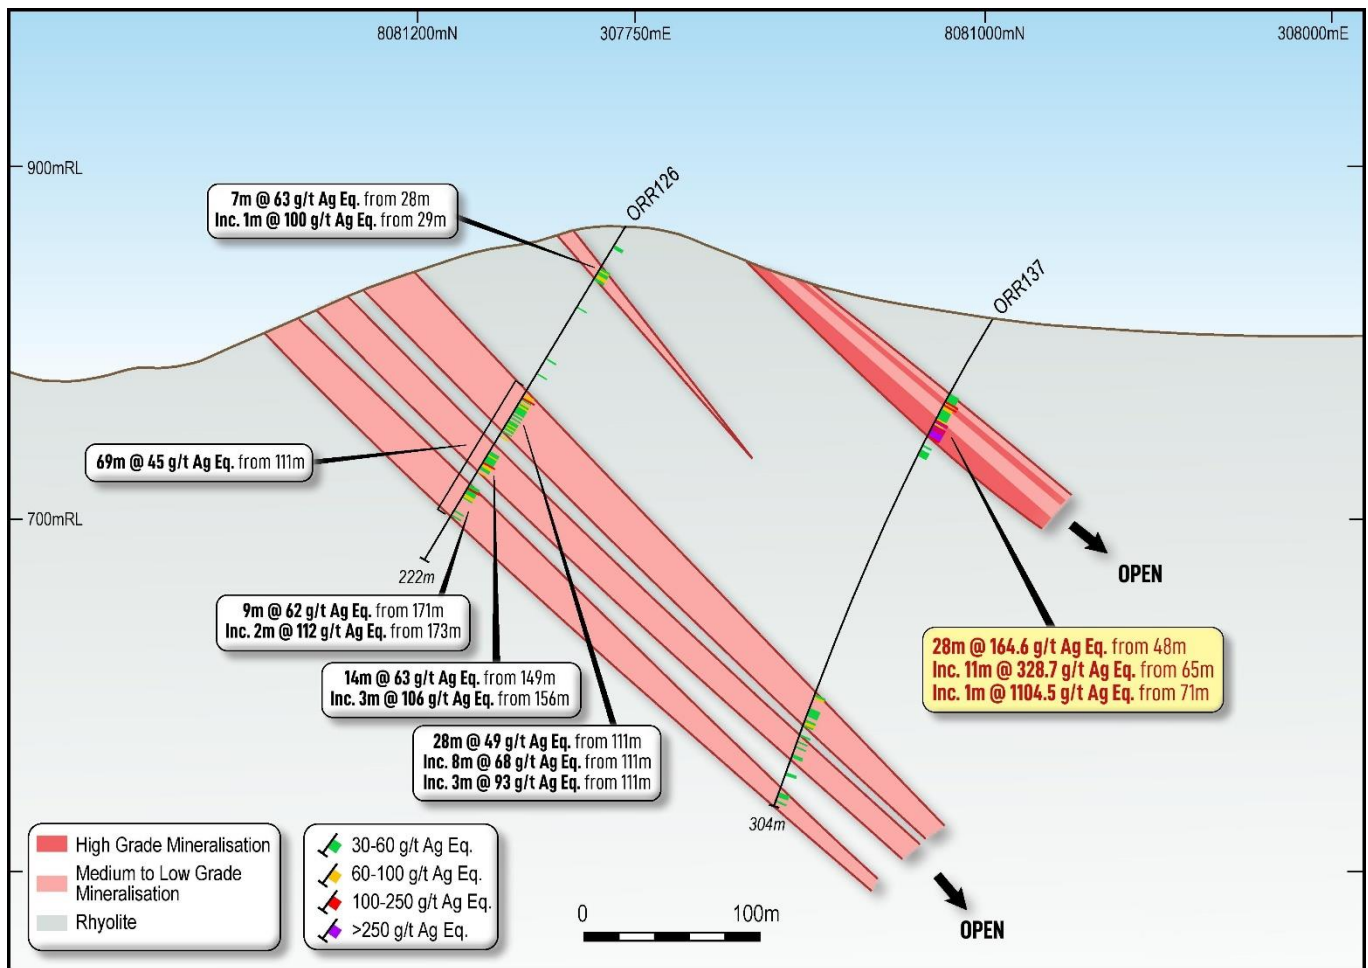

For personal use only

Figure 5 Orient VTEM Drilling and Ground EM Survey Lines

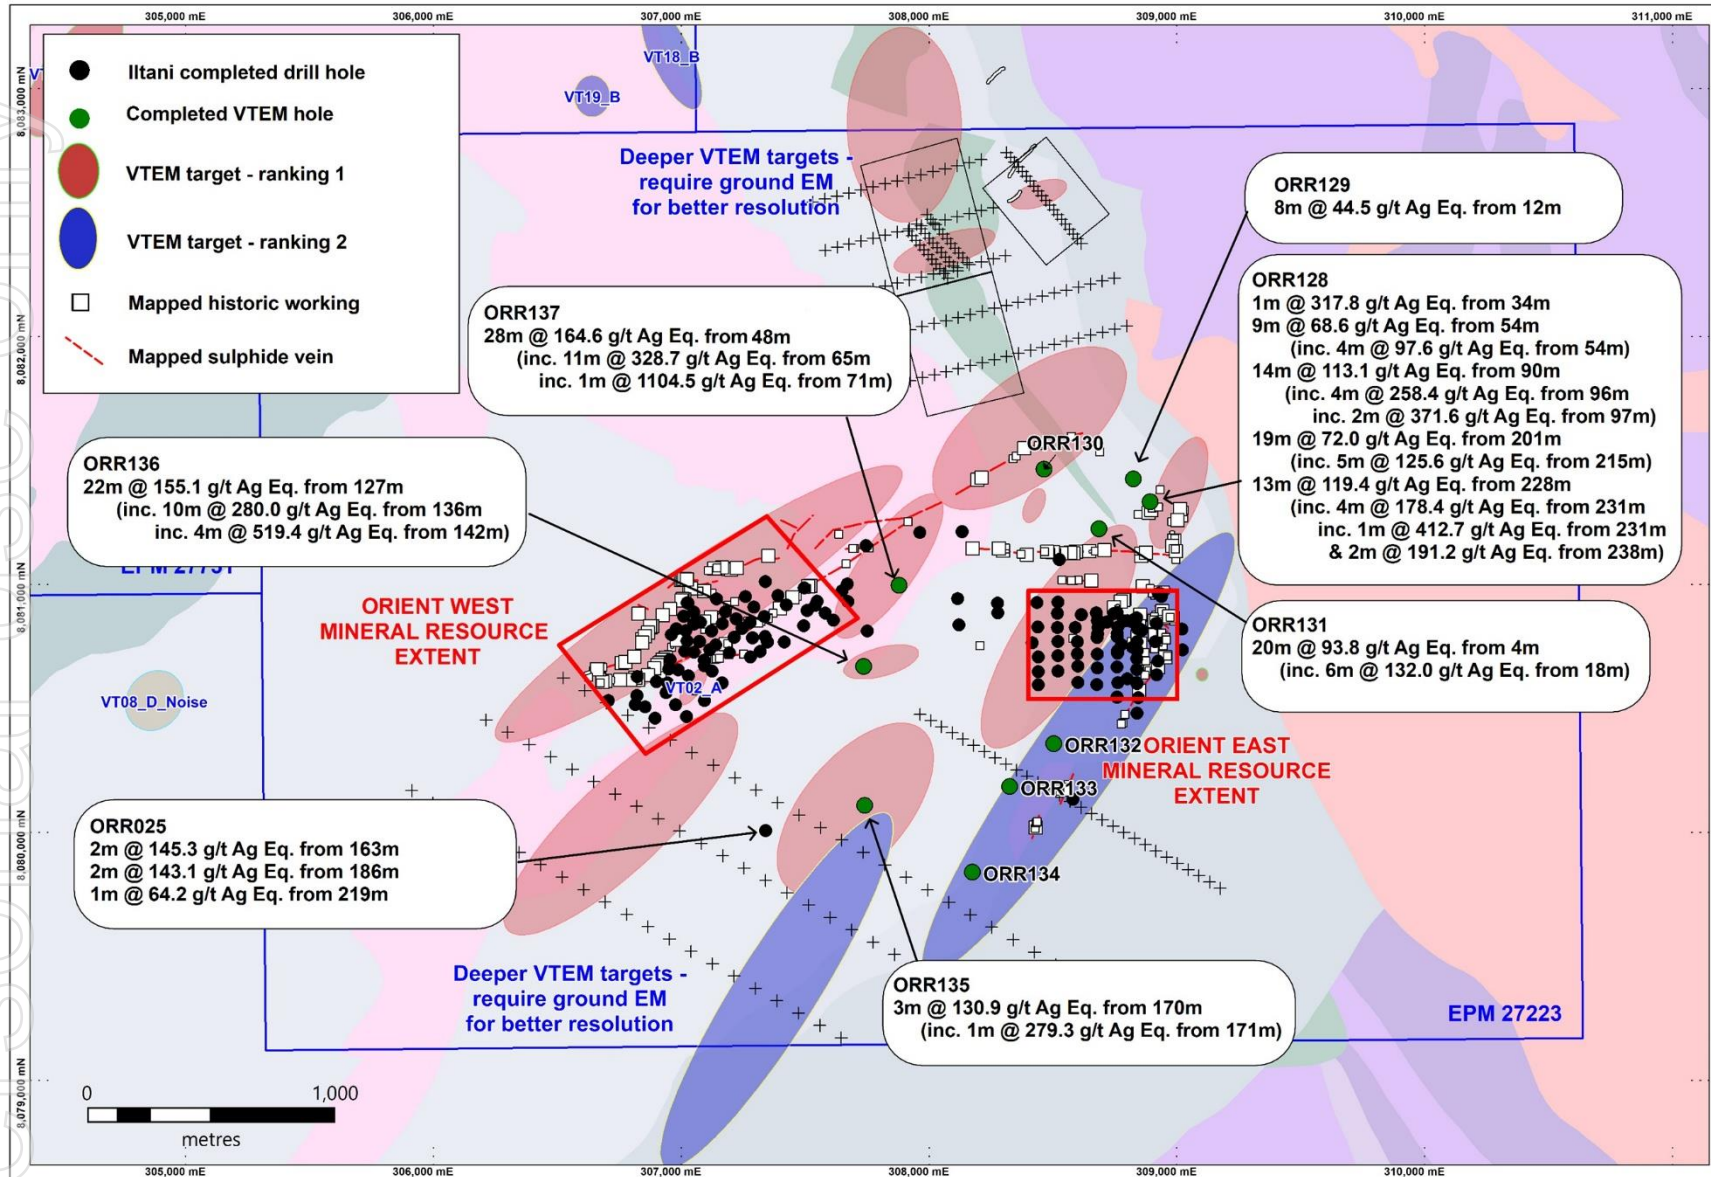



#### 1.4. Drillholes ORR130 to ORR135

RC holes ORR132 to ORR134 tested the elongate northeast-southwest trending VT42 anomaly at Orient South. VT42 was interpreted as a north dipping target below 100m depth. Geology intersected was hematite altered fine-grained rhyolite and microgranite. No significant mineralisation was intersected in these holes. ORR133 was collared 200m from earlier RC hole ORR061, which transected altered rhyolite with only minor sulphide. There appears to be a change in lithology between the two holes. Iltani's geophysical consultant considers the VTEM target appears real and as no geology was intersected to explain the anomaly and has recommended down hole EM to determine why minor sulphide mineralisation was present. This will be undertaken in 2026.


ORR130 was completed to test VT07\_L3120\_200S and possibly offset targets VT07\_L3110\_180S and VT12\_L3130\_110S, located along the northeast extension of the Orient North mineralisation. The hole intersected a strong zone of sulphide, returning 4m at 59.7g/t Ag Eq. from 129m. The tenor of grade was expected to be larger based on the amount of sulphide present. It appears that the sulphide vein is predominantly pyrrhotite and pyrite, with lesser base metal sulphide, as indicated by a result of 42% Fe and >10% S for the highest sulphide interval. Iltani has planned three drill holes to test this area to determine whether ORR130 has intersected an atypical zone of high pyrrhotite and pyrite.

## 2. Next Steps

Iltni has commenced the surface EM survey program at Orient and this should be completed by the end of November.

Iltni is also planning a 10 hole RC program (for approximately 1,600m drilled) to test several intersections from the recent shallow VTEM drilling program plus drill several shallow holes into Vein 1. Vein 1 outcrops approximately 150m north of the Orient East Mineral Resource and has an E-W strike of 800m (refer to Figure 6).

Figure 6 Vein 1 Location

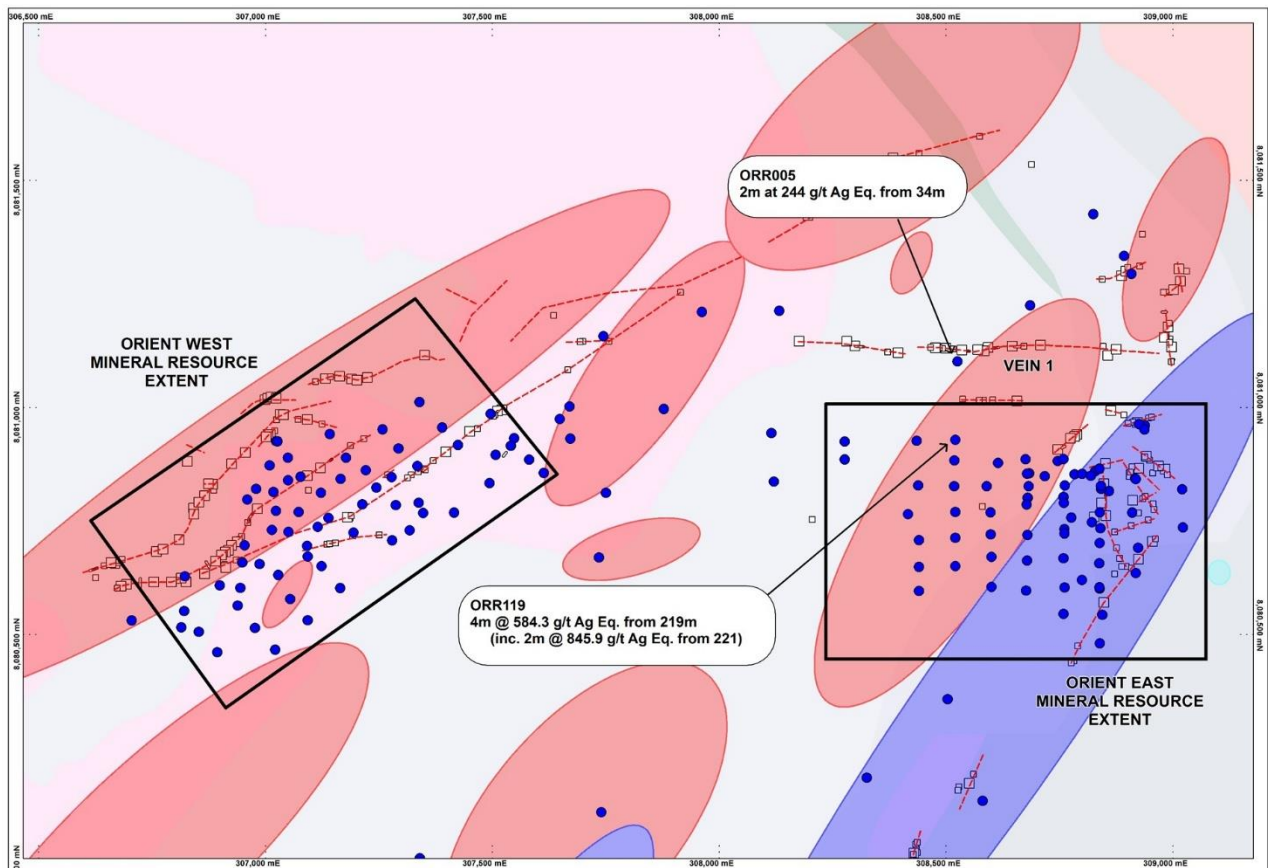

Iltni recently tested Vein 1 with ORR119 (refer to ILT release date 23 Sept 2025 – Orient East extension drilling delivers more silver-indium intercepts), intersecting **4m @ 584.3 g/t Ag Eq.** from 219m inc. **2m @ 845.9 g/t Ag Eq.** from 221m downhole.

The hole was pushed deeper to follow up an early intersection of 2m at 244 g/t Ag Eq. from 34m in ORR005 completed in 2023. The earlier hole tested the western extent of an 800m trend of workings following a south dipping sulphide vein/breccia zone. The workings at surface (Figure 7) indicate the veining is narrow, as was the discrete result from ORR005, hence the lack of immediate follow up drilling. However, the high-grade intersection encountered in ORR119 warrants further investigation, particularly as recently reported rock chips (ORRK003 – ORRK006) from outcropping veining at the eastern extent of the mineralised trend returned up to 67 g/t Ag, 209 g/t In, 3.6% Pb and 0.45% Zn. As the veining outcrops there is potential to develop an open pit resource and, if consistent at depth, the exceptionally high grade mineralisation encountered in ORR119 would sustain underground mining.

Figure 7 Vein 1 Historical Workings



For personal use only



### 3. Orient Silver-Indium Project Overview


Orient is Australia’s largest known silver-indium deposit and is located in Northern Queensland, approximately 120km SW of Cairns (Figure 8).

Orient is part of Ittani’s larger Herberton Project, where Ittani holds approximately 370km<sup>2</sup> of wholly owned tenements in the Herberton Mineral Field, with most of the tenements located approximately 20km west of the historical mining town of Herberton in Northern Queensland.

The Herberton Mineral Field is a highly prospective terrain with a long history of mining. Tin deposits discovered in 1880; more than 2,400 historical mines and prospects known in the Herberton-Mt Garnet region. The area has been mainly worked for tin, but also tungsten, copper and silver-lead-zinc plus bismuth, antimony, molybdenum and gold.

Ittani’s tenement holdings cover the area of the Boonmoo Sag Caldera, which in addition to Orient includes several historical Cu, Ag-Pb-Zn mines and Au targets. Ittani also holds a tenement over the Isabel deposit (a low tonnage exceptionally high-grade Cu-Pb-Zn-In-Ag rich massive sulphide deposit) and the high grade Cu-rich massive sulphide target at Isabel Extended.

Figure 8 Herberton and Orient Project Location

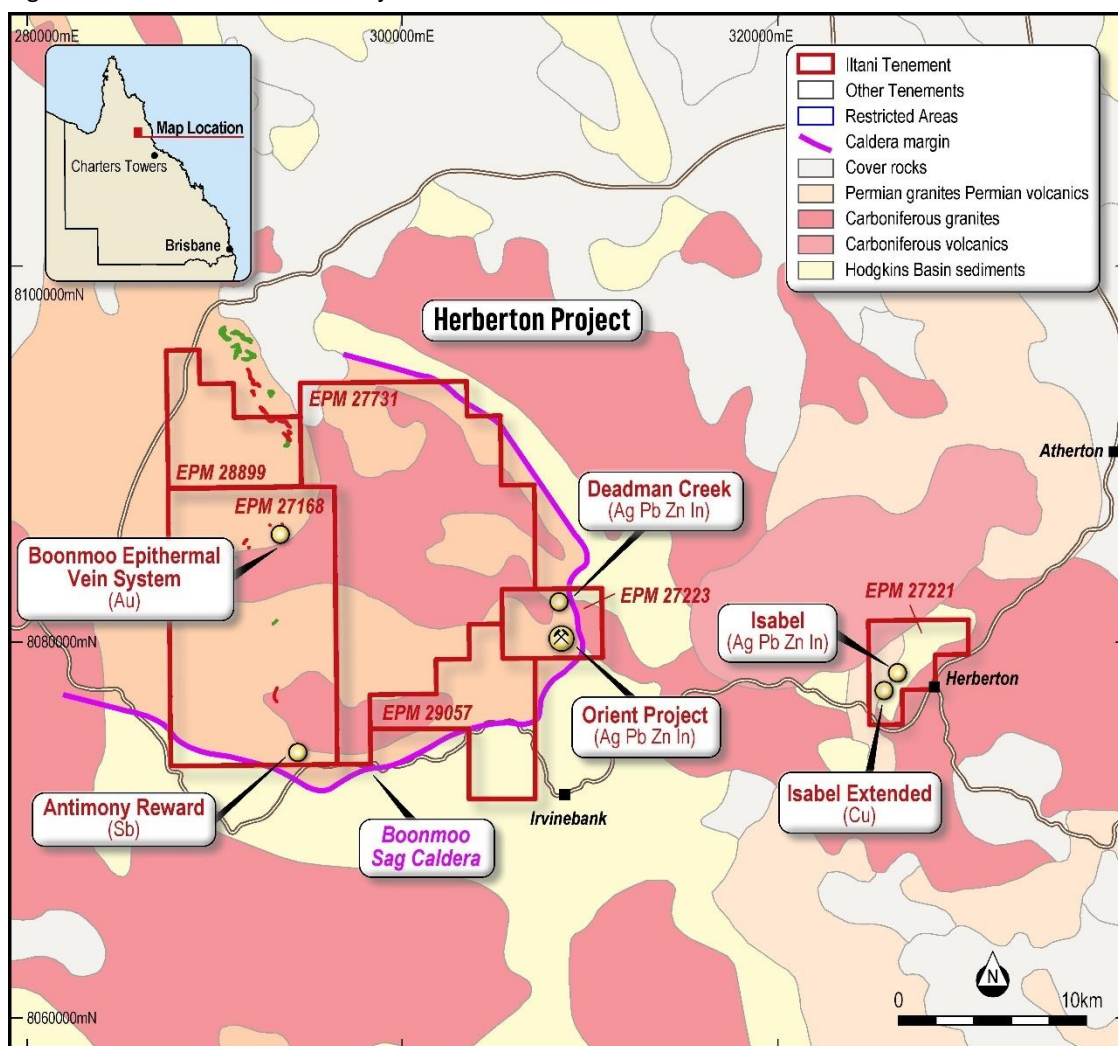

Orient is a large-scale silver rich epithermal system, extending over at least 6km<sup>2</sup>, High-grade sulphide rich veins surrounded by extensive lower grade zones (up to 100m thick). The key economic minerals are silver rich galena (lead sulphide) & indium rich sphalerite (zinc sulphide), with historical test work indicating that silver, indium, lead and zinc are recoverable to, and payable in a lead-silver concentrate & a zinc-indium-silver concentrate.



To date, Iltani has defined an Orient Project Mineral Resource Estimate (MRE) of **34.2 Mt @ 110.4 g/t Ag Eq.** (Table 2) consisting of Orient East (**12.6 Mt @ 128 g/t Ag Eq.**) plus Orient West (**21.6 Mt @ 100.5 g/t Ag Eq.**)

Table 2 Orient Project JORC Resource Estimate (60 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	21.5	31.8	15.4	0.74	0.90	110.1	22.0	332	159	193	76.1
Inferred	12.7	30.5	19.5	0.73	0.91	111.0	12.4	247	93	115	45.3
<b>Total</b>	<b>34.2</b>	<b>31.3</b>	<b>16.9</b>	<b>0.74</b>	<b>0.90</b>	<b>110.4</b>	<b>34.4</b>	<b>579</b>	<b>252</b>	<b>308</b>	<b>121.4</b>


Table 3 Orient East JORC Resource Estimate (60 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	9.4	37	7	0.93	0.96	121	11.2	66	88	90	36.8
Inferred	3.1	45	17.9	1.14	1.09	148	4.6	56	36	34	15.0
<b>Total</b>	<b>12.6</b>	<b>39</b>	<b>9.7</b>	<b>0.98</b>	<b>0.99</b>	<b>128</b>	<b>15.8</b>	<b>122</b>	<b>124</b>	<b>124</b>	<b>51.8</b>

Table 4 Orient West JORC Resource Estimate (60 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	12.1	27.8	22.0	0.59	0.85	101.7	10.8	265	71	103	39.5
Inferred	9.6	25.8	20.0	0.60	0.85	99.0	7.9	191	57	81	30.4
<b>Total</b>	<b>21.6</b>	<b>26.9</b>	<b>21.1</b>	<b>0.59</b>	<b>0.85</b>	<b>100.5</b>	<b>18.7</b>	<b>456</b>	<b>128</b>	<b>184</b>	<b>69.9</b>

Figure 9 Orient Silver-Indium Project

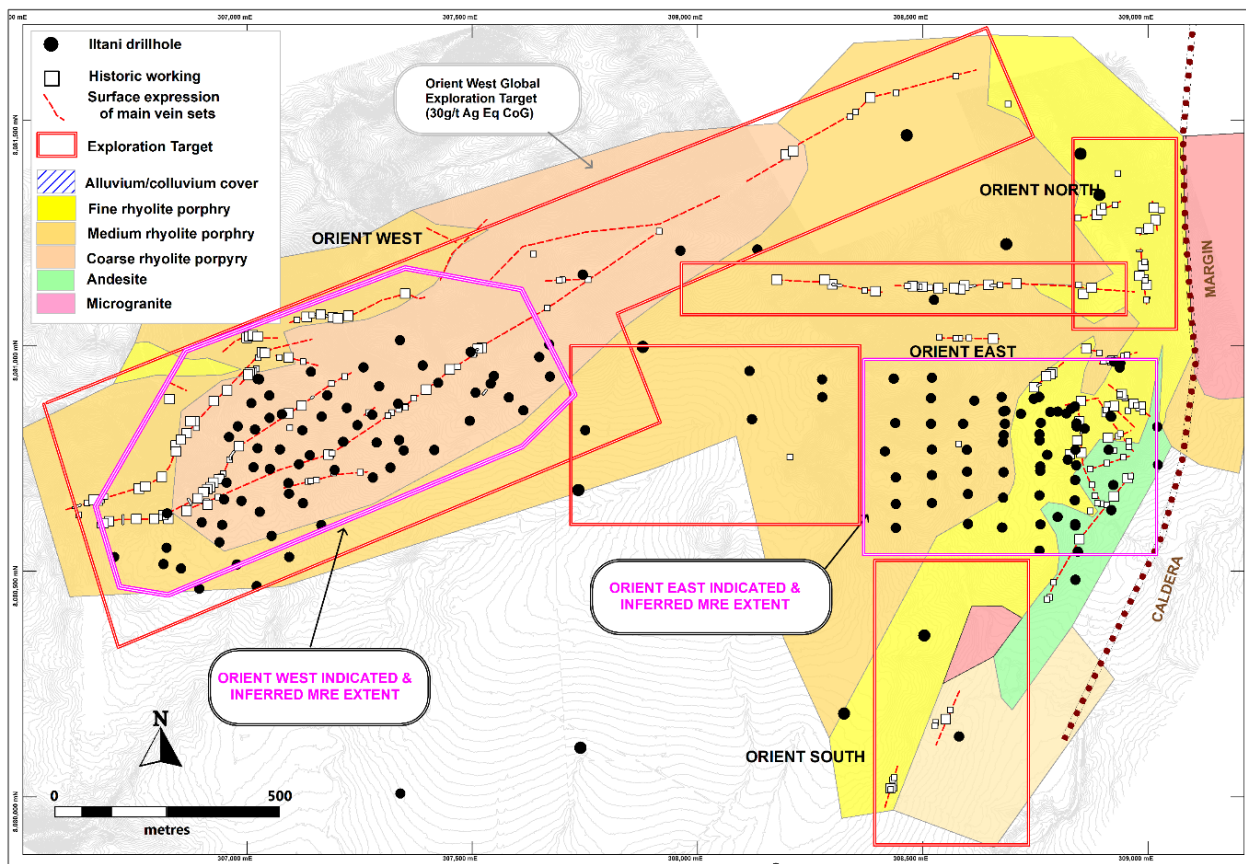

There is also a material Orient Project Exploration Target Estimate of **15.4 – 18.8 Mt @ 95 – 117 g/t Ag Eq.** (Table 5) which Ittani intends to convert to Mineral Resources through further drilling.

Table 5 Orient Project Exploration Target Estimate (60 g/t Ag Eq. cut-off grade)

		Resource Parameters					
		Tonnes	Ag	In	Pb	Zn	Ag Eq.
		Mt	g/t	g/t	%	%	g/t
<b>Orient East</b>	<b>Min</b>	<b>6.5</b>	<b>34.7</b>	<b>19.7</b>	<b>0.89</b>	<b>0.88</b>	<b>120.0</b>
	<b>Max</b>	<b>7.9</b>	<b>42.4</b>	<b>24.1</b>	<b>1.09</b>	<b>1.08</b>	<b>146.6</b>
Orient West	Min	8.9	19.4	13.1	0.47	0.71	77.7
	Max	10.9	23.8	16.1	0.57	0.87	94.9
<b>Orient Project</b>	<b>Min</b>	<b>15.4</b>	<b>25.8</b>	<b>15.9</b>	<b>0.65</b>	<b>0.78</b>	<b>95</b>
	<b>Max</b>	<b>18.8</b>	<b>31.6</b>	<b>19.4</b>	<b>0.79</b>	<b>0.96</b>	<b>117</b>

The potential quantity and grade of the Exploration Target is conceptual in nature. There has been insufficient exploration to estimate a Mineral Resource and it is uncertain if further exploration will result in the estimation of a Mineral Resource. The Exploration Target has been prepared in accordance with the 2012 Edition of The Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves ('the JORC Code')

**Authorisation**

This announcement has been approved for issue by Donald Garner, Iltani Resources Managing Director.

**Contact Details**

For further information, please contact:

**Donald Garner**

Managing Director  
Iltani Resources Limited  
+61 438 338 496  
[dgarner@iltaniresources.com.au](mailto:dgarner@iltaniresources.com.au)

**Nathan Ryan**

Investor Relations  
NWR Communications  
+61 420 582 887  
[nathan.ryan@nwrcommunications.com.au](mailto:nathan.ryan@nwrcommunications.com.au)

**Competent Persons Statement****Orient Mineral Resource Estimate**

The information in this report that relates to the Orient Mineral Resource Estimate is based on information compiled by Mr Louis Cohalan who is a member of The Australasian Institute of Geologists (AIG), and is a full time employee of Mining One Consultants, and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (JORC Code).

Mr Cohalan consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

**Exploration Results**

The information in this report that relates to Exploration Results is based on information compiled by Mr Erik Norum who is a member of The Australasian Institute of Geologists (AIG), and is an employee of Iltani Resources Limited., and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (JORC Code).

Mr Norum consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

**Exploration Target**

The Exploration Target estimate has been prepared by Mr Stuart Hutchin, who is a Member of the Australian Institute of Geoscientists. Mr Hutchin is a full-time employee of Mining One Consultants. Mr Hutchin has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity for which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves".

Mr Hutchin consents to the inclusion in the release of the matters based on his information in the form and context in which it appears.




**About Ittani Resources**

Ittani Resources (ASX: ILT) is an ASX listed company focused on exploring for the base metals and critical minerals required to create a low emission future. Ittani has built a portfolio of advanced exploration projects in Queensland and Tasmania with multiple high quality, drill-ready targets. Ittani has completed drilling at the Orient Silver-Indium Project, part of its Herberton Project, in Northern Queensland. The drilling has returned outstanding intercepts of silver-lead-zinc-indium mineralisation, positioning Orient as Australia’s most exciting silver-indium discovery.

Additional projects include the Northern Base Metal Project in Northern Queensland plus the Mt Read Volcanics Project in Tasmania which are highly prospective for base metal mineralisation, particularly copper.

Figure 10 Location of Ittani Resources' projects in Queensland and Tasmania

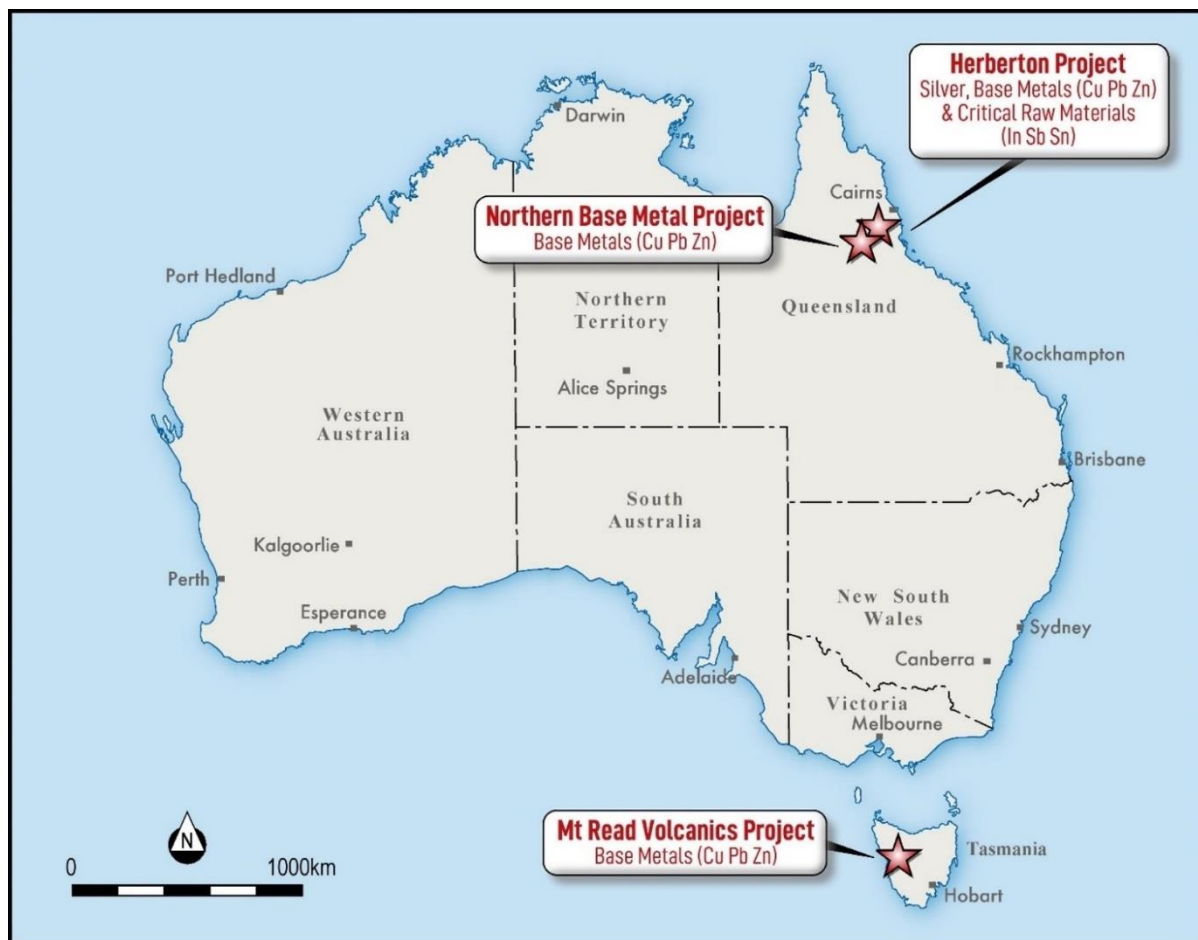

For personal use only



Table 6 Orient VTEM RC Drill Program Drillhole Data

Prospect	Hole_ID	Hole Type	Depth (m)	East	North	RL	Dip	Azi	Status
VT_11	ORR128	RC	250	308892	8081334	804	-50	145	Complete
VT_11	ORR129*	RC	133	308850	8081425	799	-60	145	Abandoned
VT_07	ORR130	RC	250	308464	8081466	761	-60	320	Complete
VT_10	ORR131	RC	250	308685	8081225	755	-60	145	Complete
VT_42	ORR132	RC	178	308503	8080358	779	-60	135	Complete
VT_42	ORR133	RC	203	308325	8080185	784	-60	135	Complete
VT_42	ORR134	RC	190	308174	8079840	776	-60	135	Complete
VT_09	ORR135	RC	226	307740	8080109	777	-60	330	Complete
VT_34	ORR136	RC	160	307735	8080670	793	-60	360	Complete
VT_05	ORR137	RC	304	307878	8080997	813	-60	320	Complete

Grid Coordinates are MGA94\_55

\* Hole abandoned due to excessive water flow and poor sample return

For personal use only



Table 7 Orient East RC Drill Program Assay Data (ORR130)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR130	134160	128.00	129.00	1.00	5.0	5.8	0.05%	0.22%	20.3
ORR130	134161	129.00	130.00	1.00	4.6	9.4	0.08%	0.42%	32.7
ORR130	134162	130.00	131.00	1.00	3.0	3.8	0.02%	0.15%	13.0
ORR130	134163	131.00	132.00	1.00	34.9	8.3	0.05%	0.17%	49.2
ORR130	134164	132.00	133.00	1.00	59.0	52.1	0.12%	1.12%	143.8
ORR130	134165	133.00	134.00	1.00	15.2	8.8	0.03%	0.17%	29.1
ORR130	134166	134.00	135.00	1.00	3.2	2.1	0.01%	0.04%	6.3
<i>Intersection width is downhole width only</i>									

Table 8 Orient East RC Drill Program Assay Data (ORR131)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR131	134199	4.00	8.00	4.00	26.6	1.5	0.61%	0.15%	56.7
ORR131	134201	8.00	12.00	4.00	68.9	2.8	1.79%	0.35%	151.4
ORR131	134202	12.00	16.00	4.00	11.3	0.6	0.23%	0.26%	32.9
ORR131	134203	16.00	17.00	1.00	22.6	0.7	0.49%	0.30%	55.5
ORR131	134204	17.00	18.00	1.00	20.7	1.3	0.47%	0.55%	65.5
ORR131	134205	18.00	19.00	1.00	54.2	1.9	1.53%	1.06%	162.7
ORR131	134206	19.00	20.00	1.00	63.9	4.0	1.60%	1.87%	216.3
ORR131	134207	20.00	21.00	1.00	13.8	1.1	0.36%	0.38%	46.2
ORR131	134208	21.00	22.00	1.00	10.2	0.4	0.24%	0.19%	28.3
ORR131	134209	22.00	23.00	1.00	15.8	1.5	0.47%	0.51%	59.0
ORR131	134210	23.00	24.00	1.00	84.2	6.2	2.17%	2.30%	279.4
ORR131	134211	24.00	28.00	4.00	5.1	0.4	0.13%	0.16%	17.7
<i>Intersection width is downhole width only</i>									

Table 9 Orient East RC Drill Program Assay Data (ORR132)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR132	134293	88.00	89.00	1.00	7.2	0.1	0.13%	0.34%	28.9
ORR132	134294	89.00	90.00	1.00	23.1	0.1	0.19%	0.64%	62.1
ORR132	134295	90.00	91.00	1.00	10.2	0.1	0.10%	0.17%	22.2
ORR132	134304	110.00	114.00	4.00	4.0	0.1	0.05%	0.08%	9.9
ORR132	134305	114.00	118.00	4.00	7.4	0.1	0.26%	0.33%	33.2
ORR132	134306	118.00	122.00	4.00	0.7	0.1	0.01%	0.01%	1.6
<i>Intersection width is downhole width only</i>									

Table 10 Orient East RC Drill Program Assay Data (ORR133)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR133	134370	185.00	186.00	1.00	12.5	0.4	0.11%	0.19%	26.1
ORR133	134371	186.00	187.00	1.00	24.3	0.3	0.20%	0.44%	53.5
ORR133	134372	187.00	188.00	1.00	7.1	0.3	0.07%	0.11%	15.1
<i>Intersection width is downhole width only</i>									



Table 11 Orient East RC Drill Program Assay Data (ORR135)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR135	134485	169.00	170.00	1.00	3.1	0.1	0.06%	0.07%	8.6
ORR135	134486	170.00	171.00	1.00	10.4	0.1	0.18%	0.24%	28.8
ORR135	134487	171.00	172.00	1.00	89.1	4.3	1.97%	2.35%	279.3
ORR135	134488	172.00	173.00	1.00	23.1	1.4	0.46%	0.89%	84.8
ORR135	134489	173.00	174.00	1.00	1.6	0.1	0.03%	0.05%	5.0
<i>Intersection width is downhole width only</i>									

Table 12 Orient East RC Drill Program Assay Data (ORR136)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR136	134556	126.00	127.00	1.00	0.5	0.0	0.02%	0.02%	1.9
ORR136	134557	127.00	128.00	1.00	10.5	0.6	0.43%	0.47%	49.6
ORR136	134558	128.00	129.00	1.00	12.6	0.9	0.50%	0.61%	61.4
ORR136	134559	129.00	130.00	1.00	9.1	0.5	0.35%	0.41%	42.6
ORR136	134560	130.00	131.00	1.00	12.0	0.9	0.45%	0.53%	55.2
ORR136	134561	131.00	132.00	1.00	14.4	0.8	0.49%	0.49%	56.7
ORR136	134562	132.00	133.00	1.00	11.4	0.7	0.37%	0.43%	46.6
ORR136	134563	133.00	134.00	1.00	18.6	2.1	0.53%	0.60%	68.3
ORR136	134564	134.00	135.00	1.00	5.9	0.2	0.19%	0.23%	24.1
ORR136	134565	135.00	136.00	1.00	13.6	1.5	0.36%	0.41%	47.4
ORR136	134566	136.00	137.00	1.00	46.4	7.7	1.40%	1.32%	166.0
ORR136	134567	137.00	138.00	1.00	40.7	8.3	0.90%	1.39%	146.4
ORR136	134568	138.00	139.00	1.00	46.0	4.7	1.15%	0.79%	129.0
ORR136	134569	139.00	140.00	1.00	34.3	4.1	0.82%	0.75%	103.1
ORR136	134570	140.00	141.00	1.00	23.5	3.0	0.54%	0.60%	74.0
ORR136	134571	141.00	142.00	1.00	36.4	6.5	0.73%	0.76%	103.4
ORR136	134572	142.00	143.00	1.00	137.5	34.4	2.91%	2.58%	386.7
ORR136	134573	143.00	144.00	1.00	237.2	48.3	4.95%	3.06%	589.1
ORR136	134574	144.00	145.00	1.00	235.9	108.3	4.72%	5.40%	725.3
ORR136	134576	145.00	146.00	1.00	122.0	53.6	2.37%	2.89%	376.5
ORR136	134577	146.00	147.00	1.00	6.5	1.8	0.12%	0.11%	17.3
ORR136	134578	147.00	148.00	1.00	25.7	2.3	0.53%	0.40%	65.7
ORR136	134579	148.00	149.00	1.00	15.8	3.0	0.32%	0.97%	77.5
ORR136	134580	149.00	150.00	1.00	4.3	0.9	0.07%	0.26%	20.1
<i>Intersection width is downhole width only</i>									



Table 13 Orient East RC Drill Program Assay Data (ORR137)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR137	134596	44.00	48.00	4.00	1.2	0.1	0.03%	0.03%	3.9
ORR137	134597	48.00	52.00	4.00	10.6	1.0	0.28%	0.27%	34.7
ORR137	134598	52.00	53.00	1.00	17.1	1.1	0.49%	0.47%	58.8
ORR137	134599	53.00	54.00	1.00	35.1	7.6	0.89%	0.74%	107.3
ORR137	134601	54.00	55.00	1.00	26.7	6.8	0.65%	0.65%	85.6
ORR137	134602	55.00	56.00	1.00	34.0	17.4	0.87%	1.11%	128.5
ORR137	134603	56.00	57.00	1.00	26.7	5.5	0.68%	0.57%	82.2
ORR137	134604	57.00	58.00	1.00	25.1	2.5	0.77%	0.65%	86.6
ORR137	134605	58.00	59.00	1.00	15.7	4.7	0.37%	0.40%	50.8
ORR137	134606	59.00	60.00	1.00	12.2	2.2	0.38%	0.30%	42.1
ORR137	134607	60.00	64.00	4.00	11.5	3.9	0.29%	0.28%	37.6
ORR137	134608	64.00	65.00	1.00	22.3	3.5	0.51%	0.40%	62.2
ORR137	134609	65.00	66.00	1.00	51.1	30.3	1.00%	1.18%	159.9
ORR137	134610	66.00	67.00	1.00	168.2	41.5	4.06%	1.41%	402.8
ORR137	134611	67.00	68.00	1.00	33.0	12.5	0.72%	0.68%	98.6
ORR137	134612	68.00	69.00	1.00	70.2	26.1	1.68%	1.17%	200.5
ORR137	134613	69.00	70.00	1.00	104.1	20.1	2.47%	0.97%	250.1
ORR137	134614	70.00	71.00	1.00	82.0	31.5	1.86%	1.31%	228.6
ORR137	134615	71.00	72.00	1.00	384.5	168.9	8.23%	6.94%	1104.5
ORR137	134617	72.00	73.00	1.00	191.7	18.4	4.66%	0.79%	405.7
ORR137	134618	73.00	74.00	1.00	173.0	23.4	3.82%	0.96%	367.5
ORR137	134619	74.00	75.00	1.00	88.6	40.9	1.88%	1.67%	258.5
ORR137	134620	75.00	76.00	1.00	46.9	18.5	1.19%	0.83%	139.4
ORR137	134621	76.00	80.00	4.00	4.8	0.8	0.12%	0.07%	13.0
<i>Intersection width is downhole width only</i>									



**JORC Code, 2012 Edition – Table 1**  
**Section 1 Sampling Techniques and Data**  
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Drilling reported is reverse circulation (RC) drilling.</li> <li>The drilling was completed by Charters Towers, Qld based drilling contractors Eagle Drilling Pty Ltd.</li> <li>RC drilling returned samples through a fully enclosed cyclone system, then via a remote controlled gate into a cone splitter. 1m RC samples were homogenised and collected by a static cone splitter to produce a representative 3-5kg sub sample.</li> <li>Sampling comprises 4m composite samples or, where visual mineralisation is encountered, 1m increment RC sub-samples, that were bagged and sent to Intertek Townsville for preparation and analysis.</li> <li>Preparation consisted of drying of the sample and the entire sample being crushed to 70% passing 6mm and pulverised to 85% passing 75 microns in a ring and puck pulveriser.</li> <li>Analysis will consist of four acid digest with Inductively Coupled Plasma Mass Spectrometry (ICP-MS) (4A-MS48) analysis for the following elements: Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y Zn, Zr.</li> <li>Ore grade sample analysis consisted of four acid digest with Inductively Coupled Plasma Atomic Emission Spectroscopy (ICP-AES) finish. This was carried out for Ag, Pb, Zn, Sn &amp; In.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>The drilling was completed using a track mounted RC rig utilising 6m rods with reverse circulation capability.</li> <li>Drilling diameter was 5.5 inch RC hammer using a face sampling bit.</li> <li>RC hole length ranged from 133m to 304m with average hole length of 214m.</li> <li>Downhole surveys were undertaken at nominal 30m intervals during drilling utilising a digitally controlled Imdex Gyroscope instrument</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists</li> </ul>	<ul style="list-style-type: none"> <li>All samples were weighted and weights recorder in the logging sheet. Samples with no recovery or very low recoveries were recorded also in the logging sheet. A few samples were collected wet due to rig unable to keep the hole dry. Wet samples were noted in the logging sheet.</li> <li>Iltani personnel and Eagle Drilling crew monitor sample recovery, size and moisture, making</li> </ul>

For personal use only



For personal use only

Criteria	JORC Code explanation	Commentary
	<p>between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</p>	<p>appropriate adjustments as required to maintain quality.</p> <ul style="list-style-type: none"> <li>• A cone splitter is mounted beneath the cyclone to ensure representative samples are collected.</li> <li>• The cyclone and cone splitter were cleaned with compressed air necessary to minimise contamination.</li> <li>• No significant contamination or bias has been noted in the current drilling.</li> </ul>
Logging	<ul style="list-style-type: none"> <li>• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>• Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>• The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>• Geological logging was carried out on RC chips by suitably qualified geologists. Lithology, veining, alteration, mineralisation and weathering are recorded in the geology table of the drill hole database. Final and detailed digital geological logs were forwarded from the field following sampling.</li> <li>• Geological logging of the RC samples is qualitative and descriptive in nature.</li> <li>• Observations were recorded appropriate to the sample type based on visual field estimates of sulphide content and sulphide mineral species.</li> <li>• All drill holes are logged to the end of hole (EoH).</li> </ul>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li>• If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>• Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>• Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>• 1m increment samples were collected off the drill rig via cyclone - cone splitter into calico bags with a respective weight between 3-5kg.</li> <li>• The onsite geologist selects the mineralised interval from logging of washed RC chips, based on identification of either rock alteration and/or visual sulphides.</li> <li>• Industry standard sample preparation is conducted under controlled conditions within the laboratory and is considered appropriate for the sample types.</li> <li>• QAQC samples (standards, blanks and field duplicates) were submitted at a frequency of at least 1 in 25. Regular reviews of the sampling were carried out by Iltani Geologist to ensure all procedures and best industry practice were followed.</li> <li>• Sample sizes and preparation techniques are considered appropriate for the nature of mineralisation.</li> </ul>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>• For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations</li> </ul>	<ul style="list-style-type: none"> <li>• Industry standard assay techniques were used to assay for silver and base metal mineralisation (ICP for multi-elements with a four-acid digest)</li> <li>• No geophysical tools, spectrometers or handheld XRF instruments have been used to determine assay results for any elements.</li> <li>• Monitoring of results of blanks, duplicates and standards (inserted at a minimum rate of 1:25) is conducted regularly. QAQC data is reviewed for bias prior to uploading results in the database.</li> </ul>



Criteria	JORC Code explanation	Commentary
	<p>factors applied and their derivation, etc.</p> <ul style="list-style-type: none"> <li>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</li> </ul>	
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>No drill holes were twinned.</li> <li>Primary data is collected in the field via laptops in a self-validating data entry form; data verification and storage are accomplished by Iltani contractor and staff personnel.</li> <li>All drillhole data was compiled in Excel worksheets and imported into Micromine in order to query 3D data and generate drill plans and cross sections.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>Drill hole collar locations are initially set out using a hand held GPS.</li> <li>At completion of drilling, all drill collars were accurately surveyed to 50mm by Twine Surveyors, Atherton, by DGPS.</li> <li>Downhole surveys completed at nominal 30m intervals by driller using a digitally controlled Imdex Gyroscope instrument.</li> <li>All exploration works are conducted in the GDA94 zone 55 datum.</li> <li>Topographic control is based on a detailed drone survey and is considered adequate.</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>Drilling was targeted on selected veins and areas of potential stockwork mineralisation.</li> <li>Drill hole spacing is not adequate to report geological or grade continuity.</li> <li>Sample compositing has been applied outside the zones of logged mineralisation, where 4m sample composites have been utilised. Iltani will resample the 4m composites on a 1m basis should the composites return high-grade assay results</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised</li> </ul>	<ul style="list-style-type: none"> <li>The drill holes were orientated in order to intersect the interpreted mineralisation zones as perpendicular as possible based on information to date.</li> <li>Due to locally varying intersection angles between drillholes and lithological units all results will be defined as downhole widths.</li> <li>No drilling orientation and sampling bias has been</li> </ul>

For personal use only



Criteria	JORC Code explanation	Commentary
	structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	recognised at this time and it is not considered to have introduced a sampling bias.
Sample security	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>Samples were stored in sealed polyweave bags at the drill rig then put on a pallet and transported to Intertek Townsville by using a freight carrying company.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul style="list-style-type: none"> <li>No audits or reviews have been carried out at this point</li> </ul>

For personal use only



**Section 2 Reporting of Exploration Results**

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>Orient is located on EPM 27223. EPM 27223 is wholly owned by Iltani Resources Limited</li> <li>All leases/tenements are in good standing</li> </ul>
Exploration done by other parties	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Exploration activities have been carried out (underground mapping, diamond drilling, surface geochemical surveys and surface mapping, pre-feasibility study) by Great Northern Mining Corporation and Mareeba Mining and Exploration over the West and East Orient areas from 1978 to 1989.</li> <li>Exploration activities have been carried out (soils and rock chip sampling) around Orient West and East by Monto Minerals Limited from 2014 to 2017</li> <li>Red River Resources carried out mapping, sampling and geophysical exploration (drone mag survey and IP survey) in 2020 and 2021.</li> </ul>
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>Mineralisation occurs in primary vein systems up to 3m wide (controlled by fractures/shears) containing argentiferous galena, cerussite, anglesite, sphalerite, pyrite, marmatite, cassiterite (minor), and stannite (minor) surrounded by a stockwork of lesser veinlets of variable density.</li> <li>The lead-zinc-silver-indium mineralisation at Orient is believed to represent part of an epithermal precious metals system. The Orient vein and stockwork mineralisation are associated with a strongly faulted and deeply fractured zone near the margin of a major caldera subsidence structure.</li> </ul>
Drill hole Information	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes, including, easting and northing, elevation or RL, dip and azimuth, down hole length, interception depth and hole length.</li> <li>If the exclusion of this information is justified the Competent Person should clearly explain why this is</li> </ul>	<ul style="list-style-type: none"> <li>Iltani Resources has completed at total of 118 RC (Reverse Circulation) drill holes for 22,725m drilled at both Orient East and Orient West and 5 diamond holes for 1731.2m drilled</li> <li>Relevant information for recent drill holes is summarised in Table 2, assay results for significant intervals are presented in Tables 3 to 10.</li> </ul>

For personal use only



For personal use only

Criteria	JORC Code explanation	Commentary															
	the case.																
Data aggregation methods	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>Itani are using a 30 g/t Ag Eq. lower cut with no upper cut applied) to report material intersections</li> <li>Metal equivalents are used (silver equivalent)</li> <li>The equivalent silver formula is <math>Ag\ Eq. = Ag + (Pb \times 35.5) + (Zn \times 50.2) + (In \times 0.47)</math></li> </ul> <p>Metal Equivalent Calculation - Recoveries and Commodity Prices</p> <table border="1"> <thead> <tr> <th>Metal</th> <th>Price/Unit</th> <th>Recovery</th> </tr> </thead> <tbody> <tr> <td>Silver</td> <td>US\$20/oz</td> <td>87%</td> </tr> <tr> <td>Lead</td> <td>US\$1.00/lb</td> <td>90%</td> </tr> <tr> <td>Zinc</td> <td>US\$1.50/lb</td> <td>85%</td> </tr> <tr> <td>Indium</td> <td>US\$300/kg</td> <td>85%</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>It is Itani's opinion that all the elements included in the metal equivalents calculation have a reasonable potential to be recovered and sold</li> </ul>	Metal	Price/Unit	Recovery	Silver	US\$20/oz	87%	Lead	US\$1.00/lb	90%	Zinc	US\$1.50/lb	85%	Indium	US\$300/kg	85%
Metal	Price/Unit	Recovery															
Silver	US\$20/oz	87%															
Lead	US\$1.00/lb	90%															
Zinc	US\$1.50/lb	85%															
Indium	US\$300/kg	85%															
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>Drilling is generally perpendicular to the structure by angled RC at 50° to 60° into structures dipping between 45° and 80°.</li> </ul>															
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plans and sections.</li> </ul>	<ul style="list-style-type: none"> <li>Refer to plans and sections within report</li> </ul>															
Balanced reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>The accompanying document is considered to represent a balanced report</li> </ul>															
Other substantive exploration data	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported.</li> </ul>	<ul style="list-style-type: none"> <li>All meaningful and material data is reported</li> </ul>															
Further work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> </ul>	<ul style="list-style-type: none"> <li>Exploration of the target area is ongoing.</li> <li>Itani plans to complete further drilling at Orient during 2025.</li> </ul>															



### Metallurgical Equivalent Calculation – Additional Disclosure

The equivalent silver formula is  $Ag Eq. = Ag + (Pb \times 35.5) + (Zn \times 50.2) + (In \times 0.47)$

Table 14 Metal Equivalent Calculation - Recoveries and Commodity Prices

Metal	Price/Unit	Recovery
Silver	US\$20/oz	87%
Lead	US\$1.00/lb	90%
Zinc	US\$1.50/lb	85%
Indium	US\$350/kg	85%

Please refer to the release dated 14 November 2023 (Test Work Confirms Silver-Indium Production Potential) detailing the historical test work which Iltani is using to support the metal equivalent calculation.

The metal equivalent calculation (Ag Eq.) assumes lead and silver will be recovered to a lead concentrate and zinc, silver and indium will be recovered to a zinc concentrate. It is Iltani's opinion that all the elements included in the metal equivalent calculation have a reasonable potential to be recovered and sold.

It should be noted that there are other metals present, notably antimony and tin, that have the potential to be included in the metallurgical equivalent calculation, but at this stage, Iltani has chosen not to do so. These metals will likely also be recovered to the concentrates, notably the lead concentrate, however Iltani is currently assuming that these metals will not be payable, so are excluded from the metallurgical equivalent calculation.

Should this situation change, and the antimony and tin become payable in the lead concentrate and/or metallurgical test work indicates that the antimony or tin can be recovered to a separate concentrate where they are payable, then the metallurgical equivalent calculation could be expanded to include these metals.

For personal use only



## Orient West Exploration Target – Additional Disclosure

### 1. Summary of Relevant Exploration Data

The Exploration Target is based on the interpretation of the following geology and mineralisation data that has been collated as of the date of this announcement, which includes previously reported exploration results, and information in this report that relates to previously reported exploration results has been cross-referenced in this report to the date it was reported to the ASX. Exploration data is comprised of:

- 22 reverse circulation (RC) drill holes completed for 4,406 metres drilled
- 2,773 assay results from RC drill hole samples
- Detailed surface geological mapping
- Wireframing and 3D block modelling of the Orient West mineralised vein systems.

Historical exploration completed at Orient includes:

- 255 rock chip assay results from Orient East and Orient West
- Geophysical data sets (14km<sup>2</sup> drone mag survey over the Orient area plus 7.18-line km of a dipole-dipole Induced Polarisation survey)
- Great Northern Mining Corporation (GNMC) completed 16 diamond drill holes at Orient West in the 1970s. Drilling did not delineate the margins of mineralisation, leaving it open to extension in all directions. GNMC undertook limited assay of the drill samples (core and percussion) with a focus on the high-grade vein system. Extensive low-grade mineralisation was logged, usually forming halos around the higher grade veins but this was not assayed. The assay data was not used in the Exploration Target estimation process (due to lack of certainty of the data), and the geological data was used in the wireframing process.

### 2. Methodology to Determine the Grade and Tonnage Range for the Exploration Target

Resource estimation was performed using Leapfrog Edge by Mining One Pty Ltd, Melbourne.

Wireframes were constructed for each individual vein. Mineralised intercepts in downhole drilling align from section to section along structures that can be assumed to be continuous between drilling. Mineralised zones broadly pinch and swell but can confidently be linked together across drilled sections.

Assays were composited in each domain to 1m which is the nominal assay interval. Domains were snapped to assay intervals. Ag, Pb, Zn & In were estimated from the composites in each domain using hard boundaries using ordinary kriging and inverse distance squared (ID2) estimation. Parent cell grades were estimated within each domain, dependent upon data density and if variographic analysis was possible. The domains containing the greatest amount of data were estimated using ordinary kriging (OK), with domains comprising less or sparse data being estimated via inverse distance squared (ID2) or nearest neighbour (NN) methodologies.

A multiple-pass estimation strategy was applied. Quantitative Kriging Neighbourhood Analysis (QKNA) assisted with the selection of search distances and sample number constraints. Extrapolation was limited to approximately half the nominal drill spacing. The relative correlation of metals estimated resulted in similar outcomes from variography and QKNA. Given the higher contribution of Ag to the resource, these values were applied for the other elements (As, In, Pb, Zn).

The Block Model has parent blocks 20m x 20m x 10m. It is sub-blocked using an octree method 8 x 8 x 16 resulting in sub-blocks as small as 2.5 m x 2.5m x 0.625m to honour the vein geometry even as they pinch out or splay against each other.



The Exploration Target is reported from the same Orient West Resource Block Model. It consists of the remaining blocks that are either “Unclassified” or outside the RPEEE (Reasonable Prospects for Eventual Economic Extraction) optimised pit shell.

### **3. Progress Towards a Mineral Resource Estimate**

Proposed exploration activities designed to progress the Orient West Exploration Target to a Mineral Resource Estimate will consist of an infill drilling program and are planned to take place over the next 6 to 12 months.

For personal use only



## Orient East Exploration Target – Additional Disclosure

### 1. Summary of Relevant Exploration Data

The Orient East Exploration Target is based on the interpretation of the following geology and mineralisation data that has been collated as of the date of this announcement and information in this report that relates to previously reported exploration results has been cross-referenced in this report to the date it was reported to the ASX. Exploration data is comprised of:

- 35 reverse circulation (RC) drill holes completed for 5,154 metres drilled
- 2,522 assay results from RC drill hole samples
- Detailed surface geological mapping
- Wireframing and 3D block modelling of the Orient East mineralised vein systems.

(NB: drill samples comprise 1m cone split samples, 4m composite spear samples, with some samples not submitted for assay as they were first tested with a portable XRF device).

Historical exploration completed at Orient includes:

- 255 rock chip assay results from Orient East and Orient West
- Geophysical data sets (14km<sup>2</sup> drone mag survey over the Orient area plus 7.18-line km of a dipole-dipole Induced Polarisation survey)
- Great Northern Mining Corporation (GNMC) completed 16 diamond drill holes at Orient West and five diamond drill holes at Orient East in the 1970s. Drilling did not delineate the margins of mineralisation, leaving it open to extension in all directions. GNMC undertook limited assay of the drill core samples with a focus on the massive sulphide high grade veins only. Extensive low-grade mineralisation was logged, usually forming halos around the higher grade veins but this was not assayed. The historic drill data was not used in the Exploration Target estimation process due to lack of certainty of the data.

### 2. Methodology to Determine the Grade and Tonnage Range for the Exploration Target

Resource estimation was performed using Leapfrog Edge by Mining One Pty Ltd, Melbourne.

Wireframes were constructed for each individual vein. Mineralised intercepts in downhole drilling align from section to section along structures that can be assumed to be continuous between drilling. Mineralised zones broadly pinch and swell but can confidently be linked together across drilled sections.

Assays were composited in each domain to 1m which is the nominal assay interval. Domains were snapped to assay intervals. Ag, Pb, Zn & In were estimated from the composites in each domain using hard boundaries using ordinary kriging and inverse distance squared (ID2) estimation. Parent cell grades were estimated within each domain, dependent upon data density and if variographic analysis was possible. The domains containing the greatest amount of data were estimated using ordinary kriging (OK), with domains comprising less or sparse data being estimated via inverse distance squared (ID2) or nearest neighbour (NN) methodologies.

A multiple-pass estimation strategy was applied. Quantitative Kriging Neighbourhood Analysis (QKNA) assisted with the selection of search distances and sample number constraints. Extrapolation was limited to approximately half the nominal drill spacing. The relative correlation of metals estimated resulted in similar outcomes from variography and QKNA. Given the higher contribution of Ag to the resource, these values were applied for the other elements (As, In, Pb, Zn).

The Block Model has parent blocks 15m x 15m x 15m. It is sub-blocked using an octree method 16 x 16 x 16 resulting in sub-blocks as small as 0.9375m x 20.9375m x 0.9375m to honour the vein geometry even as they pinch out or splay against each other.



The Exploration Target is reported from the same Orient East Resource Block Model. It consists of the remaining blocks that are either “Unclassified” or outside the RPEEE (Reasonable Prospects for Eventual Economic Extraction) optimised pit shell.

### **3. Progress Towards an Orient East Mineral Resource Estimate**

Proposed exploration activities designed to progress the Orient East Exploration Target to a Mineral Resource Estimate will consist of infill drilling and are planned to take place over the next six to twelve months

For personal use only