

ASX ANNOUNCEMENT

10 February 2026



CRML Announces Compelling High-Grade Drilling Results Tanbreez Greenland

European Lithium Limited (ASX: EUR, FRA:PF8, OTC: EULIF) (“European Lithium” or the “Company”), is pleased to announce that it has received the final assay results from the 2025 drilling program at Area B and the Fjord Deposit at the Tanbreez Rare Earths Project in Greenland.

Key Highlights

Area B – Extent of mineralisation:

Broad-spaced drilling results successfully demonstrate significant and extensive mineralisation potential across Area B, located immediately adjacent to the eastern margin of the Hill Zone Deposit (refer to ASX announcements dated 16 December 2025 and 15 January 2026, Figure 2).

Fjord Deposit – Extent of mineralisation:

The Fjord area remains open along strike, with mineralisation consistently confirmed near surface and demonstrating strong lateral and vertical continuity (refer to ASX announcements dated 16 December 2025 and 15 January 2026, Figure 2).

Resource growth potential:

The 2025 Fjord and Upper Fjord drilling results provide a strong indication of potential for resource growth and extension drilling for 2026 currently being planned.

Grade profile:

Total Rare Earth Oxide (TREO+Y) grades from the 2025 diamond drilling range from 0.40% to 0.47%, with heavy rare earth oxides (HREO) comprising approximately 26–27% of TREO+Y

Tony Sage, Chief Executive Officer of Critical Metals Corp., commented:

“I am very encouraged by the 2025 deep diamond drilling results, which continue to demonstrate meaningful extensions to our known Mineral Resource and confirm consistent rare earth mineralisation across the Fjord, Upper Fjord, Hill and now, Area B zone. These results enhance our confidence in the broader REE potential of the Tanbreez Deposit.

Importantly, the new assay data is expected to add further mineralised tonnage to the existing Hill and Fjord Deposits, supporting a potential uplift in scale and continuity across a significantly larger project footprint. This reinforces Tanbreez as a strategic, long-life rare earth asset.



Our team is now progressing extension and infill drilling programs for the 2026 field season, focused on optimising future pit designs and advancing Mineral Resource studies. These next steps are aimed at de-risking the project and positioning Tanbreez for future development milestones.”

New results are as follows.

AREA B — Final 2025 drill results

Hole 25-D10

132.0m @ 0.46% TREOY (23.84% HREO), including 98 ppm Ga₂O₅, 294 ppm HfO₂, 1,722 ppm CeO₂, and 1,260 ppm Nb₂O₅ from 0.0m

Hole 25-D13

128.0m @ 0.43% TREOY (23.59% HREO), including 106 ppm Ga₂O₅, 270 ppm HfO₂, 1,620 ppm CeO₂, and 1,166 ppm Nb₂O₅ from 0.0m

13.5m @ 0.47% TREOY (26.06% HREO), 88 ppm Ga₂O₅, 373 ppm HfO₂, 1,701 ppm CeO₂, and 1,500 ppm Nb₂O₅ from 136m

Hole 25-D16

6.0m @ 0.50% TREOY (25.94% HREO), including 115 ppm Ga₂O₅, 352 ppm HfO₂, 1,857 ppm CeO₂, and 1,234 ppm Nb₂O₅ from 0.0m

37.0m @ 0.43% TREOY (23.51% HREO), including 103 ppm Ga₂O₅, 258 ppm HfO₂, 1,633 ppm CeO₂, and 1,062 ppm Nb₂O₅ from 27.0m

93.0m @ 0.42% TREOY (23.89% HREO), 95 ppm Ga₂O₅, 268 ppm HfO₂, 1,587 ppm CeO₂, 1,140 ppm Nb₂O₅ from 68.0m

Hole 25-D17

82.0m @ 0.4386% TREOY (23.16% HREO), including 102 ppm Ga₂O₅, 245 ppm HfO₂, 1,700 ppm CeO₂, and 1,026 ppm Nb₂O₅ from 2.0m

2.0m @ 0.61% TREOY (26.46% HREO), including 75 ppm Ga₂O₅, 487 ppm HfO₂, 2,223 ppm CeO₂, and 1,873 ppm Nb₂O₅ from 97.0m

80.0m @ 0.44% TREOY (24.64% HREO), including 96 ppm Ga₂O₅, 297 ppm HfO₂, 1,605 ppm CeO₂, and 1,239 ppm Nb₂O₅ from 103.0m

Area B – Geological context and exploration results

Area B is located to the east-northeast of the Hill Deposit and spans an approximately 1,750 metre corridor of highly prospective geology. All drilling completed in 2025 within this area has returned broad intervals of rare earth mineralisation, with TREO+Y grades typically ranging from ~0.35% to ~0.77%.

Drill holes 25-D17, 25-D13, 25-D10 and 25-D09 formed part of a reconnaissance drilling program designed to assess the prospectivity within this eastern extension of the Hill Deposit.

While the current drilling pattern remains widely spaced, results to date indicate strong geological and grade continuity across the corridor. This continuity highlights significant laterally extensive mineralisation potential within Area B, which is positioned immediately adjacent to the eastern margin of the Hill Zone Deposit.

In addition, results have now been returned for the final 2025 drillhole at the Fjord deposit.

Fjord Deposit – Final 2025 drill results

Hole 25-D14

16.5m @ 0.4003 TREOY (25.02% HREO), 96 ppm Ga₂O₅, 274ppm HfO₂, 1485ppm CeO₂, 1125ppm Nb₂O₅ from 0.5m

38.0m @ 0.3801 TREOY (26.59% HREO), 84 ppm Ga₂O₅, 311ppm HfO₂, 1381ppm CeO₂, 1259ppm Nb₂O₅ from 21.0m

Hole 25-D15

55.5m @ 0.406 TREOY (26.02% HREO), 95 ppm Ga₂O₅, 325ppm HfO₂, 1491ppm CeO₂, 1307ppm Nb₂O₅ from 2.0m

Holes 25-D14 and 25-D15 are located at the northeastern end of the Fjord Deposit and confirm that mineralisation remains open along strike. The assay results are consistent with previously reported drilling in this area and are expected to support preparation of a revised Mineral Resource Estimate, as well as the advancement of subsequent mine planning studies (refer to Table 1).

The assay results continue to demonstrate consistent rare earth grades and highlight the presence of strategic metals, including gallium, hafnium, cerium, and yttrium. These outcomes further reinforce Tanbreez's status as a globally significant peralkaline-hosted rare earth system with scale potential and exposure to multiple strategic metals exposure.

Details of the 2025 drilling program are provided in Table 1 (collar information), with mineralized greater than >0.3% TREO+Y listed in Appendix 2, individual assay results provided in Appendix 3, and supporting geological interpretations presented in Figures 3, 4, and 5, pursuant to ASX Listing Rule 5.7.2.



Figure 1. Diamond drill hole pad DDH25-5 drilled September 2025.



Figure 2. Area B ground proofing September 2025 for drill pad locations below 25-D09.

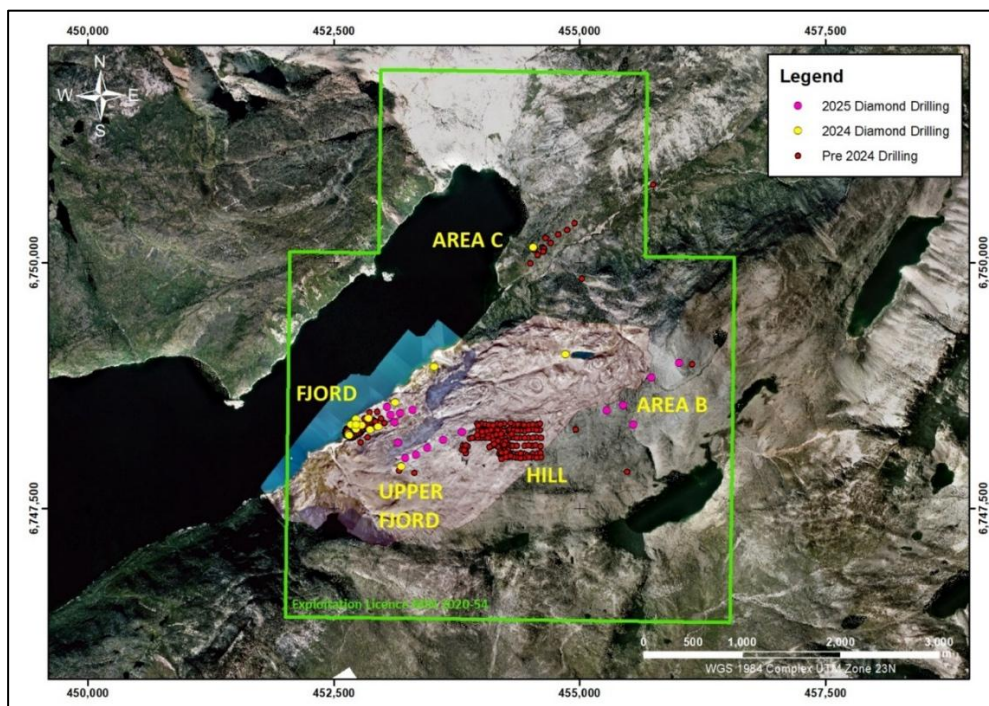


Figure 3 . Project Dilling historical 2007- 2014 and 2024 and 2025 Summary Plan (WGS84 zone 23N)

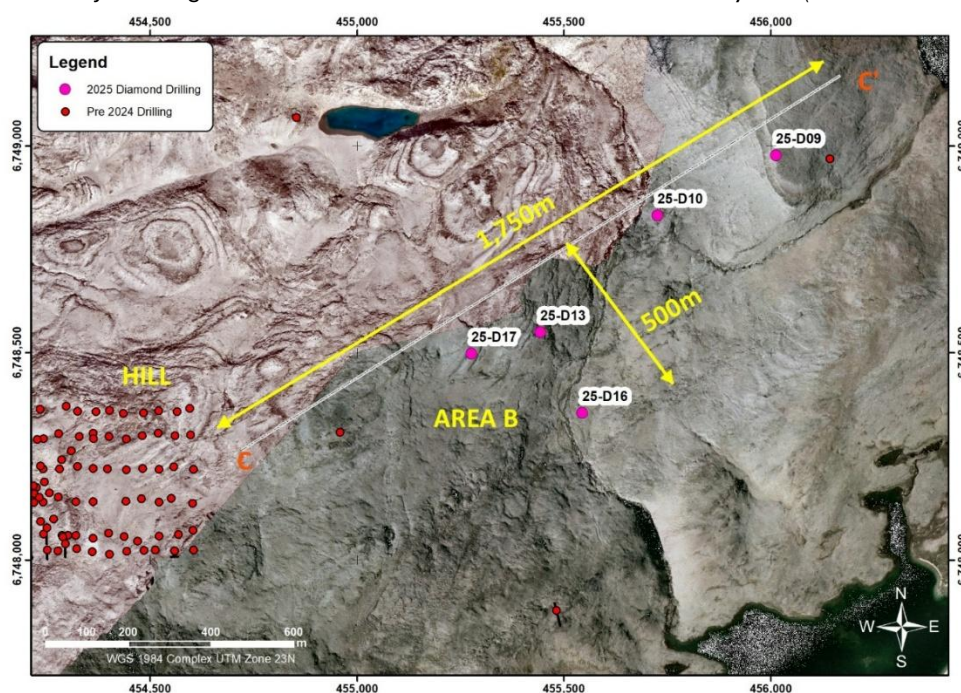


Figure 4. Area B - over 1,750m strike length of TREO mineralisation

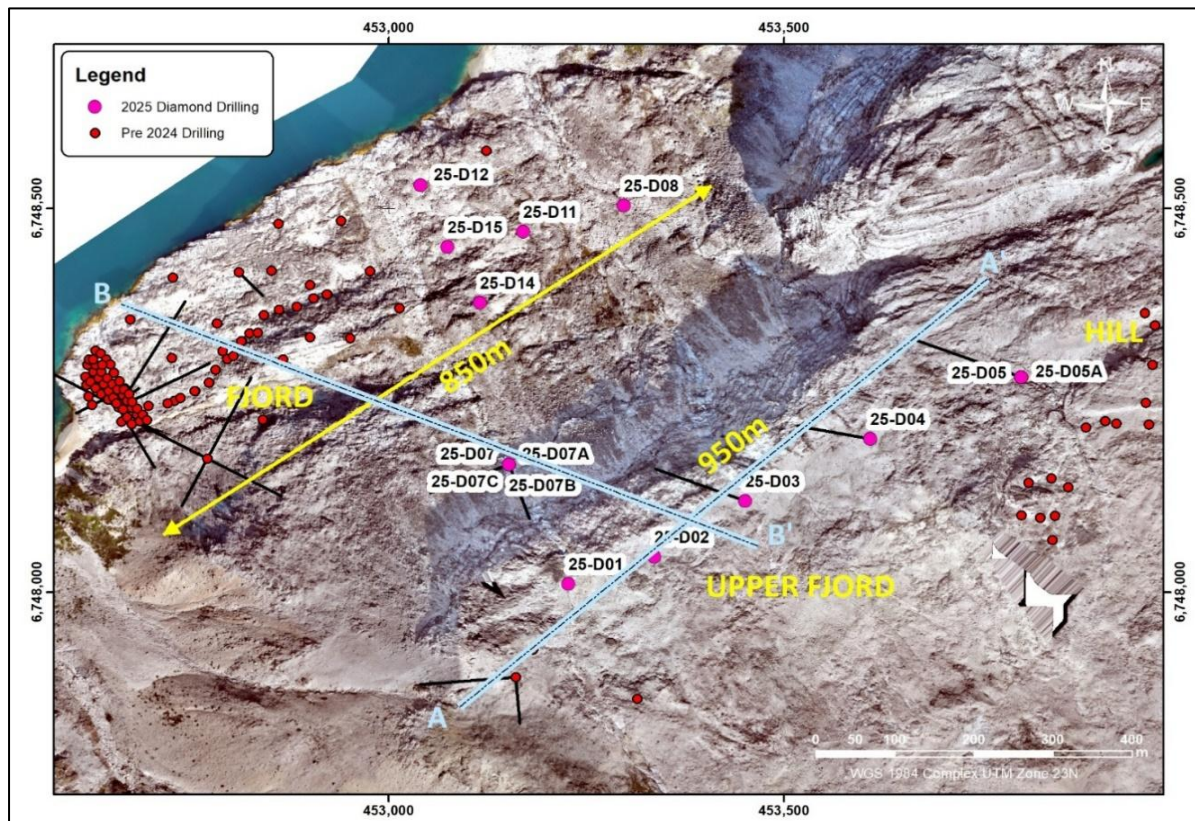


Figure 5. Project Drilling: historical (2007- 2014) and 2024 and 2025 Summary Plan (WGS84 zone 23N).

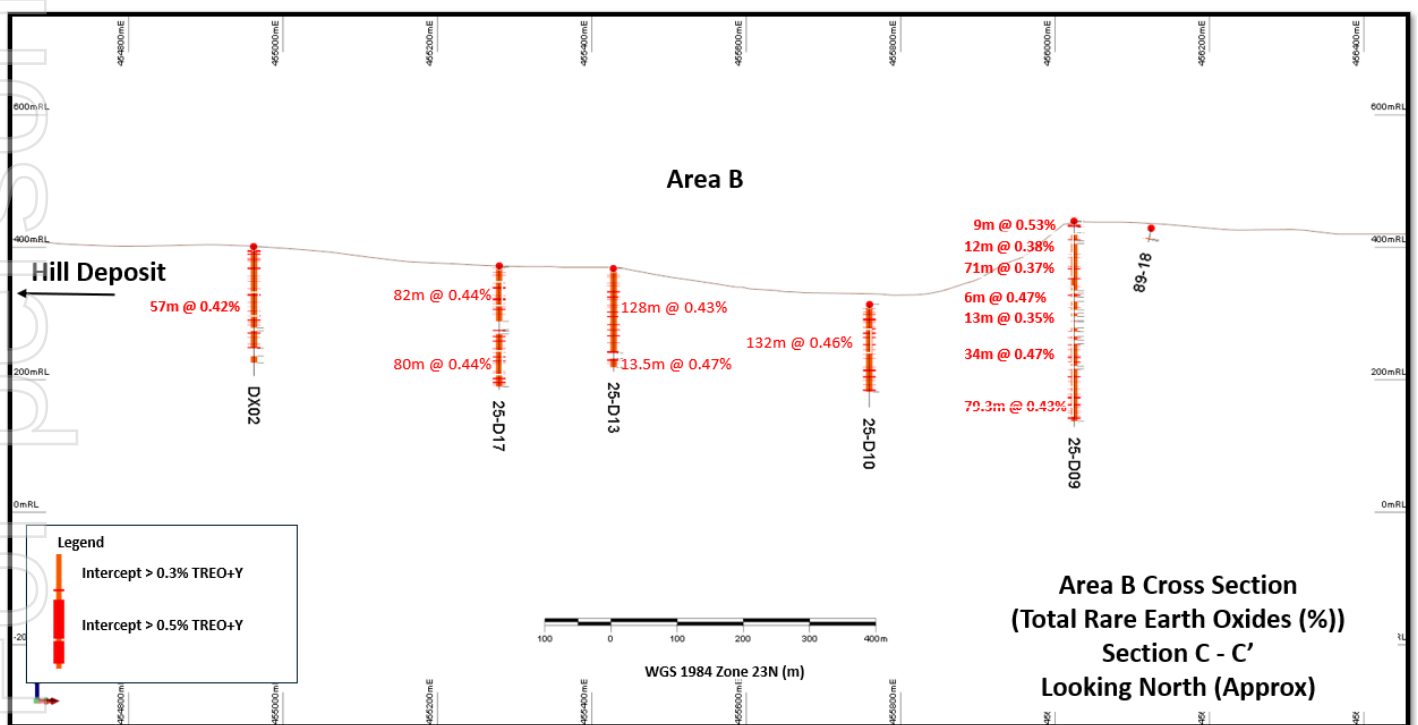


Figure 5. Area B - over 950m strike length of TREO mineralisation

Area B and Hill Zone Deposit Tie-in Zone

Drill holes 25-D17, 25-D13, 25-D10 and 25-D09 formed part of a reconnaissance program designed to assess the prospectivity east-northeast of the Hill Deposit. Although the drill spacing remains broad, results clearly indicate significant laterally extensive mineralisation potential across Area B, which is located immediately adjacent to the eastern margin of the Hill Zone Deposit.

Based on the results reported in this announcement, additional drilling across Area B and the Upper Fjord area is considered warranted to further define mineralised scale, continuity and potential resource growth.

Results from Area B, together with the broader 2024 and 2025 drilling programs, demonstrate TREO+Y grades ranging from approximately 0.35% to 0.77%, with an average heavy rare earth oxide (HREO) content of approximately 25.7%.

Grade Summary - Area B 2025 Drilling

- **Total Rare Earth Oxide + Yttrium (TREO+Y):** ranges between approximately 0.35%–0.61%.
- **Heavy Rare Earth Oxide (HREO) proportion:** ranges between approximately 21–27% of TREO+Y.
- **Strategic and associated elements:** Gallium oxide (~99 ppm), hafnium oxide (~292 ppm), yttrium oxide (~690 ppm), and cerium oxide (~1,646 ppm) are consistently present, together with zirconium oxide (0.9%–2.4%), niobium (~1,154ppm), and tantalum (~85ppm).

Reporting and Methodology Notes

- TREO+Y represents the sum of La₂O₃, CeO₂, Pr₂O₃, Nd₂O₃, Sm₂O₃, Eu₂O₃, Gd₂O₃, Tb₄O₇, Dy₂O₃, Ho₂O₃, Er₂O₃, Tm₂O₃, Yb₂O₃, Lu₂O₃, and Y₂O₃.
- A minimum downhole intercept width of 2m has been applied.
- No economic weighting has been applied to the reported results.
- A grade cut-off of 3,000ppm for TREO+Y has been applied with no metal equivalence calculation.
- All drilling and assay results, including both higher and lower grade intervals, are reported to ensure balanced and transparent disclosure.

Next Steps

The Company is undertaking a detailed review of several optimization strategies, which will be integrated with the advanced planning currently underway for the 2026 field season.

Hole ID	Easting	Northing	Elevation	Dip	Azimuth	Depth
25-D10	455727.9	6748831.9	313.8	-90	0	155.4
25-D13	455446.7	6748549.4	368.3	-90	0	155.9
25-D14	453114.7	6748379.0	83.0	-90	0	65.0
25-D15	453073.0	6748451.9	50.3	-90	0	65.4
25-D16	455543.4	6748348.19	373.3	-90	0	161.0
25-D17	455275.1	6748499.5	372.5	-90	0	188.0
Total						790.7

Table 1- 2025 reported Drilling Coordinates based on WGS1984 Zone 23 North grid system with results to date for 2025.

Competent Person Statement (ASX Listing Rule 5.22) Mr Colwin Lloyd

The information in this announcement relates to Exploration Results for the Tanbreez Rare Earth Project in Greenland. Mr Colwin Lloyd is the Principal Director of Core Geoscience PTY Ltd, and a Member of the Australasian Institute of Mining and Metallurgy (AusIMM) and is a Geologist with sufficient relevant experience in relation to Rare Earth and Rare Earth Mineralisation being reported on, to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code).

Mr. Lloyd consents to the use of this information in this report in the form and context in which it appears.

The information included in this announcement relates to Exploration Results at the Tanbreez Rare Earth Project, Greenland, which were first reported by the Company in accordance with the new Exploration Results and is provided pursuant to new Exploration results and is provided pursuant to ASX Listing Rule 5.7.1.

About European Lithium

European Lithium Limited is an exploration and development stage mining company focused on lithium assets in Austria, Ukraine, and Ireland, along with various assets in Australia, and a rare earth project in Greenland.

European Lithium currently holds 45,536,338 (37.5%) ordinary shares in Critical Metals. Based on the closing share price of Critical Metals being US\$11.97 per share as of 9 February 2026, the Company's current investment in Critical Metals is valued at US\$545,069,966 (A\$768,548,652) noting that this valuation is subject to fluctuation in the share price of Critical Metals.

For more information, please visit <https://europeanlithium.com>.

About Critical Metals Corp

Critical Metals Corp (Nasdaq: CRML) is a leading mining development company focused on critical metals and minerals, and producing strategic products essential to electrification and next-generation technologies for Europe and its Western world partners. Its flagship Project, Tanbreez, is one of the world's largest, rare-earth deposits and is located in Southern Greenland. The deposit is expected to have access to key transportation outlets as the area features year-round direct shipping access via deep water fjords that lead directly to the North Atlantic Ocean.

Another key asset is the Wolfsberg Lithium Project located in Carinthia, 270 km south of Vienna, Austria. The Wolfsberg Lithium Project is the first fully permitted mine in Europe and is strategically located with access to established road and rail infrastructure, and is expected to be the next major producer of key lithium products to support the European market. Wolfsberg is well-positioned with offtake and downstream partners to become a unique and valuable asset in an expanding geostrategic critical metals portfolio. With this strategic asset portfolio, Critical Metals Corp is positioned to become a reliable and sustainable supplier of critical minerals essential for defense applications, the clean energy transition, and next-generation technologies in the Western world.

For more information, please visit <https://ir.criticalmetalscorp.com/>

This announcement has been approved for release on ASX by the Board of Directors.

-END-

APPENDIX 1 – JORC Table 1 & 2

JORC Code, 2012 Edition

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	Diamond drilling was employed using NQ diameter core to ensure optimal recovery and representativeness of the layered kakortokite unit. Drill core was oriented where possible, and core recovery was routinely measured and recorded. Sampling intervals were geologically controlled and based on lithological and mineralogical boundaries, typically ranging from 0.5 m to 2.0 m in length. The review of the QA/QC outcomes do not indicate any issues with the assays used in the Release. Blanks and standards were reported within acceptable limits. Drill core was logged in detail for lithology, mineralogy, structure, and magnetic response, and digitally photographed. Logging was performed using standardised coding schemes to ensure consistency and facilitate geostatistical analysis. Samples were accompanied by blank samples, repeat samples duplicates etc. The core for all diamond holes was cut in Greenland with a quarter of the core being flown to ALS (Australian Laboratory Services, INAB Reg. Nr. 173T) in Australia for assay.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Conventional diamond drilling from surface with single standard tube NQ, 2024 and 2025
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	Recovery from diamond drilling was visually recorded in the range of 95-100% and monitored by the onsite project geologist.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	All core was logged qualitatively and photographed.

Criteria	JORC Code explanation	Commentary																					
Sub-sampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	Half Core was submitted to the Laboratory for Assaying with the remaining half core retained in Greenland for Assay checks and additional test work if required. Half Core was deemed a representative sample.																					
Quality of assay data and laboratory tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	The laboratory results compare favourably with other samples taken over many years on this site. ALS's internal standards reused approximately 50 elements are the certified standards used by labs and they were an acceptable range Assay Laboratory Methods used by ALS Geochemistry Perth combined both XRF and ICP Fusion. All sampling was conducted under the supervision of a qualified geologist. Sample preparation and analysis followed industry-standard QA/QC protocols, including the insertion of certified reference materials, blanks, and duplicates at a minimum rate of 5% each. All QA/QC results were within acceptable limits, with no significant bias detected.																					
Verification of sampling and assaying	• The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data.	No twin holes under taken. Any significant intersections have been verified by Company Person and Core Geoscience. Multielement results (REE) are converted to stoichiometric oxide (REO) using element-to stoichiometric conversion factors. <table border="1"> <thead> <tr> <th>Element ppm</th><th>Conversion Factor</th><th>Oxide Form</th></tr> </thead> <tbody> <tr> <td>Ce</td><td>1.1713</td><td>CeO2</td></tr> <tr> <td>Dy</td><td>1.1477</td><td>Dy2O3</td></tr> <tr> <td>Er</td><td>1.1435</td><td>Er2O3</td></tr> <tr> <td>Eu</td><td>1.1579</td><td>Eu2O3</td></tr> <tr> <td>Gd</td><td>1.1526</td><td>Gd2O3</td></tr> <tr> <td>Ho</td><td>1.1455</td><td>Ho2O3</td></tr> </tbody> </table>	Element ppm	Conversion Factor	Oxide Form	Ce	1.1713	CeO2	Dy	1.1477	Dy2O3	Er	1.1435	Er2O3	Eu	1.1579	Eu2O3	Gd	1.1526	Gd2O3	Ho	1.1455	Ho2O3
Element ppm	Conversion Factor	Oxide Form																					
Ce	1.1713	CeO2																					
Dy	1.1477	Dy2O3																					
Er	1.1435	Er2O3																					
Eu	1.1579	Eu2O3																					
Gd	1.1526	Gd2O3																					
Ho	1.1455	Ho2O3																					

Criteria	JORC Code explanation	Commentary																											
		<table border="1"> <tr><td>La</td><td>1.1728</td><td>La2O3</td></tr> <tr><td>Lu</td><td>1.1371</td><td>Lu2O3</td></tr> <tr><td>Nd</td><td>1.1664</td><td>Nd2O3</td></tr> <tr><td>Pr</td><td>1.1703</td><td>Pr2O3</td></tr> <tr><td>Sm</td><td>1.1596</td><td>Sm2O3</td></tr> <tr><td>Tb</td><td>1.1510</td><td>Tb4O7</td></tr> <tr><td>Tm</td><td>1.1421</td><td>Tm2O3</td></tr> <tr><td>Y</td><td>1.2699</td><td>Y2O3</td></tr> <tr><td>Yb</td><td>1.1387</td><td>Yb2O3</td></tr> </table> Rare earth oxide is the industry accepted form for reporting rare earths. The following calculations are used for compiling REO into their reporting and evaluation groups: TREO (Total Rare Earth Oxide) = La2O3 + CeO2 + Pr2O3 + Nd2O3 + Sm2O3 + Eu2O3 + Gd2O3 + Tb4O7 + Dy2O3 + Ho2O3 + Er2O3 + Tm2O3 + Yb2O3 + Lu2O3 + Y2O3. Note that Y2O3 is included in the TREO calculation.	La	1.1728	La2O3	Lu	1.1371	Lu2O3	Nd	1.1664	Nd2O3	Pr	1.1703	Pr2O3	Sm	1.1596	Sm2O3	Tb	1.1510	Tb4O7	Tm	1.1421	Tm2O3	Y	1.2699	Y2O3	Yb	1.1387	Yb2O3
La	1.1728	La2O3																											
Lu	1.1371	Lu2O3																											
Nd	1.1664	Nd2O3																											
Pr	1.1703	Pr2O3																											
Sm	1.1596	Sm2O3																											
Tb	1.1510	Tb4O7																											
Tm	1.1421	Tm2O3																											
Y	1.2699	Y2O3																											
Yb	1.1387	Yb2O3																											
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	All 2025 Drill Holes have been surveyed by a licensed Greenland surveyor using conventional DGPS method, excluding two drill holes which remain controlled by hand held GPS due to weather constraints. Topography control is based on 2025 Drone survey.																											
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	All drillholes were sampled at approximately one metre intervals adjusted according to lithologies. Data spacing and distribution is being assessed to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications. No sample compositing was applied.																											
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	Vertical and angled drilling was undertaken through horizontal, and sub horizontal layered sequences targeting known mineralisation.																											

Criteria	JORC Code explanation	Commentary
Sample security	The measures taken to ensure sample security.	Core locked in containers in Greenland. Chain of custody was managed by the operator throughout
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	The CP has verified the data and the geological interpretations.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	Exploitation Licence MIN 2020-54 granted for 30 years in 2020 License is held 100% by Tanbreez Mining A/S which is a Greenlandic company. EUR owns 7.5% of Tanbreez. As part of the granting of the project it received full environmental and social approval. There is no native title in Greenland.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	All exploration on the current tenement has been done by Tanbreez Mining Greenland A/S. Earlier exploration was carried out by Highwood Resources in the late 1980s
Geology	Deposit type, geological setting and style of mineralisation.	The kakortokite host rock at Tanbreez occurs within the Llímaussaq Intrusive Complex, southern Greenland, as part of a layered nepheline syenite–alkaline igneous sequence. The unit consists of rhythmically layered bands, with mineralisation dominated by eudialyte, arfvedsonite and feldspar. The kakortokite forms a laterally continuous magmatic cumulate horizon that is parallel to the primary magmatic layering of the intrusion. The mineral assemblage is interpreted as a primary crystallised directly from the parental magma.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	The Drill hole statistics are included in the body of the report see Table 1 and Appendix 2.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should	No cutting of grades has been undertaken. Data has been aggregated according to downhole intercept length above the cut-off grade and internal sub-grade material has been included. A lower cut-off grade of 3000ppm TREO + Y has been applied. EUR considers this to be an appropriate cut-off grade for exploration data for the Tanbreez Rare Earth Project.

Criteria	JORC Code explanation	Commentary
	be clearly stated.	Multielement results (REE) are converted to stoichiometric oxide (REO) using element-to stoichiometric conversion factors. These stoichiometric conversion factors are stated in the 'verification of sampling and assaying' table above and can be referenced in appropriate publicly available technical data, see Table 2 and Appendix 2.
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	The whole of each drill hole is in mineralisation from the surface near the base some xenoliths of the unit below or distinct Phonolite Tephry were noted. Drillholes drilled vertical and angle to intersect flat to shallow dipping mineralisation. Vertical holes are interpreted as approximate true widths. Intercepts are reported as down hole only.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	See maps and figures in the body of the report.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Balanced report based on available data. No outlier values were reported.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	Check assays and other holes assays are currently going through the procedure and not yet submitted to the lab.
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Interpretation of drilling results is currently being undertaken in preparation for the 2026 Field Season.

APPENDIX 2 – Drill Assay Results – TREOY, HREO & Metal Oxides

Hole ID	From	To	Interval	TREOY ppm	HREOY ppm	LREO ppm	HREO Ratio %	ZrO2 %	Ta2O5 ppm	Nb2O5 ppm	Ga2O5 ppm	HfO2 ppm	CeO2 ppm	Th ppm	U ppm
25-D10	0.0	132.0	132.0	4577	1109	3468	23.8	1.5066	92	1260	98	294	1722	56	19
25-D11	4.0	90.0	86.0	3881	1029	2852	26.2	1.5682	100	1226	92	318	1418	37	13
25-D13	0.0	128.0	128.0	4293	1032	3261	23.6	1.3925	81	1166	106	270	1620	65	21
25-D13	136.0	149.5	13.5	4714	1245	3469	26.1	1.8670	119	1500	88	373	1701	42	15
25-D14	0.5	17.0	16.5	4003	1004	2999	25.0	1.4617	85	1125	96	274	1485	39	15
25-D14	21.0	59.0	38.0	3801	1020	2781	26.6	1.7188	104	1259	84	311	1381	36	12
25-D15	2.0	57.5	55.5	4060	1061	2999	26.0	1.5871	105	1307	95	325	1491	40	15
25-D16	0.0	6.0	6.0	5001	1297	3704	25.9	1.8562	98	1234	115	352	1857	34	13
25-D16	27.0	64.0	37.0	4314	1031	3283	23.5	1.3426	77	1062	103	258	1633	50	17
25-D16	68.0	161.0	93.0	4229	1033	3196	23.9	1.3517	87	1140	95	268	1587	52	17
25-D17	2.0	84.0	82.0	4386	1026	3360	23.2	1.4080	69	1026	102	245	1700	56	18
25-D17	97.0	99.0	2.0	6113	1618	4495	26.5	2.4517	163	1873	75	487	2223	33	12
25-D17	103.0	183.0	80.0	4355	1085	3269	24.6	1.4949	93	1239	96	297	1605	61	16

SiteID

SiteID

25-D13	5	6	3115	609	196	2506	581	1265	125	449	79	7	61	10	63	13	37	5	35	5	380	114	121	734	36	0.7267	0.0102	0.0030
25-D13	6	7	4018	861	214	3157	715	1597	161	576	99	9	81	15	90	19	56	8	53	7	531	117	190	1000	57	1.1077	0.0093	0.0030
25-D13	7	8	4067	927	228	3140	729	1572	158	570	101	9	84	15	98	21	60	9	57	8	575	108	222	1024	64	1.2603	0.0072	0.0030
25-D13	8	9	4068	893	209	3375	813	1720	163	569	99	9	81	14	87	19	55	8	51	7	531	122	178	1001	51	1.0820	0.0092	0.0030
25-D13	9	10	4544	906	199	3639	862	1836	178	643	110	9	85	15	92	20	55	8	53	7	569	122	184	1088	55	1.0928	0.0090	0.0030
25-D13	10	11	5879	1383	235	4496	1018	2260	226	822	155	14	129	24	145	32	94	13	89	11	846	90	340	1477	99	1.8371	0.0057	0.0020
25-D13	11	12	4007	688	212	3318	739	1695	171	608	97	8	77	12	71	15	42	6	36	5	424	109	119	868	38	0.7105	0.0077	0.0030
25-D13	12	13	4489	941	170	3548	802	1793	179	650	114	10	90	16	98	21	61	9	56	7	584	110	200	1075	61	1.1455	0.0082	0.0030
25-D13	13	14	5064	963	190	4101	901	2088	210	763	128	11	97	16	101	21	60	9	55	7	597	105	189	1158	60	1.0725	0.0074	0.0030
25-D13	14	15	3928	829	211	3099	707	1566	155	562	101	8	79	14	82	18	51	7	47	6	526	110	138	885	42	0.8780	0.0040	0.0020
25-D13	15	16	4544	1199	264	3351	712	1641	164	617	122	11	68	12	119	26	67	11	57	9	781	99	216	1076	53	1.1847	0.0096	0.0030
25-D13	16	17	3965	1158	292	2807	667	1376	136	514	105	9	95	18	111	26	75	11	74	10	738	94	195	885	50	1.2319	0.0065	0.0030
25-D13	17	18	3502	1076	307	2427	591	1180	117	436	93	8	85	16	106	24	70	11	68	9	687	94	186	758	43	1.1725	0.0060	0.0030
25-D13	18	19	3597	740	206	2857	639	1431	147	537	95	8	74	12	77	17	48	7	39	5	461	125	147	846	44	0.8348	0.0068	0.0020
25-D13	19	20	3091	603	195	2487	547	1235	131	486	82	7	66	11	65	14	39	6	32	4	367	116	125	747	40	0.6943	0.0067	0.0020
25-D13	20	21	3558	659	185	2899	634	1443	154	563	95	8	73	12	71	14	42	6	35	4	401	117	130	862	43	0.7065	0.0110	0.0030
25-D13	21	22	4755	875	184	3880	866	1941	204	735	124	10	93	15	93	19	55	8	46	6	541	109	173	1126	56	0.9280	0.0088	0.0030
25-D13	22	23	5203	998	192	4206	990	2119	214	747	125	11	100	17	103	22	64	9	55	7	620	109	204	1180	62	1.0996	0.0094	0.0030
25-D13	23	24	4883	786	161	4097	911	2064	218	770	124	10	90	14	82	17	48	7	39	5	484	116	132	1063	45	0.7524	0.0072	0.0030
25-D13	24	25	2158	495	230	1663	407	806	84	306	55	5	45	8	50	11	34	5	31	4	307	120	118	569	32	0.6605	0.0091	0.0020
25-D13	25	26	4076	1024	251	3052	715	1505	153	565	106	9	91	16	107	24	70	10	65	9	632	116	270	1113	81	1.3778	0.0099	0.0030
25-D13	26	27	6525	1671	256	4853	1163	2371	245	889	170	16	149	27	177	40	121	17	107	14	1018	75	456	1739	132	2.2761	0.0065	0.0020
25-D13	27	28	2809	699	249	2110	496	1053	105	381	69	6	62	11	73	16	49	7	44	6	431	95	192	745	50	0.9780	0.0042	0.0010
25-D13	28	29	3947	862	219	3084	725	1548	156	553	95	9	82	15	89	19	57	8	50	7	536	108	196	942	58	1.0158	0.0088	0.0030
25-D13	29	30	3304	782	196	2837	658	1443	143	503	83	8	76	12	83	19	53	8	43	6	438	110	135	797	40	0.7897	0.0092	0.0030
25-D13	30	31	3275	716	219	2558	618	1284	127	443	79	7	64	11	73	16	46	7	43	6	451	110	158	795	46	0.8645	0.0102	0.0030
25-D13	31	32	4037	866	201	3441	833	1744	171	584	100	9	84	14	88	19	55	8	48	6	544	108	180	1017	56	0.9685	0.0089	0.0030
25-D13	32	33	2869	617	215	2251	532	1120	113	409	70	6	59	11	65	14	41	6	36	5	381	122	145	693	46	0.7537	0.0046	0.0020
25-D13	33	34	1536	380	247	1156	277	560	60	216	40	4	34	6	39	9	26	4	23	3	235	164	99	407	30	0.5201	0.0028	0.0010
25-D13	34	35	6680	1799	269	4881	1185	2383	242	883	172	16	154	29	192	44	131	19	113	15	1101	132	508	1888	161	2.5192	0.0038	0.0020
25-D13	35	36	15534	4299	285	11105	2733	5344	556	2035	399	39	375	71	465	106	322	47	287	38	2718	66	1250	4368	377	6.1732	0.0070	0.0020
25-D13	36	37	2733	721	279	3623	771	1973	197	737	179	17	173	21	211	36	118	21	75	12	1107	110	239	1619	161	2.7691	0.0099	0.0030
25-D13	37	38	3065	710	232	2355	557	1177	117	420	78	7	63	11	73	16	48	7	43	6	442	112	178	802	47	0.9537	0.0072	0.0020
25-D13	38	39	3643	746	205	2897	661	1456	149	531	93	8	75	13	78	17	49	7	42	6	461	122	159	877	46	0.8861	0.0088	0.0030
25-D13	39	40	2978	689	231	2289	552	1134	114	409	73	6	60	11	72	16	47	7	44	6	427	122	176	773	46	0.9294	0.0075	0.0020
25-D13	40	41	2949	699	237	2251	563	1123	107	381	71	6	57	11	70	15	46	7	43	6	444	126	167	769	44	0.9334	0.0119	0.0040
25-D13	41	42	4136	894	216	3242	765	1634	164	572	99	9	85	15	93	20	60	9	52	7	554	120	216	1016	61	1.1144	0.0063	0.0020
25-D13	42	43	5174	1156	224	4018	919	1990	207	433	83	8	72	13	81	17	57	11	71	9	706	109	282	1294	85	1.4251	0.0070	0.0020
25-D13	44	44	6144	1445	235	4440	1259	2328	236	854	137	14	118	24	153	24	61	15	56	8	896	94	337	1551	107	1.5809	0.0075	0.0020
25-D13	44	45	6138	1493	243	4645	1118	2303	233	825	154	13	134	25	154	34	104	15	93	12	922	93	384	1597	113	1.9992	0.0070	0.0030
25-D13	45	46	2897	671	232	2226	523	1107	113	402	74	6	62	11	68	15	46	7	42	6	414	110	166	766	46	0.8767	0.0081	0.0020
25-D13	46	47	3542	729	206	2813	664	1419	146	488	89	8	72	12	76	16	47	7	41	6	453	124	154	866	43	0.8659	0.0099	0.0030
25-D13	47	48	6072	1266	209	4806	1155	2371	254	854	159	13	130	22	135	27	80	12	71	10	780	109	264	1534	81	1.4454	0.0116	0.0040
25-D13	48	49	4209	1146	272	3063	755	1523	154	518	103	10	97	18	120	26	82	12	77	11	704	89	321	1266	86	1.6817	0.0072	0.0020
25-D13	49	50	3304	778	225	2526	603	1271	129	433	83	8	72	13	81	17	53	8	49	7	479	91	197	858	52	1.0590	0.0074	0.0020
25-D13	50	51	4144	921	224	3224	767	1628	166	551	103	9	89	15	98	20	61	9	56	8	564	104	216	991	59	1.2401	0.0095	0.0030
25-D13	51	52	3629	804	221	2825	677	1419	147	485	90	8	76	13	83	17	53	8	47	6	500	105	184	865	50	1.0050	0.0068	0.0020
25-D13	52	53	3238	787	243	2451	603	1226	123	412	80	7	71	13	82	17	53	8	49	7	488	110	196	811	51	1.0469	0.0065	0.0020
25-D13	53	54	4077	933	229	3144	755	1578	162	537	102	9	88	16	98	20	62	9	56	8	575	118	226	1005	63	1.2009	0.0074	0.0030
25-D13	54	55	3812	859	225	2953	720	1486	150	497	91	8	79	14	89	19	57	9	52	7	533	117	200	943	56	1.0982	0.0080	0.0030
25-D13	55	56	7199	1712	238	5487	1390	2702	279	921	179	16	156	28	181	38	118	17	105	14	1054	110	428	1922	130	2.2086	0.0075	0.0030
25-D13	56	57	4383	1187	271	3196	782	1585	161	547	111	10	102	19	127	27	85	13	7									

25-D13	147	148	4461	1165	26.1	3296	780	1634	166	596	111	10	105	19	123	27	83	13	78	11	706	97	343	1414	105	1.7223	0.0045	0.0020	
25-D13	148	1	4952	1145	27.1	3076	725	1511	155	570	105	10	103	18	119	26	81	12	76	11	698	81	336	1369	108	1.6885	0.0037	0.0010	
25-D14	05	1	9452	2382	25.2	7070	1624	3550	363	1266	245	23	217	40	257	54	165	26	154	21	1448	86	632	2532	208	3.2284	0.0067	0.0030	
25-D14	1	2	4513	1142	25.3	3372	785	1689	168	607	113	10	103	19	122	25	81	12	74	11	693	95	313	1249	96	1.6075	0.0039	0.0020	
25-D14	2	3	4156	1047	25.2	3109	738	1554	156	552	101	9	94	18	113	24	74	11	67	10	637	98	289	1175	89	1.4859	0.0049	0.0020	
25-D14	3	4	2373	644	27.2	1729	425	853	85	301	60	5	55	11	68	14	45	7	44	6	394	91	189	713	53	0.9739	0.0031	0.0010	
25-D14	4	5	2983	777	26.1	2206	558	1086	111	371	73	6	67	13	80	17	53	8	51	8	480	106	211	855	62	1.1036	0.0051	0.0020	
25-D14	5	6	3141	755	24.0	2386	588	1184	119	409	79	7	68	12	79	16	51	8	49	7	464	118	199	862	58	1.0307	0.0055	0.0020	
25-D14	6	7	2531	616	24.3	1915	481	947	95	327	60	6	55	10	62	13	41	6	39	5	384	112	157	707	47	0.8510	0.0047	0.0020	
25-D14	7	8	779	250	23.6	1153	119	414	78	119	414	78	7	69	13	82	17	54	8	50	7	416	116	205	871	67	1.0717	0.0043	0.0020
25-D14	8	9	5945	1582	26.6	4363	1010	2205	216	766	152	14	143	27	170	36	114	18	108	15	954	195	447	1722	139	2.8289	0.0045	0.0020	
25-D14	9	10	5068	1211	23.9	3856	847	1935	197	731	135	12	120	20	131	29	90	13	84	11	714	78	330	1386	105	1.7695	0.0042	0.0020	
25-D14	10	11	3436	694	20.3	2740	597	1370	143	528	94	8	76	12	75	16	48	7	43	6	414	95	162	847	53	0.9118	0.0048	0.0020	
25-D14	11	12	2801	694	24.8	2107	516	997	111	404	72	7	67	11	73	16	51	7	48	6	414	83	186	797	57	1.0671	0.0041	0.0020	
25-D14	12	13	3113	767	24.6	2346	572	1120	123	440	83	8	70	13	83	18	56	8	52	7	460	90	205	872	63	1.1522	0.0044	0.0020	
25-D14	13	14	3472	850	24.5	2622	619	1296	133	476	90	8	80	14	89	19	61	9	58	8	511	99	231	957	71	1.3022	0.0044	0.0020	
25-D14	14	15	2062	826	27.0	2236	544	1049	117	433	85	8	76	13	88	19	62	9	59	8	493	95	234	925	72	1.1914	0.0037	0.0010	
25-D14	15	16	6541	1702	26.0	4840	1111	2408	246	892	167	16	157	28	182	41	128	18	122	17	1007	79	484	1888	158	2.5868	0.0044	0.0020	
25-D14	16	17	5071	1289	25.4	3782	867	1873	191	706	132	13	119	21	137	30	98	14	91	12	768	90	366	1471	118	2.0127	0.0042	0.0020	
25-D14	17	18	2449	577	23.6	1872	459	884	101	358	64	6	57	10	62	13	42	6	39	5	343	120	149	683	47	0.8415	0.0054	0.0020	
25-D14	18	19	2895	749	25.9	2146	530	1006	112	413	77	7	70	12	79	18	54	8	53	7	448	95	204	846	64	1.1401	0.0045	0.0020	
25-D14	19	20	2532	640	26.1	1872	463	880	101	356	67	6	61	11	72	15	49	7	48	6	391	78	193	779	59	1.0671	0.0033	0.0010	
25-D14	20	21	2728	691	25.3	2038	600	1182	129	385	74	7	65	11	72	16	52	7	415	87	489	86	358	1866	136	2.8766	0.0036	0.0020	
25-D14	21	22	4492	1121	25.0	3371	771	1689	169	616	115	11	107	18	120	26	85	12	80	11	643	89	315	1200	101	1.7378	0.0046	0.0020	
25-D14	22	23	4033	1004	24.9	3029	699	1511	152	551	107	10	94	17	108	24	76	11	71	10	593	89	291	1180	93	1.5534	0.0045	0.0020	
25-D14	23	24	2552	629	24.6	1923	469	903	101	377	67	6	63	11	66	14	46	6	44	6	372	101	178	753	54	0.9874	0.0045	0.0020	
25-D14	24	25	2873	702	24.4	2171	530	1022	116	418	78	7	66	11	74	16	50	7	47	6	424	99	188	838	60	1.0698	0.0045	0.0020	
25-D14	25	26	4423	1143	25.8	3280	763	1628	166	600	112	11	106	18	121	27	83	12	78	10	687	91	314	1277	102	1.7155	0.0049	0.0020	
25-D14	26	27	4044	1045	25.9	2999	697	1486	148	551	107	10	97	17	111	25	77	11	74	10	622	71	313	1215	100	1.7223	0.0041	0.0020	
25-D14	27	28	3223	738	24.5	2479	600	1182	129	385	74	7	65	11	72	16	52	7	415	87	489	86	358	1866	136	2.8766	0.0036	0.0020	
25-D14	28	29	3153	786	24.9	2367	568	1134	124	449	84	8	75	13	83	19	56	8	53	7	471	83	215	917	69	1.2049	0.0042	0.0020	
25-D14	29	30	3643	876	24.0	2767	652	1382	137	497	90	9	83	15	92	20	64	9	59	8	527	99	231	1024	79	1.2941	0.0058	0.0020	
25-D14	30	31	3931	1038	26.4	2894	683	1437	144	521	99	10	95	17	108	24	77	11	72	10	625	95	305	1260	109	1.6480	0.0047	0.0020	
25-D14	31	32	3095	864	27.9	2231	551	1044	115	433	80	8	77	14	92	20	66	9	62	8	514	83	268	1032	89	1.4251	0.0030	0.0010	
25-D14	32	33	4835	1286	26.6	3550	844	1757	176	637	124	12	118	21	139	30	96	13	92	12	764	81	394	1540	133	2.0870	0.0042	0.0020	
25-D14	33	34	3279	869	26.5	2410	596	1152	124	443	87	8	80	14	91	20	63	9	59	8	526	102	243	1034	84	1.3400	0.0060	0.0020	
25-D14	35	36	2674	694	25.2	2042	531	954	104	377	75	7	69	12	80	18	54	8	54	7	442	98	242	985	80	1.1444	0.0044	0.0020	
25-D14	35	36	5928	1718	29.0	4210	1004	2082	207	749	155	13	150	28	183	42	136	19	129	17	1013	78	570	2327	220	2.9042	0.0025	0.0010	
25-D14	36	37	9892	2882	29.1	7010	1847	3341	331	1225	242	23	246	46	313	71	230	33	219	30	1695	58	976	3901	349	5.0115	0.0029	0.0020	
25-D14	37	38	2810	748	26.6	2063	524	969	107	385	71	7	66	12	77	17	57	8	54	8	450	79	246	992	79	1.3427	0.0037	0.0010	
25-D14	38	39	2742	742	27.1	2000	471	980	104	366	71	7	65	12	82	17	54	8	52	7	446	85	222	894	69	1.3008	0.0038	0.0010	
25-D14	39	40	2810	774	27.6	2036	482	1002	104	371	70	7	69	12	83	17	57	8	56	8	466	86	237	934	73	1.3643	0.0038	0.0010	
25-D14	40	41	4082	1109	27.2	2974	665	1548	142	512	97	10	95	17	123	26	83	12	82	11	660	83	344	1334	111	1.9452	0.0049	0.0020	
25-D14	42	43	4161	1261	26.2	3179	729	1732	164	587	115	12	109	20	136	29	93	13	93	12	752	75	383	1511	128	2.1613	0.0036	0.0010	
25-D14	42	43	2869	772	27.6	2077	489	1018	106	384	73	7	69	12	84	18	57	8	55	8	451	91	237	969	74	1.3778	0.0039	0.0010	
25-D14	43	44	6105	1724	28.2	4381	968	2279	213	757	150	15	148	27	191	40	129	19	126	16	1030	82	522	2081	175	2.9312	0.0046	0.0020	
25-D14	44	45	6462	1821	28.2	4641	1020	2414	225	807	158	17	156	28	204	42	141	20	136	17	1076	77	570	2441	187	3.1744	0.0045	0.0020	
25-D14	45	46	4351	1166	26.8	3186	695	1677	153	544	107	10	103	18	130	27	88	12	87	11	688	78	369	1431	118	1.8082	0.0039	0.0010	
25-D14	46	47	2862	770	26.9	2091	487	1031	106	390	71	7	68	12	83	18	57	8	56	8	461	82	241	966	77	1.3711	0.0042	0.0010	
25-D14	47	48	2856	776	27.2	2079	489	1026	106	378	73	8	67	12	85	18	57	8	55	7	467	97	234	966	77	1.3711	0.0042	0.0010	
25-D14	49	50	4596	1256	27.3	3339	729	1732	164	587	115	12	109	20	136	29	93	13	93	12	752	75	383	1511	128	2.1613	0.0036	0.0010	
25-D14	49	50	2959	757	26.0	2152	497	1056	111	406	75	7	69	12	81	17	54	8	54	7	455</								

25-D17	150	151	4923	1160	23.6	3763	867	1830	200	720	135	12	117	21	130	27	83	12	76	10	684	102	242	1034	76	1.2049	0.0080	0.0020
25-D17	151	152	4688	983	21.0	3705	842	1800	202	720	130	11	105	18	108	23	67	10	58	8	587	113	229	1192	81	1.1617	0.0060	0.0020
25-D17	152	153	4625	1112	24.0	3513	839	1720	181	643	120	11	106	19	119	27	80	12	74	10	664	91	305	1363	110	1.4859	0.0049	0.0020
25-D17	153	154	2699	584	21.6	2115	494	1050	110	387	68	6	57	10	62	13	41	6	39	6	349	83	166	737	56	0.8334	0.0033	0.0010
25-D17	154	155	1091	236	21.6	856	204	408	47	165	29	2	24	4	25	5	17	3	17	3	138	75	78	335	27	0.3904	0.0008	0.0000
25-D17	155	156	3276	903	27.6	2373	557	1165	123	437	83	8	74	14	94	22	70	12	77	11	530	94	439	1711	142	2.1343	0.0028	0.0020
25-D17	156	157	3751	947	25.2	2804	691	1370	142	498	95	8	85	16	101	22	68	10	65	9	570	114	276	1169	93	1.3576	0.0071	0.0020
25-D17	157	158	3949	968	24.5	2981	747	1462	150	516	98	9	86	16	105	23	72	11	67	10	578	126	294	1203	103	1.4386	0.0050	0.0020
25-D17	158	159	2755	669	24.3	2086	507	1027	106	370	70	6	61	11	75	16	51	8	48	7	392	108	206	837	77	0.9955	0.0035	0.0010
25-D17	159	160	3790	1011	26.7	2779	671	1351	144	505	99	9	90	17	111	25	78	12	73	10	594	71	341	1306	126	1.5872	0.0020	0.0010
25-D17	160	161	7785	2060	26.5	5725	1460	2727	293	1031	197	18	186	34	227	51	156	24	147	20	1215	65	658	2418	250	3.1068	0.0054	0.0020
25-D17	161	162	4471	1228	27.5	3244	780	1578	169	591	115	10	108	20	131	30	94	14	93	13	724	87	473	1939	160	2.3707	0.0038	0.0030
25-D17	162	163	1756	420	23.9	1336	337	639	70	241	45	4	39	7	45	10	30	5	28	4	250	87	130	521	41	0.6484	0.0032	0.0010
25-D17	163	164	5196	1283	24.7	3913	988	1867	200	709	138	12	119	22	141	31	92	13	82	11	772	85	296	1243	99	1.4521	0.0083	0.0020
25-D17	164	165	3904	981	25.1	2923	715	1431	150	520	98	9	88	16	103	23	70	11	68	9	593	99	290	1192	95	1.4386	0.0045	0.0020
25-D17	165	166	3000	724	24.1	2276	568	1120	114	393	74	7	65	12	78	17	53	8	50	7	434	98	219	853	74	1.0887	0.0056	0.0020
25-D17	166	167	3694	948	25.7	2746	678	1351	138	478	92	8	84	16	102	23	73	11	68	9	561	87	303	1111	101	1.4386	0.0042	0.0010
25-D17	167	168	2586	618	23.9	1968	480	946	103	367	66	6	56	9	65	13	42	6	41	6	380	75	163	727	50	0.7862	0.0063	0.0020
25-D17	168	169	4411	1164	26.4	3247	807	1554	167	596	113	10	98	17	122	25	81	12	75	10	724	98	328	1380	102	1.6885	0.0067	0.0020
25-D17	169	170	6056	1780	29.4	4276	1074	2058	219	756	155	14	142	27	191	40	130	19	124	17	1091	89	561	2076	175	2.7556	0.0079	0.0020
25-D17	170	171	6840	1918	28.0	4922	1202	2438	247	848	170	16	161	28	203	42	138	20	132	18	1176	85	583	2213	182	2.9042	0.0051	0.0020
25-D17	171	172	6632	1860	28.0	4772	1167	2340	238	844	168	15	153	28	195	42	138	20	131	18	1137	79	585	2218	186	2.9177	0.0063	0.0020
25-D17	172	173	3891	1116	28.7	2775	685	1321	143	511	106	10	97	16	114	23	72	10	64	9	712	78	264	1057	83	1.3400	0.0057	0.0010
25-D17	173	174	3410	909	26.7	2501	627	1208	129	441	89	8	76	14	94	19	63	9	59	8	566	87	269	1074	84	1.3508	0.0043	0.0010
25-D17	174	175	4219	1174	27.8	3045	773	1468	156	531	108	9	97	17	123	26	84	12	81	11	723	91	364	1414	116	1.8641	0.0049	0.0020
25-D17	175	176	5161	1663	32.2	3498	828	1652	183	673	148	15	145	25	177	36	112	15	94	12	1046	82	336	1323	105	1.6885	0.0100	0.0020
25-D17	176	177	6106	1915	31.4	4191	976	1990	222	815	172	16	168	29	210	42	131	18	111	14	1192	81	256	1045	76	1.2954	0.0128	0.0020
25-D17	177	178	5971	1398	23.4	4573	1152	2254	229	783	143	12	129	23	149	30	97	13	79	11	869	82	243	991	75	1.2292	0.0068	0.0010
25-D17	178	179	4775	1420	29.7	3356	802	1609	180	628	126	11	115	21	148	32	106	14	100	14	870	58	445	1642	137	2.1545	0.0053	0.0010
25-D17	179	180	1243	405	32.6	837	209	409	43	148	26	2	25	5	37	9	33	5	37	6	249	83	234	900	68	1.1725	0.0031	0.0010
25-D17	180	181	7001	1954	27.9	5048	1231	2469	254	902	176	15	165	29	209	44	141	20	132	17	1198	71	581	2161	192	2.7826	0.0061	0.0020
25-D17	181	182	3324	922	27.8	2401	611	1149	124	427	84	7	74	14	96	21	70	10	64	8	565	83	321	1277	108	1.5534	0.0033	0.0010
25-D17	182	183	3491	876	25.1	2615	604	1253	140	511	99	8	84	13	94	19	60	8	55	7	535	77	184	894	66	0.8902	0.0033	0.0020