

31 March 2026

PRIORITY GOLD TARGETS DEFINED AT SHAIB MARQAN PROJECT, SAUDI ARABIA

HIGHLIGHTS

- High-resolution ground magnetic survey completed over 91.88 km² at the Shaib Marqan Project
- Magnetics define multiple structural corridors and fault-controlled targets prospective for gold mineralisation. Seven major fault systems identified
- Strong spatial correlation between magnetic anomalies and previously reported high-grade sample assay surface results of up to 40.35 g/t Au¹
- Four priority target zones (Z1–Z4) defined for immediate follow-up exploration and drilling
- Rock chip sampling program to commence shortly at defined targets followed by a planned first phase 5,000 metre drill program

Resource Minerals International Ltd (ASX:RMI) ("RMI" or the "Company") is pleased to report the results of an extensive and detailed ground magnetic survey at its Shaib Marqan Project in Saudi Arabia. The Shaib Marqan Project is one of two RMI projects here with the second project, Wadi Salamah, located 150 km to the west (Figure 1).

Shaib Marqan is located within the Arabian Shield and covers ~91.88 km². This region is considered prospective for gold mineralisation and remains largely untested by modern systematic exploration. The survey represents the first phase of systematic work at the project and provides a critical dataset for defining structural controls and priority drill targets.

Executive Chairman, Asimwe Kabunga, said: "This magnetic survey is a significant step and investment in advancing our Saudi Arabian portfolio. The results confirm that Shaib Marqan hosts a structurally controlled system with multiple target zones aligned along major regional fault corridors. Particularly encouraging is the clear spatial association between magnetic anomaly boundaries and the high-grade surface results previously reported, which included peak assays of 40.35 g/t Au¹. By identifying seven major fault systems, including the interpreted F1 and F2 regional structures, we have moved from regional-scale exploration to defined, high-priority targets. This survey provides a clear framework to guide our next phase of work as we focus on advancing these targets through field validation and drilling."

Shaib Marqan Project

Shaib Marqan is situated ~240 km south-west of Riyadh and hosted within southern section of the Ar Rayn Terrane (Figure 1). The project is near the major northwest striking Al Amar

¹ See ASX Announcement 13th October 2025

fault zone which bounds the Ar Rayn Terrane. A significant north-south striking splay of the Al Amar fault bisects the Shaib Marqan project area with multiple subordinate northeast and east west structures in a structurally complex area.

The Ar Rayn Terrane (Figure 1) hosts multiple mineral systems and mineral commodities, including volcanogenic massive sulphide ("VMS")-hosted copper and zinc, epithermal and orogenic gold, and iron oxide copper/gold ("IOCG") deposits.

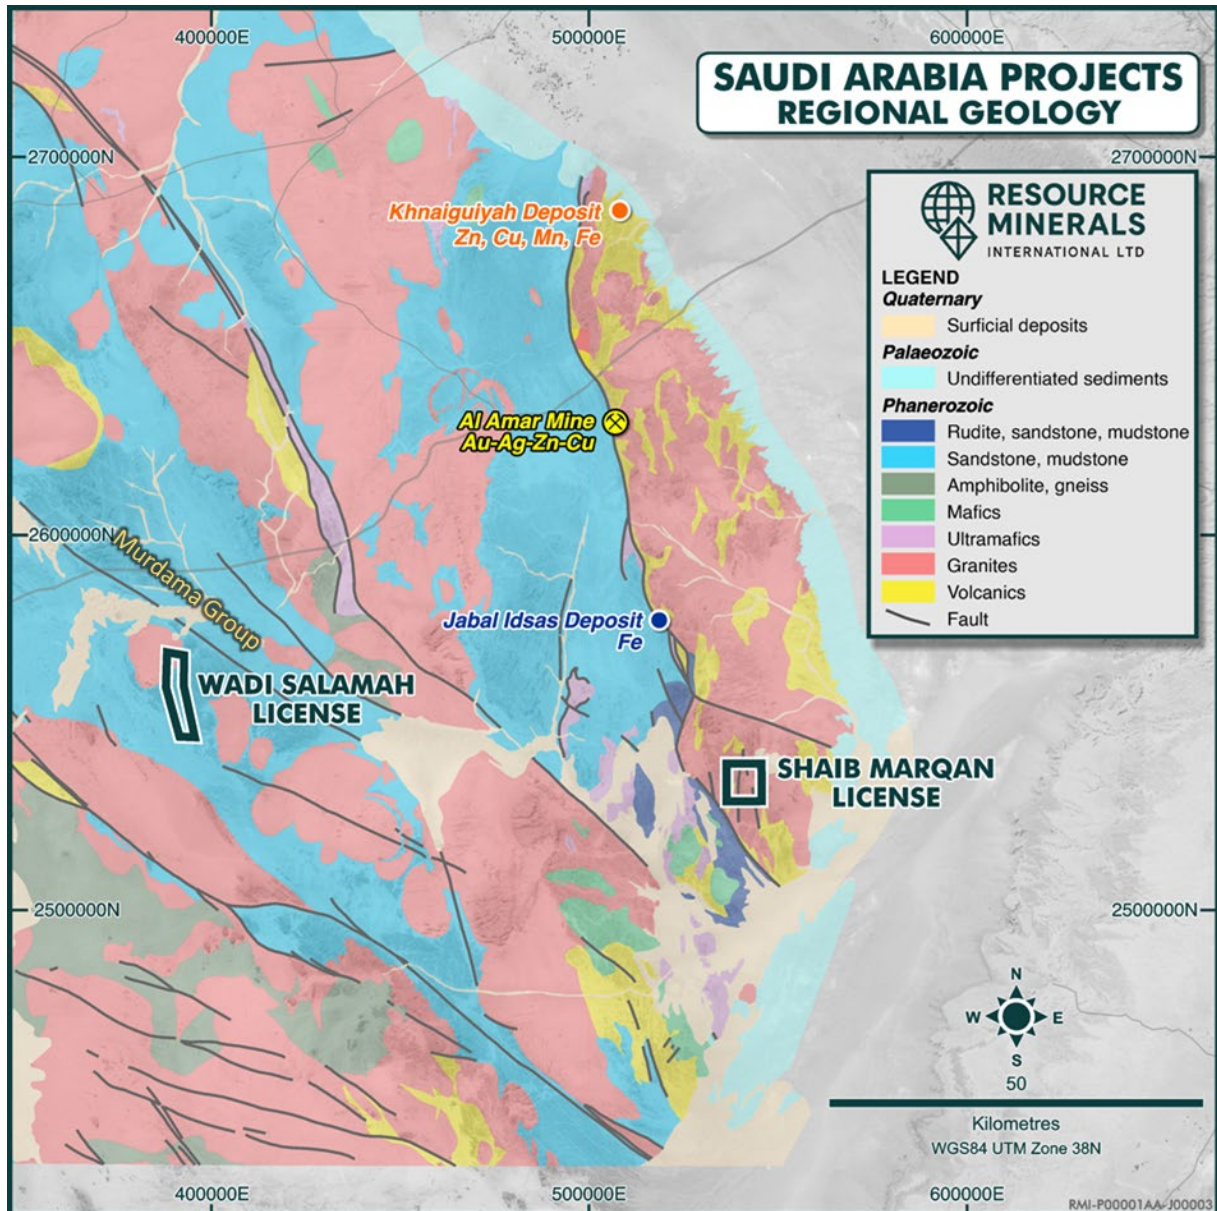


Figure 1. 1:1 million scale regional geology Shaib Marqan and Wadi Salamah license areas

High-Resolution Magnetic Survey

The primary objective of the geophysical survey was to expand beyond known surface mineralisation and identify the key structural controls to identify "blind" targets beneath the

For personal use only

surface cover. Magnetic surveying at Shaib Marqan was completed in collaboration with CNNC Geological Science and Technology Co. Ltd. Data was collected from E-W oriented lines, approximately perpendicular to the structural strike using a GSM-19W Overhauser magnetometer.

A total measuring area of 91.88 km² was covered in this acquisition, with 101 survey lines laid out, a total length of 932 km, and the measurement specifications of 100 m line spacing and 20 m point spacing were adopted, achieving full coverage of the work area. Results were contoured as total magnetic field, first vertical derivative, and second vertical derivative map products. Preliminary interpretation of the results indicates a geological terrain of multiple lithologies and abundant structural elements. Eight key structures, F1 to F8, have been interpreted within the project area (Figure 2).

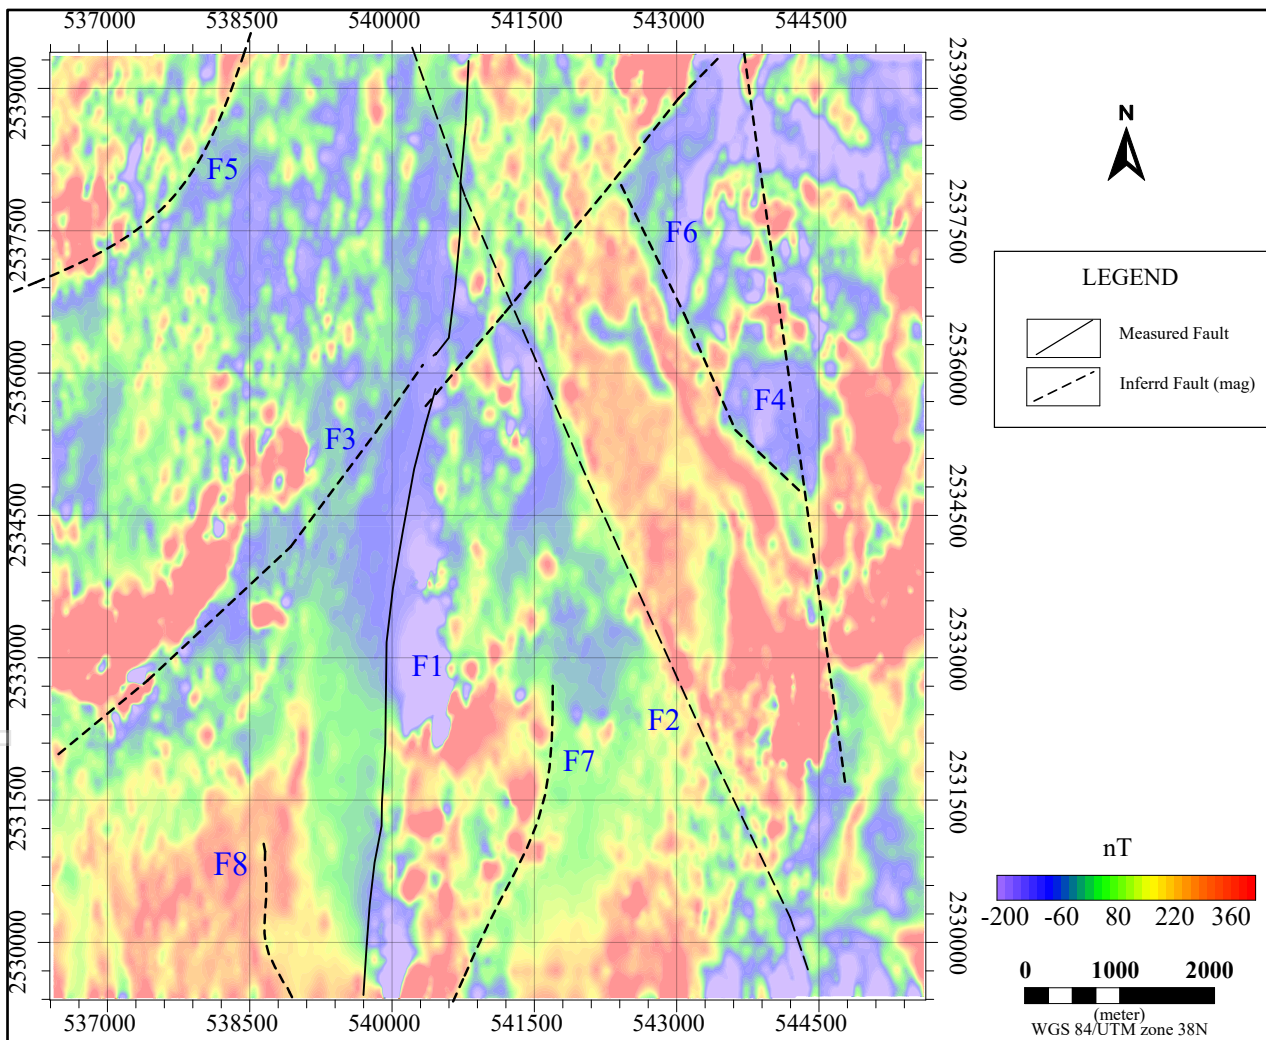


Figure 2. RTP Magnetic Anomalies and Inferred Structures of the Shaib Marqan Area

The integration of lithological information, geochemical data¹ and location of ancient workings resulted in the identification of four structural targets, Z1-4 (Figure 3; Table 1)

Table 1. Structural targets Z1 to Z4 (See Figure 3 for location)

Target Area	Structural Interpretation and Targets
Z1 (Central)	Gold mineralization is structurally controlled by the main F1 phyllonite zone, in conjunction with subsidiary faults related to intrusive bodies and lithological boundaries. Target N to NNW faults (F7) along lithological boundaries
Z2 (Southwest)	Gold mineralization is controlled by a northerly-trending fault (F8). Favourable target for the exploration of contact zone-type gold deposits associated with the contact between Ru rock masses and HT granite intrusions. Target F8 faults along boundaries, along western lithological contact
Z3 (North)	Key target areas include the vicinity surrounding the intersection of the northwest-trending F6 and northeast-trending F3 structures, as well as the northern segment of the area bounded by the major F2 and F6 faults. Target fractured and altered rocks within the F2, F3 and F6 fault zones
Z4 (West)	The existing ancient gold occurrence is in the transition zone between high and low magnetic anomalies and adjacent to the inferred F3 structure. Target NW-trending F3 fault hosting ancient gold occurrence

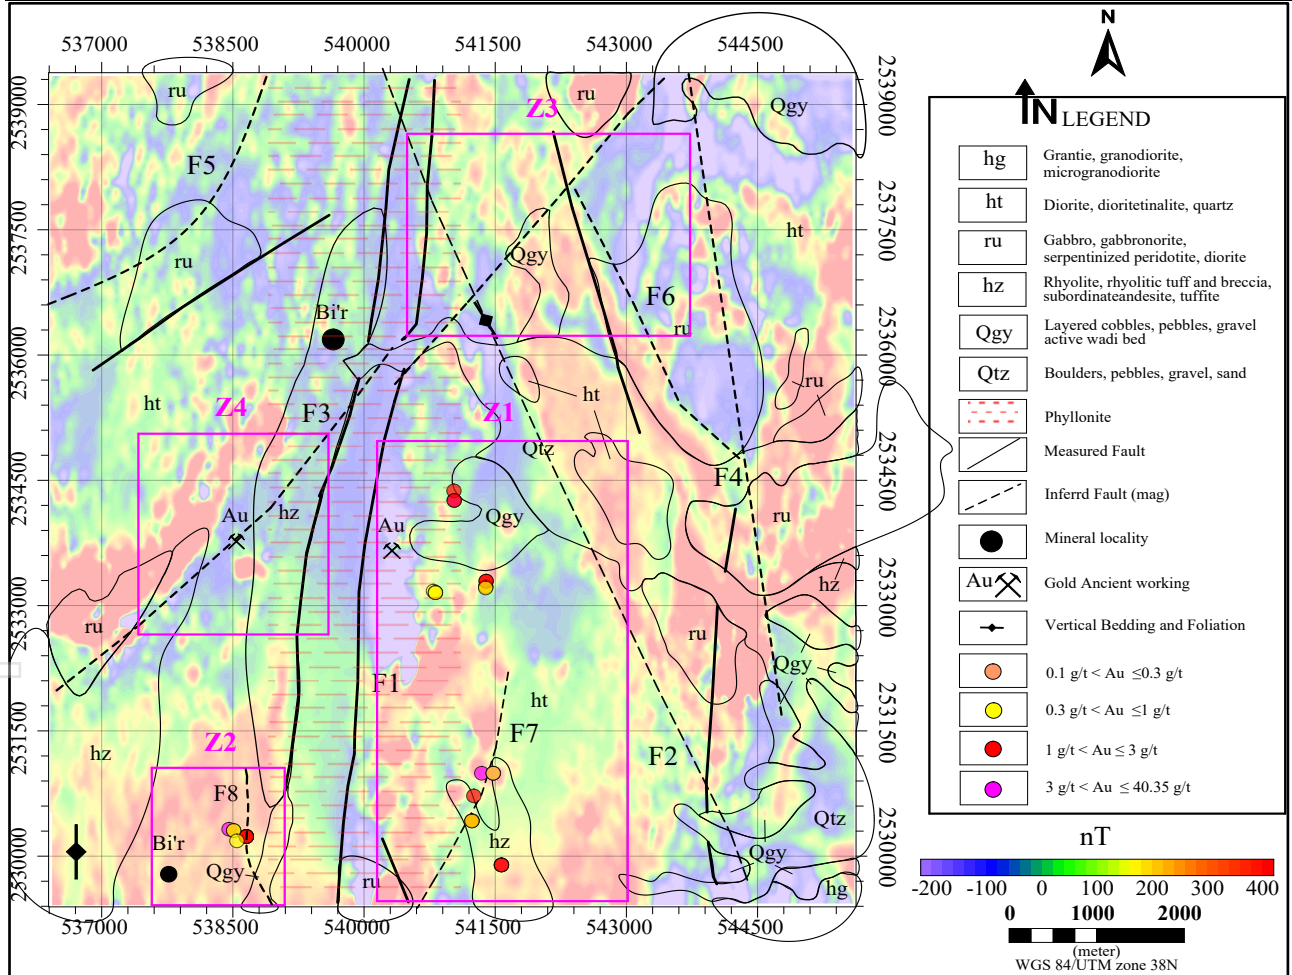


Figure 3. Target Zones (Z1-Z4), Rock Samples on RTP Magnetic Anomaly Map, Shaib Marqan Area (on TMI IVD; EPSG 32638: WGS84 UTM 38N)

Exploration Next Steps

The Company is currently planning follow-up field work programs including detailed 1:10,000 geological mapping and surface rock sampling of priority zones. Based on these results an initial scout drilling program of up to ~5,000m, and supplementary IP and resistivity surveys to test vertical continuity is planned. The field program will begin in Q2 with the planned commencement of drilling anticipated in Q3 2026.

END

This ASX announcement has been authorised for lodgement by the Board of Resource Minerals International Ltd.

For further information, contact	
Asimwe Kabunga Executive Chairman rmi@resmin.com.au	Ben Jarvis Six Degrees Investor Relations 0413 150 448 or ben.jarvis@sdir.com.au

About Resource Minerals International Ltd

The strategic intent of Resource Minerals International Ltd (ASX:RMI) is to establish a long-term business based on mineral development delivering consistent shareholder value whilst operating in a sustainable way within the community and environment in which we operate.

In Tanzania, RMI has two exploration projects targeting Copper-Gold and six projects focussed on Nickel occurrences in sulphides within known and prolific mafic and ultramafic intrusions. In Finland, RMI has two projects, focusing on the exploration of Lithium. In Saudi Arabia, RMI has two exploration projects focussed on exploration for gold and silver within the Arabian-Nubian Shield (ANS) which extends across much of Saudi Arabia and eastern Egypt and Eritrea and hosts significant mineral deposits.

The Board has strong ties to Tanzania, Chaired by Asimwe Kabunga, a Tanzanian-born Australian entrepreneur who was instrumental in establishing the Tanzania Community of Western Australia Inc. and served as its first President.

Tanzanian Projects	Finnish Projects
<p><u>Copper/Gold</u></p> <ul style="list-style-type: none"> Mpanda and Mbozi Projects 	<p><u>Lithium</u></p> <ul style="list-style-type: none"> Kola Lithium Project (Köyhäjoki exploration permit) Located in the most significant lithium- mining region of Finland,

Tanzanian Projects	Finnish Projects
<p>Both projects are located within the Ubendian Orogenic Belt, a major source of Ni, Cu and Au resources within Tanzania.</p> <p style="text-align: center;"><u>Nickel</u></p> <ul style="list-style-type: none"> • Kabanga North Nickel Project Situated along strike from the Kabanga Nickel Project, which has an estimated mineral resource of 58mt @ 2.62% Ni, or nickel equivalent grade of 3.14% (including cobalt and copper)¹. • Kapalagulu Project 32km mapped mafic/ultramafic sequence with historical reports noting nickel, PGE and copper anomalism. • Kabulwanyele Project The project is located in the Mpanda District of Tanzania covering approximately 20.5 square kilometres. • Southern Projects (Liparamba, Kitai, Mbinga) Previously explored by BHP/Albidon and Jacana Resources. 	<p>and directly south of Keliber's flagship Syväjärvi and Rapasaari deposits.</p> <ul style="list-style-type: none"> • Hirvikallio Lithium Project (Laitainen permit application) Initial exploration works completed by GTK across the project's area identified approximately 25 km² with pegmatite dykes returning promising results including 5m @ 2.30% Li₂O and 2m @ 1.33% Li₂O².
	<p style="text-align: center;">Saudi Arabian Projects</p> <p style="text-align: center;"><u>Gold</u></p> <ul style="list-style-type: none"> • Shaib Marqan Project is in the southern section of the Ar Rayn Terrane and covers an area of 91.8km². • Wadi Salamah Project occurs within Murdama group rocks of the Zaydi formation and covers an area of 98.7km².

Competent Person Statement

The information in this release that relates to Exploration Results is based on information compiled and reviewed by Dr Warren Thorne a Competent Person who is a member of Australasian Institute of Mining and Metallurgy Geoscientists (AUSIMM) and Head of Exploration at Eryt Geological Services. Dr Thorne has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for the Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Dr Thorne consents to the inclusion in this release of the matters based on is information in the form and context in which it appears.

Where the Company refers to Exploration Results in this announcement (referencing previous releases made to the ASX), the Company confirms that it is not aware of any

¹ Refer to ASX announcement dated 9 May 2022 including the Competent Person Statement disclosed, and Glencore Resources and Reserves as at 31 December 2019. The Mineral Resource Estimate is broken down into the following classifications – 13.8mT @ 2.49% Ni Measured, 23.4mT @ 2.72% Ni% indicated & 21mT @ 2.6% Ni inferred. RMI does not have any interest in the Kabanga Nickel Project.

² Refer to ASX announcement dated 7 June 2022 "Nickel and Lithium Tenements under Exclusive Option" including the disclosed Competent Person Statement.

new information or data that materially affects the information included in the relevant market announcements.

Forward Looking Statements

Some of the statements appearing in this announcement may be forward-looking statements. You should be aware that such statements are only predictions and are subject to inherent risks and uncertainties. Those risks and uncertainties include factors and risks specific to the industries in which the Company operates and proposes to operate as well as general economic conditions, prevailing exchange rates and interest rates and conditions in the financial markets, among other things. Actual events or results may differ materially from the events or results expressed or implied in any forward- looking statement. No forward-looking statement is a guarantee or representation as to future performance or any other future matters, which will be influenced by several factors and subject to various uncertainties and contingencies, many of which will be outside the Company's control.

The Company does not undertake any obligation to update publicly or release any revisions to these forward-looking statements to reflect events or circumstances after today's date or to reflect the occurrence of unanticipated events. No representation or warranty, express or implied, is made as to the fairness, accuracy, completeness or correctness of the information, opinions or conclusions contained in this announcement. To the maximum extent permitted by law, neither of the Company's Directors, employees, advisors or agents, nor any other person, accepts any liability for any loss arising from the use of the information contained in this announcement. You are cautioned not to place undue reliance on any forward-looking statement. The forward-looking statements in this announcement reflect views held only as at the date of this announcement.

This announcement is not an offer, invitation or recommendation to subscribe for, or purchase securities by the Company. Nor does this announcement constitute investment or financial product advice (nor tax, accounting or legal advice) and is not intended to be used for the basis of making an investment decision. Investors should obtain their own advice before making any investment decision.

JORC Code, 2012 Edition – Table 1 report

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	Not applicable, no drilling being reported.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	Not applicable, no drilling being reported.

¹ See ASX Announcement 13th October 2025

For personal use only

Criteria	JORC Code explanation	Commentary
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	Not applicable, no drilling being reported.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	Not applicable, no drilling being reported.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	Not applicable, no drilling being reported.
Quality of assay data and	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used 	Not applicable, no drilling being reported.

Criteria	JORC Code explanation	Commentary
laboratory tests	<p>and whether the technique is considered partial or total.</p> <ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<p>GEM GSM-19W Overhauser, DGPS upgraded, rapid sampling magnetometers (2x Rover unit and Base station) 3s Sampling Rate.</p> <p>Not applicable, no drilling being reported.</p>
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	Not applicable, no drilling being reported.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<p>Not applicable, no drilling being reported.</p> <p>All results reported use EPSG 32638: WGS84 UTM 38N</p>
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<p>The ground magnetic survey was acquired along 20 m spaced lines with a 3s sampling rate along line.</p> <p>Not applicable, no drilling being reported.</p> <p>Not applicable, no assay results being reported.</p>

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<p>The ground magnetic survey lines were orientated perpendicular to the lithological strike</p> <p>Not applicable, no assay results being reported.</p>
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	Not applicable, no assay results being reported.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	Data from the ground magnetic survey were averaged from multiple readings at each station to improve measurement reliability. Daily QA/QC checks were undertaken to confirm data accuracy and consistency. Repeat stations were collected throughout the survey to verify data stability and ensure that acquisition standards were maintained.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<p>The Shaib Marqan project is located in the central region of the Kingdom, of Saudi Arabia, approx. 240 km south-west of Riyadh in central Saudi Arabia.</p> <p>The project is covered by a 91.8 km² granted exploration licence number 20240300037 and was granted on 17 August 2025 and has an initial term of 5 years.</p>
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<p>Most of the exploration work within Shaib Marqan has been conducted by the Bureau de Recherche's Geologiques et Minière's (BRMG), beginning in 1956, with further mapping, sampling, petrography, airborne magnetic and scintillometer surveys completed in 1970. In 1983 BRGM conducted soil rock sampling, channel sampling, dump sampling, stream sediment sampling.</p> <p>Detailed geological mapping of the Wadi Al Mulayh Quadrangle (Sheet 22H was completed in 1984.</p> <p>Total-intensity aeromagnetic maps of the Arabian Shield were completed in 1985.</p>

Criteria	JORC Code explanation	Commentary
		Auking Mining Limited conducted reconnaissance rock chip sampling in 2024 with 11 samples collected from several locations.
Geology	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<p>Shaib Marqan occurs in the Ar Reyn Terrane comprised of mainly syn-to post-tectonic tonalitic and granodioritic gneisses that intrude tholeiitic to calc alkaline volcanic rocks of the Al Amar group.</p> <p>The Shaib Marqan project is dominated by volcanic rocks Syn to post tectonic tonalite, diorite, gabbro, rhyolite tuff, marble and andesite of the Shalahib formation of the Al Amar Group.</p> <p>Regional mineralisation is primarily epithermal Au, with the Al Amar deposit being the most notable example.</p> <p>Mineralisation with the Shaib Marqan project area has historically been identified within metre-thick and 300m long auriferous quartz veins inside granitic and intrusive massifs</p>
Drill hole Information	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	Not applicable, no drilling being reported.
Data aggregation methods	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	Not applicable, no drilling being reported.

Criteria	JORC Code explanation	Commentary
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i> 	Not applicable, no assay results being reported.
<i>Diagrams</i>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	All appropriate maps and plans and sections are included in the body of the report including maps of the survey areas and the processed images.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	All appropriate information is included in the report
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<p>Ground Magnetic Survey type — Ground magnetic survey on 100 m-spaced lines for 932 line km</p> <p>Instrumentation — GEM GSM-19W Overhauser rapid-sampling magnetometers.</p> <p>Acquisition parameters — 3-second sampling rate.</p> <p>Base station control — Diurnal variations corrected using a co-located base-station magnetometer.</p> <p>Data processing — Magnetic data processed and filtered using proprietary geophysical software to produce final datasets suitable for interpretation.</p> <p>Data Quality and Reliability Daily QA/QC checks were undertaken to confirm data accuracy and consistency. High sensitivity magnetometers (0.01nT) and GPS (sub 1 cm) units were used in data acquisition. Data was averaged to remove effect of any erroneous measurements</p>
<i>Further work</i>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	Future work programs are anticipated to include stages of field verification, drill hole planning and RC/AC drilling programs.