



BLACK CANYON

ASX: BCA

08 April 2026

Beneficiation Testwork Delivers Manganese Grades over 40%

Highlights

- Sighter level beneficiation testwork produced a high-grade manganese oxide concentrate from each of the lower, mid and high-grade Wandanya feeds using a simple density-based technique (Heavy Liquid Separation – HLS).
- Significant manganese upgrades, on average, produced close to or over the 44% Mn oxide benchmark:
 - High-Grade MnO composite upgraded from a raw feed grade of **45% Mn to grades between 48.2% to 49.9% Mn***
 - Medium-Grade MnO composite upgraded from a raw feed grade of **30.9% Mn to grades between 39.3% to 40.3% Mn***
 - Low-Grade MnO composite upgraded from a raw feed grade of **24.4% Mn to grades between 37.9% to 41.8% Mn***
- **Mn recoveries for the high and medium-grade feeds ranging between 91% and 87%** respectively with low deleterious elements from the beneficiated Mn products.
- Additional HLS testwork to continue followed by larger scale dense media separation (DMS)
- The RC rig has now mobilised to site to commence the **15,000m infill and expansion drill program** with baseline environmental and further heritage surveys through April.

Black Canyon's Managing Director Brendan Cummins said:

“Continuing on from the positive crush and sizing analysis, the beneficiation testwork applied to the manganese oxide composites have yet again delivered strong results for the project. Most of the manganese product grades from the beneficiated low, medium and high-grade composites either were close to or over 40 % Mn showing the amenability of the mineralisation to upgrade using simple density-based methods.

“The important take away from the metallurgical testwork program is the quality and grade of the manganese oxide product that could potentially be produced from Wandanya. Potential end users remain very interested in our product specifications as we continue to move the project forward through exploration, resource definition and pre-development activities.

* HLS 2.8 g/cm³ & 1-38 mm size fractions

Contact

35 Richardson Street West Perth, WA, 6005
E info@blackcanyon.com.au
W www.blackcanyon.com.au

Capital Structure (ASX: BCA)

Shares on Issue	162.2M
14c Options (exp 14/10/2026)	8.0M
Top 20 Shareholders	45%
Board & Management	8%
Funds & Institutions	28%

Board of Directors

Graham Ascough
Non-Executive Chairman

Brendan Cummins
Managing Director

Simon Taylor
Non-Executive Director

Adrian Hill
Non-Executive Director


Wandanya Project

High-grade Mn & Fe discovery

Balfour Manganese Field

Global MRE 315Mt @10.5% Mn*
Largest Resource in Western Australia

*BCA Announcement 22/10/25

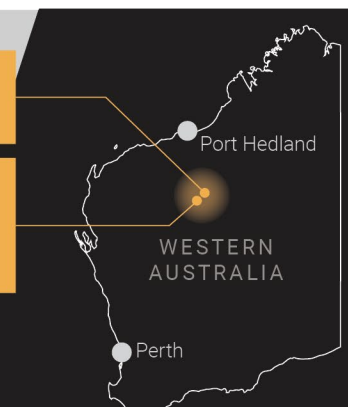

“This phase of sighter level testwork has revealed several conceptual processing options for the Company to consider as we further understand the mineralisation styles, grade distribution and how that impacts grade–recovery curves. The geometallurgical characteristics of the discovery will be important as we examine the processing options to inform potential flowsheet design and cost estimates for a planned Scoping Level economic analysis later in 2026. Having a well-informed mining and processing strategy is a key objective as we develop the Wandanya project.”

Australian manganese explorer and developer, Black Canyon Limited (**Black Canyon or the Company**) is pleased to announce the sighter level Stage 2 HLS results. This follows the initial Stage 1 crush, sizing and assay metallurgical testwork across multiple PQ3 diamond drill core composites received from the Wandanya Project.

Three manganese oxide composites comprising low, medium and high were submitted for heavy liquid separation testwork. The sighter level metallurgical program has demonstrated key benefits of the mineralisation discovered at Wandanya, including;

1. The suitability of all the manganese oxide composites to beneficiate with the application of a simple density-based separation technique.
2. High quality low-impurity content product specification.
3. Over 70% of the manganese grade and recoveries were produced from the fractions over 8mm, which is positive for producing a lump size product¹.
4. Multiple options for developing a final product strategy. This may include producing several saleable products such as a high-grade 42-44% Mn Direct Shipping Ore (DSO), in addition to a blended mid and low-grade feed product to produce a 38-40% Mn concentrate or potentially a combined low, mid and high-grade feed to deliver a 40-42% Mn beneficiated concentrate.

Further testwork will assist in developing the conceptual operating and processing strategies.

With the completion of the Stage 2 HLS testwork the Company is planning additional HLS in preparation for larger scale DMS. The additional HLS testwork will examine blended feeds combining low, medium and high-grade Mn composites in ratios reflecting the current geometallurgical understanding of the discovery.

Wandanya Project (BCA 100%)

Stage 1 Composite Collection

Testwork samples were selected from the PQ3 diamond core drill program completed in November 2025². Representative examples of mineralisation were collected from along the full 3km of strike currently drill tested by the Company focusing on the mineralisation type, geology, grade and spatial distribution. The PQ3 holes twinned previously drilled RC holes and a total of 22 diamond core holes were completed for 298m. Refer to Appendix 1 for the diamond drill collar listing and Appendix 2 for JORC Table 1 information.

Stage 1 of the metallurgical testwork program comprised the collection of representative master composite samples, followed by crushing and homogenisation to ensure consistent and reliable feed material for subsequent testwork. The master manganese composite head grades for the testwork are provided in Table 1.

Table 1: Head grade assays from the manganese oxide (MnO) composites

Manganese Composites	Mn (%)	Fe (%)	Al (%)	Si (%)	Ca (%)	K (%)	Mg (%)	Ba (%)	P (%)	LOI (%)
Low Grade MnO	24.4	6.09	3.13	14.4	0.76	1.24	1.36	0.45	0.01	11.03
Med Grade MnO	30.9	6.85	3.15	9.9	0.93	1.19	0.95	0.93	0.01	12.15
High Grade MnO	45	3.15	1.3	3.6	1.59	0.94	1.07	1.5	0.01	13.65

Stage 2 Heavy Liquid Separation

Following on from the initial crush, sizing and assay metallurgical testwork, the low, medium and high-grade Mn oxide composites were submitted for HLS testwork. The composites were screened at 8mm to produce a fine (-8mm+1mm) and a coarser fraction (+8mm-38mm). The fine and coarse fractions were subjected to heavy liquid separation at a liquid specific gravity (SG) of 2.80 g/cm³.

The objective of the sighter level testwork is to examine the beneficiation characteristics of the Mn oxide composites at various grades. The testwork also assesses the grade-recovery trends for mineralisation styles at various grade ranges with the results consistently demonstrating positive beneficiation outcomes.

At higher feed grades the overall recoveries are high at around 90%, reflecting a higher portion of semi-massive to massive Mn oxide which though coarse crushing liberates well from the gangue. The lower grade Mn oxide composite upgraded from a feed of 24.4% Mn to 40.5% Mn with a lower overall recovery at around 47%. This lower recovery reflects more disseminated and fracture fill related remobilised manganese bands/veins. Further testwork examining a finer crush is planned to potentially increase the recovery of the lower grade style of mineralisation.

The beneficiation grade and recovery information from these initial HLS tests will be used to inform the selection of a number of blends based on relative proportions of low, medium and high-grade feeds to reflect the current geometallurgical understanding of the mineralisation.

The results are displayed in Table 2 and show significant grade uplifts, especially from the lower and moderate feed materials. Table 3 summarises the beneficiated Mn product specifications from the MnO samples tested.

Table 2. HLS testwork summary of results from the MnO composites

MnO Composite	Sample type	Assayed head Mn (%)	Size fraction	HLS Results				
				Parameter	Mn (%) Sinks	Mn Stage Rec (%)	Mn (%) ave Sinks	Mn overall rec (%) Sinks
Low Grade MnO	PQ3 diamond core	24.4	+8mm - 38mm	SG 2.80	41.8	31.8	40.5	46.6
			-8.0mm + 1mm		37.9	14.8		
Med Grade MnO	PQ3 diamond core	30.9	+8mm - 38mm	SG 2.80	40.3	67.4	40.1	87
			-8.0mm + 1mm		39.3	19.5		
High Grade MnO	PQ3 diamond core	45	+8mm - 38mm	SG 2.80	49.1	73.7	48.9	91.2
			-8.0mm + 1mm		48.2	17.4		

Table 3. HLS testwork concentrate element analysis from the moderate and high-grade composites

Composite	Size fraction	Density Parameter	Beneficiated Mn Specification				
			Mn (%)	Fe (%)	Al (%)	Si (%)	P (%)
Low Grade MnO	+8mm - 38mm	SG 2.80	41.8	9.7	1.3	4.1	0.02
	-8.0mm + 1mm		37.9	8.3	2.1	5.8	0.02
Med Grade MnO	+8mm - 38mm	SG 2.80	40.3	7.8	2.0	5.3	0.02
	-8.0mm + 1mm		39.3	7.8	2.2	5.5	0.02
High Grade MnO	+8mm - 38mm	SG 2.80	49.1	2.4	1.0	2.7	0.01
	-8.0mm + 1mm		48.2	3.4	1.1	2.6	0.01

Next Steps

Further metallurgical testwork is underway to examine several low, medium and high-grade blend combinations to reflect the geometallurgy and grade distribution of Wandanya. At the conclusion of this HLS program at least 2 larger scale blends will be formulated for Dense Media Separation (DMS) and assay analysis.

The iron lump samples are currently being tested for strength, durability, and degradation characteristics under impact using drop tower tests.

At the conclusion of the test work program the data will be reviewed, and conceptual flowsheets will be designed for Scoping Level cost estimates. Further larger scale testwork using more diamond drill core or bulk samples from pits to be excavated from site are being considered once the deposit has been drilled out.

Field programs have commenced with substantial progress on the drill line clearing siteworks while the RC Rig is expected to arrive in the coming days for the 15,000m program. The rig will be initially infill drilling the 3km strike of known mineralisation before drilling extensions to the north and east.

Other surveys planned to commence in Q2 include detailed flora/vegetation, fauna, short range endemics (SRE) and further heritage surveys.

- ENDS -

For personal use only

This announcement has been approved by the Board of Black Canyon Limited.

For further details:

Brendan Cummins
Managing Director

Telephone: +61 400 799 756

Email: brendan.cummins@blackcanyon.com.au

For media and broker enquiries:

Jason Mack
White Noise Communications


Telephone: +61 400 643 799

Email: jason@whitenoisecomms.com

ASX Reference List:

1. ASX Announcement 17 March 2025 – Wandanya Metallurgical Results Demonstrate DSO Potential
2. ASX announcement 11 December 2025 – Exploration Update Heritage & Diamond Drilling Completed

About Black Canyon

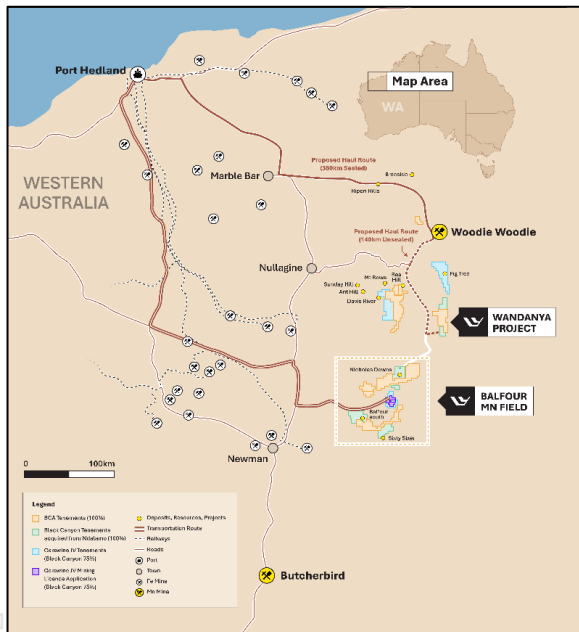

Black Canyon has consolidated a significant land holding over 2,000km² in the underexplored Balfour Manganese Field (BMF) and across the Oakover Basin, in Western Australia.

The Company holds several exploration licenses 100% or under joint venture within the BMF. A Global Mineral Resource (Measured, Indicated & Inferred) of 315 Mt @ 10.5% Mn has been defined across the BMF projects. This MRE comprises 100Mt @ 10.4% Mn (Measured), 173Mt @ 10.2% Mn (Indicated) and 42Mt @ 11.9% Mn (Inferred) – announced to the ASX on 22 October 2025.

The Wandanya Discovery represents a new exploration model on the eastern margin of the Oakover Basin comprising, stratabound high-grade manganese and high-grade iron with significant scale and grade potential.

Manganese continues to have attractive long-term fundamentals where it is essential and non-substitutable in the manufacturing of alloys for the steel industry and a critical mineral in the cathodes of Li-ion batteries.

Compliance Statements

Reporting of Exploration Results and Previously Reported Information

The information in this report that relates to Exploration Results is based on, and fairly represents, information and supporting documentation reviewed by Mr Brendan Cummins, Managing Director of Black Canyon Limited. Mr Cummins is a member of the Australian Institute of Geoscientists, and he has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which has been undertaken to qualify as a Competent Person as defined in the 2012 Edition of the “Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves”. Mr Cummins consents to the inclusion in this release of the matters based on the information in the form and context in which they appear. Mr Cummins is a shareholder of Black Canyon Limited.

The information in this report that relates to metallurgical testwork results is based on information reviewed by Mr David Pass, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Pass is an employee of BatteryLimits and consultant to Black Canyon Limited. Mr Pass has sufficient experience relevant to the mineralogy and type of deposit under consideration and the typical beneficiation thereof to qualify as a Competent Person as defined by the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (the JORC Code, 2012 Edition). Mr Pass consents to the inclusion in the report of the matters based on the reviewed information in the form and context in which it appears.

For further information, please refer to ASX announcements dated 14 February 2023, 27 March 2023, June 1 2023, June 14 2023, June 17 2023, July 14 2023, 23 August 2023, 5 September 2023, 26 September 2023, 12 October 2023, 27 November 2023, 12 December 2023, 26 March 2024, and 1 May 2024, 2 July 2024, 21 August 2024, 25 September 2024, 27 September 2024, 8 October 2024, 18 October 2024, 14 November 2024, 27 November 2024, 4 December 2024, 23 December 2024 and 11 February 2025, 1 April 2025, 16 April 2025, 1 May 2025, 30 June 2025 7 July 2025, 7 August 2025, 27 August 2025, 1 September 2025, 8 October 2025, 28 October 2025 ,10 November 2025, 26 November 2025, 10 December 2025 and 17 March, 2026 which are available from the ASX Announcement web page on the Company’s website.

The Company confirms that it is not aware of any new information or data that materially affects the information included in this release that relate to Exploration Results and, in the case of mineral resource estimates, that all material assumptions and technical parameters underpinning the estimates in the relevant release continue to apply and have not materially changed.

APPENDIX 1: Diamond hole collar details

RC HOLE ID	DD HOLE ID	Domain	E_GDA94	N_GDA94	RL	EOH	DIP	AZI	TWIN HOLE RC DRILL INTERSECTION
WDRC007	WDDD007	MnO	322785	7524001	397	14	-90	360	7m @ 28.3% Mn & 4.2% Fe from 6m, including 5m @ 34.9% Mn & 2.9% Fe from 7m
WDRC032	WDDD032	MnO	322753	7524061	397	11	-90	360	6m @ 29.2% Mn & 2.3% Fe from 4m, including 3m @ 39.7% Mn & 1.8% Fe from 6m
WDRC062	WDDD062	MnO	322680	7525904	417.3	13	-90	360	9m @ 26.4% Mn & 11.5% Fe from 3m including 3m @ 39.7% Mn & 4.9% Fe from 9m
WDRC063	WDDD063	MnO	322721	7525897	415.7	15	-90	360	10m @ 27.7% Mn & 7.6% Fe from 4m including 3m @ 39.6% Mn & 3.9% Fe from 10m
WDRC065	WDDD065	MnO	322800	7525897	412	18	-90	360	12m @ 31.9% Mn & 7.2% Fe from 5m including 7m @ 39.3% Mn & 4.5% Fe from 9m
WDRC068	WDDD068	MnO	322919	7525898	408	17	-90	360	9m @ 22% Mn & 2.5% Fe from 7m
WDRC094	WDDD094	MnO	322840	7525431	410	7	-90	360	4m @ 33.8% Mn & 5% Fe from 0m
WDRC095	WDDD095	MnO	322877	7525427	407.5	7	-90	360	6m @ 35% Mn & 3.2% Fe from 0m including 3m @ 42.1% Mn & 3% Fe from 3m
WDRC096	WDDD096	MnO	322922	7525421	405	8	-90	360	7m @ 29.7% Mn & 2.4% Fe from 0m including 3m @ 42.4% Mn & 2.7% Fe from 4m
WDRC097	WDDD097	MnO	322963	7525426	403	9	-90	360	8m @ 28.5% Mn & 2.6% Fe from 0m including 3m @ 43.2% Mn & 2% Fe from 4m
WDRC098	WDDD098	MnO	322995	7525420	402	8	-90	360	6m @ 23.2% Mn & 2.1% Fe from 1m including 2m @ 41.5% Mn & 1.5% Fe from 4m
WDRC167	WDDD167	MnO	322639	7526300	412	8	-90	360	7m @ 31.4% Mn & 3.6% Fe from 0m including 3m @ 39.3% Mn & 3.1% Fe from 4m
WDRC168	WDDD168	MnO	322680	7526299	411	9	-90	360	8m @ 32.5% Mn & 3.7% Fe from 0m including 3m @ 38.3% Mn & 4.1% Fe from 4m
WDRC140	WDDD140	MnCb	322859	7524402	400	31	-90	360	5m @ 24.9% Mn & 2.7% Fe from 25m including 2m @ 36% Mn & 1.5% Fe from 27m
WDRC215	WDDD215	MnCb	322799	7526764	414.1	23	-90	360	4m @ 28.1% Mn & 3.3% Fe from 18m
WDRC047	WDDD047	Fe	322637	7525537	430	11	-90	360	10m @ 0% Mn & 56.3% Fe from 0m
WDRC048	WDDD048	Fe	322681	7525537	426	9	-90	360	7m @ 0% Mn & 56.9% Fe from 1m
WDRC054	WDDD054	Fe	322362	7525901	433	11	-90	360	10m @ 0.3% Mn & 58% Fe from 0m
WDRC056	WDDD056	Fe	322436	7525902	428.8	15	-90	360	13m @ 0.7% Mn & 59.3% Fe from 1m including 7m @ 0.7% Mn and 62.0% Fe from 7m
WDRC058	WDDD058	Fe	322519	7525901	423.8	18	-90	360	14m @ 0.2% Mn & 56.4% Fe from 3m including 7m @ 0.2% Mn & 58.8% Fe from 9m
WDRC196	WDDD196	Fe	322397	7526098	427	19	-90	360	16m @ 0.7% Mn & 58.1% Fe from 2m including 9m @ 1.0% Mn & 60.8% Fe from 2m
WDRC197	WDDD197	Fe	322435	7526098	424.8	17	-90	360	13m @ 0.5% Mn & 57% Fe from 3m including 6m @ 0.3% Mn & 60.1% Fe from 10m

For personal use only

APPENDIX 2: JORC 2012: TABLE 1

Section 1 Sampling Techniques and Data		
Criteria	Explanation	Comment
Sampling techniques	<p><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<p><i>Reverse circulation ('RC') was used as the primary drilling technique for the projects.</i></p> <p><i>RC cuttings were continuously sampled at 1 m intervals. All drill holes were sampled and logged from surface to end of hole or depth of mineralisation.</i></p> <p><i>Drilling completed by Black Canyon has been used for the projects.</i></p> <p><i>All drill samples were logged for weathering, colour, lithology and mineralogy.)</i></p> <p><i>RC samples were collected and placed in marked green plastic bags in order at each collar position.</i></p> <p><i>The 1m interval samples are considered industry standard and representative of the material being tested.</i></p> <p><i>There was limited water encountered during the drill program.</i></p> <p><i>The drilling and sample techniques are considered representative for the style of mineralisation utilising 1m sample intervals</i></p> <p><i>The target sample weight was between 2-3kg which is appropriate for the style of mineralisation</i></p> <p><i>The samples were collected using industry standard diamond drilling (DD) methods.</i></p> <p><i>The drilling and sample techniques are considered representative for the style of mineralisation utilising conventional triple tube equipment to maximise recoveries</i></p>
Drilling techniques	<p><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<p><i>Black Canyon drilling was completed using RC technique at 90-degree angle to collect 1 m samples as RC chips. Drill diameter is 5.25 inches as per standard RC sizing. A face sampling hammer was used to drill and sample the holes.</i></p> <p><i>The drill type is diamond core (DD) drilling vertical holes</i></p> <p><i>The external drill diameter is 122mm but the PQ3 core has a diameter of 83mm</i></p>

For personal use only

For personal use only

<p><i>Drill sample recovery</i></p>	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p><i>The 2025 drill campaign recorded satisfactory drill sample recovery. The sample weights were not recorded on site, but the samples were weighed once received at the laboratory. The samples weights show good overall recoveries with smaller samples weights recorded in the top 1-2m.</i></p> <p><i>During the 2025 drill program the 1m samples were collected from a levelled cone splitter affixed to the side of the drill rig.</i></p> <p><i>It is unlikely the lower weights encountered in the top 1 - 2m of the holes has biased the samples particularly with the style of mineralisation.</i></p> <p><i>The samples were drilled mostly dry minimising sample bias.</i></p> <p><i>Core recovery was estimated by the geologist on the rig and secondly by measuring the length of the core recovered between metre intervals and calculating the overall recovery</i></p> <p><i>The drill recoveries were deemed good in the more competent rock types but was good to poor in the less competent rocks</i></p> <p><i>Core loss through the mineralisation will need to be factored into the metallurgical testwork program that will affect the intervals to be composited.</i></p> <p><i>Based on the composite grades it is likely core loss has resulted in an overestimate of the interval grade from the manganese oxide composites. The impact of the slightly higher-grade ranges is unlikely to be material from a metallurgical perspective with the overall trends showing higher grade associated with coarser fraction from the low, med and high-grade composites.</i></p> <p><i>Core loss for the MnCb and Iron samples are not material due to the competency of that style of mineralisation.</i></p>
<p><i>Logging</i></p>	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p><i>Geological logs exist for the August 2025 drill program.</i></p> <p><i>Logging of individual 1 metre intervals was completed using logging code dictionary which recorded weathering, colour, lithology and observed commentary to assist with determining manganese mineralisation.</i></p> <p><i>Logging and sampling has been carried out to industry standards.</i></p> <p><i>Drill holes were geologically logged in their entirety, and a reference set of drill chips were collected in 20m interval chip trays for the drill program. The chip trays were all photographed on site at the end of drilling each hole.</i></p> <p><i>All metres drilled were logged</i></p> <p><i>Drillhole logging was completed at the drill site recording lithology, texture, grain size and colour plus geotechnical parameters – core recovery, RQD and fracture counting.</i></p>

For personal use only

		<p>Wet/dry density was also calculated from core samples</p> <p>The core trays were photographed wet and dry and used to further detailed logging post the drill program</p> <p>The logging was considered appropriate for exploration reporting and eventually metallurgical and geotechnical evaluations</p> <p>Every 1m interval as logged for the entire drill program</p>
<p>Sub-sampling techniques and sample preparation</p>	<p>If core, whether cut or sawn and whether quarter, half or all core taken.</p> <p>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</p> <p>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</p> <p>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</p> <p>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</p> <p>Whether sample sizes are appropriate to the grain size of the material being sampled.</p>	<p>The 1m RC samples were gathered by using a levelled cone splitter of the side of the rig.</p> <p>The samples the subject of this release were submitted to Bureau Veritas who dried the sample for 12 hrs and pulverised the entire sample until 95% passing 105µm. This method is considered appropriate to ensure sample representivity.</p> <p>The samples were dominantly dry.</p> <p>Black Canyon inserted Certified Reference Material (CRM) at a rate of 1/50, blanks at a rate of 1/50 and field duplicates from the cone splitter at a rate of 1/50 for a total insertion rate of QA/QC materials at 6%</p> <p>The sub sampling technique and quality control procedures is considered appropriate to ensure sample representivity.</p> <p>The sample size is considered appropriate for the grainsize and style of mineralisation</p> <p>The diamond drill metallurgical composites core samples will not be cut or assayed. Full core will be used for the metallurgical testwork programs and then the composite samples were assayed</p> <p>The grades were approximated from twin RC drill holes</p> <p>The 1m RC samples were gathered by using a levelled cone splitter of the side of the rig</p>
<p>Quality of assay data and laboratory tests</p>	<p>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</p> <p>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</p> <p>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie</p>	<p>The samples were submitted to the primary laboratory - Bureau Veritas in Canningvale, WA.</p> <p>The 2 – 3kg samples were weighed and dried prior to pulverising 100% of the sample 95% passing 105µm.</p> <p>The sample was then analysed using method XF203 for manganese ores using fusion disc XRF for Fe, SiO₂, Mn, Al₂O₃, TiO₂, P₂O₅, S, MgO, K₂O, CaO and BaO.</p> <p>Loss on Ignition (LOI) was also measured by Thermo Gravimetric Analysis (TGA)</p> <p>Review of the quality control results received to date that include CRM, blanks, duplicates show an acceptable level of accuracy (lack of bias) and precision has been achieved.</p> <p>In addition, Bureau Veritas has undertaken its own internal QAQC checks using CRM, Blanks and pulp duplicates and no issues have been reported or identified.</p>

For personal use only

	<p>lack of bias) and precision have been established.</p>	<p>A selected number of samples will also be submitted to a secondary laboratory for verification</p> <p>The CP is satisfied that the analysis was completed to an acceptable standard in the context in which the results have been reported.</p> <p>The diamond drill metallurgical composites core samples will not be cut or assayed. Full core will be used for the metallurgical testwork programs</p> <p>The grades were approximated from twin RC drill holes</p>
<p>Verification of sampling and assaying</p>	<p>The verification of significant intersections by either independent or alternative company personnel.</p> <p>The use of twinned holes.</p> <p>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</p> <p>Discuss any adjustment to assay data.</p>	<p>Validation of the drilling files (collar, assay and lithology) was undertaken with field and data entry cross checks</p> <p>Adjustment of elemental oxides to primary element was completed using well known conversion factors.</p> <p>There were no twin holes at this stage</p> <p>There has been no adjustment to the RC assay data.</p> <p>The diamond drill metallurgical composites core samples will not be cut or assayed. Full core will be used for the metallurgical testwork programs</p> <p>The grades were approximated from twin RC drill holes</p>
<p>Location of data points</p>	<p>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</p> <p>Specification of the grid system used.</p> <p>Quality and adequacy of topographic control.</p>	<p>All drill holes in the project area were surveyed by handheld GPS with an accuracy of +/-5 m. The accuracy of the location of the drill collars is sufficient at this stage of exploration and resource development.</p> <p>The grid system used: GDA94 / UTM zone 51S.</p> <p>Once a DD hole was completed the drill collar was located using a GARMIN handheld GPS with an accuracy of +/- 5m</p>
<p>Data spacing and distribution</p>	<p>Data spacing for reporting of Exploration Results.</p> <p>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</p> <p>Whether sample compositing has been applied.</p>	<p>The 2025 drilling completed at Wandanya was conducted via a conventional drill grid. The nominal drill spacing was 40 m along east-west traverses and each traverse was spaced between 100 and 350m apart north-south.</p> <p>The drill spacing is sufficient to establish grade and geological continuity.</p> <p>No sample compositing has been applied to the RC data.</p> <p>At Wandanya the drill spacing of the DD drill program is not relevant because they are do not form part of an MRE</p> <p>The diamond drill holes were located to approximate a range of manganese and iron grades and geological variation.</p> <p>The diamond core metallurgical samples will be selected and composited</p>

For personal use only

<p><i>Orientation of data in relation to geological structure</i></p>	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<p><i>At Wandanya the drill lines were oriented east-west across the strike of the primary mineralisation trend. The drill holes were completed at 90 degrees (vertical).</i></p> <p><i>At Wandanya the mineralisation is relatively flat lying exhibiting a gentle dip to the east.</i></p> <p><i>The drill grid is assumed to be located both perpendicular to the planar orientation of the key mineralised horizon with no or limited bias introduced with respect to the strike or dip of the mineralised horizon.</i></p>
<p><i>Sample security</i></p>	<p><i>The measures taken to ensure sample security.</i></p>	<p><i>The samples were collected into bulka bags, sealed with cable ties and stored on site until the drill program was completed.</i></p> <p><i>The samples were then trucked to Perth in one consignment and delivered directly to Bureau Veritas in Canningvale.</i></p> <p><i>The bulka bags were inspected and audited by Bureau Veritas who did not report any suspicious or tampered samples.</i></p> <p><i>The diamond core will be secured to pallets and stored on site until the drill program is completed</i></p> <p><i>The samples will then be trucked to Perth in one consignment and delivered directly to ALS-CHEMEX Metallurgy in Balcatta</i></p>
<p><i>Audits or reviews</i></p>	<p><i>The results of any audits or reviews of sampling techniques and data.</i></p>	<p><i>No audits or reviews have taken place on the sampling techniques or data</i></p> <p><i>The CP was on site for half of RC drill program and some of the DD program and considers the sampling and sub sampling techniques to be equal to industry standard and appropriate for the style of mineralisation and the results being reported</i></p>

Section 2 – Reporting of Exploration Results

Criteria	Explanation	Comment
Mineral tenement and land tenure status	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p> <p>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</p>	<p>The Wandanya mineralisation is located within E46/1407 held 100% by Black Canyon Ltd. Tenement E47/1407 was granted on the 11/04/2022 and expires on 10/04/2027</p> <p>The tenement upon which Wandanya is located are subject to a native title agreement with the Karlka Nyiyaparli Aboriginal Corporation. Archaeologic and Ethnographic heritage surveys have been completed on the Wandanya deposits which has enabled the drilling to be completed. Further Heritage surveys will be required to continue ground disturbing activities beyond the current drill areas.</p> <p>There are no other known impediments to obtaining a licence to operate in the area.</p>
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<p>No other material historic exploration has been completed on the tenement for manganese on E46/1407.</p> <p>For Wandanya Black Canyon completed a ground reconnaissance exercise in 2023 to map the manganese enrichments and determine down dip upside. The exercise proved significant manganese enrichment throughout the project areas both as outcropping, sub-cropping and as substantial float material. The early reconnaissance groundwork by Black Canyon was used as a basis for the 2023 DDIP survey and the September 2024 and June/August 2025 RC drilling programmes.</p>
Geology	Deposit type, geological setting and style of mineralisation.	<p>The mineralisation model at Wandanya is preliminary but it appears to be a fault related hydrothermal stratabound deposit. There is likely supergene overprint to the original hydrothermal mineralisation.</p> <p>The mineralisation is located within a sedimentary sequence. From the base to the top of the sequence the geology comprises footwall dolomite, spotted manganese dolomite, massive manganese and manganese dolomite breccia overlain by hangingwall dolomite. The consistency of the mineralisation down dip and along strike has been interpreted to represent fault related, hydrothermal stratabound style of manganese mineralisation. Geothite alteration is common above the manganese zone and hematite was logged within the mineralised zones as jaspilitic bands. Manganese intensity increases towards the base of the sequence.</p> <p>The overall geological sequence is dipping very shallowly to the east but is also openly folded with a northerly axial plane forming undulating outcrops. Several large north-easterly faults can be identified along strike associated with surface mineralisation.</p> <p>The hematite iron mineralisation appears to be a thicker up dip lateral equivalent of the manganese, but further drilling and evaluation is required to understand its genesis.</p>

For personal use only

For personal use only

Criteria	Explanation	Comment
		<i>The lithological sequence of the Wandanya project principally consists of the overlying Enachedong Formation carbonates overlying the Stag Arrow Formation sediments from the Proterozoic Manganese Group of the southern Oakover Basin. The mineralisation style at Wandanya is stratabound and maybe associated with hydrothermal fluids replacing a suitable reactive host rock at the base of the Enachedong Formation. Faults and structure are considered important features of this style of mineralisation with multiple northeast trending faults visible from surface imagery.</i>
<i>Drill hole Information</i>	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <ul style="list-style-type: none"> • <i>easting and northing of the drill hole collar</i> • <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> • <i>dip and azimuth of the hole</i> • <i>down hole length and interception depth</i> • <i>hole length.</i> <p><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	<i>Refer to Appendix 2 for a listing of the DD drill holes.</i>
<i>Data aggregation methods</i>	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <p><i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of</i></p>	<p><i>No grade cutting to assays has been undertaken.</i></p> <p><i>Aggregation of samples has been undertaken using simple average calculations for each 1m sample.</i></p> <p><i>Manganese intervals have been reported at 10% Mn cut off allowing 1m internal dilution that enables the total reported grade to be greater than 25% Mn.</i></p> <p><i>Iron intervals have been reported at 50% Mn cut off allowing 1m internal dilution that enables the total reported grade to be greater than 55% Mn.</i></p> <p><i>Assays have been reported as elements.</i></p> <p><i>The diamond drill metallurgical composites core samples will not be cut or assayed. Full core will be used for the metallurgical testwork programs</i></p>

For personal use only

Criteria	Explanation	Comment
	<p><i>such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	
<i>Relationship between mineralisation widths and intercept lengths</i>	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></p>	<p><i>The Wandanya Prospect is mostly flat lying exhibiting a gentle dip of mineralisation to the east (4 to 6°) and 90° (vertical) drill holes are considered appropriate.</i></p> <p><i>The drill results reported are interpreted to represent close to true widths of the mineralisation and are reported as down hole length.</i></p>
<i>Diagrams</i>	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></p>	<p><i>Refer images within the body of this release for further details.</i></p>
<i>Balanced reporting</i>	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<p><i>Information considered material to the reader's understanding of the Exploration Results has been reported. in the body of the text and significant results have selectively been reported to provide the reader with the potential tenor and widths of the mineralisation</i></p>
<i>Other substantive exploration data</i>	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<p><i>No other substantive exploration has been completed at Wandanya.</i></p>
<i>Further work</i>	<p><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p>	<p><i>Further infill and extension RC drilling is required.</i></p>

For personal use only

Criteria	Explanation	Comment
	<p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	<p><i>Gravity surveys might also detect deeper buried mineralisation associated with the underlying sedimentary sequences.</i></p>