

DRILLING INDICATES GOLD MINERALISING SYSTEM REPEATS AT DEPTH

Positive visual indicators at Lincoln support resource growth potential beneath known mineralisation. Assay results from resource drilling and a maiden JORC MRE are also imminent as the ~3,270m drill programme nears completion.

HIGHLIGHTS

- **Deep holes DDH0280 and DDH0281 completed from XC7 have encountered zones of alteration, silicification, veining and sulfide mineralisation at depths greater than 150m below the current decline, indicating possible repetitions at depth below the Lincoln-Comet non-compliant NI 43-101 resource (assays pending) - Refer Figure 1 for drill hole plan and Figure 2 & 3 for core trays.***
- **More than 3,100m** of HQ diamond core has been drilled to date, with the balance of the programme at XC8 expected to be completed this week.
- Anticipated near-term catalysts include (Refer Figure 5):
 1. Assay results from XC3-XC8 (supporting the JORC Resource): **April.**
 2. JORC Compliant MRE for Lincoln-Comet & Medean: **Late April to early May.**
 3. Exploration target at Medean: **Late April to early May.**
 4. Results from deep repetition holes DDH0280 and DDH0281: **Early May.**
- Further resource growth opportunities include:
 1. Additional deep and targeted drilling: **July.**
 2. Additional Exploration Targets: **Second half of year.**
- The development pathway of the Lincoln Gold Project is supported by **~\$90m** of prior capital investment; including a processing plant (315ktpa), 880m long underground decline & development drives totaling 900m, workshops & offices and key operational permits in place.

***Cautionary note:** In relation to the disclosure of visual mineralisation, the Company cautions that visual estimates of mineralogy or material abundance should never be considered a proxy or substitute for laboratory analysis. Laboratory assay results are required to determine the widths, mineralogy, and grade of the visible mineralisation reported.

Haranga Resources Limited (ASX: HAR; FRA: 65E0) ("Haranga" or "the Company") is pleased to advise that its drilling at the Company's wholly-owned Lincoln Gold Project ("**Project**") is nearing completion. The Company has substantially completed the workstreams required to support the objectives (**Figure 5 illustrates the objectives of the programme**) of the programme, being:

- 1) Confirmatory drilling required for the conversion of the current Lincoln-Comet & Medean NI 43-101 (non-compliant) Mineral Resource Estimate of **958,910t @ 9.29 g/t Au (~286koz Au at a 4.2 g/t cut-off) to a JORC-compliant Mineral Resource**

For personal use only

Estimate (MRE).^{2,3} - **Status:** drilling completes this week, with assays pending prior to resource estimation.

- 2) Defining an Exploration Target at South Spring Hill and potentially Medean - **Status:** Exploration Target at South Spring Hill announced of **1.16Mt - 1.64Mt at 5.4 g/t Au to 5.8 g/t Au for 202koz to 308koz au (2.0 g/t Au cut-off).**⁴ Medean Exploration Target anticipated late April, early May.
- 3) **Testing for potential repetitions at depth beneath the current non-compliant Mineral Resource Estimate**, with the aim of identifying additional high-grade gold zones and expanding the known mineralised footprint - **Status:** Deep holes DDH0280 and DDH0281 confirm positive visual indicators, with assays pending and expected early May.

The Mineral Resource estimates relating to the Lincoln Gold Project contained in this announcement have been prepared in accordance with Canadian National Instrument 43-101 ("NI-43-101") standards and have not been reported in accordance with the 2012 Joint Ore Reserves Committee's Australasian Code for Reporting of Mineral Resources and Ore Reserves ("JORC Code"). Refer to Haranga's website at <https://www.haranga.com/> for information in relation to the Mineral Resource estimates prepared for Lincoln. A competent person has not done sufficient work to classify the Mineral Resources in accordance with the JORC Code and it is uncertain that following evaluation and/or further exploration work that the estimate will be able to be reported as a Mineral Resource or Ore Reserve in accordance with the JORC Code. Please refer to further disclosure required by the ASX Listing Rules at the conclusion of this announcement.

Chairman, Mr. Michael Davy commented: *"This programme represents the first diamond drilling campaign at Lincoln-Comet in over 12 years and marks a significant development milestone for the Project and for the Company.*

Importantly, two deep holes, DDH0280 and DDH0281 were designed to test for possible repetitions of mineralisation beneath the existing Lincoln-Comet system, which is a key part of our broader growth strategy. Pleasingly, visual indications thus far support our view that Lincoln may host additional sources of mineralisation below the current known footprint. Across the Mother Lode Gold Belt, mineralised systems are known to extend as deep as 2,000m below surface.

In parallel to this growth drilling, a key focus has been the delivery of a maiden JORC MRE at the Lincoln-Comet & Medean mineralisation. This work is now well advanced, and we expect to release this as well as the supporting assays from XC3-XC8 in the coming weeks.

Following the delivery of an MRE, our focus is to rapidly grow the scale of the project to support a development pathway, leveraging the significant existing infrastructure and established permitting base in place. In the near-term, we intend to do this by evaluating the potential for further exploration targets in areas of known mineralisation, as well as preparing XC9, XC10 and XC11 for further targeted drilling and exploration at depth.

We believe that the Motherlode system has the potential to evolve into a high-grade, multi-million-ounce gold project, and we intend to fully unlock this potential. There are multiple developments we expect to report on over the coming weeks and I look forward to keeping shareholders and stakeholders updated as results come through."

INITIAL DRILLING TEST FOR REPETITIONS AT DEPTH COMPLETE

A key component of the Company's resource growth strategy is to target potential repetitions of mineralisation at depth. Mineralisation observed along the Mother Lode Gold Belt is known to extend to depths as great as 2,000m.⁵

To test this potential, two deep holes, DDH0280 (191.0m) and DDH0281 (328.5m) drilled from XC7 were designed to intersect possible repetitions of veining at depth, below the known mineralised system at Lincoln-Comet (Figure 1). **Both DDH0280 and DDH0281 have encountered zones of alteration, silicification, veining and sulfide mineralisation at depths greater than 150m below the current decline:**

- **DDH0280:** A main zone of interest was noted from 160-176.6m (Figure 2 & Table 1), within a wider 34m zone of alteration and veining from 152.6-186.1m downhole.
- **DDH0281:** A main zone of interest was noted from 144.5-155.4m (Figure 3 & Table 2), within a wider 20m zone of alteration and veining from 144.5-164m downhole.

The two zones are considered independent of each other and sit within the overall subvertical fabric of expected extensions or repetitions to mineralisation below the Comet section of the mineral resource.

Cautionary note: In relation to the disclosure of visual mineralisation, the Company cautions that visual estimates of mineralogy or material abundance should never be considered a proxy or substitute for laboratory analysis. Laboratory assay results are required to determine the widths, mineralogy, and grade of the visible mineralisation reported.

Additional zones above the main zones of interest in each hole have been identified and sampled. **Both holes remained in prospective host rock for the full length of each respective hole and have been left open and capped for possible re-entry at a later date.**

The Company is currently working on an assessment of the significance of these zones, including estimations of true width from geological logging, and the Company looks forward to receiving assay results for these zones. Assay results from DDH0280 and DDH0281 are expected early May and will inform additional deep drilling planned from XC8 and beyond.

The Company notes that timely access to XC8 was delayed by additional rainfall and increased groundwater inflows. Consequently, the Company took the opportunity to undertake deeper drilling from XC7, rather than proceeding with the original plan to drill deep holes from XC8 following completion of resource definition drilling.

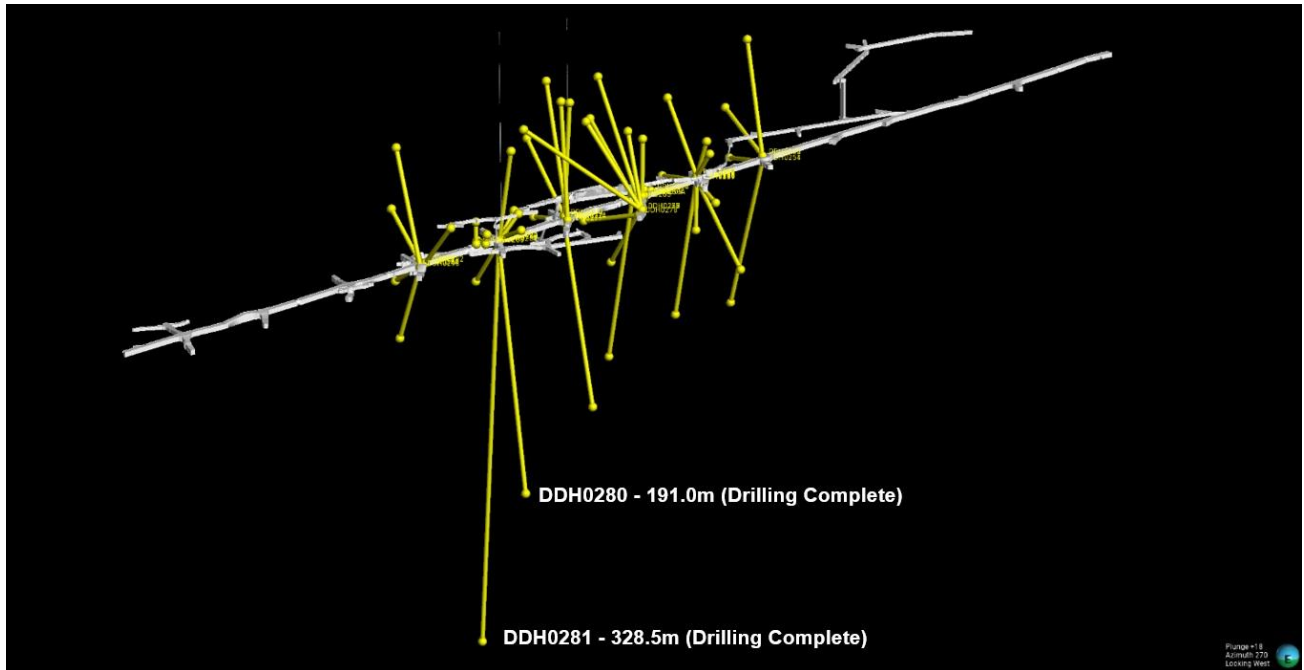


Figure 1: Oblique view of 2025-26 Diamond Drilling Programme viewed to west from slight above; shown relative to position of decline, respective crosscuts, and development. Deep holes DDH0280 and DDH0281 from XC7 are labelled.



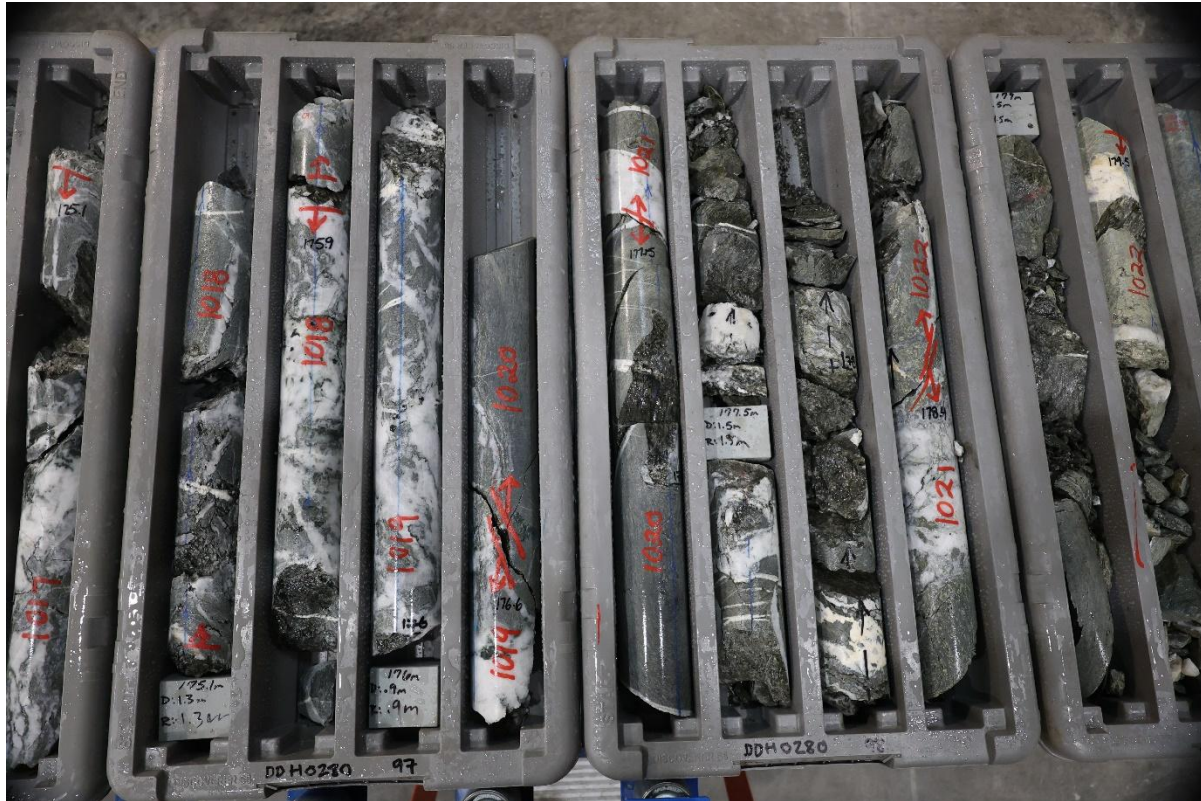


Figure 2: Consecutive Core trays 95-98 of prospective gold mineralisation in DDH0280 marked for cutting and analysis; Main zone of interest from 160-176.6m , within a wider 34m zone of alteration and veining from 152.6-186.1m downhole.





Figure 3: Consecutive Core trays 80-83 of prospective gold mineralisation in DDH0281 marked for cutting and analysis; Main zone of interest was noted from 144.5-155.4m, within a wider 20m zone of alteration and veining from 144.5-164m downhole.

Table 1: DDH0280 Logging accompanying observations and photographs

From (m)	To (m)	Lithology
0	2.1	carb. -ser alt. Phyllonite
2.1	22.2	Greenstone
22.2	23.1	Phyllonite
23.1	32.65	Greenstone
32.65	35.5	carb. -ser alt. Phyllonite
35.5	37.8	Greenstone
37.8	38.5	Sheared carb. ser. alt. Greenstone + m. qv
39	40.5	carb. -ser alt. Phyllonite
40.5	48.2	Greenstone
48.2	50.5	Sheared carb. ser. alt. Greenstone
50.5	52.5	Quartz Veined zone, >10% qtz
52.5	54.3	carb. -ser alt. Phyllonite
54.3	62.7	Greenstone
62.7	70	Sheared carb. ser. alt. Greenstone + m. qv
70	141.3	Greenstone

141.3	152.6	Greenstone +/- m. qv
152.6	153	Sheared carb. ser. alt. Greenstone
153	158.75	carb.-ser. Alt. Greenstone
158.75	159.95	carb.-ser. alt. Greenstone + qv
159.95	160.7	Quartz vein (>50% qtz) + tr. sulfides
160.7	163.1	carb. -ser alt. Phyllonite +/- qv
163.1	163.3	Quartz vein (>50% qtz) + tr. sulfides
163.3	164.8	carb.-ser. alt. Greenstone
164.8	166.4	Quartz Veined zone, >10% qtz + tr. sulfides
166.4	169.5	Greenstone
169.5	169.8	Quartz vein (>50% qtz)
169.8	173.3	Phyllonite +/- m.qv
173.3	176.6	Quartz vein (>50% qtz)
180	186.1	Sheared Greenstone
186.1	191	Greenstone

Table 2: DDH0281 Logging accompanying observations and photographs

From (m)	To (m)	Lithology
0	10	carb.-ser. Alt. Greenstone
10	27.5	carb. -ser alt. Phyllonite +/- qv
27.5	41.9	Greenstone
41.9	42.9	Greenstone m. qv
42.9	77.65	Greenstone
77.65	83.05	Sheared Greenstone/Phyllonite + m. qv
83.05	115	Greenstone
115	120.3	Sheared carb. ser. Alt. Greenstone/Phyllonite
120.3	131	Volcanic Tuff + m. qv
131	134	Phyllonite
134	144.5	Greenstone
144.5	149.45	carb.-ser. alt. Greenstone m. qv
148.7	148.9	Quartz vein (>50% qtz) + tr. sulfides
148.9	150.25	carb.-ser. alt. Greenstone m. qv
150.25	151.9	Quartz vein (>50% qtz) + tr. sulfides
151.9	155.4	carb.-ser. alt. Greenstone m. qv
155.4	159.4	Greenstone
159.4	160.4	Phyllonite
160.4	160.7	Quartz vein (>50% qtz)
160.7	162.6	Greenstone
162.6	164	carb.-ser. alt. Greenstone m. qv
164	166.3	Greenstone
166.3	198.2	Greenstone +/- carbonate veinlets
198.2	201.8	Greenstone
201.8	328.5	Greenstone, occasional m. qv

For personal use only

DRILLING NEARS COMPLETION

Drilling is currently nearing completion at XC8 (Figure 4) with two holes remaining in the current programme. With less than 150m of drilling remaining at the time of writing, the balance of drilling is expected to be completed within the week. The total programme comprises 44 holes of varying lengths, with total meterage of approximately 3,270m (Annexure 1).

Assays from XC3-XC8 supporting the JORC MRE are expected to be released in late April.



Figure 4: Drilling of DDH0289 against west rib, XC8.

JORC MINERAL RESOURCE ESTIMATE FOR LINCOLN-COMET & MEDEAN

As previously announced,⁴ all samples from drilling from XC7 and below have been, and continue to be submitted on an expedited basis to the ALS laboratory in Reno, with all results greater than 10 g/t Au duplicated by screen fire assay. All workstreams supporting the new MRE for Lincoln-Comet & Medean are well advanced, with the MRE expected to be announced in late April to early May. The initial MRE will also include an inferred

component from Medean (previously 'Keystone' in the 2015 NI 43-101 Foreign Resource Estimate).

Given the supportive gold price environment, the Company believes there is potential to apply a lower cut-off grade to the JORC Mineral Resource Estimate relative to the non-compliant foreign estimate. While the Company intends to formally report at 2.0 g/t Au cut-off in keeping with agreed milestones to the initial vend terms, the Company will report resources at multiple cut-off grades to better inform the market of the opportunity at the Lincoln Gold Project.

ADDITIONAL EXPLORATION TARGET

Further to ongoing exploration activities at Lincoln-Comet, the Company is advancing the delineation of an additional Exploration Target at Medean, independent of the anticipated inferred resource at Medean, which is currently anticipated to be completed by late April to Early May.

The Company has recently successfully delineated an Exploration Target at South Spring Hill (Figure 5) close to the Stringbean Alley Decline, highlighting the opportunity for further resource growth across the Project area. The South Spring Hill Exploration Target is summarised below:

South Spring Hill Exploration Target: 1.16Mt - 1.64Mt at 5.4g/t Au to 5.8g/t Au for 202koz to 308koz au (2.0g/t Au cut-off).⁴

Cautionary Statement: The potential quantity and grade mentioned above are conceptual in nature, as there has been insufficient exploration to estimate a Mineral Resource and it is uncertain if further exploration will result in the estimation of a Mineral Resource.

- Further surface and/or underground diamond drilling, subject to access being secured, is planned within the next two years.
- The Exploration Target sits within a package of owned and leased mineral claims which form the Lincoln Gold Project, which has both underground accesses, a conditional use permit that allows production of gold, and a mill circuit which produced gold as recently as 2022.
- Refer to the JORC Table for further information from the ASX release from 24 March 2026.

NEAR-TERM RESULTS PIPELINE FROM ONGOING EXPLORATION

The Company anticipates a steady flow of news over the coming months, with timing expectations as follows:

- Anticipated near-term catalysts include:
 1. Assay results from XC3-XC8 (supporting the JORC Resource): **April.**
 2. JORC Compliant MRE for Lincoln-Comet & Medean: **Late April to early May.**
 3. Exploration target at Medean: **Late April to early May.**
 4. Results from DDH0280 and DDH0281: **Early May.**
- Further resource growth opportunities include:
 1. Additional deep and targeted drilling : **July.**
 2. Additional Exploration Targets: **Second half of year.**

DEWATERING PROGRESS

Dewatering has cleared access to underground cross-cut 8 (**XC8**; Figure 6), enabling diamond drilling to commence in the area. XC8 represents the final cross-cut for drilling under the initial 3,270m diamond drilling programme (Appendix 1).

To support additional exploration drilling at XC9-XC11 and to ensure compliance with respective regulators, the Company will continue dewatering at maximum permitted rates following completion of the current drilling programme.

The Company will also use the planned pause in drilling activities to re-establish services to the base of the decline, including installation of a new Mobile Power Centre (MPC) to provide power to pumps, fans and drilling at greater depths; installation of refurbished fans to re-establish suitable ventilation; and upgraded communications for the length of the decline.

Further drilling at positions below XC8 is intended to commence following the planned return of the Swick Gen II underground diamond drill rig to site in July.



Figure 6: Dewatering continuing below XC8.

This ASX Announcement has been authorised for release by the Board of Haranga Resources Limited.

Kyla Garic

Company Secretary

HARANGA RESOURCES LIMITED**Competent Person's and Compliance Statement**

The information in this announcement that relates to Exploration Results is based on and fairly represents information and supporting documentation compiled or reviewed by Mr Craig Hall, a Competent Person, who is a Member of the Australian Institute of Geoscientists (AIG member #1748). Mr Hall has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Hall is the Chief Operating Officer for Haranga Resources Limited at the Lincoln Gold Project and consents to the inclusion in this announcement of the Exploration Results in the form and context in which they appear.

The information in this announcement that are footnoted below (1-4) relates to exploration results and mineral resources that have been released previously on the ASX. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements and that, in the case of mineral resources estimates (including foreign estimates), all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's finding is presented have not been materially modified from the original market announcements.

Saraya - Mineral Resource¹

The Company confirms it is not aware of any new information or data that materially affects the information included in the Mineral Resource estimate and all material assumptions and technical parameters underpinning the estimate continue to apply and have not materially changed when referring to its resource announcement made on 27 August 2024¹. The Company confirms that the form and context in which the Competent Person's finding is presented have not been materially modified from the original market announcements.

Saraya - Mineral Resource Estimate

The resource as reported at 27 August 2024 is as follows:

Classification	Tonnage	Grade	Contained eU ₃ O ₈	
	Mt	eU ₃ O ₈ ppm	Mlbs	Tonnes
Indicated	4.1	740	6.7	3,038
Inferred	10.4	475	10.9	4,946
Total	14.5	550	17.6	7,984

Table 3: Saraya Mineral Resource Estimate¹ - 250ppm cutoff, Indicator Kriging.

ASX Announcements directly referenced in this release

1. Mineral Resource Estimate results taken from the report titled "Saraya Uranium Mineral Resource Approaches 20 Mlb eU₃O₈" released on the ASX on 27th of August 2024 and available to view on <https://haranga.com/investors/asx-announcements/>.
2. Information confirming acquisition of the Lincoln Gold Project taken from the report titled "Haranga completes acquisition of the Lincoln Gold Project" released on the ASX on 30th of July 2025 and available to view on <https://haranga.com/investors/asx-announcements/>.
3. Information relating to the proposed purchase of the Lincoln Gold Project taken from the report titled "Haranga Secures Richest Section of Historic Mother Lode" released on the ASX on 25th of March 2025 and available to view on <https://haranga.com/investors/asx-announcements/>.
4. Information regarding the Exploration Target at South Spring Hill is taken from the report titled "Exploration Target Highlights Growth Potential at Lincoln" released on the ASX on 24th of March 2026 and available to view on <https://haranga.com/investors/asx-announcements/>.
5. Information regarding the Mother Lode Gold Belt is taken from the report titled "Corporate Presentation November 2025", released on the ASX on 20th of November 2025 and available to view on <https://haranga.com/investors/asx-announcements/>.

Disclaimer

Forward-looking statements are statements that are not historical facts. Words such as "expect(s)", "feel(s)", "believe(s)", "will", "may", "anticipate(s)", "potential(s)" and similar expressions are intended to identify forward-looking statements. These statements include, but are not limited to statements regarding future production, resources or reserves and exploration results. All of such statements are subject to certain risks and uncertainties, many of which are difficult to predict and generally beyond the control of the Company, that could cause actual results to differ materially from those expressed in, or implied or projected by, the forward-looking information and statements. These risks and uncertainties include, but are not limited to: (i) those relating to the interpretation of drill results, the geology, grade and continuity of mineral deposits and conclusions of economic evaluations, (ii) risks relating to possible variations in reserves, grade, planned mining dilution and ore loss, or recovery rates and changes in project parameters as plans continue to be refined, (iii) the potential for delays in exploration or development activities or the completion of feasibility studies, (iv) risks related to commodity price and foreign exchange rate fluctuations, (v) risks related to failure to obtain adequate financing on a timely basis and on

acceptable terms or delays in obtaining governmental approvals or in the completion of development or construction activities, and (vi) other risks and uncertainties related to the Company's prospects, properties and business strategy. Investors are cautioned not to place undue reliance on these forward-looking statements that speak only as of the date hereof, and the Company does not undertake any obligation to revise and disseminate forward-looking statements to reflect events or circumstances after the date hereof, or to reflect the occurrence of or non-occurrence of any events.

About Haranga Resources

Haranga Resources is a gold exploration and development company with assets across California's legendary Mother Lode Gold Belt and Senegal's Kéniéba Inlier. In California, the Company has recently finalised the acquisition of the advanced, high-grade Lincoln Gold Project, which benefits from significant existing infrastructure and is fully permitted for mining. The Company has commenced an underground diamond drilling programme designed to support the delivery of a maiden JORC Resource for the Project and to test for potential repetitions at depth.

In Senegal, Haranga holds the highly prospective Ibel South Gold Project, which has returned spectacular near-surface high-grade gold mineralisation from recent maiden drilling. In addition, Haranga holds the Saraya Uranium Project, previously owned by Uranium giant Orano (previously Areva) and which has in excess of 65,000m of historical drilling and a defined a mineral resource of 14.5Mt @ 550ppm eU3O8 for 17.6 Mlbs contained eU3O8 Indicated and Inferred.

Haranga's collective expertise includes considerable experience running ASX-listed companies and financing, operating and developing mining and exploration projects in Africa, Australia, and other parts of the world.

Schedule 1 - Lincoln Gold Project³ - Foreign Estimate Disclosures

The NI 43-101 Mineral Resources for the Lincoln Gold Project, as at 2 July 2015, are estimated at 958,910 tonnes at 9.29g/t Au for 286,000 ounces of gold.

The information in this announcement relating to the Lincoln Gold Project Mineral Resources is reported in accordance with the requirements applying to foreign estimates in the ASX Listing Rules and, as such, are not reported in accordance with the JORC Code.

A Competent Person has not yet completed sufficient work to classify the NI 43-101 Mineral Resources as JORC Code Mineral Resources in accordance with the JORC Code 2012.

It is uncertain that following evaluation and/or further exploration work that the NI 43-101 Mineral Resources will be able to be reported as Mineral Resources or Ore Reserves in accordance with the JORC Code.

The information in this announcement that relates to the NI 43-101 Mineral Resources and of the Lincoln Gold Project has been extracted from the unpublished report entitled "Updated Technical Report on the Lincoln Mine Project, Amador County, California, prepared for Sutter Gold Mining Inc" dated 2 July 2015 (the "Report"), which sets out the Mineral Resources of the Lincoln Gold Project as at 2 July 2015.

The Mineral Resource estimates for the Lincoln Gold Project have been prepared using the National Instrument 43-101 - Standards of Disclosure for Mineral Projects of the Canadian Securities Administrators (the "Canadian NI 43-101 Standards").

The Mineral Resources estimates for the Lincoln Gold Project are not, and do not purport to be, compliant with the JORC Code and are therefore classified as "foreign estimates" under the ASX Listing Rules.

Annexure 1 - Drill Programme status (nominal coordinates)

Hole_ID	Position	Easting	Northing	Elevation	Azimuth	Dip	Status	Depth
DDH0251	XC3	2103824	582886	318	240	-10	Complete	50
DDH0252	XC3	2103824	582886	322.5	240	25	Complete	60.9
DDH0253	XC3	2103824	582886	322.5	240	75	Complete	90
DDH0254	XC3	2103824	582886	318	240	-70	Complete	133.5
DDH0255	XC4	2103854	582835	312	240	-10	Complete	52.5
DDH0256	XC4	2103854	582835	313	240	-75	Complete	121
DDH0257	XC4	2103854	582835	315	240	50	Complete	67.5
DDH0258	XC4	2103854	582835	312.5	60	-40	Complete	85.1
DDH0259	XC4	2103857	582835	312	60	-20	Complete	30
DDH0260	XC4	2103854	582835	312	240	-89	Complete	40
DDH0261	XC4	2103857	582835	315	60	50	Complete	30
DDH0262	XC4	2103857	582835	315	60	65	Complete	35
DDH0263	XC5	2103873	582800	309	240	-15	Complete	80
DDH0264	XC5	2103873	582800	309	240	-50	Complete	94.5
DDH0265	XC5	2103885	582786	306	240	-75	Complete	140
DDH0266	XC5	2103885	582786	309	240	35	Complete	78.3
DDH0267	XC5E	2103918	582793	306.5	240	53.5	Complete	110
DDH0268	XC5E	2103918	582793	306.5	240	70	Complete	60
DDH0269	XC5E	2103886	582795	309	240	80	Complete	4.5
DDH0269A	XC5E	2103888	582793.5	309	60	89	Complete	45

DDH0270	XC6	2103916	582735	301.5	55	85	Complete	90
DDH0271	XC6	2103916	582735	297	55	-75	Complete	141
DDH0272	XC6	2103916	582735	298.7	235	-10	Complete	42
Hole_ID	Position	Easting	Northing	Elevation	Azimuth	Dip	Status	Depth
DDH0273	XC6	2103916	582735	301.5	235	45	Complete	70
DDH0274	XC6	2103924	582737.5	301	235	75	Complete	105
DDH0275	XC6	2103924	582737.5	301	235	85	Complete	90
DDH0276	XC5E	2103910	582795	307	168	37	Complete	112
DDH0277	XC5E	2103918	582793	307	198	56	Complete	78
DDH0278	XC5E	2103917	582791	303	217	-15	Complete	54
DDH0279	XC7	2103953	582687	293.7	60	75	Complete	76
DDH0280	XC7	2103947	582686.5	290	55	-80	Complete	191
DDH0281	XC7	2103947	582686.5	290	235	-85	Complete	328.5
DDH0282	XC7	2103947	582686.5	290	235	-50	Complete	49.5
DDH0283	XC7	2103947	582686.5	290	235	-10	Complete	30
DDH0284	XC7	2103946	582685	290	212	-5	Complete	33.2
DDH0285	XC7	2103953	582687	293.7	320	55	Complete	25
DDH0286	XC7	2103953	582687	293.7	305	55	Complete	25
DDH0287	XC7	2103958	582677	292.5	000	90	Complete	17.1
DDH0288	XC7	2103958	582677	292.5	60	75	Complete	8.1
DDH0289	XC8	2103977	582629	281	235	-65	Complete	70
DDH0290	XC8	2103977	582629	281	235	-30	Complete	40
DDH0291	XC8	2103977	582629	284	235	40	Complete	42.6
DDH0292	XC8	2103992	582630	284.5	235	60	Drilling	90
DDH0293	XC8	2103982	582633	285	55	45	Planned	50
Total (m)								3270

JORC Code, 2012 Edition - Table 1

SECTION 1 SAMPLING TECHNIQUES AND DATA

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>Drilling Results used as the basis for the Foreign Resource Estimation (NI43-101) are summarised in the report entitled "Updated Technical Report on the Lincoln Mine Project, Amador Co., CA, Sutter Gold Mining Inc." created on 2nd July 2015 and available to view on https://haranga.com/investors/asx-announcements/.</p> <p>Historical Sampling</p> <p>Drilling commenced in 1983-84, with an initial 5 Reverse Circulation (RC) drillholes at Medean/Spring Hill South, with an additional 2 RC holes (unmineralized) completed at Lincoln Comet. RC drilling was excluded from the most recent resource estimations.</p> <p>The balance of total meterage completed at Lincoln-Comet is Diamond Drilling from both surface and underground (99% of meterage in database), and surface drilling only at Medean/Spring Hill South (80% of meterage in database) through to 2012.</p> <p>An additional 55 underground jackleg holes for 403m advance were completed at Lincoln-Comet as part of pre-production in 2013, and are excluded from the resource estimation.</p> <p>A component of channel sampling (753 underground channel samples, typically taken from the face of development, but also wall channel samples) is present in the database from development at Lincoln-Comet, accounting for approximately 10% of the gold assays within the resource database. The higher mean and median values for the underground samples, as compared to the drill-hole data, are considered to reflect the concentrated location of underground sampling along the major veins within the high-grade centre of the deposit. Other channel sampling is also present in the database, taken while shaft and development accesses to the North of Lincoln-Comet were opened up after pumping the respective workings to allow such access. Although there are some concerns over sample reliability, the underground sample data were considered to provide significant spatial and grade control within the deposit and were deemed appropriate for use in estimation in the most recent NI 43-101 foreign estimate.</p> <p>As the bulk of sampling is from relatively recent diamond core, industry standard practices are anticipated. A coarse gold component is to be expected in high grade gold mines of the Californian Mother Lode, which have produced at over 10 g/t Au historically, and is confirmed within the Project. Various efforts at duplicate sampling of core are recorded in later drill programmes to address QA/QC relating to coarse gold. All sample analysis is by Fire assay, with various programmes using (metallic) screen fire assay (SMF) to assist in the accurate sampling of gold in core. Significant gold was confirmed present in the coarse fraction of screening.</p> <p>Selected historical screen fires have been successfully replicated to a high order by testing balance of available sample by Chrysos PhotonAssay™ (approx. 500gram charge)</p> <p>Current Drilling and Sampling (2025-26: DDH251-293)</p> <p>Current drilling by Haranga is HQ Diamond drilling, sampling intervals are half-cored, wholly fine crushed to - 70% <2mm ; Pulverize to 85% <75 um; Split with Boyd Rotary Splitter. Samples then assayed by Au-AA26 Ore Grade Au 50g FA with AA finish; IF Au >= 100.0 ppm then sample is screen fired via Au-GRA22.</p>


Criteria	JORC Code explanation	Commentary					
		Screen fires will be replicated by testing balance of available sample by Chrysos PhotonAssay™ (approx. 500gram charge)					
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Historical Drilling Summarised by drilling type below, separated by deposit:					
		Hole_ID	Year	Deposit	Drill Type	Holes	m
			1983	Lincoln-Comet	RC	2	142
		ddh-003-ddh-0015	1984-1985	Lincoln-Comet	Diamond	13	2,072
		ddh-0016-ddh-0030	1986	Lincoln-Comet	Diamond	15	2,969
		ddh-0031-ddh-0088; 0104	1987-1990	Lincoln-Comet	Diamond	59	9,245
		ddh-0089-ddh-0162 (excl. 0104)	1990	Lincoln-Comet	UG diamond	74	5,569
		ddh-0163-ddh-0195	2006	Lincoln-Comet	UG diamond	33	2,782
		ddh-0196-ddh-0221	2012	Lincoln-Comet	Diamond	26	3,122
		ddh-0222-ddh-0250	2012	Lincoln-Comet	UG diamond	29	697
						251	26598
		Hole_ID	Year	Deposit	Drill Type	Holes	m
		kdh-0001r-0005r, 0007r-0008r	1983-1984	Medean/SS Hill	RC	7	1,346
		kdh-0006; kdh-0009	1983	Medean/SS Hill	Diamond	2	447
		kdh-0010-kdh-0020	1988-1989	Medean/SS Hill	Diamond	11	2,799
kdh-0021-kdh-0030	2006-2007	Medean/SS Hill	Diamond	10	3,176		
				23	6422		

personal use only

Criteria	JORC Code explanation	Commentary																																																																														
		<p>The diameter of the diamond holes varies from HQ for surface drilling, to NQ For underground. Historical core was typically not oriented.</p> <p>Current Drilling and Sampling (2025-26: DDH251-293) Current drilling by Haranga is HQ Diamond drilling from underground, all core is orientated using an IMDEX digital orientation tool</p>																																																																														
<p>Drill sample recovery</p>	<p>Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</p>	<p>Historical Drilling</p> <table border="1"> <thead> <tr> <th>Hole_ID</th> <th>Year</th> <th>Deposit</th> <th>Drill Type</th> <th>Holes</th> <th>m</th> </tr> </thead> <tbody> <tr> <td></td> <td>1983</td> <td>Lincoln-Comet</td> <td>RC</td> <td>2</td> <td>142</td> </tr> <tr> <td>ddh-003-ddh-0015</td> <td>1984-1985</td> <td>Lincoln-Comet</td> <td>Diamond</td> <td>13</td> <td>2,072</td> </tr> <tr> <td>ddh-0016-ddh-0030</td> <td>1986</td> <td>Lincoln-Comet</td> <td>Diamond</td> <td>15</td> <td>2,969</td> </tr> <tr> <td>ddh-0031-ddh-0088; 0104</td> <td>1987-1990</td> <td>Lincoln-Comet</td> <td>Diamond</td> <td>59</td> <td>9,245</td> </tr> <tr> <td>ddh-0089-ddh-0162 (excl. 0104)</td> <td>1990</td> <td>Lincoln-Comet</td> <td>UG diamond</td> <td>74</td> <td>5,569</td> </tr> <tr> <td>ddh-0163-ddh-0195</td> <td>2006</td> <td>Lincoln-Comet</td> <td>UG diamond</td> <td>33</td> <td>2,782</td> </tr> <tr> <td>ddh-0196-ddh-0221</td> <td>2012</td> <td>Lincoln-Comet</td> <td>Diamond</td> <td>26</td> <td>3,122</td> </tr> <tr> <td>ddh-0222-ddh-0250</td> <td>2012</td> <td>Lincoln-Comet</td> <td>UG diamond</td> <td>29</td> <td>697</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>251</td> <td>26598</td> </tr> <tr> <th>Hole_ID</th> <th>Year</th> <th>Deposit</th> <th>Drill Type</th> <th>Holes</th> <th>m</th> </tr> <tr> <td>kdh-0001r-0005r, 0007r-0008r</td> <td>1983-1984</td> <td>Medean/SS Hill</td> <td>RC</td> <td>7</td> <td>1,346</td> </tr> <tr> <td>kdh-0006; kdh-0009</td> <td>1983</td> <td>Medean/SS Hill</td> <td>Diamond</td> <td>2</td> <td>447</td> </tr> </tbody> </table>	Hole_ID	Year	Deposit	Drill Type	Holes	m		1983	Lincoln-Comet	RC	2	142	ddh-003-ddh-0015	1984-1985	Lincoln-Comet	Diamond	13	2,072	ddh-0016-ddh-0030	1986	Lincoln-Comet	Diamond	15	2,969	ddh-0031-ddh-0088; 0104	1987-1990	Lincoln-Comet	Diamond	59	9,245	ddh-0089-ddh-0162 (excl. 0104)	1990	Lincoln-Comet	UG diamond	74	5,569	ddh-0163-ddh-0195	2006	Lincoln-Comet	UG diamond	33	2,782	ddh-0196-ddh-0221	2012	Lincoln-Comet	Diamond	26	3,122	ddh-0222-ddh-0250	2012	Lincoln-Comet	UG diamond	29	697					251	26598	Hole_ID	Year	Deposit	Drill Type	Holes	m	kdh-0001r-0005r, 0007r-0008r	1983-1984	Medean/SS Hill	RC	7	1,346	kdh-0006; kdh-0009	1983	Medean/SS Hill	Diamond	2	447
		Hole_ID	Year	Deposit	Drill Type	Holes	m																																																																									
			1983	Lincoln-Comet	RC	2	142																																																																									
		ddh-003-ddh-0015	1984-1985	Lincoln-Comet	Diamond	13	2,072																																																																									
		ddh-0016-ddh-0030	1986	Lincoln-Comet	Diamond	15	2,969																																																																									
		ddh-0031-ddh-0088; 0104	1987-1990	Lincoln-Comet	Diamond	59	9,245																																																																									
		ddh-0089-ddh-0162 (excl. 0104)	1990	Lincoln-Comet	UG diamond	74	5,569																																																																									
		ddh-0163-ddh-0195	2006	Lincoln-Comet	UG diamond	33	2,782																																																																									
		ddh-0196-ddh-0221	2012	Lincoln-Comet	Diamond	26	3,122																																																																									
		ddh-0222-ddh-0250	2012	Lincoln-Comet	UG diamond	29	697																																																																									
						251	26598																																																																									
		Hole_ID	Year	Deposit	Drill Type	Holes	m																																																																									
		kdh-0001r-0005r, 0007r-0008r	1983-1984	Medean/SS Hill	RC	7	1,346																																																																									
		kdh-0006; kdh-0009	1983	Medean/SS Hill	Diamond	2	447																																																																									

Criteria	JORC Code explanation	Commentary						
		kdh-0010-kdh-0020	1988-1989	Medean/SS Hill	Diamond	11	2,799	
		kdh-0021-kdh-0030	2006-2007	Medean/SS Hill	Diamond	10	3,176	
							23	6422
		<p>DD recovery data from all drillholes expect ddh-0003-0027 and 0030; 0036-0038; and 0186. Recoveries where recorded are considered very good to excellent due to the hard rock nature of the core. Samples taken from the core are considered representative of the mineralized sections. No known sample bias is expected due to the core recovery</p> <p>Current Drilling (2025-26: DDH251-293) DD recovery data from all drillholes expect ddh-0003-0027 and 0030; 0036-0038; and 0186. Recoveries are considered excellent due to the hard rock nature of the core. Samples taken from the core are considered representative of the mineralized sections. No known sample bias is expected due to the core recovery</p>						
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>Historical Drilling All core samples were geologically logged. The logging is considered appropriate to support basic geological domaining and to support Mineral Resource Estimation and classification. The geological logging completed is considered qualitative. All holes after ddh-0031, and kdh-0009, with the exception of ddh-0186 and ddh-0188, have geological, alteration and vein/structural presence logging. All historical core prior to ddh-0163 at Lincoln-Comet has been discarded, along with unmineralized core from 2012 drilling. Moderate quality photography for holes ddh-0031-0162 exists. The full length of all holes were geologically logged.</p> <p>Current Drilling (2025-26: DDH251-293) All core samples are geologically logged. The logging is considered appropriate to support basic geological domaining and to support Mineral Resource Estimation and classification. The geological logging completed is considered qualitative. Quality wet and dry photography completed. The full length of all holes are being geologically logged.</p>						
Sub-sampling techniques and sample preparation	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p>	<p>Historical Drilling RC holes for Medean/South Spring Hill (MSSH) were continuously sampled with a sample length of 1.52 m, reduced to 0.76 m in mineralisation. For Historical Diamond drilling, all core was cut as half core initially: From 1983 to 1994, core was selectively sampled, with quartz veins and visibly altered and/or mineralised wall rock being selected for assay, with typical sample lengths of between 0.15 and 1.5 m. Samples were also commonly taken on either side of suspected mineralisation. Analyses were typically fire assay, with some samples having a gravimetric finish.</p>						

personal use only

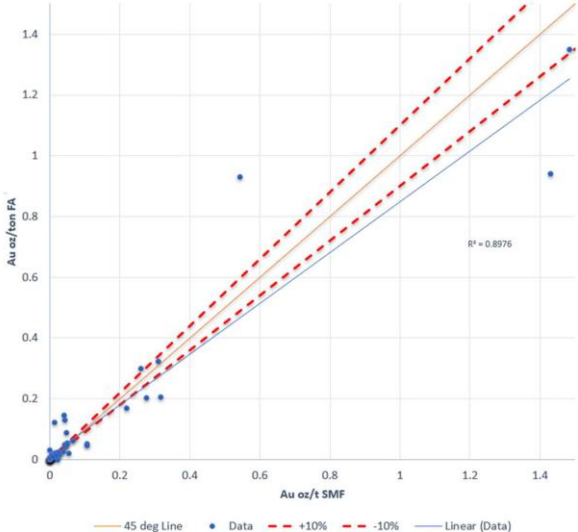Criteria	JORC Code explanation	Commentary
	<p>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</p> <p>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</p> <p>Whether sample sizes are appropriate to the grain size of the material being sampled.</p>	<p>Between 1994 and 2007, samples were selected based on the presence of visible gold, abundant arsenopyrite, the presence of vein quartz, or sulphide-replacement mineralisation. These samples were cut to lengths of between 0.88 and 1.37 m and submitted for screen assay. Other areas of altered rock considered to potentially host mineralisation were submitted for fire assay.</p> <p>During the 2012 drilling, mineralised intervals were identified during logging and analysed by fire assay with an atomic absorption finish. The remaining mineralised core was retained and the unmineralised core was discarded</p> <p>Samples from the 2013 pre-production drilling were analysed by fire assay.</p> <p>Sample Sizes are generally considered appropriate to the material being sampled.</p> <p>However studies exist analysing pulp duplicates, pulp replicates (newly pulverised sample from coarse reject) and field duplicates (or twins where the remaining core existed) was analysed. The study encompassed drill core, underground chip sample data and muck samples and was conducted to try to determine the inherent variability of mineralisation at Lincoln-Comet. Findings unsurprisingly showed high variability between samples at all subsample stages.</p> <p>The information suggests that this variability is reduced for metallic screen assay (SMF) when compared with routine fire assay (1ATF) suggesting that SMF is the preferred assay technique for the style of mineralisation found at Lincoln-Comet (refer scatter plot of available comparison from 2006 drilling below). Ideally all samples should be crushed and pulverised before sub-sampling occurs.</p> <p style="text-align: center;">Scatter Plot : Au SMF vs Au FA</p>  <p style="text-align: center;"> — 45 deg Line • Data - - - +10% - - - -10% — Linear (Data) </p>

personal use only

Criteria	JORC Code explanation	Commentary																														
		<p>Sample sizes are considered appropriate to the grain size of the material being sampled, but as in all gold projects with a coarse gold component, the larger sample size the better, including charge for fire assay. Haranga conducted tests on available source material, utilizing both Fire Assay with a 50gram charge, and Screen Fire to extinction for comparison with database values where possible, which supported larger sampling sizes.</p> <p>Current Drilling (2025-26: DDH251-293)</p> <p>All core to be sampled is cut as half core initially: samples are selected based on the presence of visible gold, abundant arsenopyrite, the presence of vein quartz, or sulphide-replacement mineralisation. These samples are intended to be cut to lengths of up to 1m, sampled on geological boundaries and submitted for 50gram charge fire assay. Other areas of altered rock considered to potentially host mineralisation are submitted for fire assay. Zones immediately adjacent to potential mineralisation are also sampled.</p> <p>Sample sizes are considered appropriate to the grain size of the material being sampled, All selected sampling intervals are half-cored, wholly fine crushed to - 70% <2mm; Pulverized to 85% <75 um; Split with Boyd Rotary Splitter to a 1kg sample size before sample selection. Samples then assayed by Au-AA26 Ore Grade Au 50g FA with AA finish; IF Au >= 10ppm then sample is screen fired via Au-GRA22. Screen fires will be replicated by testing balance of available sample by Chrysos PhotonAssay™ (approx. 500gram charge)</p>																														
Quality of assay data and laboratory tests	<p>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</p>	<p>Historical Drilling</p> <p>All assaying of core has been Fire Assay of variable charge, with some screen fires summarised in the table below. The technique is considered a total assay technique, and considered appropriate for the material being analysed.</p> <p>A small selection of historical high grade pulps were subjected to Chrysos PhotonAssay™, and returned values very consistent with due diligence screen fires (this release). Both values were typically not consistent with the original database value derived from FA30 gram charges.</p> <p>Acceptable levels of accuracy and precision have not currently been established where QA/QC is absent. A more detailed discussion of laboratory procedures are discussed in the report entitled "Updated Technical Report on the Lincoln Mine Project, Amador Co., CA, Sutter Gold Mining Inc." created on 2nd July 2015 and available to view on https://haranga.com/investors/asx-announcements/; but summarised below:</p> <table border="1"> <thead> <tr> <th>Hole_ID</th> <th>Assay Type</th> <th>Laboratory</th> <th>Original Assay files</th> <th>QA/QC</th> </tr> </thead> <tbody> <tr> <td>ddh-003-ddh-0015</td> <td>Fire Assay</td> <td>Shasta</td> <td>Yes</td> <td>Some</td> </tr> <tr> <td>ddh-0016-ddh-0030</td> <td>Fire Assay</td> <td>Barringer</td> <td>Yes</td> <td>Nil</td> </tr> <tr> <td>ddh-0031-ddh-0073; 0104</td> <td>FA30gm</td> <td>Barringer</td> <td>Yes</td> <td>Nil</td> </tr> <tr> <td>ddh-0074-ddh-0162 (excl. 0104)</td> <td>FA30gm</td> <td>Chemex</td> <td>Yes</td> <td>Nil</td> </tr> <tr> <td>ddh-0163-ddh-0195</td> <td>Screen Fire</td> <td>American Assay</td> <td>Yes</td> <td>Yes</td> </tr> </tbody> </table>	Hole_ID	Assay Type	Laboratory	Original Assay files	QA/QC	ddh-003-ddh-0015	Fire Assay	Shasta	Yes	Some	ddh-0016-ddh-0030	Fire Assay	Barringer	Yes	Nil	ddh-0031-ddh-0073; 0104	FA30gm	Barringer	Yes	Nil	ddh-0074-ddh-0162 (excl. 0104)	FA30gm	Chemex	Yes	Nil	ddh-0163-ddh-0195	Screen Fire	American Assay	Yes	Yes
Hole_ID	Assay Type	Laboratory	Original Assay files	QA/QC																												
ddh-003-ddh-0015	Fire Assay	Shasta	Yes	Some																												
ddh-0016-ddh-0030	Fire Assay	Barringer	Yes	Nil																												
ddh-0031-ddh-0073; 0104	FA30gm	Barringer	Yes	Nil																												
ddh-0074-ddh-0162 (excl. 0104)	FA30gm	Chemex	Yes	Nil																												
ddh-0163-ddh-0195	Screen Fire	American Assay	Yes	Yes																												

Criteria	JORC Code explanation	Commentary
		<p>For Lincoln-Comet, with the exception of the final drill program which consisted of short, underground production-type holes, all campaigns show comparable Au analyses with some differences caused by the different levels of selective assaying implemented.</p> <p>Quality of Laboratory Data: 2025 Due diligence Samples were submitted to ALS laboratory in Reno Nevada, which holds multiple accreditations, including ISO/IEC 17025:2017 for testing and calibration laboratories. It was a participating laboratory in the April 2024 round robin for WA-based Geostats Pty Ltd. Over 200 samples were hand delivered some 250km distance to ALS laboratory in Reno, Nevada for the following sample streams: Homogenisation of pulps as required (Method HOM-01- homogenise by light pulverising) Fire assay by 50 gram charge (ALS Method Au-AA26), Screen fire assay on known high grade results and proximal material (ALS Method Au-SCR24), Fire assay by 50 gram charge to extinction (ALS Method Au-GRA22) instead of screen fire when sample weight was <250grams. both ME-MS and ICP-AES on quarter core cut from selected gold-bearing intervals within ddh-203; crushed and all sample pulverised before sample selection. Core ample processing included CRU-21- Crush entire sample; CRU-31- fine crushing 70% <2mm; PUL-31- Pulverise up to 250g with 85% <75 um; and SPL-22Y- Sample Split with Boyd Rotary Splitter. ME-MS41L is aqua regia digest of a 0.5gm charge, described as Super trace Lowest Detection Limit by ICP-MS, analysing for up to 53 elements including semi-qualitative gold. ME-ICP81 is an Ore Fusion technique of up to 16 elements and elemental oxides. Sample intervals selected from each hole contained a minimum of one standard and one blank for quality control. Geostats Pty Ltd Standards G324-7 (3.64 ppm), G317-1 (11.03 ppm), G921-3 (13.01 ppm) were used, along with GBM913-3 (1 ppb Au) as a blank. As commentary, one fail (0.45 ppm for G317-1) was noted, and other gold standards generally reported within 2 Standard deviations of the expected results. Averages of the gold bearing CRM's were 98%, 96% and 97% respectively of the expected value, excluding the fail. However the blanks were consistently outside of expected below detection levels until the end of the exercise, returning values to a maximum of 0.2 ppm. The Company and laboratory considered low level gold contamination was experienced during homogenisation and/or the pulverising stages between samples. The blank results were not considered material to the estimation of resources in this setting.</p> <p>Current Drilling (2025-26: DDH251-293) All assaying will initially consist of Fire Assay utilising 50gram charge, with screen fires followup on assays >10ppm. These techniques are considered a total assay technique and considered appropriate for the material being analysed. Screen fires will be replicated by testing balance of available sample by Chrysos PhotonAssay™ (approx. 500gram charge).</p>

personal use only

Criteria	JORC Code explanation	Commentary												
		Acceptable levels of accuracy and precision for gold are expected to be achieved by submission of a range of Certified Reference materials (CRM's) and blanks provided by Geostats, specifically GLG 912-2 (0.002ppm); GBM913-3 (0.001ppm); G910-9 (1.51ppm); G324-7 (3.64ppm); G323-1 (5.74ppm); G317-1 (11.03ppm); and G921-3 (13.01ppm) inserted into the sampling sequence, targeted at mineralisation. Assays from the laboratory are currently passing acceptable levels of accuracy and precision.												
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p>	<p>Historical Drilling</p> <p>Haranga personnel and consultants have made a site visit to review primary source data and to undertake work to verify significant intersections from both core and stored pulps.</p> <p>Intentionally twinned holes are not present in the database</p> <p>Full details on data documentation and entry protocols are not known. However, Haranga personnel and consultants have reviewed scanned copies of hand-written paper logs, scanned data and a digital database of drillholes.</p> <p>Some historical assay data has been adjusted from ounce per short ton and ounce per metric tonne, to parts per million/grams per tonne as required. Sample intervals have been converted from imperial feet to metric</p> <p>2025 Due diligence</p> <p>Haranga personnel and consultants selected the primary source data, collated the stored pulps, cut the quarter core from ddh-0203, and provided the CRM's to the sample stream.</p> <p>No adjustment to assay data has been made, other than length weighting of the intervals for significant intervals. After initially considering results from Au-GRA22 as an initial result and duplicates, the Company has decided to average the values for interval calculations; treating it similarly to the larger mass screen fires they were intended to emulate.</p> <p>Current Drilling (2025-26: DDH251-293)</p> <p>Currently planned holes are intended to perform verification of historic intersections in most instances Haranga personnel and consultants are maintaining a digital database of primary data from the current programme, backed by industry standard procedures.</p> <p>No adjustment to assay data will be undertaken.</p>												
Location of data points	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<p>Historical Drilling</p> <p>Comparison of original paper logs and digital data shows a concerted effort to relocate collars to topography and position. Estimates of inaccuracy of early surface drilling collars is considered to be less than 3m at most. After professional surveying of development early UG collars were matched to position, changing from original estimated coordinates by up to 15m.</p> <table border="1"> <thead> <tr> <th>Hole_ID</th> <th>DH Survey</th> <th>Original files</th> <th>Collar Surveys</th> </tr> </thead> <tbody> <tr> <td>ddh-003-ddh-0015</td> <td>Eastman every 100'</td> <td>yes</td> <td>unknown</td> </tr> <tr> <td>ddh-0016-ddh-0030</td> <td>Eastman every 100'</td> <td>yes</td> <td>unknown</td> </tr> </tbody> </table>	Hole_ID	DH Survey	Original files	Collar Surveys	ddh-003-ddh-0015	Eastman every 100'	yes	unknown	ddh-0016-ddh-0030	Eastman every 100'	yes	unknown
Hole_ID	DH Survey	Original files	Collar Surveys											
ddh-003-ddh-0015	Eastman every 100'	yes	unknown											
ddh-0016-ddh-0030	Eastman every 100'	yes	unknown											

Criteria	JORC Code explanation	Commentary			
		ddh-0031-ddh-0073; 0104	Eastman every 100'	yes	unknown
		ddh-0074-ddh-0162 (excl. 0104)	Eastman every 100'	yes	unknown
		ddh-0163-ddh-0195	Reflex EZ every 100'	yes	Professionally
		ddh-0196-ddh-0221	Reflex EZ every 100'	yes	Professionally
		ddh-0222-ddh-0250	Reflex EZ every 100'	yes	Professionally
		<p>Collar surveys only are available and downhole survey information for ddh-0031, 0032; and 0104, 0110, 019, 0120, 0126, 0133, 0141, 0146a, 0148. Only two of these latter holes are greater than 50m length. Likewise, Collar survey only are available for ddh-0169, 0189, and 0192 (none deeper than 16m length). No downhole survey available for preproduction holes ddh-0222-ddh-0250.</p> <p>All coordinates are reported relative to the NAD83/California Zone 2 coordinate system (expressed in metres) Topographic control is reported via the North American Vertical Datum of 1988 (NAVD 88). Topographic control of the data is considered adequate for the majority of database. Early drilling has lesser location control but is not material to the resource, and superseded by subsequent drilling.</p> <p>Current Drilling (2025-26: DDH251-293)</p> <p>The Company is utilising north-seeking gyros to establish collar and downhole survey control; for deeper holes (ca. >50m) checks are undertaken during drilling to confirm expected accuracies; a continuous data set for downhole survey is completed on exit. Professional surveying of collars will be completed at the conclusion of the programme.</p> <p>Currently planned holes are intended to perform verification of historic intersections in most instances All coordinates are reported relative to the NAD83/California Zone 2 coordinate system (expressed in metres). While the Company is working towards reporting data utilising UTM, more control via survey verification is required in the near-term to satisfactorily resolve this conversion to a high accuracy.</p> <p>Topographic control is reported via the North American Vertical Datum of 1988 (NAVD 88).</p>			
Data spacing and distribution	Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied	<p>Drillholes are irregularly spaced across the Project. Holes are on a relatively close spacing around the main mineralised zones, and fanned from single collars in the main mineralisation zones from underground positions, As such reported exploration results are generally intended to show true width, but with multiple lodes intersected from development positions.</p> <p>The Competent Person considers that following the planned validation drilling and database updates, the data spacing and distribution of the historical drillholes is sufficient to imply continuity as required for future Mineral Resource Estimation and classification. This is significantly supported by underground development on the Project.</p> <p>No sample compositing has been applied to the historical drill data, although compositing has been applied to the foreign resource estimation.</p>			

personal use only

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and key mineralised structures may have introduced a sampling bias.	Mineralisation is interpreted to be structurally controlled, dipping to the west at between 50-90 degrees. Development is along the strike of mineralisation and subsequent drill platforms are oriented normal to the strike of mineralisation, and intended to achieve unbiased sampling of mineralised structures. Any bias in the data from the drilling orientations has not been assessed at this stage.
Sample security	The measures taken to ensure sample security.	<p>Historical Drilling No specific chain of custody documentation for sample preparation and transport has been presently documented.</p> <p>2025 Due Diligence: Haranga personnel and consultants collated the Due Diligence materials during the site visit. The material remained securely on site until transported by the acting Mine Manager personally to ALS in Reno, Nevada.</p> <p>Current Drilling (2025-26: DDH251-293) Samples are processed onsite within the current Mine workshop, with 24 hr observation. Samples are then transported by independent contractor directly to ALS Reno for submission on average twice weekly.</p>
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	<p>Seduli (vendors of the project to Haranga) commissioned reviews of the database by Mining Plus in 2023 in the form of a Gap Analysis and Drillhole Audit. Amongst recommendations it states:</p> <p>Collar Verification: Mining Plus considers the lack of collar verification to be low risk to the integrity of the drillhole database due to the existence of underground development that verifies the position</p> <p>Survey Verification: Of the total 249 diamond drill holes in the Lincoln-Comet deposit, 44 holes do not contain any downhole surveys (or 18% of diamond drill holes). The majority of these holes are short length holes with only 6 holes over 50m in length that are missing surveys. Mining Plus considers the lack of downhole surveys available for checks to be low risk to the integrity of the drillhole database particularly in areas proximal to existing underground development. While the quality of surveys in some of the deeper holes may not accurately define the exact location of mineralised lodes, this would have a limited impact on the thickness of the mineralisation and overall volume.</p> <p>Assay Verification- Mining Plus considers the lack of QAQC information and poor quality of the existing assay information to be a moderate risk to the integrity of the drillhole database as the accuracy and precision of the available assay data cannot be verified</p>

personal use only

SECTION 2 REPORTING OF EXPLORATION RESULTS

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The Lincoln Project comprises 47 property parcels that are held as a combination of outright ownership and lease agreements). Forty-five of the parcels include mineral rights and 15 include surface rights (leased or owned). The properties total 322 Ha, comprising 63 Ha (41 Ha owned) of surface rights and 285 Ha (57 Ha owned) of mineral rights. The mineral claims are considered secure, with claims expiring under agreement to roll over to a new term. The Project has a Conditional use permit from Amador county permitting mining up to 1000 short tons per day, and processing of 350,000 short tonnes per annum.
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The first modern gold exploration in the project area began when Callahan Mining Corp (Callahan) acquired the project in 1983. They initially identified a strong arsenic in soil anomaly over what became the Lincoln resource area. The soil anomaly was tested with reverse circulation (RC) and diamond drilling, which successfully discovered bedrock gold mineralisation at depth. The drilling was accompanied by detailed geological mapping and rock chip sampling of the project area. In 1986, Callahan entered into a joint venture with Pancana Minerals Inc (Pancana). Drilling continued within the Lincoln resource area, with the results being used to conduct a resource estimate. This represented the first major gold discovery in the Mother Lode since the 1940's. The properties were sold to Meridian Gold Company (Meridian) in 1987-1988 who carried out an extensive exploration drilling program that resulted in the discovery of the Comet orebody to the north of Lincoln, as well as a deep zone of mineralisation in the Keystone 5 vein. Meridian defined Indicated and Inferred resources for the eastern contact vein of the Keystone deposit. In 1989-1990, Meridian developed the Stringbean Alley decline to facilitate exploration of the newly discovered Comet deposit (Tietz et al., 2015). The decline was 880 m long, 3.7 m high, 4.6 m wide and declined at a rate of 12%. 731m of crosscuts were also developed. The initial goal was for the decline to continue through to the Lincoln orebody, but it was terminated before reaching the Lincoln zone. From within the underground development, Meridian conducted chip sampling and diamond drilling, resulting in additional resources being defined within the Comet zone. Four development raises and 274 m of sublevel drifts were constructed, and a 7,366-tonne bulk sample was collected and milled at the nearby Royal Mountain King mill. In 1990, Meridian was purchased by FMC Gold Company, which was later acquired by a joint venture between Seine River Resources Inc and US Energy Corp. Additional exploration and underground test work were conducted while permits for mining were sought. A pre-feasibility study (Stinnett et al., 1993) and resource estimate were conducted before US Energy and Crested Corp acquired a 100% ownership in the project. In 1994 they incorporated Sutter Gold Mining Company (SGM) to run the project.

personal use only

Criteria	JORC Code explanation	Commentary
		<p>All necessary permits for mining and milling had been obtained by 1998. SGM leased the Central Eureka mine property in 2004, extending the project area to the south, and in 2009, the Original Amador and Bunker Hill mine properties were added to the north.</p> <p>Between 2011 and 2013 SGM entered preproduction, constructed substantial siteworks and a mill, but failed to enter commercial production with a number of capital items outstanding, including tailings disposal and a proposed gold circuit.</p> <p>Seduli acquired the asset with an initial intention to achieve gold production privately, but then looked to take the Project to IPO on the ASX, but has subsequently vended the property to Haranga in 2025</p>
<p>Geology</p>	<p><i>Deposit type, geological setting and style of mineralisation.</i></p>	<p>The Lincoln Gold Project is located in Central California, within the Western Foothills of the Sierra Nevada Mountain Range. The Sierras divide the Basin and Range province in Nevada and Utah to the east from the Great Valley in California to the west. The spatially extensive Sierra Nevada granodioritic batholith that comprises much of the Sierra Nevada mountains to the east was emplaced from the Jurassic to the Cretaceous.</p> <p>The rocks of the Western Foothills were initially deposited in the Pacific Basin, before being accreted onto the western margin of North America from the Palaeozoic to Jurassic. They comprise metasedimentary and metavolcanics, as well as mafic to ultramafic intrusions that are commonly serpentinised.</p> <p>In the Late Jurassic to Early Cretaceous, the rocks of the Western Foothills underwent extensive deformation involving shearing, folding, and faulting. This deformation was associated with extensive structurally controlled gold mineralisation and the formation of the famous 190 km long, 1.5-6.5 km wide Mother Lode system, which extends from Georgetown in the north to Mormon Bar in the south.</p> <p>Mineralisation is primarily controlled by major shear zones within the Gold Fault Zone. Within these shear zones, sheeted quartz veins have developed and host most of the gold. Additional gold occurs in wall rock within the shear zones, where fluid-rock interaction has resulted in sulfidation of the original rocks. Recent mapping has identified cross-cutting shear zones that appear to have resulted in widening of the lodes and formation of high gold grades</p>
<p>Drill hole Information</p>	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <p><i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i></p>	<p>Summary documentation for the foreign resource estimation (to Ni 43-101 standard) is available to view on https://haranga.com/investors/asx-announcements/.</p> <p>No assays are reported in this release .</p> <p>Material excluded from this previous reporting is the part of ongoing review, including validation of the database to support JORC resource estimation by the acting Competent Person, which is a key milestone within the term sheet between Seduli and Haranga. Full significant intercept data will be provided at the conclusion of this exercise and reported to the ASX. This exercise is still ongoing as a process, as the company in finalising a process of rebuilding a database from first principles.</p>

personal use only

Criteria	JORC Code explanation	Commentary
	<i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	
<i>Data aggregation methods</i>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	No new results are reported in this release. No metal equivalents are reported.
<i>Relationship between mineralisation widths and intercept lengths</i>	<i>These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	Mineralisation is interpreted to be structurally controlled and drilling is attempted to be normal to this control where possible. Readers are advised to refer to previously released Lincoln Gold Project announcements discussed in this release. No new results are reported in this release.
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Maps and sections are included in the body of the previous HAR:ASX report "Haranga secures richest section of legendary Mother Lode" dated 11 April 2025.
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	No relevant information has been omitted from this report.
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and</i>	Significant metallurgical and preliminary economic assessment has been completed at the Project, however Haranga is currently completing Due Diligence of all aspects of this work. Summary detail "Updated Technical Report on the Lincoln Mine Project, Amador Co., CA, Sutter

Criteria	JORC Code explanation	Commentary
	<p><i>method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<p>Gold Mining Inc." created on 2nd July 2015 and available to view on https://haranga.com/investors/asx-announcements/.</p> <p>Both the most recent Lincoln-Comet and Keystone Foreign Resource Estimates (NI 43-101) are contained within this document, by the same party - Mine Development Associates (MDA), based in Nevada (now RESPEC).</p> <p>For the Lincoln-Comet Foreign Resource Estimate source data, published March 31, 2011-refer the Updated Technical Report, p147, bolded line in Table 17.8, and summarised in Table 17.9. At Lincoln-Comet, MDA classified most of the resource as Inferred with only a small proportion in the Indicated category. This was due to the nugget character of the deposit resulting in uncertainty in grade estimation. Twenty-six additional holes were drilled at Lincoln-Comet after the 2011 MDA resource was estimated (p133) section 14.2:</p> <p><i>"... MDA reviewed all 26 of the surface holes completed in 2012, along with the majority of underground drilling and sampling, and concludes that this drilling substantially supports the 2011 estimate. Though the drilling and underground development did locally extend and expand the high-grade gold zones, this work did not change the resource in a material way. For this reason, the Lincoln-Comet resource estimate described in this section is still current..."</i></p> <p>This estimation does use underground channel sampling (approximately 10% of assays) in grade estimation.</p> <p>For Keystone Foreign Resource Estimate source data, also refer the Updated Technical Report, p154, summarised in Table 14.12.</p> <p>At Keystone, MDA classified the resource as Inferred due to the wide drill spacing and lack of underground sampling. MDA noted that there is a possibility that portions of the resource have been mined out historically.</p>

personal use only