

## METALLURGICAL DRILLING CONFIRMS STRONG, CONSISTENT MINERALISATION ACROSS PARKS REEF

Podium Minerals Limited (ASX: POD) (**Podium** or the **Company**) is pleased to report the first batch of assay results from its recently completed metallurgical and resource extension drilling programme at the Parks Reef Platinum Group Metals (**PGM**) Project (**Parks Reef**) in Western Australia. 3E results have now been received for the 17 PQ diamond holes drilled at different locations across Target Starter Mine #1 (**Area 1**) and Target Starter Mine #2 (**Area 2**) of the Parks Reef deposit (refer Podium ASX release dated 20 April 2026, *Parks Reef Metallurgical and Resource Extension Drilling Campaign Completed*).

### HIGHLIGHTS

- All 17 sulphide metallurgical diamond holes intersected both the PGM Zone and Cu-Au Zone at expected depths, **confirming the Parks Reef geological and resource model**.
- In all holes, the **PGM Zone intercept widths ranged from 10 to 24 metres (downhole)**, with PGM mineralisation averaging ~17 metres.
- Significant **new high-grade intercept** at approximately 96m depth in PQ diamond hole **PRDD022**, returning:
  - **2.4m @ 2.52 g/t 5E PGE** from 96m
    - Including **1.1m @ 4.14 g/t 5E** from 97.3m
- Other highlights include:
  - **PRDD013: 26.0m @ 1.31 g/t 5E PGE** from 55m
    - Including **3.0m @ 2.6 g/t** from 59.0m
  - **PRDD014: 24.2m @ 1.76 g/t 5E PGE** from 58.0m
    - Including **1.6m @ 3.64 g/t** from 59.7m
  - **PRDD015: 22.0m @ 1.60 g/t 5E PGE** from 44.0m
    - Including **3.2m @ 2.65 g/t** from 44.0m
  - **PRDD022: 34.0m @ 1.33 g/t 5E PGE** from 64.0m
    - Including **6.0m @ 2.37 g/t** from 69.0m
- **3E mineral distribution profiles are consistent with previous drilling**, and display discrete high-grade hanging wall and footwall mineralised domains in 15 of the 17 PQ holes, presenting opportunities for selective mining and feed grade optimisation strategies (refer Podium ASX release dated 9 March 2026, *Parks Reef Hanging Wall Delivers Major PGM Upgrade*).
- Assay results for holes drilled in Area 2 confirm PGM Zone and Cu-Au Zone **continuity at the eastern extension** of the Parks Reef deposit.
- Drill holes **cover a total of ~3.3km strike length**: ~2.5km in Area 1 and ~800m in Area 2.
- Substantial drilling footprint of **~3.3km delivers ~2 tonnes** of representative sample for ongoing metallurgical test work, including process validation and performance optimisation of the concentrator flowsheet as well as process development for different mineralised zones.
- Rhodium and iridium assay results for 4 of the 17 PQ holes are pending, and are expected in coming weeks.
- Assay results from six deeper resource continuity holes drilled to 430-510m depth across Area 1 are also pending.

## Podium's Managing Director and CEO, Rod Baxter commented:

*"We are very pleased with these initial results from the 17 PQ diamond holes drilled in our recent Parks Reef drilling campaign. The primary purpose of the reported holes was the collection of a substantial volume of bulk sulphide material to feed our ongoing metallurgical test work program which is focussed on flowsheet validation and delivering further concentrator flowsheet performance improvements. Importantly, these holes also enable further structural and geological understanding of the Parks Reef deposit.*

*To this end, these assay results confirm the strong continuity of mineralisation at Parks Reef, with broad PGM Zone intercepts extending over downhole widths of 10-24m and delivering robust average grades across the program area. Importantly, these results closely match our current geological and structural model, with 15 of the 17 PQ holes defining discrete high-grade hanging wall and footwall domains. This supports potential selective mining and feed-grade optimisation opportunities at Parks Reef.*

*Results received to date also confirm the breadth of gold and copper enrichment within the Cu-Au Zone above the PGM Zone hanging wall domain. This highlights further opportunities for feed optimisation.*

*We look forward to receiving the rhodium and iridium assays which are still pending for four of the 17 PQ holes, along with results from the remaining deeper diamond holes which were designed to test the potential for continued Parks Reef mineralisation at depth."*

## PARKS REEF METALLURGICAL AND RESOURCE EXTENSION DRILLING

Podium has recently completed a metallurgical and resource extension drilling campaign<sup>1</sup> at its flagship Parks Reef PGM Project in Western Australia. The campaign comprised three sequential phases:


1. **Metallurgical samples (sulphide).** Seventeen (17) PQ diamond holes were drilled into the sulphide mineralisation across Area 1 and Area 2. All holes were drilled to depths of between 80m and 120m to sample the oxide-sulphide transition, Cu-Au Zone, and PGM Zone, and were oriented approximately perpendicular to strike.

Drilling providing approximately 2 tonnes of PGM Zone (plus Cu-Au Zone) diamond core sample material for further metallurgical test work, including ongoing metallurgical process validation and performance optimisation of the concentrator flowsheet as well as process development work on different mineralised zones (refer recent Podium ASX release dated 9 March 2026, *Parks Reef Hanging Wall Delivers Major PGM Upgrade*).

2. **Resource continuity at depth.** Six (6) HQ diamond holes were drilled into the bulk sulphide mineralisation at depths of approximately 300m – 500m. The assay results from this drilling are set to deliver enhanced understanding of resource continuity at depth. The drill core obtained will also generate additional metallurgical core from the PGM Zone for evaluation in the Concentrator. Assay results for these holes are still awaited.
3. **Metallurgical samples (oxide).** Four (4) RC holes were drilled into the shallow oxide section of the PGM Zone. This drilling will provide oxide zone metallurgical sample for process development.

<sup>1</sup> Refer to AS Announcement date 20 April 2026, "Parks Reef Metallurgical and Resource Extension Drilling Campaign Completed"

**Figure 1: Long section showing location of metallurgical and deeper resource continuity drill holes as well as historic drillhole traces<sup>2</sup> along Parks Reef 15km strike length**

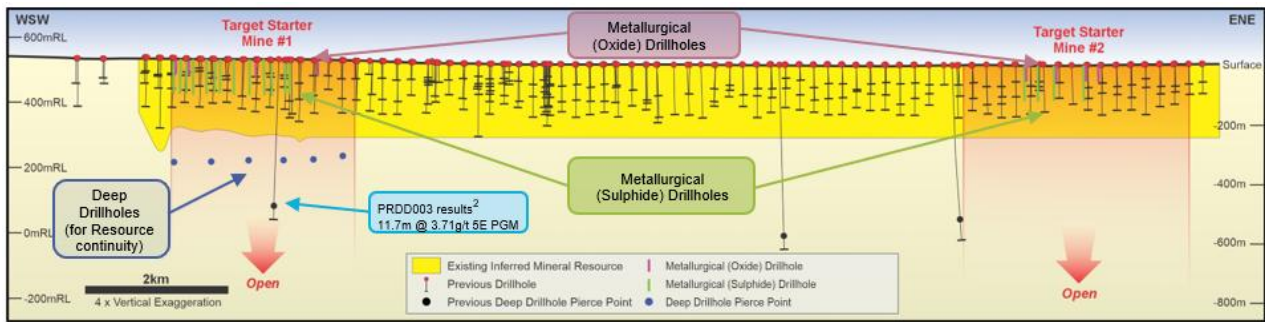

## ASSAY RESULTS

The assay suite comprised lead fire assay (Pb-FA) for platinum (Pt), palladium (Pd), and gold (Au) (collectively 3E), laser ablation ICP (LA-ICP) for copper (Cu) and nickel, and nickel sulphide fire assay (NiS-FA) for 3E plus rhodium (Rh) and iridium (Ir) (collectively 5E).


All samples were processed and analysed at Bureau Veritas Minerals Pty Ltd laboratory in Perth, Western Australia.

3E assay results have now been received for all 17 PQ diamond holes. Rhodium and iridium assay results have been received for 13 of the 17 PQ holes, with the balance of 4 holes still pending. Results for Rh and Ir will be released once received.

### Assay Results for Area 1 – Target Starter Mine #1 (PRDD010–PRDD023)

Fourteen (14) PQ diamond holes were drilled at various locations (refer to Figure 2) across 1.6km of the resource strike between Sections 19.0W and 27.0W . All holes intersected the Cu-Au Zone and PGM Zone at expected depths. The PGM Zone intercept widths ranged from 10 to 24 metres (downhole), with an average width of mineralisation of approximately 19 metres.


**Figure 2: Drill hole locations Target Starter Mine #1**

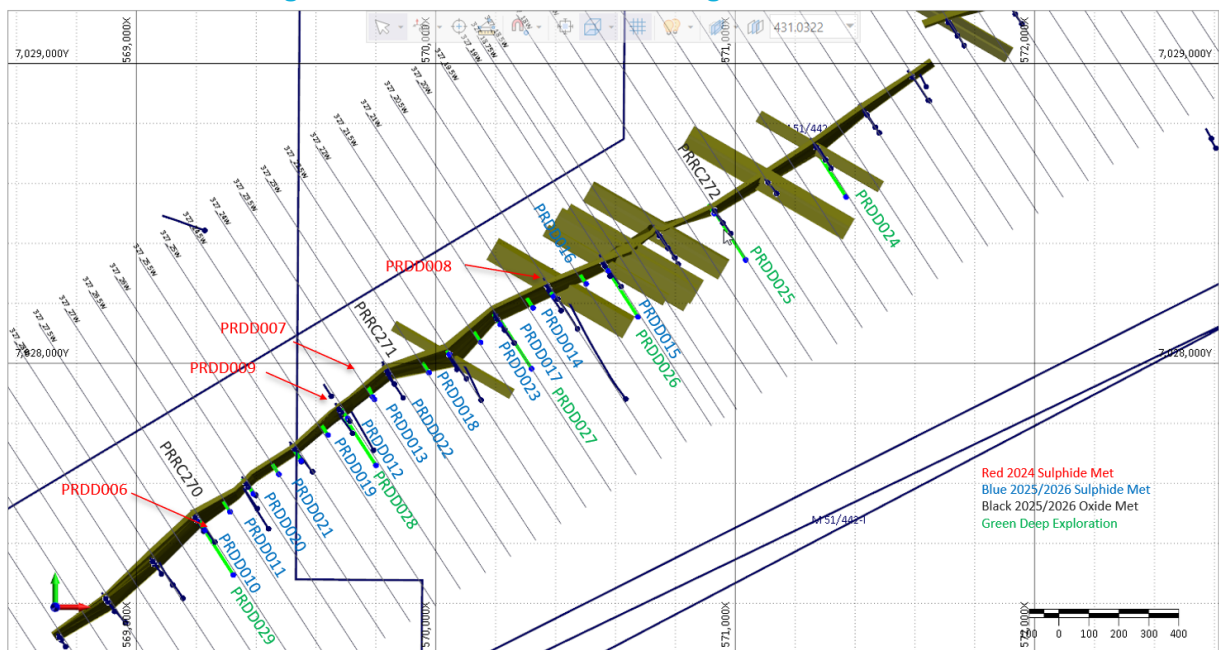


<sup>2</sup> Refer to ASX announcement dated 20 April 2022, "Outstanding High Grade Deep Diamond Drilling Results Double Depth of Parks 5E PGM Orebody to ~500m Below Surface"

Mineral distribution profiles for each of the 14 diamond holes (PRDD010 to PRDD023) are included in Figures 3 to 16.

**Figure 3: Mineral Distribution Profile for Metallurgical Hole PRDD010**

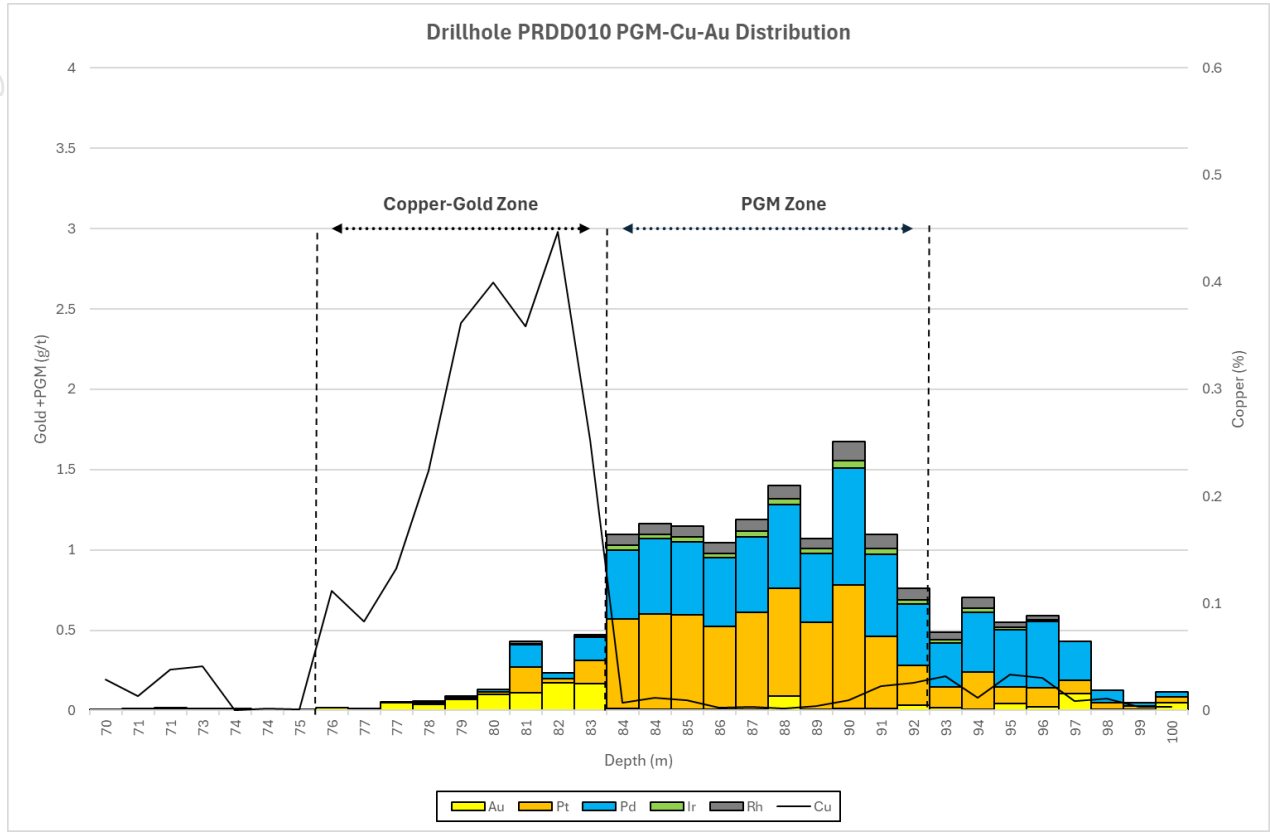

**Figure 4: Mineral Distribution Profile for Metallurgical Hole PRDD011**

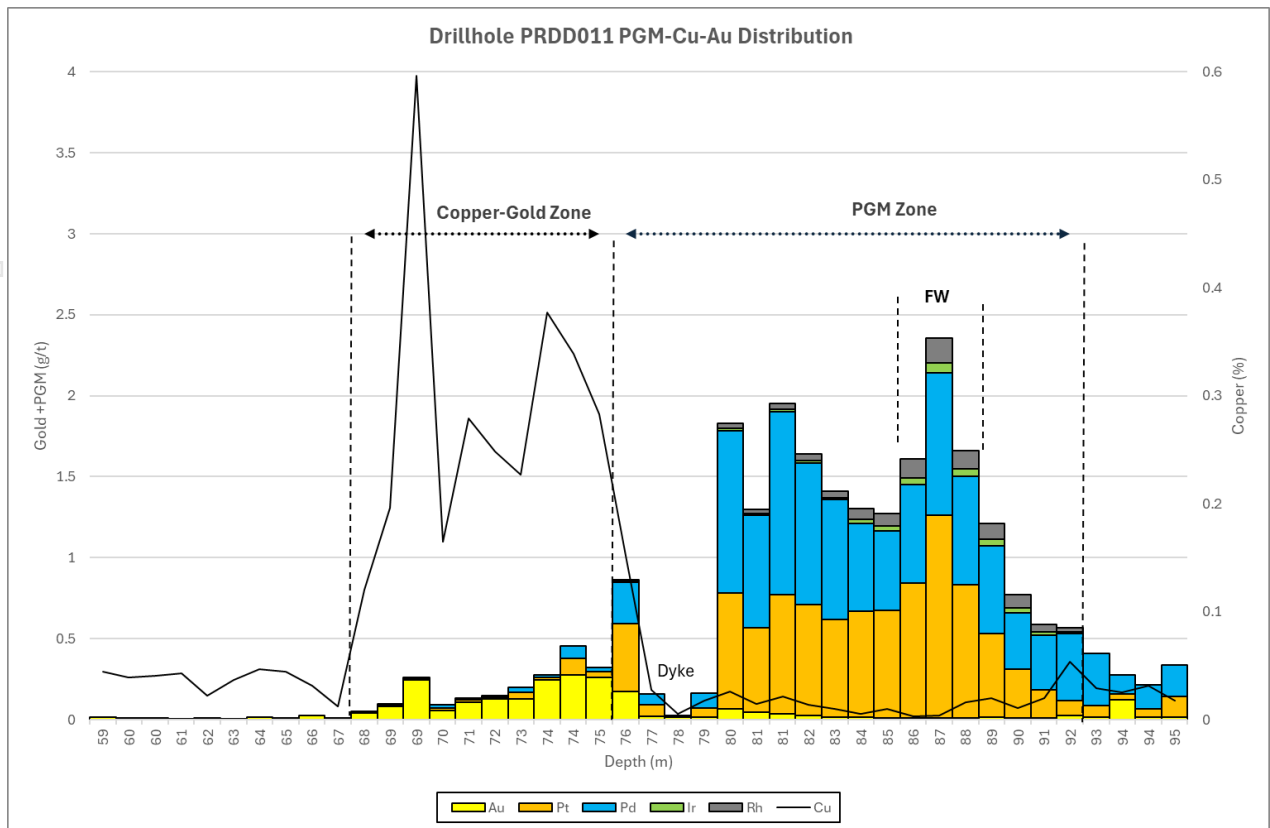

For personal use only

Figure 5: Mineral Distribution Profile for Metallurgical Hole PRDD012

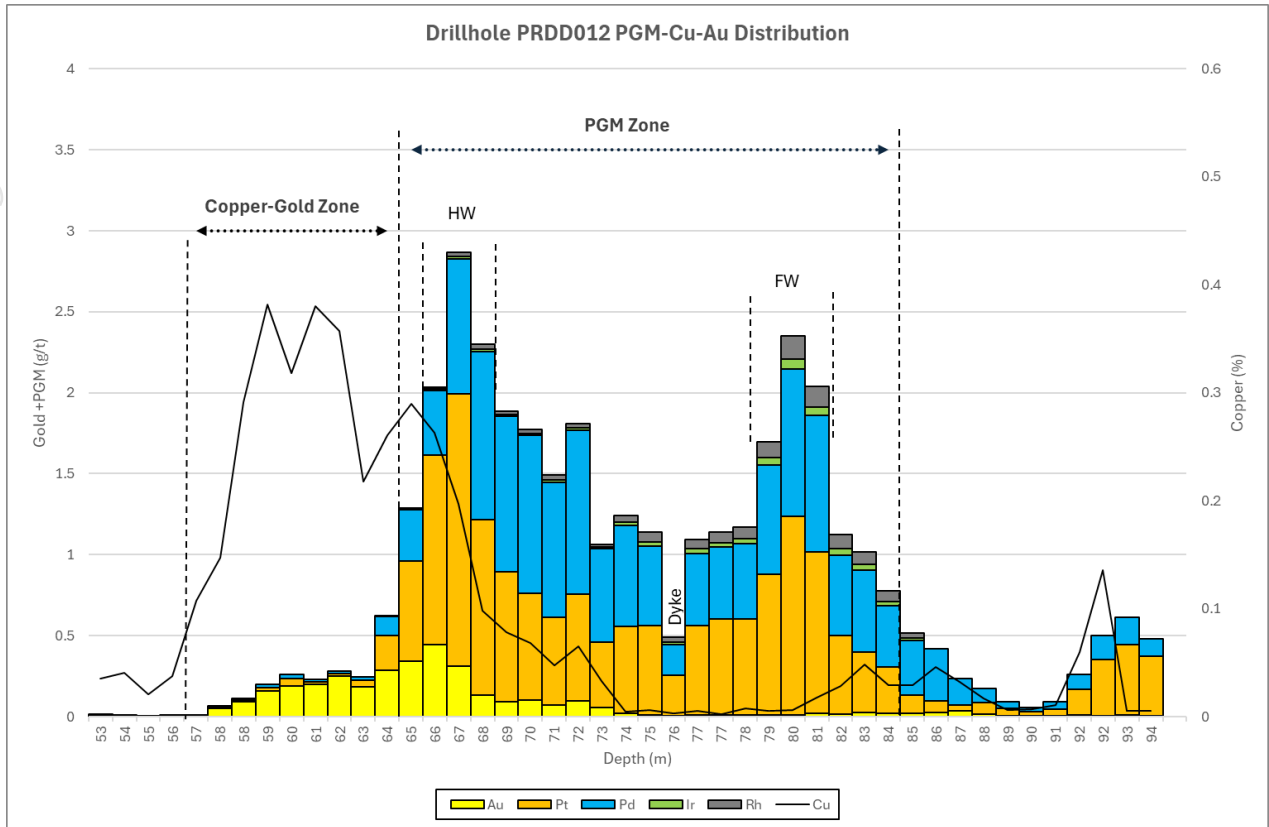


Figure 6: Mineral Distribution Profile for Metallurgical Hole PRDD013

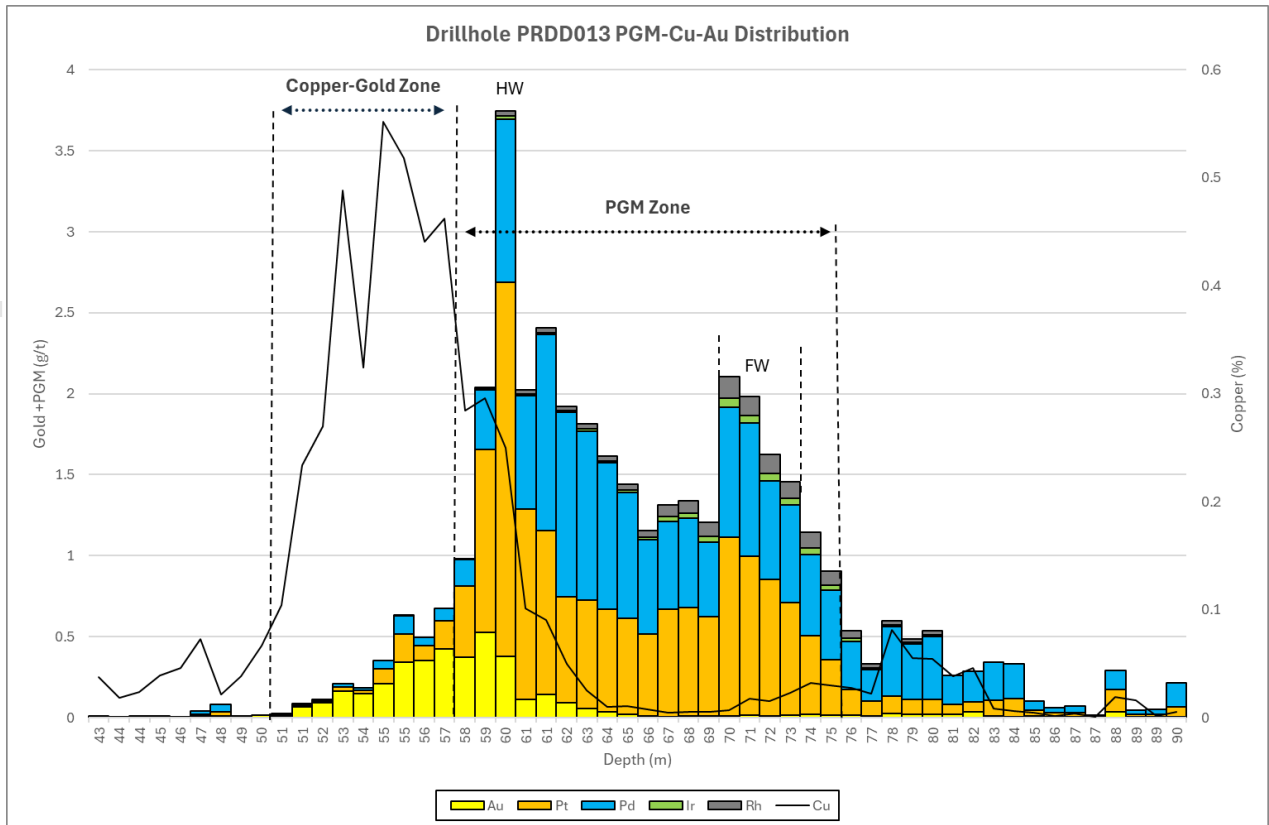


Figure 7: Mineral Distribution Profile for Metallurgical Hole PRDD014

For personal use only

For personal use only

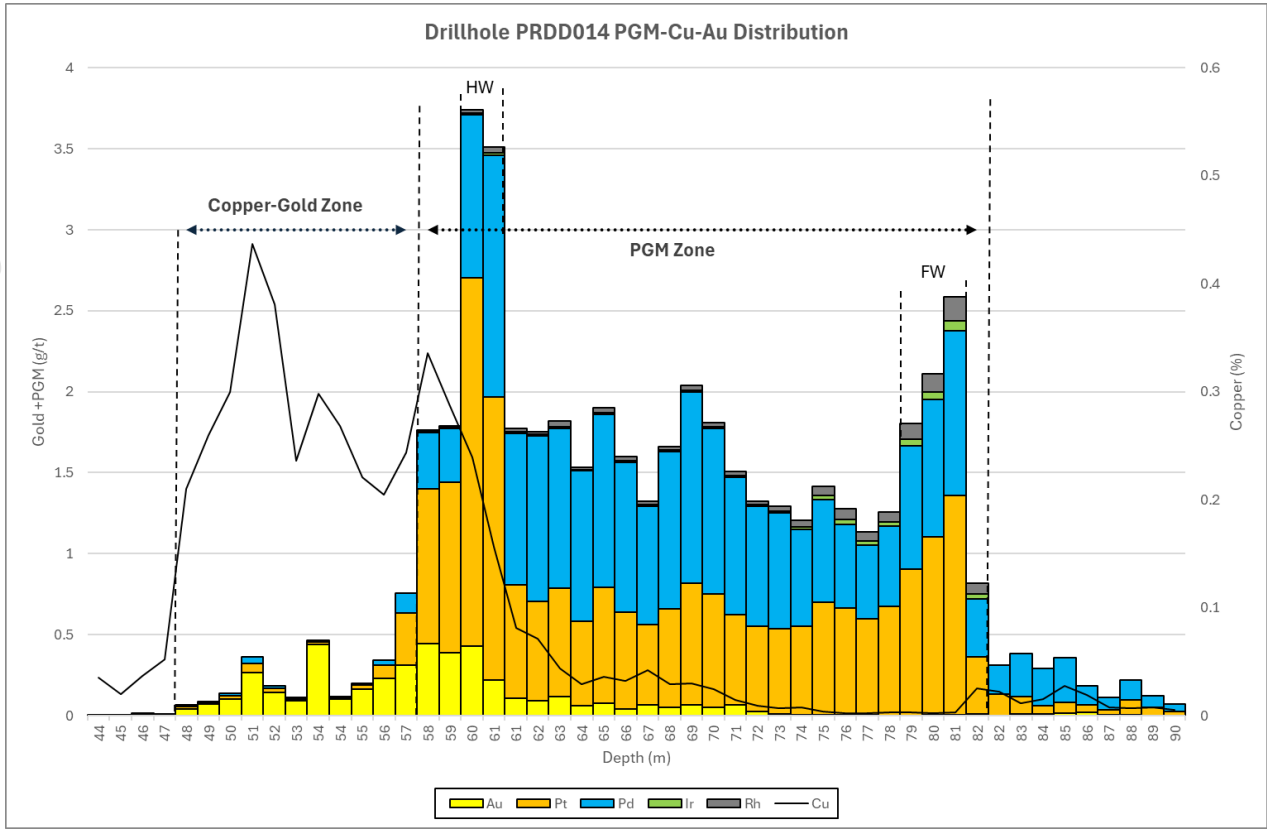


Figure 8: Mineral Distribution Profile for Metallurgical Hole PRDD015

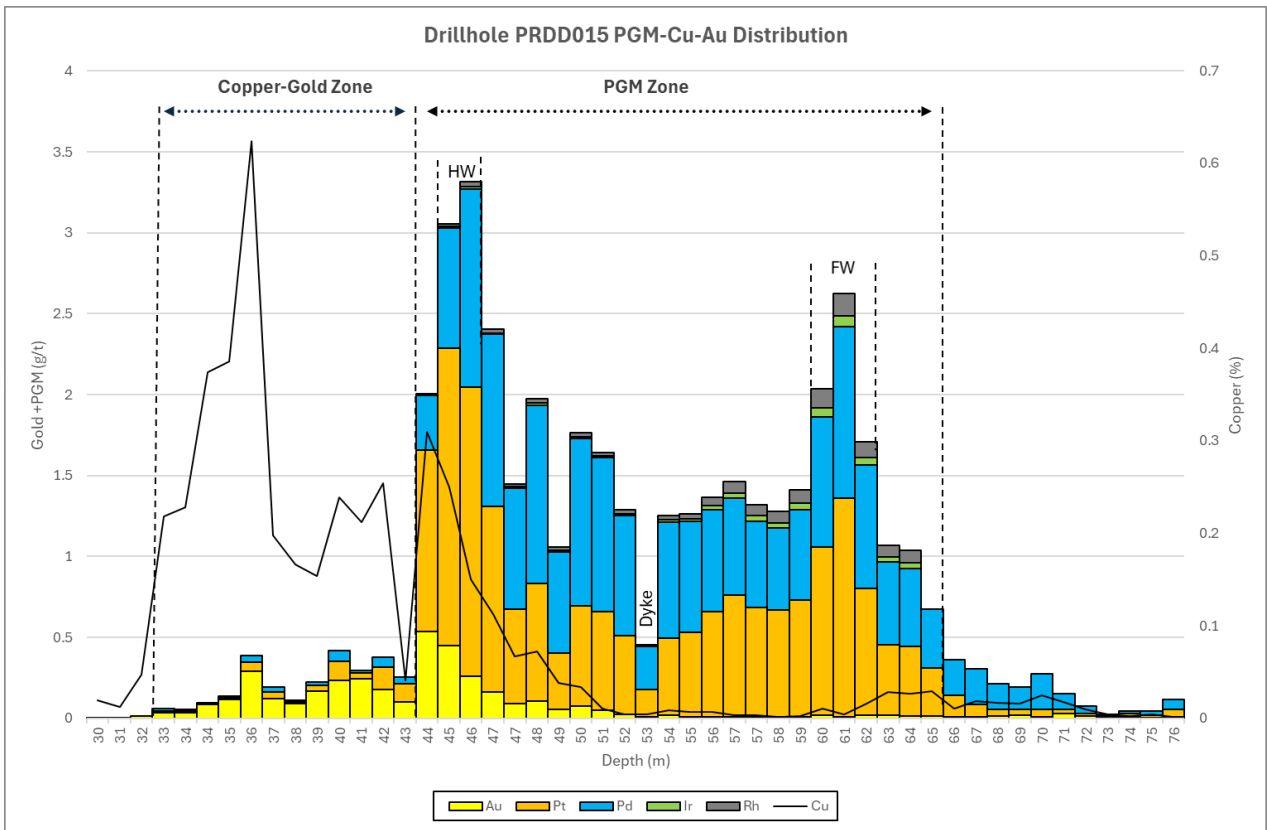


Figure 9: Mineral Distribution Profile for Metallurgical Hole PRDD016

For personal use only

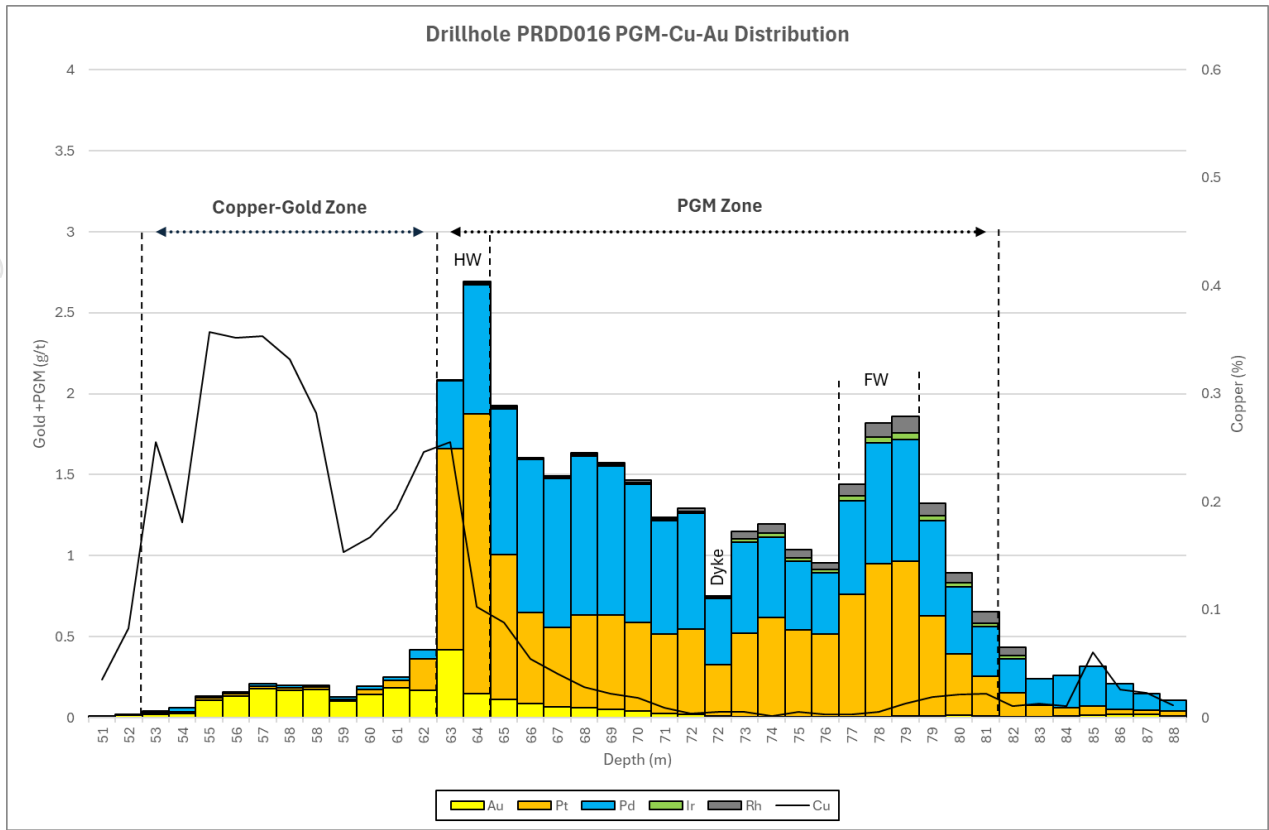


Figure 10: Mineral Distribution Profile for Metallurgical Hole PRDD017

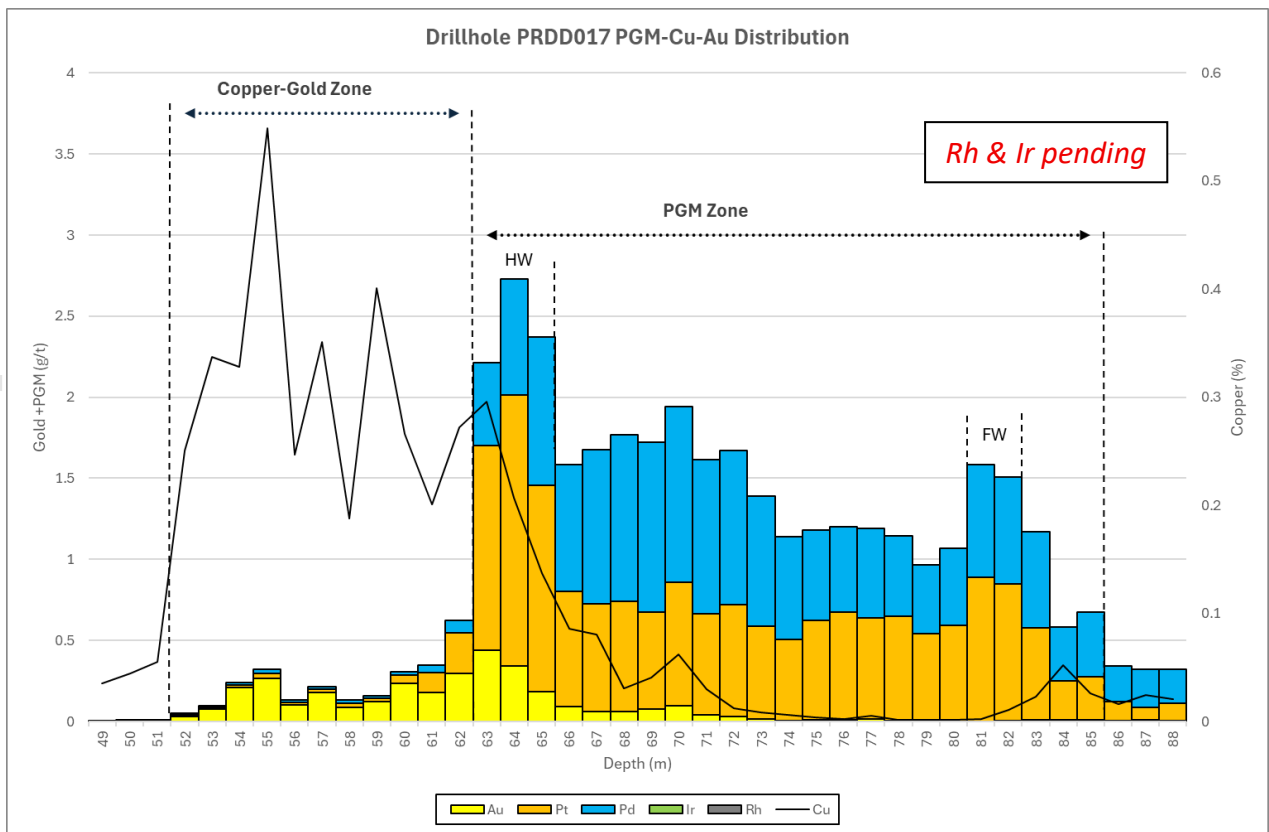


Figure 11: Mineral Distribution Profile for Metallurgical Hole PRDD018

For personal use only

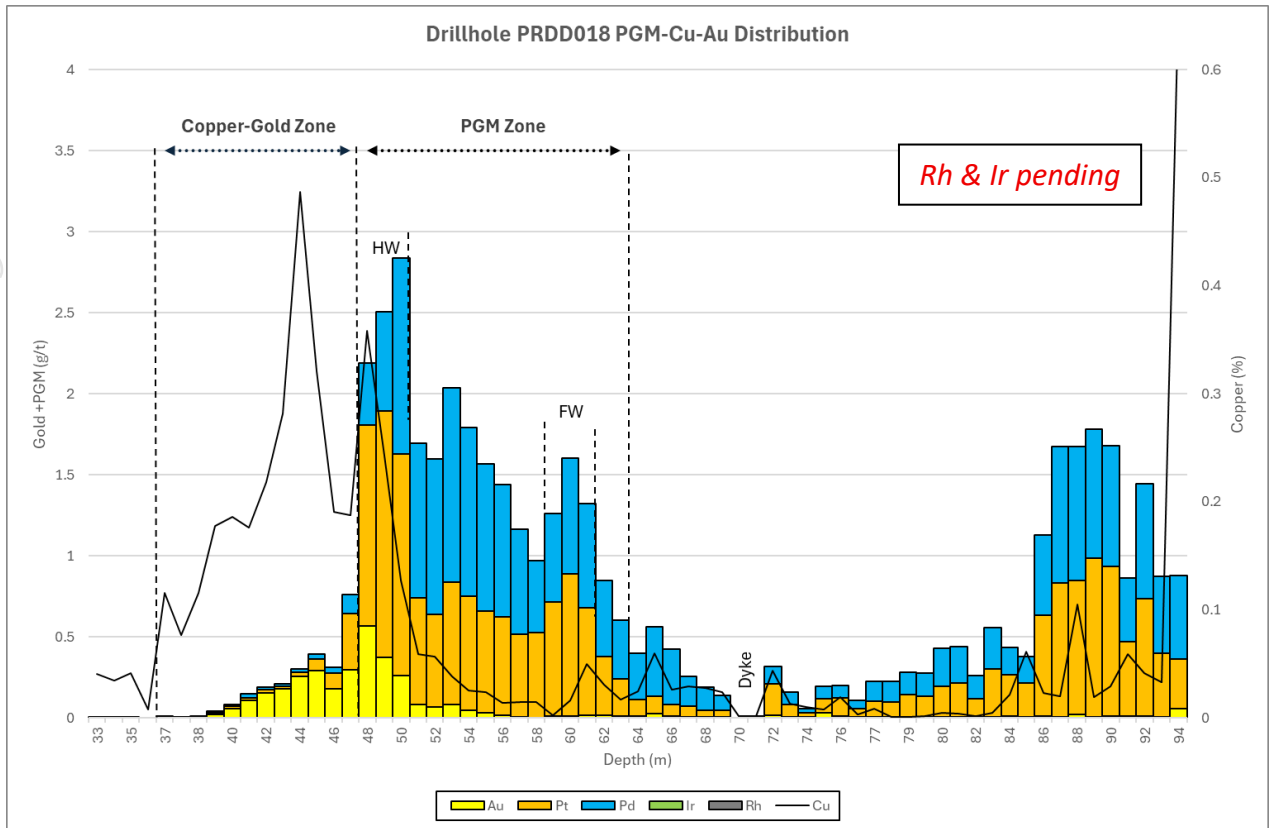


Figure 12: Mineral Distribution Profile for Metallurgical Hole PRDD019

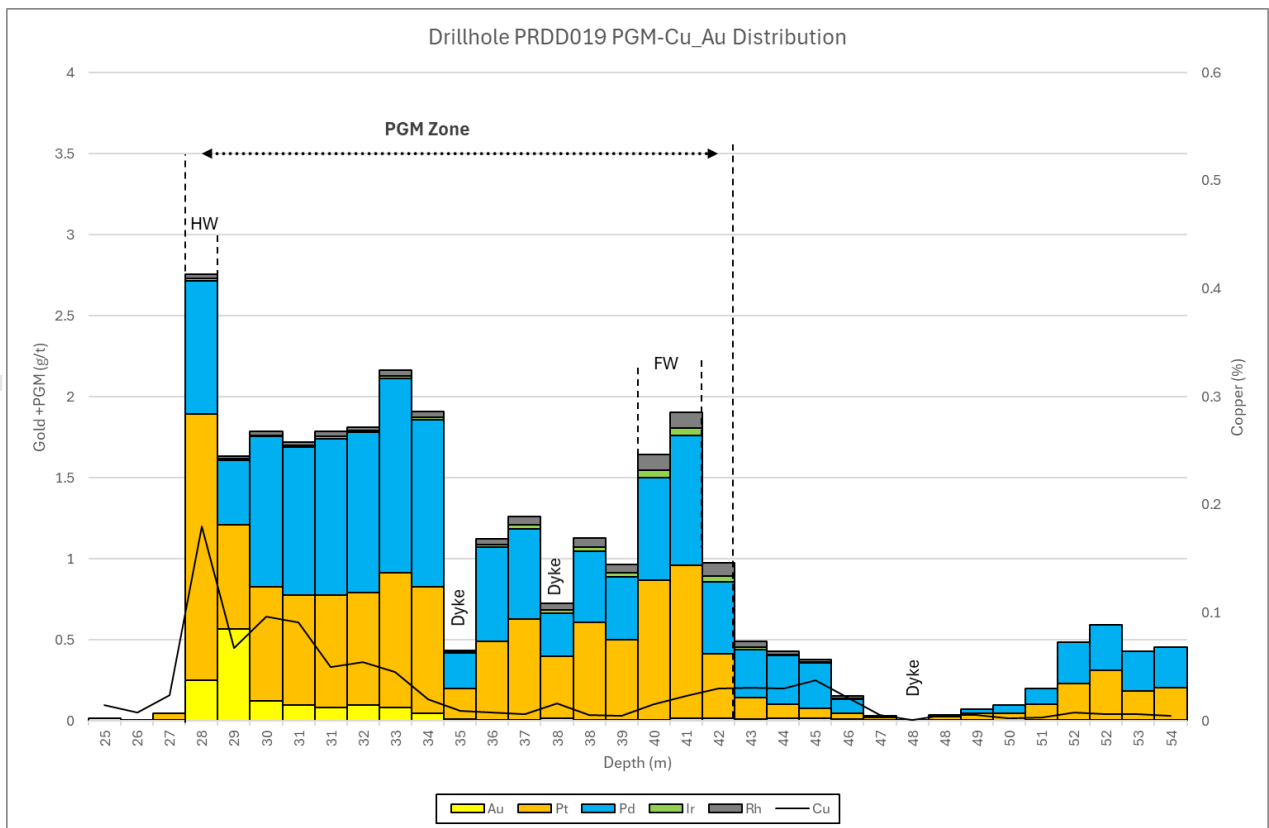


Figure 13: Mineral Distribution Profile for Metallurgical Hole PRDD020

For personal use only

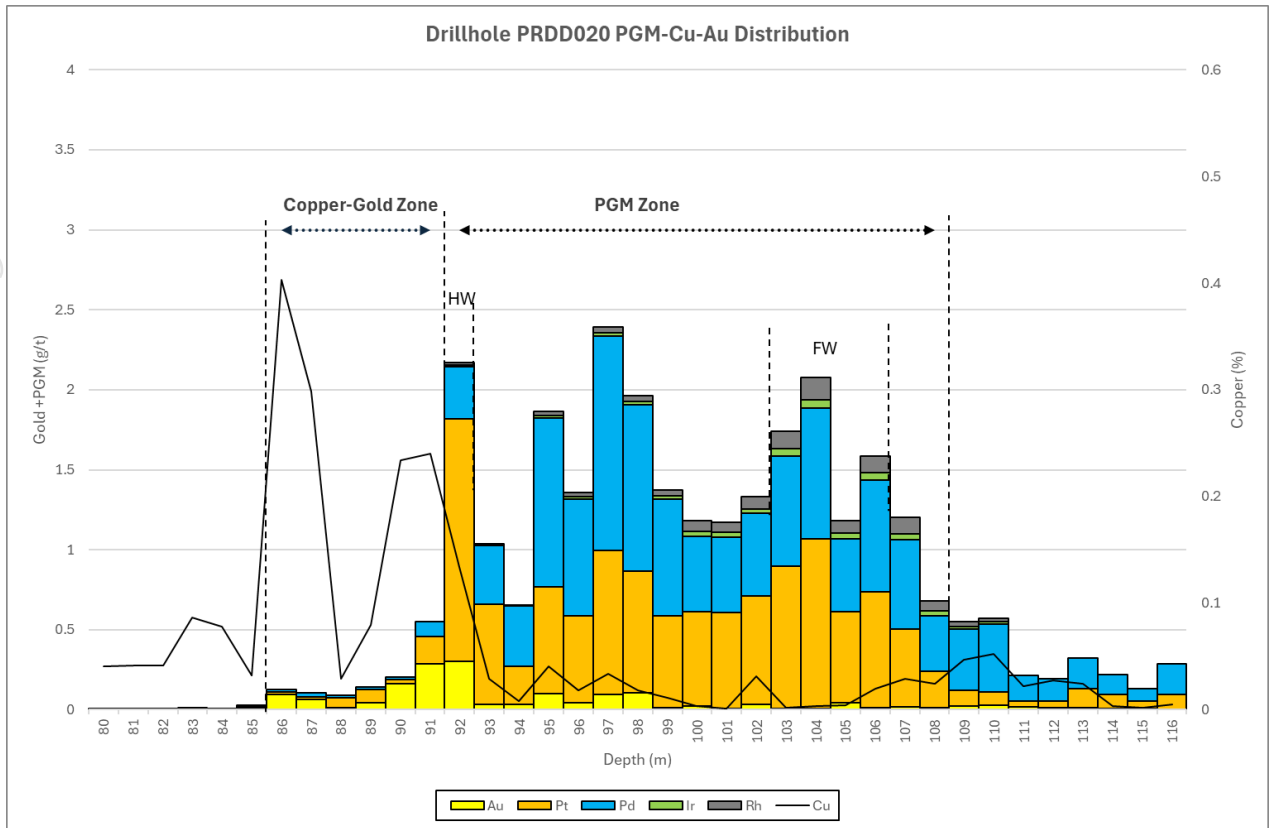


Figure 14: Mineral Distribution Profile for Metallurgical Hole PRDD021

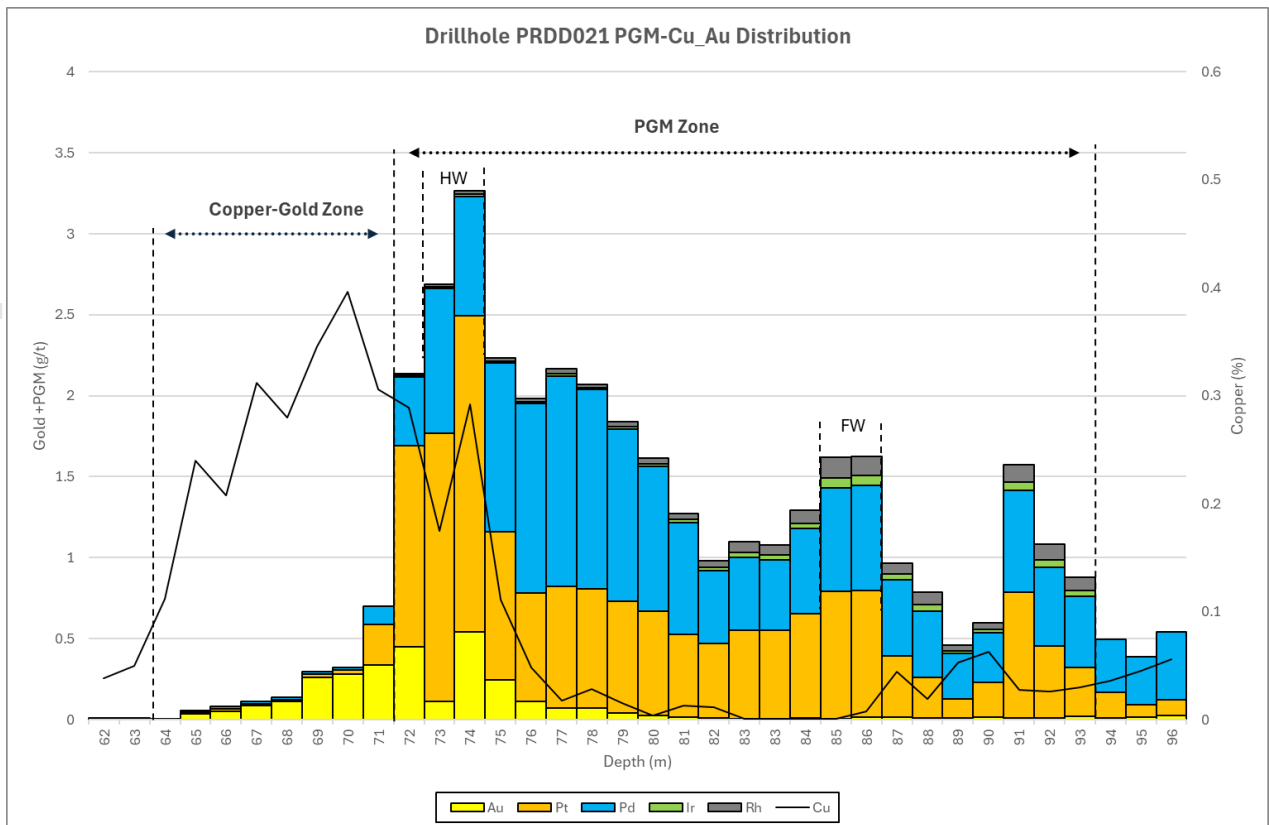


Figure 15: Mineral Distribution Profile for Metallurgical Hole PRDD022

For personal use only


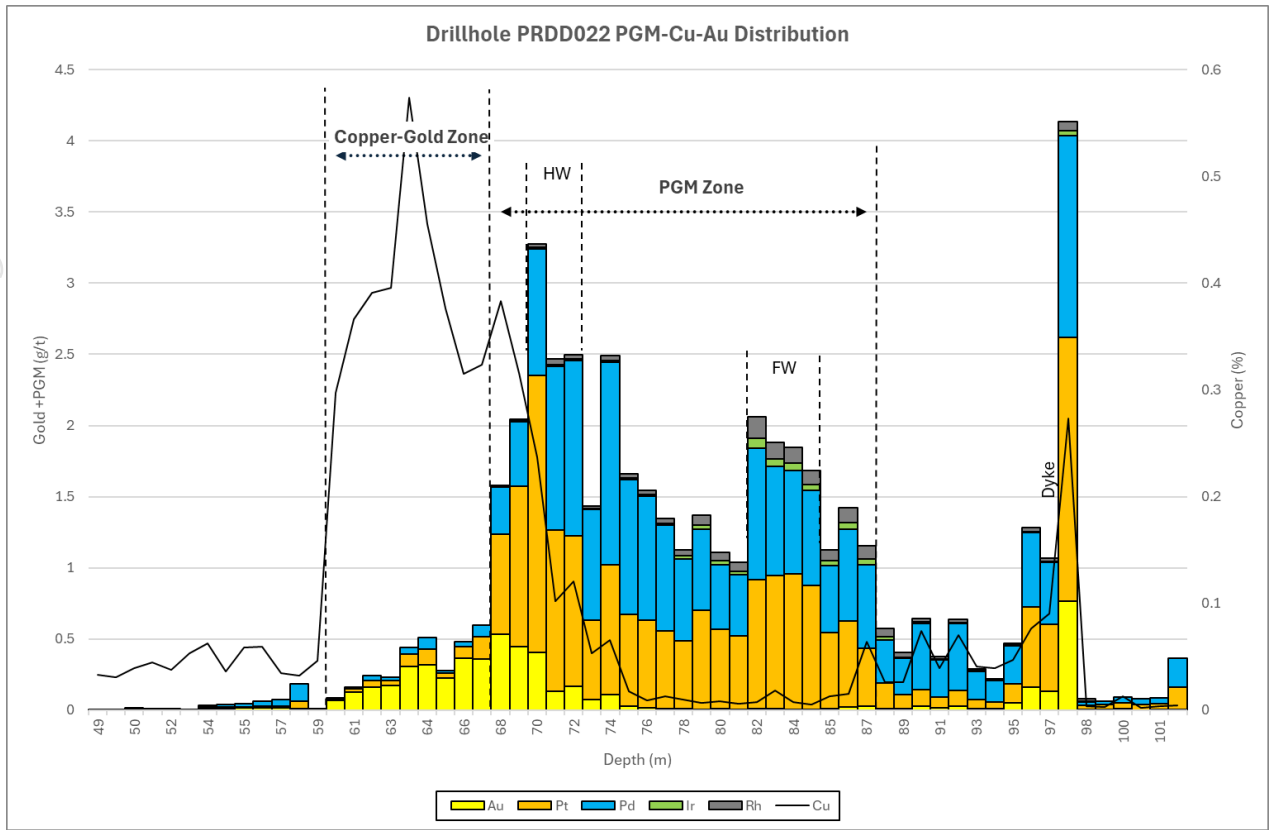


Figure 16: Mineral Distribution Profile for Metallurgical Hole PRDD023

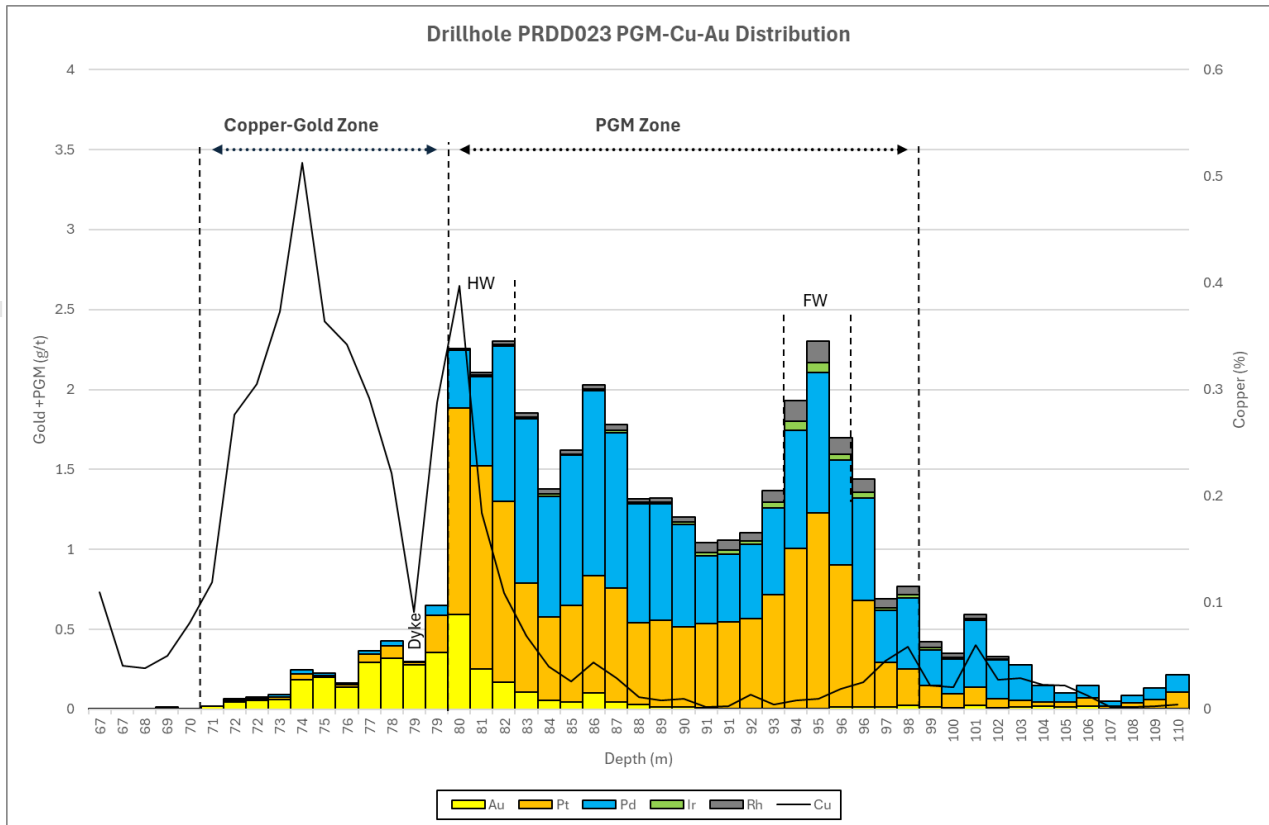

Assay Results for Area 2 – Target Starter Mine #2 (PRDD030–PRDD032)

Three (3) PQ diamond holes were drilled in Area 2 at Sections 34.0E, 36.0E and 38.0E (refer to Figure 17). Area 2 lies approximately 12 kilometres east of the Area 1 resource block. The three holes were drilled across 800m of resource strike length, with all three holes successfully intersecting the Parks Reef Cu-Au Zone and PGM Zone at expected depths and with consistent geometry, confirming continuity of the Parks Reef deposit at its eastern extent at the location of Target Starter Mine # 2.

Mineral distribution profiles for each of the 3 diamond holes (PRDD030 to PRDD033) are included in Figures 18 to 20.

Figure 17: Drill hole locations Target Starter Mine #2

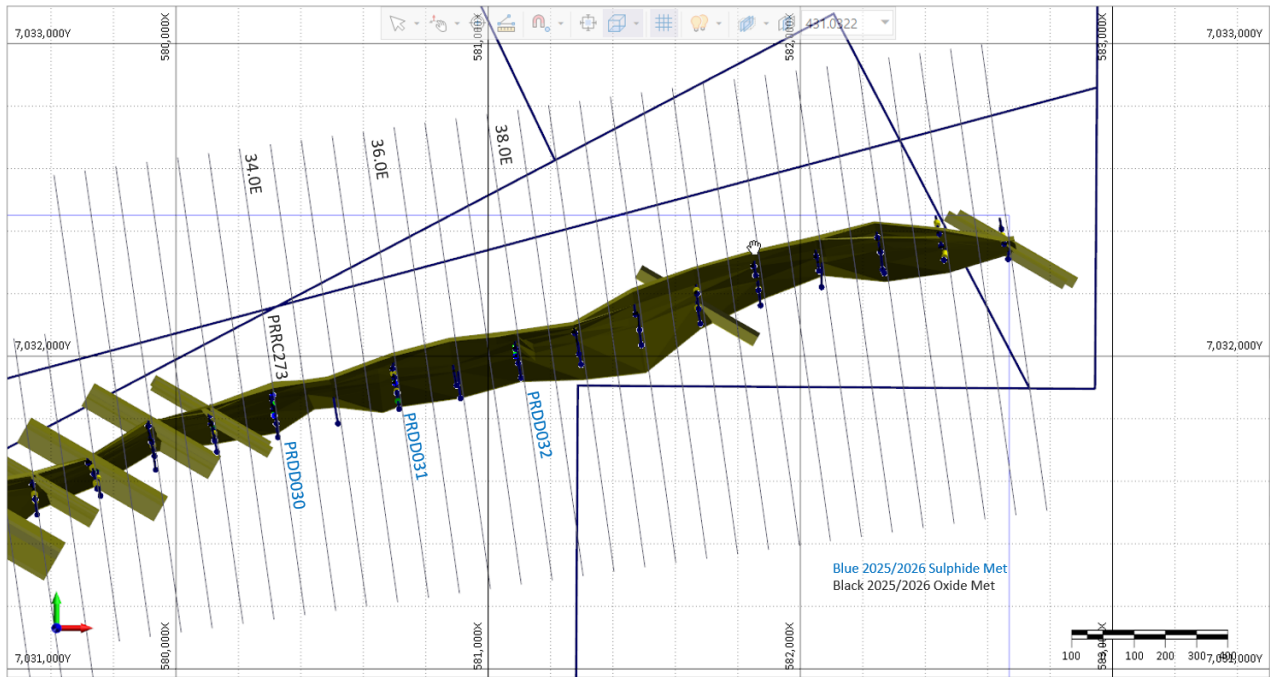


Figure 18: Mineral Distribution Profile for Metallurgical Hole PRDD030

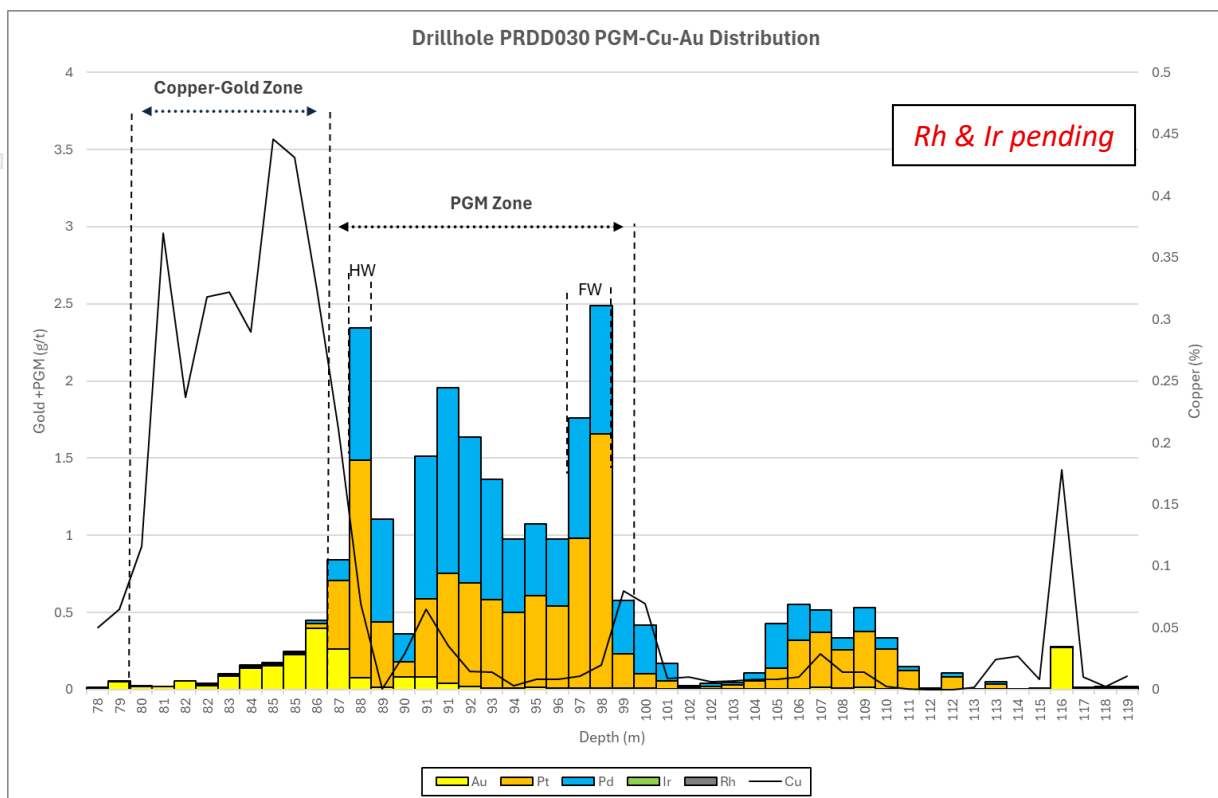


Figure 19: Mineral Distribution Profile for Metallurgical Hole PRDD031


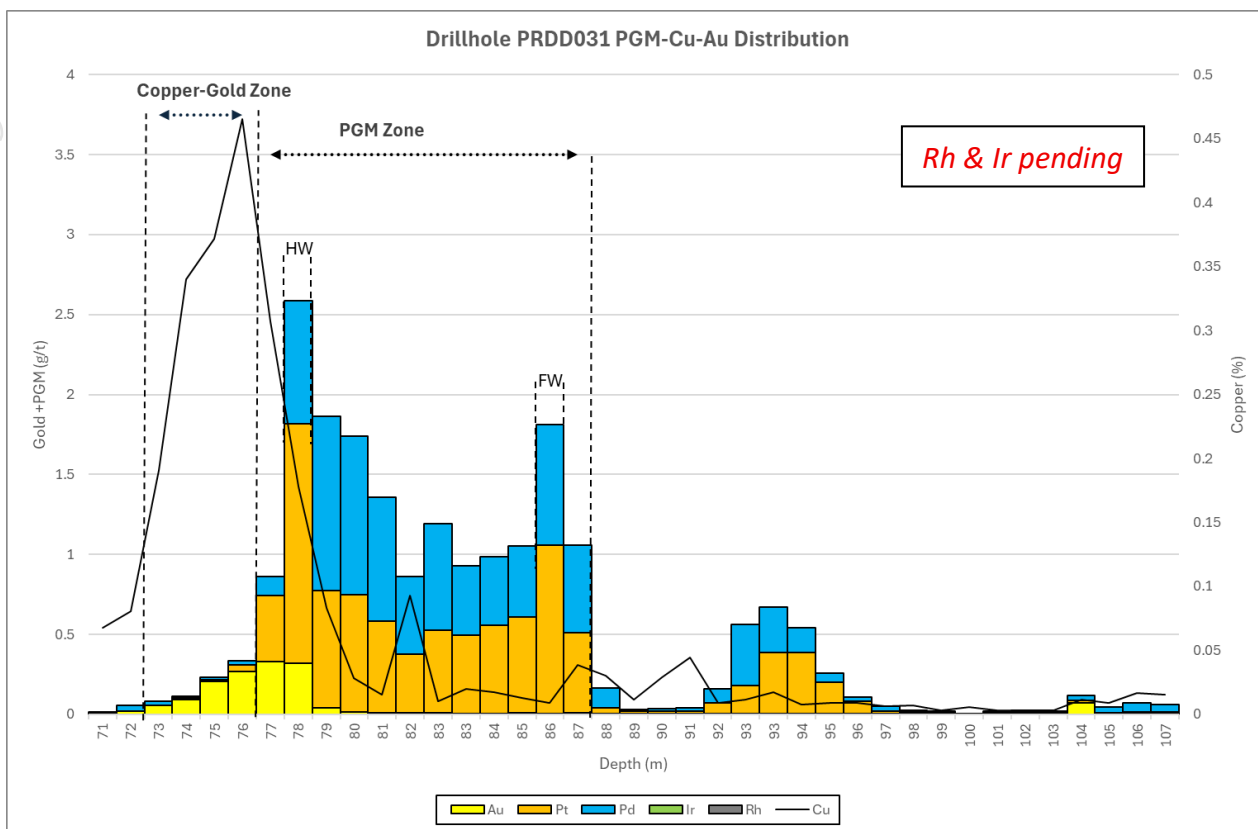


Figure 20: Mineral Distribution Profile for Metallurgical Hole PRDD032

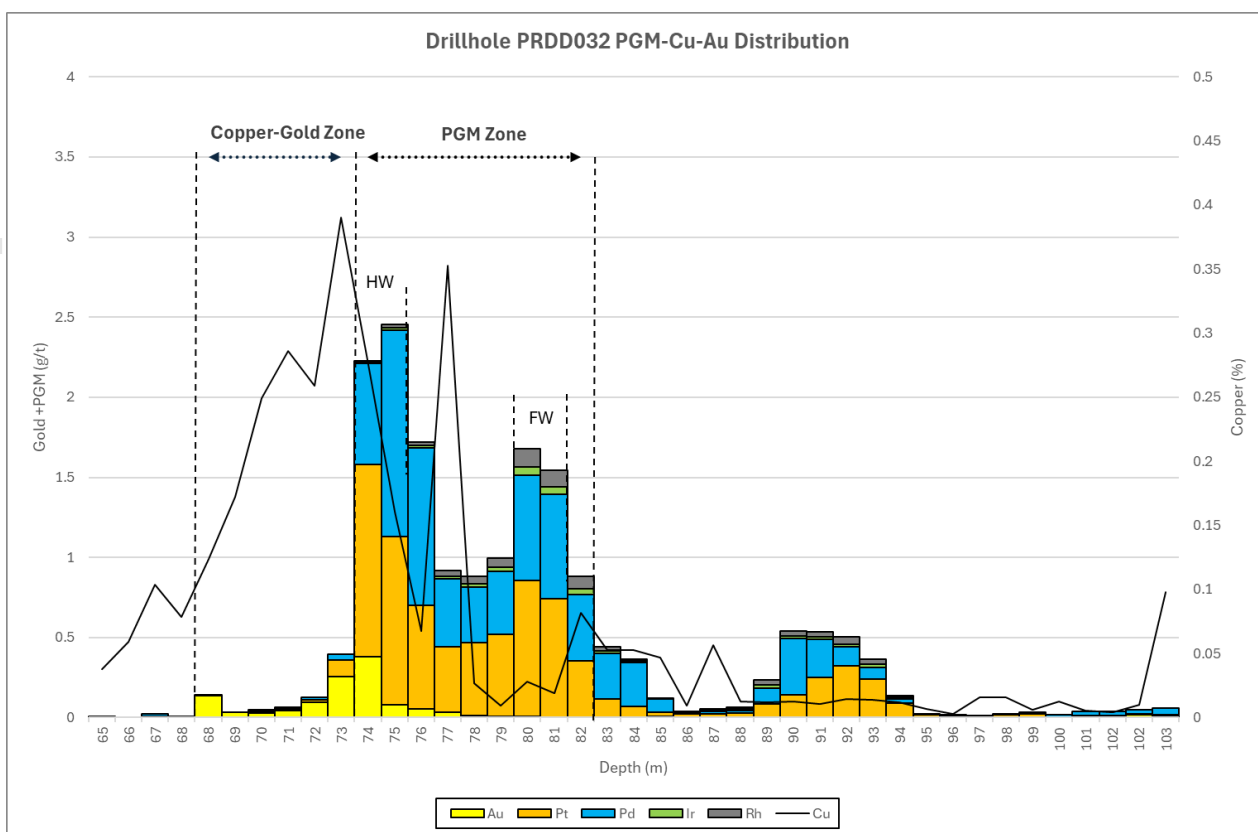

## Metallurgical Programme Context

The assay results reported are directly complementary to Podium's ongoing metallurgical test work programme at Parks Reef, with all sulphide metallurgical holes specifically targeted to generate approximately 2 tonnes of bulk sample material for the concentrator flowsheet development program. The assay data from these holes provides detailed geochemical characterisation of the sample material used in the metallurgical program, further strengthening the technical foundation of the programme.

The current metallurgical programme remains on track and is focussed on validation and performance optimisation of the concentrator flowsheet as well as process development for different mineralised zones at Parks Reef.

## Pending Assay Results

Assay results remain pending for the following, and will be released as they become available:

- Rh and Ir analysis for 4 of the 17 PQ diamond metallurgical holes in Areas 1 and 2.
- **Six (6) deep resource continuity holes** (PRDD024–PRDD029) drilled to approximately 430 - 510m depth. These holes were designed to test PGM Zone continuity at depth and enhance structural understanding.
- **Four (4) oxide RC holes** (PRRC270–PRRC273) drilled to approximately 48-66m depth to provide oxide zone sample material for process development.

This announcement was approved by the Board of Podium Minerals Limited.

For further information, please contact:

Rod Baxter  
Managing Director & CEO  
info@podiumminerals.com  
+61 8 9218 8878

Ben Newton  
Chief Financial Officer  
info@podiumminerals.com  
+61 8 9218 8878

## COMPETENT PERSONS STATEMENT

The information in this announcement that relates to Exploration Results is based on information compiled by Mr Nick Walker, a Competent Person who is a Member of the Australian Institute of Geoscientists (AIG). Mr. Walker has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (JORC Code 2012). Mr. Walker is a full-time employee of Newexco Exploration Pty Ltd, an independent industry consultant providing geological and exploration services to Podium Minerals Limited. Mr. Walker consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears.

## COMPLIANCE STATEMENT

The information in this Announcement that relates to previously reported Exploration Results for Podium, has been extracted from the Company's previous ASX announcements noted in the footnotes in the release, and can be accessed via ASX under the code POD and on the Company website [www.podiumminerals.com](http://www.podiumminerals.com), is based upon and fairly represents information previously released by the Company. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements and that the form and context in which the Competent Person's findings are presented have not been materially modified from the Company's original market announcement.

## APPENDIX A: METALLURGICAL DRILL HOLES – TARGET STARTER MINE #1

### Drill Hole collar details

Hole ID	Type	Easting	Northing	RL	Azimuth	Dip	Depth
PRDD010	Diamond	569704.089	7027830.74	525.032	330	-60	115.2
PRDD011	Diamond	569227.09	7027446.999	528.447	330	-60	103.9
PRDD012	Diamond	569312.265	7027507.645	528.106	330	-60	100
PRDD013	Diamond	569704.279	7027821.717	525.022	330	-60	100
PRDD014	Diamond	570390.262	7028225.572	522.065	330	-60	100
PRDD015	Diamond	570572.978	7028312.020	521.909	330	-60	90.2
PRDD016	Diamond	570496.88	7028267.851	521.974	330	-60	99.9
PRDD017	Diamond	570321.068	7028190.904	522.405	330	-60	102
PRDD018	Diamond	569976.856	7027972.131	523.705	330	-60	94.9
PRDD019	Diamond	569640.564	7027765.472	525.447	330	-60	80
PRDD020	Diamond	569394.411	7027562.884	527.647	330	-60	126.1
PRDD021	Diamond	569549.790	7027676.697	526.232	327	-60	101
PRDD022	Diamond	569794.503	7027885.838	524.62	330	-60	110
PRDD023	Diamond	570216.552	7028130.499	523.076	327	-60	120

## APPENDIX B: METALLURGICAL DRILL HOLES – TARGET STARTER MINE #2

### Drill Hole collar details

Hole ID	Type	Easting	Northing	RL	Azimuth	Dip	Depth
PRDD030	Diamond	580315.974	7031811.802	509.151	352	-60	124.6
PRDD031	Diamond	580704.866	7031918.277	506.15	352	-60	115.2
PRDD032	Diamond	581091.582	7032001.865	504.658	352	-60	110

## APPENDIX C: ASSAY RESULTS FOR METALLURGICAL DRILL HOLES

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD010	69.5	70.5	125837	<0.005	<0.005	-	-	0.008	0.008	0.029
PRDD010	70.5	71.4	125838	<0.005	<0.005	-	-	0.013	0.013	0.013
PRDD010	71.4	72.5	125839	<0.005	0.01	-	-	0.008	0.018	0.038
PRDD010	72.5	73.6	125840	<0.005	<0.005	-	-	0.01	0.01	0.041
PRDD010	73.6	74.4	125841	<0.005	0.005	-	-	0.005	0.01	0.001
PRDD010	74.4	75.1	125842	<0.005	<0.005	-	-	0.004	0.004	0.002
PRDD010	75.1	76.1	125843	<0.005	<0.005	-	-	0.005	0.005	0.001
PRDD010	76.1	76.7	125844	<0.005	<0.005	<0.005	<0.005	0.018	0.018	0.112
PRDD010	76.7	77.4	125845	<0.005	<0.005	<0.005	<0.005	0.015	0.015	0.083
PRDD010	77.4	78.3	125846	<0.005	0.005	<0.005	<0.005	0.048	0.053	0.133
PRDD010	78.3	79.0	125847	0.01	0.01	<0.005	<0.005	0.04	0.06	0.224
PRDD010	79.0	80.0	125848	0.01	0.01	<0.005	<0.005	0.071	0.091	0.362
PRDD010	80.0	81.0	125849	0.015	0.015	<0.005	<0.005	0.101	0.131	0.400
PRDD010	81.0	82.0	125851	0.16	0.14	0.015	0.005	0.112	0.432	0.359
PRDD010	82.0	82.7	125852	0.03	0.035	<0.005	<0.005	0.17	0.235	0.447
PRDD010	82.7	83.5	125853	0.145	0.145	0.01	0.005	0.165	0.47	0.253
PRDD010	83.5	84.3	125854	0.555	0.43	0.065	0.03	0.015	1.095	0.008
PRDD010	84.3	85.1	125855	0.595	0.465	0.065	0.03	0.008	1.163	0.012
PRDD010	85.1	85.9	125856	0.59	0.455	0.065	0.03	0.007	1.147	0.010
PRDD010	85.9	86.9	125857	0.52	0.425	0.065	0.03	0.005	1.045	0.003
PRDD010	86.9	88.0	125858	0.605	0.47	0.075	0.035	0.006	1.191	0.004
PRDD010	88.0	89.0	125859	0.675	0.52	0.085	0.035	0.088	1.403	0.002
PRDD010	89.0	90.0	125860	0.545	0.425	0.065	0.03	0.006	1.071	0.004
PRDD010	90.0	91.0	125861	0.77	0.725	0.115	0.05	0.012	1.672	0.009
PRDD010	91.0	92.0	125862	0.445	0.51	0.085	0.04	0.015	1.095	0.023
PRDD010	92.0	93.0	125863	0.25	0.38	0.07	0.03	0.031	0.761	0.026
PRDD010	93.0	94.0	125864	0.13	0.275	0.045	0.02	0.016	0.486	0.032
PRDD010	94.0	95.0	125865	0.23	0.37	0.065	0.03	0.009	0.704	0.012
PRDD010	95.0	96.0	125866	0.105	0.355	0.03	0.015	0.044	0.549	0.033
PRDD010	96.0	97.0	125867	0.115	0.415	0.025	0.01	0.025	0.59	0.031
PRDD010	97.0	98.0	125868	0.085	0.24	-	-	0.105	0.43	0.009
PRDD010	98.0	99.0	125869	0.045	0.075	-	-	0.006	0.126	0.011
PRDD010	99.0	100.0	125871	0.02	0.025	-	-	0.006	0.051	0.003
PRDD010	100.0	101.2	125872	0.04	0.03	-	-	0.047	0.117	0.003
PRDD011	58.8	59.5	125873	<0.005	<0.005	-	-	0.015	0.015	0.045
PRDD011	59.5	60.4	125874	<0.005	<0.005	-	-	0.01	0.01	0.039
PRDD011	60.4	61.3	125875	<0.005	<0.005	-	-	0.008	0.008	0.041
PRDD011	61.3	62.3	125876	<0.005	<0.005	-	-	0.007	0.007	0.043
PRDD011	62.3	63.0	125877	<0.005	<0.005	-	-	0.011	0.011	0.022
PRDD011	63.0	64.0	125878	<0.005	<0.005	-	-	0.005	0.005	0.037
PRDD011	64.0	65.0	125879	<0.005	<0.005	-	-	0.013	0.013	0.047
PRDD011	65.0	66.0	125880	<0.005	<0.005	-	-	0.012	0.012	0.044
PRDD011	66.0	67.0	125881	<0.005	<0.005	-	-	0.023	0.023	0.031
PRDD011	67.0	67.8	125882	<0.005	<0.005	-	-	0.009	0.009	0.012
PRDD011	67.8	68.5	125883	<0.005	0.01	<0.005	<0.005	0.04	0.05	0.120
PRDD011	68.5	69.4	125884	0.005	0.01	<0.005	<0.005	0.083	0.098	0.196
PRDD011	69.4	70.1	125885	0.005	0.01	<0.005	<0.005	0.244	0.259	0.596
PRDD011	70.1	70.9	125886	0.015	0.02	<0.005	<0.005	0.055	0.09	0.165
PRDD011	70.9	71.8	125887	0.015	0.01	<0.005	<0.005	0.109	0.134	0.279
PRDD011	71.8	72.6	125888	0.01	0.01	<0.005	<0.005	0.128	0.148	0.248
PRDD011	72.6	73.5	125889	0.04	0.03	<0.005	<0.005	0.129	0.199	0.227
PRDD011	73.5	74.4	125891	0.015	0.015	<0.005	<0.005	0.244	0.274	0.377
PRDD011	74.4	75.3	125892	0.105	0.075	<0.005	<0.005	0.275	0.455	0.339
PRDD011	75.3	76.2	125893	0.035	0.025	<0.005	<0.005	0.26	0.32	0.283
PRDD011	76.2	77.2	125894	0.42	0.255	0.01	0.005	0.174	0.864	0.152
PRDD011	77.2	78.0	125895	0.07	0.065	<0.005	<0.005	0.022	0.157	0.028
PRDD011	78.0	78.8	125896	<0.005	0.01	<0.005	<0.005	0.014	0.024	0.005

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD011	78.8	79.6	125897	0.06	0.09	<0.005	<0.005	0.013	0.163	0.018
PRDD011	79.6	80.5	125898	0.715	1	0.035	0.015	0.067	1.832	0.026
PRDD011	80.5	81.3	125899	0.525	0.695	0.025	0.01	0.044	1.299	0.015
PRDD011	81.3	82.3	125900	0.735	1.13	0.035	0.015	0.035	1.95	0.021
PRDD011	82.3	83.2	125901	0.685	0.875	0.04	0.015	0.025	1.64	0.014
PRDD011	83.2	84.2	125902	0.6	0.74	0.04	0.015	0.017	1.412	0.010
PRDD011	84.2	85.3	125903	0.655	0.54	0.065	0.03	0.014	1.304	0.005
PRDD011	85.3	86.1	125904	0.665	0.49	0.08	0.03	0.009	1.274	0.010
PRDD011	86.1	87.2	125905	0.835	0.605	0.115	0.045	0.009	1.609	0.003
PRDD011	87.2	88.1	125906	1.25	0.88	0.155	0.06	0.01	2.355	0.004
PRDD011	88.1	89.0	125907	0.82	0.67	0.115	0.045	0.012	1.662	0.016
PRDD011	89.0	90.0	125908	0.515	0.54	0.1	0.04	0.017	1.212	0.020
PRDD011	90.0	90.8	125909	0.3	0.35	0.08	0.03	0.01	0.77	0.010
PRDD011	90.8	91.7	125911	0.175	0.335	0.05	0.02	0.01	0.59	0.020
PRDD011	91.7	92.8	125912	0.09	0.415	0.025	0.01	0.026	0.566	0.054
PRDD011	92.8	93.6	125913	0.07	0.32	-	-	0.017	0.407	0.029
PRDD011	93.6	94.4	125914	0.035	0.115	-	-	0.124	0.274	0.025
PRDD011	94.4	95.1	125915	0.05	0.15	-	-	0.017	0.217	0.032
PRDD011	95.1	96.0	125916	0.13	0.19	-	-	0.015	0.335	0.018
PRDD012	52.9	54.0	125917	0.005	<0.005	-	-	0.009	0.014	0.035
PRDD012	54.0	55.0	125918	<0.005	<0.005	-	-	0.01	0.01	0.041
PRDD012	55.0	55.8	125919	<0.005	<0.005	-	-	0.006	0.006	0.021
PRDD012	55.8	56.7	125920	<0.005	<0.005	-	-	0.01	0.01	0.037
PRDD012	56.7	57.5	125921	<0.005	<0.005	<0.005	<0.005	0.012	0.012	0.107
PRDD012	57.5	58.0	125922	0.005	0.01	<0.005	<0.005	0.052	0.067	0.147
PRDD012	58.0	59.0	125923	0.01	0.01	<0.005	<0.005	0.091	0.111	0.291
PRDD012	59.0	60.0	125924	0.02	0.02	<0.005	<0.005	0.157	0.197	0.382
PRDD012	60.0	61.0	125925	0.045	0.025	<0.005	<0.005	0.188	0.258	0.318
PRDD012	61.0	62.1	125926	0.02	0.015	<0.005	<0.005	0.197	0.232	0.380
PRDD012	62.1	63.0	125927	0.015	0.015	<0.005	<0.005	0.25	0.28	0.357
PRDD012	63.0	64.0	125928	0.04	0.02	<0.005	<0.005	0.185	0.245	0.218
PRDD012	64.0	65.0	125929	0.215	0.12	0.005	<0.005	0.284	0.624	0.261
PRDD012	65.0	66.0	125931	0.62	0.315	0.01	0.005	0.34	1.29	0.290
PRDD012	66.0	67.0	125932	1.17	0.4	0.01	0.01	0.443	2.033	0.263
PRDD012	67.0	68.0	125933	1.68	0.835	0.025	0.015	0.311	2.866	0.197
PRDD012	68.0	69.0	125934	1.08	1.04	0.03	0.015	0.134	2.299	0.098
PRDD012	69.0	70.0	125935	0.8	0.96	0.025	0.01	0.093	1.888	0.078
PRDD012	70.0	71.0	125936	0.66	0.975	0.025	0.01	0.101	1.771	0.068
PRDD012	71.0	72.0	125937	0.545	0.83	0.03	0.015	0.07	1.49	0.047
PRDD012	72.0	73.2	125938	0.66	1.01	0.03	0.015	0.096	1.811	0.065
PRDD012	73.2	74.0	125939	0.405	0.575	0.015	0.01	0.056	1.061	0.033
PRDD012	74.0	75.0	125940	0.535	0.625	0.04	0.02	0.02	1.24	0.005
PRDD012	75.0	75.9	125941	0.55	0.49	0.06	0.025	0.012	1.137	0.006
PRDD012	75.9	76.5	125942	0.25	0.19	0.03	0.015	0.007	0.492	0.003
PRDD012	76.5	77.0	125943	0.55	0.445	0.06	0.03	0.01	1.095	0.005
PRDD012	77.0	78.0	125944	0.595	0.44	0.065	0.03	0.01	1.14	0.002
PRDD012	78.0	79.0	125945	0.595	0.465	0.07	0.03	0.008	1.168	0.008
PRDD012	79.0	80.0	125946	0.87	0.675	0.1	0.045	0.008	1.698	0.005
PRDD012	80.0	81.0	125947	1.23	0.91	0.145	0.06	0.008	2.353	0.006
PRDD012	81.0	82.0	125948	1	0.84	0.125	0.055	0.018	2.038	0.017
PRDD012	82.0	83.0	125949	0.485	0.495	0.09	0.04	0.016	1.126	0.029
PRDD012	83.0	84.0	125951	0.375	0.505	0.08	0.035	0.023	1.018	0.048
PRDD012	84.0	85.0	125952	0.285	0.38	0.065	0.025	0.02	0.775	0.029
PRDD012	85.0	86.0	125953	0.115	0.335	0.03	0.015	0.019	0.514	0.029
PRDD012	86.0	87.0	125954	0.07	0.32	-	-	0.027	0.417	0.046
PRDD012	87.0	88.1	125955	0.035	0.165	-	-	0.035	0.235	0.032
PRDD012	88.1	89.0	125956	0.075	0.085	-	-	0.014	0.174	0.017
PRDD012	89.0	90.0	125957	0.045	0.04	-	-	0.006	0.091	0.006
PRDD012	90.0	90.9	125958	0.025	0.025	-	-	0.004	0.054	0.007
PRDD012	90.9	91.5	125959	0.04	0.045	-	-	0.006	0.091	0.011

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD012	91.5	92.0	125960	0.16	0.09	-	-	0.009	0.259	0.060
PRDD012	92.0	93.0	125961	0.345	0.15	-	-	0.007	0.502	0.136
PRDD012	93.0	94.0	125962	0.435	0.17	-	-	0.008	0.613	0.005
PRDD012	94.0	95.0	125963	0.365	0.11	-	-	0.007	0.482	0.005
PRDD013	42.8	43.8	125964	<0.005	<0.005	-	-	0.012	0.012	0.037
PRDD013	43.8	44.0	125965	<0.005	<0.005	-	-	0.005	0.005	0.019
PRDD013	44.0	45.0	125966	<0.005	<0.005	-	-	0.008	0.008	0.024
PRDD013	45.0	46.0	125967	<0.005	<0.005	-	-	0.008	0.008	0.039
PRDD013	46.0	47.1	125968	<0.005	<0.005	-	-	0.006	0.006	0.046
PRDD013	47.1	48.0	125969	0.01	0.02	-	-	0.012	0.042	0.073
PRDD013	48.0	49.0	125971	0.03	0.045	-	-	0.008	0.083	0.022
PRDD013	49.0	50.0	125972	<0.005	<0.005	-	-	0.011	0.011	0.038
PRDD013	50.0	50.7	125973	<0.005	<0.005	<0.005	<0.005	0.014	0.014	0.067
PRDD013	50.7	51.0	125974	0.005	0.01	<0.005	<0.005	0.012	0.027	0.104
PRDD013	51.0	52.0	125975	0.01	0.01	<0.005	<0.005	0.068	0.088	0.234
PRDD013	52.0	53.0	125976	0.01	0.01	<0.005	<0.005	0.092	0.112	0.270
PRDD013	53.0	54.0	125977	0.025	0.02	<0.005	<0.005	0.163	0.208	0.488
PRDD013	54.0	55.0	125978	0.02	0.02	<0.005	<0.005	0.146	0.186	0.324
PRDD013	55.0	55.4	125979	0.09	0.05	<0.005	<0.005	0.21	0.35	0.552
PRDD013	55.4	56.0	125980	0.175	0.11	0.005	<0.005	0.342	0.632	0.518
PRDD013	56.0	57.0	125981	0.095	0.05	<0.005	<0.005	0.35	0.495	0.441
PRDD013	57.0	58.0	125982	0.175	0.075	<0.005	<0.005	0.424	0.674	0.462
PRDD013	58.0	59.0	125983	0.44	0.165	0.005	<0.005	0.372	0.982	0.284
PRDD013	59.0	60.0	125984	1.13	0.365	0.01	0.005	0.528	2.038	0.296
PRDD013	60.0	60.8	125985	2.31	1.01	0.03	0.02	0.376	3.746	0.250
PRDD013	60.8	61.0	125986	1.18	0.7	0.025	0.01	0.11	2.025	0.101
PRDD013	61.0	62.0	125987	1.01	1.21	0.03	0.01	0.145	2.405	0.091
PRDD013	62.0	63.0	125988	0.655	1.14	0.025	0.01	0.093	1.923	0.050
PRDD013	63.0	64.0	125989	0.67	1.04	0.03	0.015	0.057	1.812	0.026
PRDD013	64.0	65.0	125991	0.635	0.905	0.03	0.01	0.035	1.615	0.010
PRDD013	65.0	66.0	125992	0.59	0.78	0.035	0.015	0.021	1.441	0.010
PRDD013	66.0	67.0	125993	0.505	0.585	0.04	0.015	0.01	1.155	0.007
PRDD013	67.0	68.0	125994	0.66	0.545	0.07	0.03	0.007	1.312	0.005
PRDD013	68.0	69.0	125995	0.67	0.55	0.075	0.03	0.012	1.337	0.005
PRDD013	69.0	70.0	125996	0.615	0.46	0.085	0.035	0.009	1.204	0.005
PRDD013	70.0	71.0	125997	1.1	0.805	0.135	0.055	0.012	2.107	0.007
PRDD013	71.0	72.0	125998	0.985	0.82	0.12	0.045	0.014	1.984	0.018
PRDD013	72.0	73.0	125999	0.845	0.61	0.115	0.045	0.008	1.623	0.015
PRDD013	73.0	74.0	126000	0.695	0.605	0.1	0.04	0.014	1.454	0.023
PRDD013	74.0	75.0	126001	0.485	0.5	0.1	0.04	0.021	1.146	0.032
PRDD013	75.0	76.0	126002	0.34	0.43	0.085	0.03	0.017	0.902	0.030
PRDD013	76.0	77.0	126003	0.16	0.295	0.05	0.02	0.013	0.538	0.027
PRDD013	77.0	78.0	126004	0.09	0.195	0.025	0.01	0.01	0.33	0.022
PRDD013	78.0	79.0	126005	0.105	0.43	0.025	0.01	0.028	0.598	0.081
PRDD013	79.0	80.0	126006	0.09	0.345	0.02	0.01	0.021	0.486	0.055
PRDD013	80.0	81.0	126007	0.09	0.39	0.025	0.01	0.021	0.536	0.054
PRDD013	81.0	82.0	126008	0.06	0.18	-	-	0.02	0.26	0.039
PRDD013	82.0	83.0	126009	0.06	0.19	-	-	0.037	0.287	0.046
PRDD013	83.0	84.0	126011	0.1	0.235	-	-	0.009	0.344	0.008
PRDD013	84.0	85.0	126012	0.11	0.215	-	-	0.007	0.332	0.006
PRDD013	85.0	86.0	126013	0.04	0.055	-	-	0.008	0.103	0.005
PRDD013	86.0	87.0	126014	0.025	0.03	-	-	0.007	0.062	0.001
PRDD013	87.0	87.3	126015	0.025	0.04	-	-	0.006	0.071	0.004
PRDD013	87.3	88.2	126016	0.005	0.005	-	-	0.005	0.015	0.001
PRDD013	88.2	89.1	126017	0.14	0.115	-	-	0.036	0.291	0.019
PRDD013	89.1	89.3	126018	0.015	0.025	-	-	0.005	0.045	0.016
PRDD013	89.3	90.0	126019	0.015	0.03	-	-	0.004	0.049	0.002
PRDD013	90.0	91.3	126019A	0.06	0.15	-	-	0.005	0.215	0.005
PRDD014	43.9	45.0	126020	<0.005	<0.005	-	-	0.006	0.006	0.035
PRDD014	45.0	46.0	126021	<0.005	<0.005	-	-	0.001	0.001	0.020

For personal use only

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD014	46.0	47.0	126022	0.005	<0.005	-	-	0.008	0.013	0.036
PRDD014	47.0	47.9	126023	<0.005	<0.005	<0.005	<0.005	0.008	0.008	0.052
PRDD014	47.9	49.0	126024	0.015	0.01	<0.005	<0.005	0.042	0.067	0.210
PRDD014	49.0	50.1	126025	0.01	0.01	<0.005	<0.005	0.069	0.089	0.260
PRDD014	50.1	51.1	126026	0.02	0.015	<0.005	<0.005	0.103	0.138	0.300
PRDD014	51.1	52.0	126027	0.06	0.04	<0.005	<0.005	0.264	0.364	0.437
PRDD014	52.0	53.0	126028	0.025	0.015	<0.005	<0.005	0.145	0.185	0.381
PRDD014	53.0	53.7	126029	0.01	0.01	<0.005	<0.005	0.092	0.112	0.236
PRDD014	53.7	54.3	126031	0.015	0.01	<0.005	<0.005	0.439	0.464	0.298
PRDD014	54.3	55.0	126032	0.01	0.005	<0.005	<0.005	0.101	0.116	0.268
PRDD014	55.0	56.0	126033	0.03	0.01	<0.005	<0.005	0.161	0.201	0.221
PRDD014	56.0	57.0	126034	0.08	0.03	<0.005	<0.005	0.23	0.34	0.205
PRDD014	57.0	58.0	126035	0.325	0.12	<0.005	<0.005	0.311	0.756	0.244
PRDD014	58.0	58.9	126036	0.955	0.35	0.01	0.005	0.444	1.764	0.336
PRDD014	58.9	59.7	126037	1.05	0.335	0.01	0.005	0.39	1.79	0.287
PRDD014	59.7	60.6	126038	2.27	1.01	0.02	0.01	0.431	3.741	0.239
PRDD014	60.6	61.3	126039	1.75	1.49	0.035	0.015	0.219	3.509	0.156
PRDD014	61.3	62.0	126040	0.7	0.935	0.02	0.01	0.107	1.772	0.081
PRDD014	62.0	63.0	126041	0.615	1.02	0.02	0.01	0.09	1.755	0.071
PRDD014	63.0	64.0	126042	0.67	0.985	0.035	0.015	0.116	1.821	0.044
PRDD014	64.0	65.0	126043	0.52	0.93	0.015	0.005	0.061	1.531	0.029
PRDD014	65.0	66.0	126044	0.715	1.07	0.03	0.01	0.076	1.901	0.036
PRDD014	66.0	67.0	126045	0.595	0.925	0.025	0.01	0.043	1.598	0.032
PRDD014	67.0	68.0	126046	0.495	0.735	0.02	0.01	0.065	1.325	0.042
PRDD014	68.0	69.0	126047	0.61	0.97	0.02	0.01	0.05	1.66	0.029
PRDD014	69.0	70.0	126048	0.75	1.18	0.03	0.01	0.067	2.037	0.030
PRDD014	70.0	71.0	126049	0.7	1.02	0.03	0.01	0.051	1.811	0.024
PRDD014	71.0	72.0	126051	0.56	0.85	0.025	0.01	0.064	1.509	0.014
PRDD014	72.0	73.0	126052	0.525	0.74	0.025	0.01	0.026	1.326	0.009
PRDD014	73.0	74.0	126053	0.525	0.715	0.03	0.01	0.011	1.291	0.007
PRDD014	74.0	75.0	126054	0.545	0.6	0.04	0.015	0.007	1.207	0.007
PRDD014	75.0	76.0	126055	0.695	0.63	0.06	0.025	0.007	1.417	0.004
PRDD014	76.0	77.0	126056	0.66	0.515	0.065	0.03	0.006	1.276	0.002
PRDD014	77.0	78.0	126057	0.595	0.455	0.055	0.025	0.003	1.133	0.002
PRDD014	78.0	79.0	126058	0.67	0.5	0.06	0.025	0.002	1.257	0.003
PRDD014	79.0	80.0	126059	0.905	0.76	0.095	0.04	0.002	1.802	0.003
PRDD014	80.0	80.8	126060	1.1	0.85	0.11	0.045	0.003	2.108	0.002
PRDD014	80.8	81.5	126061	1.35	1.02	0.15	0.06	0.007	2.587	0.003
PRDD014	81.5	82.2	126062	0.355	0.36	0.065	0.03	0.008	0.818	0.025
PRDD014	82.2	83.0	126063	0.13	0.18	-	-	0.001	0.311	0.023
PRDD014	83.0	84.0	126064	0.105	0.265	-	-	0.011	0.381	0.011
PRDD014	84.0	85.0	126065	0.055	0.23	-	-	0.008	0.293	0.015
PRDD014	85.0	86.0	126066	0.065	0.275	-	-	0.016	0.356	0.027
PRDD014	86.0	87.0	126067	0.045	0.12	-	-	0.019	0.184	0.019
PRDD014	87.0	88.0	126068	0.03	0.075	-	-	0.006	0.111	0.008
PRDD014	88.0	88.9	126069	0.095	0.12	-	-	0.004	0.219	0.007
PRDD014	88.9	89.7	126071	0.05	0.075	-	-	<0.005	0.125	0.008
PRDD014	89.7	90.5	126072	0.025	0.045	-	-	0.002	0.072	0.005
PRDD015	30.4	31.2	126073	<0.005	<0.005	-	-	0.003	0.003	0.020
PRDD015	31.2	32.1	126074	<0.005	<0.005	<0.005	<0.005	0.004	0.004	0.012
PRDD015	32.1	33.1	126075	<0.005	<0.005	<0.005	<0.005	0.014	0.014	0.048
PRDD015	33.1	33.8	126076	0.01	0.015	<0.005	<0.005	0.034	0.059	0.218
PRDD015	33.8	34.4	126077	0.01	0.01	<0.005	<0.005	0.035	0.055	0.228
PRDD015	34.4	35.1	126078	0.005	0.01	<0.005	<0.005	0.083	0.098	0.374
PRDD015	35.1	36.2	126079	0.01	0.01	<0.005	<0.005	0.118	0.138	0.386
PRDD015	36.2	37.0	126080	0.055	0.04	<0.005	<0.005	0.292	0.387	0.624
PRDD015	37.0	38.0	126081	0.04	0.03	<0.005	<0.005	0.123	0.193	0.198
PRDD015	38.0	39.0	126082	0.01	0.01	<0.005	<0.005	0.093	0.113	0.166
PRDD015	39.0	40.0	126083	0.04	0.02	<0.005	<0.005	0.165	0.225	0.154
PRDD015	40.0	41.0	126084	0.12	0.065	<0.005	<0.005	0.232	0.417	0.239

For personal use only

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD015	41.0	42.0	126085	0.04	0.015	<0.005	<0.005	0.242	0.297	0.212
PRDD015	42.0	43.1	126086	0.14	0.06	<0.005	<0.005	0.176	0.376	0.254
PRDD015	43.1	44.0	126087	0.115	0.04	<0.005	<0.005	0.099	0.254	0.041
PRDD015	44.0	45.0	126088	1.12	0.34	0.005	0.005	0.535	2.005	0.310
PRDD015	45.0	45.7	126089	1.84	0.74	0.015	0.01	0.448	3.053	0.250
PRDD015	45.7	46.5	126091	1.79	1.22	0.03	0.015	0.258	3.313	0.150
PRDD015	46.5	47.2	126092	1.15	1.06	0.025	0.01	0.161	2.406	0.113
PRDD015	47.2	48.0	126093	0.58	0.75	0.015	0.01	0.092	1.447	0.067
PRDD015	48.0	49.0	126094	0.73	1.1	0.025	0.015	0.104	1.974	0.072
PRDD015	49.0	50.0	126095	0.345	0.625	0.02	0.01	0.056	1.056	0.039
PRDD015	50.0	51.0	126096	0.62	1.03	0.025	0.01	0.077	1.762	0.034
PRDD015	51.0	52.0	126097	0.61	0.95	0.02	0.01	0.05	1.64	0.010
PRDD015	52.0	52.8	126098	0.485	0.74	0.025	0.015	0.025	1.29	0.005
PRDD015	52.8	53.6	126099	0.17	0.265	0.01	<0.005	0.01	0.455	0.004
PRDD015	53.6	54.5	126100	0.48	0.715	0.025	0.015	0.017	1.252	0.009
PRDD015	54.5	55.5	126101	0.52	0.685	0.03	0.015	0.011	1.261	0.007
PRDD015	55.5	56.7	126102	0.65	0.63	0.05	0.025	0.01	1.365	0.007
PRDD015	56.7	57.4	126103	0.755	0.595	0.07	0.035	0.008	1.463	0.004
PRDD015	57.4	58.1	126104	0.675	0.535	0.065	0.035	0.007	1.317	0.003
PRDD015	58.1	59.0	126105	0.66	0.51	0.07	0.03	0.008	1.278	0.001
PRDD015	59.0	60.0	126106	0.72	0.56	0.085	0.04	0.008	1.413	0.002
PRDD015	60.0	61.0	126107	1.04	0.805	0.12	0.055	0.018	2.038	0.010
PRDD015	61.0	62.0	126108	1.35	1.06	0.14	0.065	0.011	2.626	0.004
PRDD015	62.0	63.0	126109	0.78	0.765	0.1	0.045	0.02	1.71	0.016
PRDD015	63.0	64.0	126111	0.435	0.51	0.07	0.035	0.019	1.069	0.028
PRDD015	64.0	65.0	126112	0.43	0.48	0.075	0.035	0.016	1.036	0.027
PRDD015	65.0	66.0	126113	0.3	0.36	-	-	0.012	0.672	0.029
PRDD015	66.0	67.0	126114	0.135	0.22	-	-	0.007	0.362	0.010
PRDD015	67.0	68.0	126115	0.075	0.22	-	-	0.008	0.303	0.019
PRDD015	68.0	68.9	126116	0.04	0.16	-	-	0.014	0.214	0.017
PRDD015	68.9	70.0	126117	0.035	0.14	-	-	0.02	0.195	0.016
PRDD015	70.0	71.0	126118	0.045	0.22	-	-	0.011	0.276	0.025
PRDD015	71.0	72.0	126119	0.025	0.095	-	-	0.03	0.15	0.017
PRDD015	72.0	73.0	126120	0.015	0.045	-	-	0.015	0.075	0.010
PRDD015	73.0	74.1	126121	0.01	0.01	-	-	0.005	0.025	0.004
PRDD015	74.1	75.2	126122	0.02	0.015	-	-	0.01	0.045	0.002
PRDD015	75.2	76.4	126123	0.02	0.025	-	-	0.001	0.046	0.004
PRDD015	76.4	77.6	126124	0.05	0.06	-	-	0.007	0.117	0.002
PRDD016	50.7	51.8	126125	<0.005	<0.005	-	-	0.009	0.009	0.035
PRDD016	51.8	52.9	126126	0.005	<0.005	-	-	0.016	0.021	0.082
PRDD016	52.9	54.0	126127	0.01	0.01	-	-	0.019	0.039	0.255
PRDD016	54.0	55.0	126128	0.01	0.025	-	-	0.028	0.063	0.181
PRDD016	55.0	56.0	126129	0.015	0.01	-	-	0.106	0.131	0.357
PRDD016	56.0	56.7	126131	0.015	0.01	-	-	0.131	0.156	0.352
PRDD016	56.7	57.5	126132	0.015	0.015	-	-	0.177	0.207	0.353
PRDD016	57.5	58.4	126133	0.015	0.015	-	-	0.167	0.197	0.332
PRDD016	58.4	59.2	126134	0.015	0.01	-	-	0.175	0.2	0.282
PRDD016	59.2	60.0	126135	0.01	0.015	-	-	0.104	0.129	0.153
PRDD016	60.0	61.0	126136	0.03	0.02	-	-	0.144	0.194	0.167
PRDD016	61.0	62.0	126137	0.05	0.02	-	-	0.182	0.252	0.193
PRDD016	62.0	62.9	126138	0.19	0.06	<0.005	<0.005	0.171	0.421	0.246
PRDD016	62.9	63.9	126139	1.24	0.42	<0.005	0.005	0.419	2.079	0.255
PRDD016	63.9	64.7	126140	1.73	0.795	0.01	0.01	0.147	2.672	0.103
PRDD016	64.7	65.9	126141	0.895	0.895	0.01	0.01	0.114	1.904	0.088
PRDD016	65.9	67.0	126142	0.56	0.945	0.01	0.005	0.087	1.592	0.054
PRDD016	67.0	68.0	126143	0.49	0.92	0.01	0.005	0.065	1.475	0.040
PRDD016	68.0	69.0	126144	0.57	0.98	0.01	0.01	0.063	1.613	0.028
PRDD016	69.0	70.0	126145	0.585	0.92	0.01	0.01	0.051	1.556	0.022
PRDD016	70.0	70.8	126146	0.545	0.855	0.015	0.01	0.043	1.443	0.019
PRDD016	70.8	71.6	126147	0.49	0.7	0.015	0.01	0.024	1.214	0.009

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD016	71.6	72.4	126148	0.53	0.715	0.02	0.01	0.019	1.264	0.004
PRDD016	72.4	73.2	126149	0.32	0.41	0.01	0.005	0.008	0.738	0.005
PRDD016	73.2	74.0	126151	0.515	0.56	0.05	0.02	0.007	1.082	0.005
PRDD016	74.0	75.0	126152	0.61	0.5	0.055	0.025	0.006	1.116	0.002
PRDD016	75.0	76.0	126153	0.535	0.425	0.05	0.02	0.006	0.966	0.005
PRDD016	76.0	76.9	126154	0.51	0.38	0.04	0.02	0.005	0.895	0.003
PRDD016	76.9	77.6	126155	0.755	0.58	0.07	0.03	0.004	1.339	0.003
PRDD016	77.6	78.5	126156	0.945	0.745	0.09	0.035	0.005	1.695	0.006
PRDD016	78.5	79.4	126157	0.955	0.755	0.1	0.04	0.009	1.719	0.013
PRDD016	79.4	80.2	126158	0.615	0.59	0.075	0.03	0.012	1.217	0.019
PRDD016	80.2	81.0	126159	0.38	0.415	0.06	0.025	0.013	0.808	0.021
PRDD016	81.0	82.0	126160	0.245	0.305	0.07	0.025	0.01	0.56	0.023
PRDD016	82.0	83.0	126161	0.145	0.21	0.05	0.02	0.007	0.362	0.011
PRDD016	83.0	84.0	126162	0.07	0.165	-	-	0.007	0.242	0.013
PRDD016	84.0	85.0	126163	0.05	0.2	-	-	0.01	0.26	0.011
PRDD016	85.0	86.0	126164	0.055	0.25	-	-	0.014	0.319	0.061
PRDD016	86.0	87.0	126165	0.035	0.155	-	-	0.018	0.208	0.026
PRDD016	87.0	87.9	126166	0.025	0.105	-	-	0.019	0.149	0.023
PRDD016	87.9	88.9	126167	0.03	0.065	-	-	0.012	0.107	0.011
PRDD017	48.6	49.9	126168	<0.005	<0.005	P	P	0.007	0.007	0.035
PRDD017	49.9	51.2	126169	<0.005	<0.005	P	P	0.009	0.009	0.044
PRDD017	51.2	52.4	126171	<0.005	<0.005	P	P	0.01	0.01	0.055
PRDD017	52.4	53.1	126172	0.01	0.01	P	P	0.029	0.049	0.251
PRDD017	53.1	54.0	126173	0.01	0.01	P	P	0.076	0.096	0.337
PRDD017	54.0	55.0	126174	0.015	0.015	P	P	0.208	0.238	0.328
PRDD017	55.0	56.0	126175	0.03	0.025	P	P	0.268	0.323	0.549
PRDD017	56.0	57.1	126176	0.015	0.015	P	P	0.104	0.134	0.247
PRDD017	57.1	57.9	126177	0.02	0.015	P	P	0.178	0.213	0.351
PRDD017	57.9	58.6	126178	0.025	0.02	P	P	0.087	0.132	0.188
PRDD017	58.6	59.8	126179	0.02	0.015	P	P	0.121	0.156	0.401
PRDD017	59.8	61.0	126180	0.05	0.02	P	P	0.236	0.306	0.266
PRDD017	61.0	62.1	126181	0.12	0.05	P	P	0.179	0.349	0.201
PRDD017	62.1	63.0	126182	0.255	0.075	P	P	0.294	0.624	0.272
PRDD017	63.0	64.0	126183	1.26	0.51	P	P	0.441	2.211	0.296
PRDD017	64.0	65.1	126184	1.67	0.72	P	P	0.341	2.731	0.207
PRDD017	65.1	66.0	126185	1.27	0.915	P	P	0.186	2.371	0.137
PRDD017	66.0	67.0	126186	0.71	0.785	P	P	0.091	1.586	0.086
PRDD017	67.0	68.0	126187	0.665	0.95	P	P	0.06	1.675	0.081
PRDD017	68.0	69.0	126188	0.68	1.03	P	P	0.059	1.769	0.031
PRDD017	69.0	70.0	126189	0.595	1.05	P	P	0.077	1.722	0.041
PRDD017	70.0	71.0	126191	0.765	1.08	P	P	0.095	1.94	0.062
PRDD017	71.0	72.0	126192	0.62	0.955	P	P	0.042	1.617	0.030
PRDD017	72.0	73.0	126193	0.69	0.95	P	P	0.033	1.673	0.012
PRDD017	73.0	74.0	126194	0.57	0.805	P	P	0.017	1.392	0.009
PRDD017	74.0	75.0	126195	0.5	0.63	P	P	0.007	1.137	0.006
PRDD017	75.0	76.0	126196	0.615	0.555	P	P	0.009	1.179	0.004
PRDD017	76.0	77.0	126197	0.665	0.53	P	P	0.008	1.203	0.003
PRDD017	77.0	78.0	126198	0.625	0.555	P	P	0.013	1.193	0.006
PRDD017	78.0	79.0	126199	0.645	0.495	P	P	0.006	1.146	0.001
PRDD017	79.0	80.0	126200	0.535	0.425	P	P	0.005	0.965	0.001
PRDD017	80.0	81.1	126201	0.59	0.475	P	P	0.001	1.066	0.001
PRDD017	81.1	82.0	126202	0.885	0.695	P	P	0.002	1.582	0.003
PRDD017	82.0	83.0	126203	0.845	0.66	P	P	0.004	1.509	0.010
PRDD017	83.0	84.0	126204	0.565	0.595	P	P	0.011	1.171	0.023
PRDD017	84.0	85.0	126205	0.24	0.335	P	P	0.009	0.584	0.052
PRDD017	85.0	85.9	126206	0.265	0.4	P	P	0.012	0.677	0.026
PRDD017	85.9	87.0	126207	0.115	0.22	P	P	0.007	0.342	0.016
PRDD017	87.0	88.0	126208	0.075	0.235	P	P	0.011	0.321	0.025
PRDD017	88.0	89.1	126209	0.105	0.21	P	P	0.007	0.322	0.021
PRDD018	33.0	34.0	126211	<0.005	<0.005	P	P	0.007	0.007	0.041

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD018	34.0	35.0	126212	<0.005	<0.005	P	P	0.004	0.004	0.035
PRDD018	35.0	35.6	126213	<0.005	<0.005	P	P	0.006	0.006	0.041
PRDD018	35.6	36.5	126214	<0.005	<0.005	P	P	<0.001	<0.001	0.008
PRDD018	36.5	37.0	126215	<0.005	<0.005	P	P	0.014	0.014	0.116
PRDD018	37.0	38.0	126216	<0.005	<0.005	P	P	0.007	0.007	0.077
PRDD018	38.0	39.1	126217	<0.005	<0.005	P	P	0.009	0.009	0.116
PRDD018	39.1	40.0	126218	0.01	0.01	P	P	0.022	0.042	0.178
PRDD018	40.0	40.9	126219	0.015	0.01	P	P	0.056	0.081	0.186
PRDD018	40.9	42.0	126220	0.015	0.025	P	P	0.109	0.149	0.176
PRDD018	42.0	43.0	126221	0.02	0.015	P	P	0.153	0.188	0.218
PRDD018	43.0	44.0	126222	0.015	0.015	P	P	0.178	0.208	0.282
PRDD018	44.0	45.0	126223	0.025	0.02	P	P	0.257	0.302	0.487
PRDD018	45.0	46.0	126224	0.075	0.03	P	P	0.291	0.396	0.321
PRDD018	46.0	47.0	126225	0.095	0.035	P	P	0.181	0.311	0.191
PRDD018	47.0	48.0	126226	0.345	0.12	P	P	0.298	0.763	0.188
PRDD018	48.0	49.0	126227	1.24	0.38	P	P	0.569	2.189	0.358
PRDD018	49.0	50.0	126228	1.52	0.61	P	P	0.376	2.506	0.243
PRDD018	50.0	51.0	126229	1.37	1.21	P	P	0.259	2.839	0.127
PRDD018	51.0	52.0	126231	0.66	0.955	P	P	0.082	1.697	0.059
PRDD018	52.0	53.0	126232	0.575	0.955	P	P	0.066	1.596	0.057
PRDD018	53.0	54.0	126233	0.755	1.2	P	P	0.081	2.036	0.039
PRDD018	54.0	55.0	126234	0.705	1.04	P	P	0.048	1.793	0.025
PRDD018	55.0	56.0	126235	0.63	0.905	P	P	0.031	1.566	0.024
PRDD018	56.0	57.0	126236	0.605	0.815	P	P	0.019	1.439	0.014
PRDD018	57.0	57.9	126237	0.51	0.645	P	P	0.008	1.163	0.015
PRDD018	57.9	59.0	126238	0.525	0.445	P	P	0.002	0.972	0.015
PRDD018	59.0	60.0	126239	0.705	0.545	P	P	0.009	1.259	0.002
PRDD018	60.0	61.0	126240	0.875	0.715	P	P	0.012	1.602	0.016
PRDD018	61.0	62.0	126241	0.66	0.645	P	P	0.019	1.324	0.050
PRDD018	62.0	63.0	126242	0.365	0.465	P	P	0.016	0.846	0.031
PRDD018	63.0	64.0	126243	0.23	0.36	P	P	0.011	0.601	0.017
PRDD018	64.0	65.0	126244	0.105	0.285	P	P	0.01	0.4	0.024
PRDD018	65.0	66.0	126245	0.105	0.43	P	P	0.028	0.563	0.060
PRDD018	66.0	67.0	126246	0.075	0.34	P	P	0.009	0.424	0.026
PRDD018	67.0	68.0	126247	0.065	0.185	P	P	0.006	0.256	0.029
PRDD018	68.0	69.0	126248	0.04	0.145	P	P	0.005	0.19	0.028
PRDD018	69.0	69.9	126249	0.045	0.09	P	P	0.004	0.139	0.024
PRDD018	69.9	71.0	126251	<0.005	<0.005	P	P	<0.001	<0.001	0.001
PRDD018	71.0	72.2	126252	<0.005	<0.005	P	P	0.014	0.014	0.002
PRDD018	72.2	73.0	126253	0.195	0.11	P	P	0.015	0.32	0.044
PRDD018	73.0	74.0	126254	0.075	0.08	P	P	0.006	0.161	0.013
PRDD018	74.0	75.0	126255	0.025	0.025	P	P	0.006	0.056	0.010
PRDD018	75.0	76.0	126256	0.085	0.08	P	P	0.032	0.197	0.008
PRDD018	76.0	76.5	126257	0.11	0.075	P	P	0.013	0.198	0.019
PRDD018	76.5	77.0	126258	0.055	0.05	P	P	0.005	0.11	0.003
PRDD018	77.0	78.0	126259	0.095	0.125	P	P	0.007	0.227	0.008
PRDD018	78.0	78.5	126260	0.095	0.125	P	P	0.005	0.225	0.001
PRDD018	78.5	79.0	126261	0.14	0.135	P	P	0.005	0.28	0.001
PRDD018	79.0	80.0	126262	0.125	0.145	P	P	0.007	0.277	0.001
PRDD018	80.0	81.0	126263	0.19	0.235	P	P	0.005	0.43	0.005
PRDD018	81.0	82.0	126264	0.21	0.225	P	P	0.005	0.44	0.004
PRDD018	82.0	83.0	126265	0.115	0.14	P	P	0.004	0.259	0.002
PRDD018	83.0	84.0	126266	0.295	0.26	P	P	0.005	0.56	0.005
PRDD018	84.0	85.0	126267	0.255	0.17	P	P	0.011	0.436	0.022
PRDD018	85.0	86.0	126268	0.21	0.165	P	P	0.006	0.381	0.061
PRDD018	86.0	87.0	126269	0.62	0.495	P	P	0.013	1.128	0.023
PRDD018	87.0	88.0	126271	0.825	0.84	P	P	0.008	1.673	0.020
PRDD018	88.0	89.2	126272	0.825	0.83	P	P	0.022	1.677	0.105
PRDD018	89.2	90.0	126273	0.98	0.795	P	P	0.007	1.782	0.019
PRDD018	90.0	91.0	126274	0.925	0.745	P	P	0.011	1.681	0.029

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD018	91.0	92.0	126275	0.46	0.39	P	P	0.012	0.862	0.059
PRDD018	92.0	93.0	126276	0.725	0.71	P	P	0.011	1.446	0.042
PRDD018	93.0	94.0	126277	0.395	0.475	P	P	0.006	0.876	0.033
PRDD018	94.0	94.7	126278	0.31	0.515	-	-	0.056	0.881	0.653
PRDD019	25.4	26.0	126279	<0.005	<0.005	-	-	0.016	0.016	0.014
PRDD019	26.0	27.0	126280	<0.005	<0.005	-	-	0.004	0.004	0.008
PRDD019	27.0	28.1	126281	0.04	<0.005	<0.005	<0.005	0.006	0.046	0.024
PRDD019	28.1	29.0	126282	1.64	0.825	0.025	0.015	0.253	2.718	0.180
PRDD019	29.0	30.0	126283	0.64	0.4	0.015	0.01	0.089	1.129	0.068
PRDD019	30.0	31.0	126284	0.705	0.925	0.025	0.01	0.124	1.754	0.097
PRDD019	31.0	31.4	126285	0.68	0.91	0.025	0.01	0.098	1.688	0.091
PRDD019	31.4	32.0	126286	0.695	0.965	0.03	0.015	0.083	1.743	0.050
PRDD019	32.0	33.0	126287	0.695	0.99	0.02	0.01	0.097	1.782	0.054
PRDD019	33.0	34.0	126288	0.83	1.2	0.035	0.015	0.085	2.115	0.046
PRDD019	34.0	35.2	126289	0.785	1.03	0.035	0.015	0.045	1.86	0.020
PRDD019	35.2	36.0	126291	0.19	0.22	0.01	0.005	0.01	0.42	0.010
PRDD019	36.0	37.0	126292	0.485	0.58	0.035	0.015	0.007	1.072	0.008
PRDD019	37.0	37.8	126293	0.625	0.555	0.05	0.025	0.006	1.186	0.007
PRDD019	37.8	38.2	126294	0.385	0.265	0.04	0.02	0.015	0.665	0.017
PRDD019	38.2	39.0	126295	0.605	0.44	0.055	0.025	0.004	1.049	0.005
PRDD019	39.0	40.0	126296	0.495	0.39	0.05	0.025	0.006	0.891	0.005
PRDD019	40.0	41.0	126297	0.865	0.63	0.1	0.045	0.006	1.501	0.016
PRDD019	41.0	42.0	126298	0.945	0.8	0.1	0.045	0.016	1.761	0.023
PRDD019	42.0	43.2	126299	0.4	0.445	0.08	0.035	0.015	0.86	0.030
PRDD019	43.2	44.0	126300	0.13	0.295	0.035	0.015	0.014	0.439	0.031
PRDD019	44.0	44.9	126301	0.085	0.3	0.02	0.01	0.017	0.402	0.030
PRDD019	44.9	46.0	126302	0.06	0.28	0.015	0.005	0.017	0.357	0.037
PRDD019	46.0	47.0	126303	0.035	0.085	0.015	0.005	0.014	0.134	0.021
PRDD019	47.0	47.5	126304	0.015	0.01	-	-	0.006	0.031	0.006
PRDD019	47.5	47.9	126305	<0.005	<0.005	-	-	0.003	0.003	0.001
PRDD019	47.9	49.0	126306	0.02	0.01	-	-	0.006	0.036	0.006
PRDD019	49.0	50.0	126307	0.04	0.03	-	-	0.005	0.075	0.005
PRDD019	50.0	51.0	126308	0.045	0.05	-	-	0.003	0.098	0.002
PRDD019	51.0	51.7	126309	0.1	0.095	-	-	0.004	0.199	0.003
PRDD019	51.7	52.0	126311	0.225	0.255	-	-	0.004	0.484	0.008
PRDD019	52.0	53.0	126312	0.31	0.28	-	-	0.004	0.594	0.006
PRDD019	53.0	54.0	126313	0.18	0.245	-	-	0.004	0.429	0.007
PRDD019	54.0	54.4	126314	0.2	0.25	-	-	0.004	0.454	0.005
PRDD020	80.4	81.1	126315	<0.005	<0.005	-	-	0.01	0.01	0.041
PRDD020	81.1	82.0	126316	<0.005	<0.005	-	-	0.007	0.007	0.042
PRDD020	82.0	83.0	126317	<0.005	<0.005	-	-	0.009	0.009	0.041
PRDD020	83.0	84.0	126318	<0.005	<0.005	-	-	0.012	0.012	0.087
PRDD020	84.0	84.7	126319	<0.005	<0.005	-	-	0.01	0.01	0.078
PRDD020	84.7	85.8	126320	0.005	0.01	-	-	0.014	0.029	0.032
PRDD020	85.8	87.0	126321	0.015	0.015	<0.005	<0.005	0.098	0.128	0.403
PRDD020	87.0	88.1	126322	0.02	0.025	<0.005	<0.005	0.062	0.107	0.298
PRDD020	88.1	89.2	126323	0.065	0.015	<0.005	<0.005	0.011	0.091	0.029
PRDD020	89.2	90.0	126324	0.085	0.015	<0.005	<0.005	0.044	0.144	0.080
PRDD020	90.0	91.0	126325	0.025	0.015	<0.005	<0.005	0.163	0.203	0.234
PRDD020	91.0	92.0	126326	0.17	0.095	<0.005	<0.005	0.286	0.551	0.240
PRDD020	92.0	93.1	126327	1.52	0.325	0.015	0.01	0.3	2.17	0.134
PRDD020	93.1	94.0	126328	0.625	0.37	0.01	<0.005	0.032	1.037	0.029
PRDD020	94.0	94.8	126329	0.24	0.375	0.005	<0.005	0.034	0.654	0.008
PRDD020	94.8	95.9	126331	0.665	1.06	0.025	0.015	0.101	1.866	0.040
PRDD020	95.9	97.0	126332	0.545	0.73	0.025	0.015	0.042	1.357	0.018
PRDD020	97.0	98.0	126333	0.9	1.34	0.035	0.02	0.097	2.392	0.033
PRDD020	98.0	99.0	126334	0.76	1.04	0.035	0.02	0.108	1.963	0.018
PRDD020	99.0	100.1	126335	0.57	0.73	0.04	0.02	0.015	1.375	0.012
PRDD020	100.1	101.2	126336	0.59	0.47	0.065	0.03	0.025	1.18	0.004
PRDD020	101.2	102.2	126337	0.6	0.47	0.065	0.03	0.007	1.172	0.001

For personal use only

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD020	102.2	103.2	126338	0.675	0.515	0.075	0.03	0.036	1.331	0.031
PRDD020	103.2	104.2	126339	0.885	0.69	0.11	0.045	0.01	1.74	0.002
PRDD020	104.2	105.3	126340	1.06	0.815	0.14	0.055	0.009	2.079	0.003
PRDD020	105.3	106.2	126341	0.57	0.455	0.08	0.035	0.043	1.183	0.004
PRDD020	106.2	107.1	126342	0.725	0.7	0.105	0.045	0.012	1.587	0.020
PRDD020	107.1	108.0	126343	0.49	0.555	0.1	0.04	0.016	1.201	0.029
PRDD020	108.0	109.0	126344	0.23	0.345	0.065	0.03	0.011	0.681	0.024
PRDD020	109.0	110.0	126345	0.1	0.38	0.03	0.015	0.024	0.549	0.047
PRDD020	110.0	111.0	126346	0.085	0.425	0.02	0.015	0.026	0.571	0.052
PRDD020	111.0	112.0	126347	0.04	0.16	-	-	0.016	0.216	0.022
PRDD020	112.0	113.0	126348	0.04	0.14	-	-	0.015	0.195	0.028
PRDD020	113.0	114.2	126349	0.12	0.19	-	-	0.012	0.322	0.024
PRDD020	114.2	115.1	126351	0.09	0.125	-	-	0.007	0.222	0.004
PRDD020	115.1	116.0	126352	0.045	0.075	-	-	0.01	0.13	0.002
PRDD020	116.0	116.6	126353	0.09	0.195	-	-	0.004	0.289	0.005
PRDD021	61.7	62.6	126354	<0.005	<0.005	-	-	0.01	0.01	0.038
PRDD021	62.6	63.5	126355	<0.005	<0.005	-	-	0.008	0.008	0.050
PRDD021	63.5	64.5	126356	<0.005	<0.005	<0.005	<0.005	0.007	0.007	0.112
PRDD021	64.5	65.5	126357	0.01	0.01	<0.005	<0.005	0.037	0.057	0.240
PRDD021	65.5	66.5	126358	0.015	0.015	<0.005	<0.005	0.053	0.083	0.208
PRDD021	66.5	67.5	126359	0.01	0.015	<0.005	<0.005	0.085	0.11	0.312
PRDD021	67.5	68.5	126360	0.015	0.015	<0.005	<0.005	0.11	0.14	0.280
PRDD021	68.5	69.6	126361	0.02	0.015	<0.005	<0.005	0.263	0.298	0.346
PRDD021	69.6	70.5	126362	0.025	0.02	<0.005	<0.005	0.279	0.324	0.396
PRDD021	70.5	71.5	126363	0.25	0.115	<0.005	<0.005	0.336	0.701	0.306
PRDD021	71.5	72.5	126364	1.24	0.425	0.01	0.01	0.45	2.135	0.289
PRDD021	72.5	73.6	126365	1.66	0.895	0.015	0.01	0.11	2.69	0.175
PRDD021	73.6	74.5	126366	1.95	0.735	0.02	0.015	0.544	3.264	0.292
PRDD021	74.5	75.5	126367	0.915	1.04	0.02	0.01	0.247	2.232	0.111
PRDD021	75.5	76.5	126368	0.67	1.17	0.02	0.01	0.111	1.981	0.049
PRDD021	76.5	77.5	126369	0.75	1.3	0.03	0.015	0.073	2.168	0.017
PRDD021	77.5	78.5	126371	0.735	1.23	0.02	0.01	0.074	2.069	0.029
PRDD021	78.5	79.5	126372	0.69	1.06	0.035	0.015	0.042	1.842	0.015
PRDD021	79.5	80.5	126373	0.645	0.895	0.035	0.015	0.025	1.615	0.004
PRDD021	80.5	81.5	126374	0.515	0.69	0.035	0.02	0.013	1.273	0.013
PRDD021	81.5	82.5	126375	0.46	0.45	0.045	0.02	0.008	0.983	0.011
PRDD021	82.5	83.3	126376	0.545	0.45	0.065	0.03	0.007	1.097	0.001
PRDD021	83.3	84.1	126377	0.545	0.435	0.065	0.03	0.005	1.08	0.000
PRDD021	84.1	85.0	126378	0.645	0.525	0.08	0.035	0.008	1.293	0.000
PRDD021	85.0	86.0	126379	0.785	0.64	0.13	0.06	0.005	1.62	0.001
PRDD021	86.0	87.0	126380	0.785	0.65	0.115	0.06	0.013	1.623	0.008
PRDD021	87.0	87.9	126381	0.375	0.47	0.07	0.035	0.017	0.967	0.044
PRDD021	87.9	88.8	126382	0.255	0.405	0.08	0.04	0.008	0.788	0.019
PRDD021	88.8	89.7	126383	0.12	0.28	0.035	0.015	0.01	0.46	0.053
PRDD021	89.7	90.5	126384	0.215	0.305	0.04	0.02	0.016	0.596	0.063
PRDD021	90.5	91.5	126385	0.775	0.63	0.105	0.05	0.012	1.572	0.028
PRDD021	91.5	92.5	126386	0.445	0.485	0.1	0.045	0.01	1.085	0.026
PRDD021	92.5	93.5	126387	0.305	0.435	0.08	0.04	0.019	0.879	0.030
PRDD021	93.5	94.5	126388	0.16	0.325	-	-	0.011	0.496	0.036
PRDD021	94.5	95.7	126389	0.08	0.295	-	-	0.014	0.389	0.045
PRDD021	95.7	96.8	126391	0.1	0.42	-	-	0.024	0.544	0.056
PRDD022	48.6	49.0	126392	<0.005	<0.005	-	-	0.003	0.003	0.033
PRDD022	49.0	50.0	126393	<0.005	<0.005	-	-	0.004	0.004	0.031
PRDD022	50.0	51.0	126394	0.005	<0.005	-	-	0.008	0.013	0.039
PRDD022	51.0	52.0	126395	0.005	<0.005	-	-	0.004	0.009	0.045
PRDD022	52.0	53.0	126396	<0.005	<0.005	-	-	0.008	0.008	0.038
PRDD022	53.0	53.5	126397	<0.005	<0.005	-	-	0.005	0.005	0.053
PRDD022	53.5	54.0	126398	0.01	0.015	-	-	0.01	0.035	0.063
PRDD022	54.0	55.0	126399	0.01	0.015	-	-	0.012	0.037	0.037
PRDD022	55.0	56.0	126400	0.01	0.02	-	-	0.014	0.044	0.059

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD022	56.0	57.0	126401	0.015	0.035	-	-	0.015	0.065	0.059
PRDD022	57.0	58.0	126402	0.015	0.045	-	-	0.014	0.074	0.035
PRDD022	58.0	59.0	126403	0.05	0.125	-	-	0.01	0.185	0.032
PRDD022	59.0	59.9	126404	<0.005	<0.005	-	-	0.008	0.008	0.046
PRDD022	59.9	61.0	126405	0.01	0.01	<0.005	<0.005	0.067	0.087	0.297
PRDD022	61.0	62.0	126406	0.02	0.015	<0.005	<0.005	0.127	0.162	0.366
PRDD022	62.0	63.0	126407	0.045	0.035	<0.005	<0.005	0.163	0.243	0.391
PRDD022	63.0	64.0	126408	0.03	0.025	<0.005	<0.005	0.175	0.23	0.396
PRDD022	64.0	64.4	126409	0.085	0.045	<0.005	<0.005	0.308	0.438	0.574
PRDD022	64.4	65.0	126411	0.11	0.08	<0.005	<0.005	0.321	0.511	0.455
PRDD022	65.0	66.0	126412	0.035	0.02	<0.005	<0.005	0.225	0.28	0.376
PRDD022	66.0	67.0	126413	0.08	0.035	<0.005	<0.005	0.364	0.479	0.315
PRDD022	67.0	68.0	126414	0.16	0.08	<0.005	<0.005	0.357	0.597	0.324
PRDD022	68.0	69.0	126415	0.705	0.33	0.01	<0.005	0.534	1.579	0.383
PRDD022	69.0	70.0	126416	1.13	0.45	0.01	0.005	0.446	2.041	0.316
PRDD022	70.0	71.0	126417	1.95	0.89	0.025	0.01	0.403	3.278	0.237
PRDD022	71.0	72.0	126418	1.13	1.15	0.04	0.015	0.134	2.469	0.102
PRDD022	72.0	73.0	126419	1.06	1.23	0.03	0.01	0.167	2.497	0.121
PRDD022	73.0	74.0	126420	0.555	0.78	0.02	0.005	0.076	1.436	0.053
PRDD022	74.0	75.0	126421	0.915	1.42	0.035	0.01	0.109	2.489	0.066
PRDD022	75.0	76.0	126422	0.65	0.945	0.03	0.01	0.025	1.66	0.017
PRDD022	76.0	77.0	126423	0.615	0.875	0.03	0.01	0.015	1.545	0.009
PRDD022	77.0	78.0	126424	0.545	0.745	0.035	0.01	0.013	1.348	0.013
PRDD022	78.0	79.0	126425	0.48	0.575	0.045	0.02	0.008	1.128	0.010
PRDD022	79.0	80.0	126426	0.695	0.57	0.07	0.03	0.006	1.371	0.007
PRDD022	80.0	81.0	126427	0.56	0.455	0.06	0.025	0.008	1.108	0.008
PRDD022	81.0	82.0	126428	0.515	0.43	0.065	0.025	0.005	1.04	0.006
PRDD022	82.0	83.0	126429	0.91	0.92	0.15	0.07	0.009	2.059	0.007
PRDD022	83.0	84.0	126431	0.935	0.77	0.115	0.05	0.01	1.88	0.019
PRDD022	84.0	84.4	126432	0.955	0.725	0.11	0.05	0.005	1.845	0.008
PRDD022	84.4	85.0	126433	0.87	0.67	0.1	0.04	0.006	1.686	0.006
PRDD022	85.0	86.0	126434	0.535	0.47	0.08	0.035	0.008	1.128	0.013
PRDD022	86.0	87.0	126435	0.605	0.645	0.105	0.045	0.02	1.42	0.016
PRDD022	87.0	88.0	126436	0.405	0.59	0.095	0.04	0.027	1.157	0.064
PRDD022	88.0	89.0	126437	0.18	0.3	0.06	0.025	0.01	0.575	0.026
PRDD022	89.0	90.0	126438	0.095	0.255	0.03	0.01	0.013	0.403	0.026
PRDD022	90.0	91.0	126439	0.115	0.465	0.025	0.01	0.029	0.644	0.074
PRDD022	91.0	92.0	126440	0.075	0.265	0.02	0.005	0.014	0.379	0.040
PRDD022	92.0	93.0	126441	0.11	0.47	0.025	0.005	0.027	0.637	0.070
PRDD022	93.0	94.0	126442	0.06	0.2	0.015	0.005	0.012	0.292	0.041
PRDD022	94.0	95.0	126443	0.045	0.155	0.01	<0.005	0.01	0.22	0.040
PRDD022	95.0	96.0	126444	0.13	0.27	0.015	0.005	0.052	0.472	0.047
PRDD022	96.0	96.6	126445	0.565	0.52	0.03	0.01	0.16	1.285	0.077
PRDD022	96.6	97.3	126446	0.47	0.44	0.02	0.005	0.13	1.065	0.091
PRDD022	97.3	98.4	126447	1.85	1.42	0.065	0.035	0.767	4.137	0.273
PRDD022	98.4	99.0	126448	0.03	0.025	0.015	0.005	0.003	0.078	0.003
PRDD022	99.0	100.0	126449	0.035	0.025	-	-	0.002	0.062	0.003
PRDD022	100.0	100.4	126451	0.04	0.045	-	-	0.008	0.093	0.013
PRDD022	100.4	101.0	126452	0.04	0.04	-	-	0.001	0.081	0.002
PRDD022	101.0	101.9	126453	0.04	0.045	-	-	0.003	0.088	0.003
PRDD022	101.9	102.3	126454	0.16	0.2	-	-	0.003	0.363	0.005
PRDD023	66.7	67.0	126455	<0.005	<0.005	-	-	0.005	0.005	0.110
PRDD023	67.0	68.0	126456	<0.005	<0.005	-	-	0.003	0.003	0.041
PRDD023	68.0	69.0	126457	<0.005	<0.005	-	-	0.004	0.004	0.039
PRDD023	69.0	70.0	126458	<0.005	0.01	-	-	0.006	0.016	0.050
PRDD023	70.0	71.0	126459	<0.005	<0.005	-	-	0.005	0.005	0.081
PRDD023	71.0	71.7	126460	<0.005	<0.005	-	-	0.019	0.019	0.119
PRDD023	71.7	72.0	126461	0.01	0.01	-	-	0.044	0.064	0.276
PRDD023	72.0	73.0	126462	0.01	0.01	-	-	0.057	0.077	0.305
PRDD023	73.0	74.0	126463	0.015	0.015	-	-	0.063	0.093	0.373

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD023	74.0	75.0	126464	0.035	0.025	-	-	0.187	0.247	0.513
PRDD023	75.0	76.0	126465	0.015	0.015	-	-	0.198	0.228	0.364
PRDD023	76.0	77.0	126466	0.015	0.01	-	-	0.14	0.165	0.342
PRDD023	77.0	78.0	126467	0.05	0.02	-	-	0.295	0.365	0.292
PRDD023	78.0	78.8	126468	0.075	0.03	-	-	0.32	0.425	0.221
PRDD023	78.8	79.1	126469	0.015	0.005	-	-	0.276	0.296	0.091
PRDD023	79.1	80.0	126471	0.23	0.065	<0.005	<0.005	0.356	0.651	0.288
PRDD023	80.0	81.0	126472	1.29	0.36	0.005	0.005	0.595	2.245	0.397
PRDD023	81.0	82.0	126473	1.27	0.555	0.02	0.01	0.253	2.078	0.184
PRDD023	82.0	83.2	126474	1.13	0.97	0.02	0.01	0.171	2.271	0.109
PRDD023	83.2	84.0	126475	0.68	1.03	0.025	0.01	0.109	1.819	0.068
PRDD023	84.0	85.0	126476	0.52	0.755	0.03	0.015	0.058	1.333	0.040
PRDD023	85.0	86.0	126477	0.6	0.94	0.025	0.01	0.047	1.587	0.026
PRDD023	86.0	87.0	126478	0.73	1.16	0.025	0.01	0.103	1.993	0.044
PRDD023	87.0	88.0	126479	0.715	0.97	0.035	0.015	0.043	1.728	0.029
PRDD023	88.0	89.0	126480	0.51	0.745	0.02	0.01	0.031	1.286	0.011
PRDD023	89.0	90.0	126481	0.54	0.73	0.025	0.01	0.016	1.286	0.008
PRDD023	90.0	91.0	126482	0.5	0.64	0.035	0.015	0.014	1.154	0.010
PRDD023	91.0	91.3	126483	0.53	0.42	0.06	0.025	0.007	0.957	0.002
PRDD023	91.3	92.0	126484	0.54	0.425	0.065	0.025	0.005	0.97	0.003
PRDD023	92.0	93.0	126485	0.565	0.465	0.05	0.02	0.004	1.034	0.014
PRDD023	93.0	94.0	126486	0.715	0.54	0.075	0.035	0.004	1.259	0.004
PRDD023	94.0	95.0	126487	1	0.74	0.13	0.055	0.004	1.744	0.008
PRDD023	95.0	95.7	126488	1.22	0.88	0.135	0.06	0.006	2.106	0.010
PRDD023	95.7	96.0	126489	0.885	0.655	0.1	0.04	0.016	1.556	0.019
PRDD023	96.0	97.0	126491	0.665	0.64	0.085	0.035	0.016	1.321	0.026
PRDD023	97.0	98.0	126492	0.275	0.325	0.055	0.02	0.016	0.616	0.046
PRDD023	98.0	99.0	126493	0.225	0.445	0.05	0.02	0.026	0.696	0.059
PRDD023	99.0	100.0	126494	0.135	0.225	0.035	0.015	0.012	0.372	0.023
PRDD023	100.0	101.0	126495	0.09	0.215	0.025	0.01	0.009	0.314	0.020
PRDD023	101.0	102.0	126496	0.11	0.42	0.025	0.01	0.027	0.557	0.060
PRDD023	102.0	103.0	126497	0.055	0.245	0.015	0.005	0.011	0.311	0.028
PRDD023	103.0	104.0	126498	0.045	0.22	-	-	0.013	0.278	0.029
PRDD023	104.0	105.0	126499	0.025	0.105	-	-	0.02	0.15	0.023
PRDD023	105.0	106.0	126500	0.03	0.055	-	-	0.015	0.1	0.022
PRDD023	106.0	107.0	126501	0.05	0.08	-	-	0.02	0.15	0.013
PRDD023	107.0	108.0	126502	0.02	0.03	-	-	0.002	0.052	0.002
PRDD023	108.0	109.0	126503	0.04	0.045	-	-	0.002	0.087	0.002
PRDD023	109.0	110.0	126504	0.06	0.07	-	-	0.002	0.132	0.003
PRDD023	110.0	110.6	126505	0.105	0.11	-	-	0.003	0.218	0.004
PRDD030	78.0	79.0	126506	0.005	0.005	P	P	0.003	0.013	0.050
PRDD030	79.0	80.0	126507	<0.005	0.005	P	P	0.049	0.054	0.065
PRDD030	80.0	80.7	126508	<0.005	0.005	P	P	0.02	0.025	0.116
PRDD030	80.7	81.5	126509	<0.005	<0.005	P	P	0.018	0.018	0.370
PRDD030	81.5	82.4	126511	<0.005	<0.005	P	P	0.057	0.057	0.237
PRDD030	82.4	83.1	126512	0.005	0.01	P	P	0.023	0.038	0.318
PRDD030	83.1	84.0	126513	0.01	0.01	P	P	0.084	0.104	0.322
PRDD030	84.0	84.5	126514	0.01	0.01	P	P	0.139	0.159	0.290
PRDD030	84.5	85.0	126515	0.01	0.01	P	P	0.155	0.175	0.446
PRDD030	85.0	86.0	126516	0.01	0.01	P	P	0.228	0.248	0.431
PRDD030	86.0	87.1	126517	0.035	0.02	P	P	0.394	0.449	0.324
PRDD030	87.1	88.0	126518	0.445	0.135	P	P	0.262	0.842	0.211
PRDD030	88.0	89.0	126519	1.41	0.855	P	P	0.078	2.343	0.070
PRDD030	89.0	90.0	126520	0.425	0.665	P	P	0.013	1.103	0.001
PRDD030	90.0	90.6	126521	0.1	0.18	P	P	0.079	0.359	0.029
PRDD030	90.6	91.0	126522	0.505	0.925	P	P	0.082	1.512	0.065
PRDD030	91.0	92.0	126523	0.715	1.2	P	P	0.04	1.955	0.036
PRDD030	92.0	93.0	126524	0.675	0.945	P	P	0.018	1.638	0.014
PRDD030	93.0	94.0	126525	0.575	0.78	P	P	0.008	1.363	0.014
PRDD030	94.0	95.0	126526	0.495	0.475	P	P	0.007	0.977	0.003

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD030	95.0	96.0	126527	0.595	0.465	P	P	0.013	1.073	0.008
PRDD030	96.0	96.9	126528	0.535	0.435	P	P	0.007	0.977	0.008
PRDD030	96.9	98.0	126529	0.975	0.78	P	P	0.007	1.762	0.011
PRDD030	98.0	99.0	126531	1.65	0.83	P	P	0.009	2.489	0.020
PRDD030	99.0	100.0	126532	0.22	0.345	P	P	0.01	0.575	0.080
PRDD030	100.0	101.0	126533	0.09	0.315	P	P	0.011	0.416	0.070
PRDD030	101.0	101.7	126534	0.05	0.115	P	P	0.004	0.169	0.009
PRDD030	101.7	102.0	126535	0.01	0.01	P	P	0.003	0.023	0.010
PRDD030	102.0	103.0	126536	0.015	0.02	P	P	0.006	0.041	0.006
PRDD030	103.0	103.8	126537	0.025	0.015	P	P	0.003	0.043	0.007
PRDD030	103.8	105.0	126538	0.05	0.05	P	P	0.006	0.106	0.008
PRDD030	105.0	106.0	126539	0.135	0.29	P	P	0.003	0.428	0.008
PRDD030	106.0	107.0	126540	0.315	0.23	P	P	0.004	0.549	0.010
PRDD030	107.0	108.0	126541	0.355	0.145	P	P	0.015	0.515	0.029
PRDD030	108.0	109.0	126542	0.25	0.075	P	P	0.007	0.332	0.014
PRDD030	109.0	110.0	126543	0.36	0.155	P	P	0.014	0.529	0.014
PRDD030	110.0	110.7	126544	0.255	0.075	P	P	0.006	0.336	0.002
PRDD030	110.7	111.5	126545	0.12	0.03	P	P	0.001	0.151	0.000
PRDD030	111.5	111.8	126546	<0.005	<0.005	P	P	0.008	0.008	<0.0002
PRDD030	111.8	112.7	126547	0.08	0.025	P	P	0.001	0.106	<0.0002
PRDD030	112.7	113.0	126548	<0.005	<0.005	P	P	0.002	0.002	0.002
PRDD030	113.0	114.0	126549	0.03	0.015	P	P	0.003	0.048	0.024
PRDD030	114.0	115.0	126551	<0.005	<0.005	P	P	0.002	0.002	0.027
PRDD030	115.0	116.0	126552	0.005	<0.005	P	P	0.002	0.007	0.008
PRDD030	116.0	117.0	126553	0.005	0.005	P	P	0.27	0.28	0.178
PRDD030	117.0	118.0	126554	0.005	0.005	P	P	0.002	0.012	0.010
PRDD030	118.0	119.0	126555	0.01	0.01	P	P	0.001	0.021	0.002
PRDD030	119.0	120.1	126556	0.01	0.005	P	P	0.003	0.018	0.011
PRDD031	70.8	71.9	126557	<0.005	0.01	P	P	0.005	0.015	0.068
PRDD031	71.9	73.0	126558	<0.005	0.035	P	P	0.018	0.053	0.080
PRDD031	73.0	74.1	126559	<0.005	0.025	P	P	0.056	0.081	0.191
PRDD031	74.1	75.2	126560	0.01	0.01	P	P	0.092	0.112	0.340
PRDD031	75.2	76.1	126561	0.015	0.015	P	P	0.203	0.233	0.372
PRDD031	76.1	77.0	126562	0.04	0.025	P	P	0.267	0.332	0.465
PRDD031	77.0	78.0	126563	0.415	0.115	P	P	0.33	0.86	0.307
PRDD031	78.0	79.0	126564	1.5	0.77	P	P	0.317	2.587	0.178
PRDD031	79.0	80.1	126565	0.73	1.09	P	P	0.042	1.862	0.083
PRDD031	80.1	80.9	126566	0.735	0.99	P	P	0.013	1.738	0.028
PRDD031	80.9	81.6	126567	0.575	0.775	P	P	0.008	1.358	0.015
PRDD031	81.6	82.6	126568	0.365	0.485	P	P	0.01	0.86	0.093
PRDD031	82.6	83.4	126569	0.515	0.665	P	P	0.011	1.191	0.010
PRDD031	83.4	84.2	126571	0.49	0.43	P	P	0.006	0.926	0.020
PRDD031	84.2	85.0	126572	0.55	0.43	P	P	0.006	0.986	0.017
PRDD031	85.0	86.0	126573	0.6	0.445	P	P	0.007	1.052	0.013
PRDD031	86.0	87.0	126574	1.05	0.755	P	P	0.006	1.811	0.009
PRDD031	87.0	88.0	126575	0.5	0.55	P	P	0.01	1.06	0.039
PRDD031	88.0	89.0	126576	0.035	0.125	P	P	0.003	0.163	0.030
PRDD031	89.0	90.0	126577	0.015	0.015	P	P	0.002	0.032	0.011
PRDD031	90.0	91.0	126578	0.02	0.015	P	P	0.002	0.037	0.029
PRDD031	91.0	91.8	126579	0.02	0.02	P	P	0.002	0.042	0.044
PRDD031	91.8	92.5	126580	0.07	0.085	P	P	0.002	0.157	0.009
PRDD031	92.5	93.2	126581	0.175	0.38	P	P	0.006	0.561	0.011
PRDD031	93.2	94.0	126582	0.38	0.285	P	P	0.005	0.67	0.017
PRDD031	94.0	95.0	126583	0.385	0.155	P	P	0.003	0.543	0.008
PRDD031	95.0	96.0	126584	0.2	0.055	P	P	0.002	0.257	0.009
PRDD031	96.0	97.0	126585	0.08	0.025	P	P	0.002	0.107	0.009
PRDD031	97.0	98.0	126586	0.02	0.03	P	P	0.002	0.052	0.007
PRDD031	98.0	99.0	126587	0.01	0.015	P	P	0.002	0.027	0.007
PRDD031	99.0	100.0	126588	0.01	0.005	P	P	0.002	0.017	0.003
PRDD031	100.0	101.0	126589	<0.005	<0.005	P	P	0.001	0.001	0.005

Hole ID	Depth From	Depth To	Sample ID	Pt <sup>1</sup>	Pd <sup>1</sup>	Rh <sup>2</sup>	Ir <sup>2</sup>	Au <sup>1</sup>	5E	Cu <sup>3</sup>
PRDD031	101.0	102.0	126591	0.01	0.005	P	P	0.003	0.018	0.003
PRDD031	102.0	103.0	126592	0.01	0.005	P	P	0.01	0.025	0.003
PRDD031	103.0	103.9	126593	0.01	0.005	P	P	0.003	0.018	0.003
PRDD031	103.9	105.0	126594	0.015	0.03	P	P	0.071	0.116	0.011
PRDD031	105.0	106.0	126595	0.005	0.035	P	P	0.003	0.043	0.009
PRDD031	106.0	107.0	126596	0.01	0.06	P	P	0.002	0.072	0.016
PRDD031	107.0	108.1	126597	0.01	0.05	P	P	0.002	0.062	0.016
PRDD032	64.9	65.9	126598	<0.005	<0.005	-	-	0.003	0.003	0.038
PRDD032	65.9	66.8	126599	<0.005	<0.005	-	-	<0.001	<0.001	0.059
PRDD032	66.8	67.6	126600	<0.005	0.015	-	-	0.008	0.023	0.104
PRDD032	67.6	68.3	126601	<0.005	<0.005	-	-	0.003	0.003	0.079
PRDD032	68.3	69.0	126602	<0.005	0.005	-	-	0.136	0.141	0.124
PRDD032	69.0	70.0	126603	<0.005	<0.005	-	-	0.032	0.032	0.172
PRDD032	70.0	71.0	126604	0.01	0.01	-	-	0.027	0.047	0.249
PRDD032	71.0	71.7	126605	0.01	0.01	-	-	0.045	0.065	0.286
PRDD032	71.7	72.8	126606	0.015	0.015	-	-	0.095	0.125	0.259
PRDD032	72.8	73.9	126607	0.105	0.035	<0.005	<0.005	0.257	0.397	0.390
PRDD032	73.9	75.1	126608	1.2	0.635	0.005	0.01	0.379	2.229	0.279
PRDD032	75.1	76.0	126609	1.05	1.29	0.02	0.015	0.079	2.454	0.161
PRDD032	76.0	77.0	126611	0.65	0.98	0.02	0.015	0.053	1.718	0.068
PRDD032	77.0	78.0	126612	0.41	0.42	0.035	0.02	0.034	0.919	0.353
PRDD032	78.0	79.0	126613	0.455	0.35	0.045	0.02	0.011	0.881	0.027
PRDD032	79.0	80.0	126614	0.515	0.39	0.055	0.03	0.006	0.996	0.009
PRDD032	80.0	81.1	126615	0.845	0.66	0.115	0.05	0.009	1.679	0.028
PRDD032	81.1	82.0	126616	0.735	0.655	0.105	0.045	0.005	1.545	0.019
PRDD032	82.0	83.0	126617	0.35	0.415	0.075	0.035	0.005	0.88	0.082
PRDD032	83.0	84.0	126618	0.115	0.285	0.025	0.015	0.003	0.443	0.053
PRDD032	84.0	85.0	126619	0.065	0.275	0.01	0.01	0.004	0.364	0.053
PRDD032	85.0	86.0	126620	0.025	0.085	<0.005	0.005	0.006	0.121	0.047
PRDD032	86.0	87.1	126621	0.02	0.015	<0.005	0.005	0.001	0.041	0.009
PRDD032	87.1	88.1	126622	0.02	0.015	0.005	0.01	0.003	0.053	0.056
PRDD032	88.1	89.2	126623	0.025	0.015	0.01	0.01	0.003	0.063	0.013
PRDD032	89.2	90.0	126624	0.085	0.095	0.035	0.02	0.002	0.237	0.012
PRDD032	90.0	91.0	126625	0.14	0.35	0.03	0.015	0.004	0.539	0.013
PRDD032	91.0	92.0	126626	0.25	0.235	0.03	0.015	0.003	0.533	0.010
PRDD032	92.0	93.0	126627	0.32	0.115	0.045	0.02	0.005	0.505	0.014
PRDD032	93.0	94.0	126628	0.235	0.075	0.03	0.02	0.005	0.365	0.014
PRDD032	94.0	95.2	126629	0.09	0.025	0.01	0.01	0.001	0.136	0.012
PRDD032	95.2	96.2	126631	0.015	0.005	-	-	0.002	0.022	0.007
PRDD032	96.2	97.1	126632	0.01	0.005	-	-	0.003	0.018	0.003
PRDD032	97.1	98.0	126633	0.005	<0.005	-	-	0.007	0.012	0.016
PRDD032	98.0	99.1	126634	0.015	0.005	-	-	0.002	0.022	0.016
PRDD032	99.1	99.8	126635	0.02	0.01	-	-	0.001	0.031	0.006
PRDD032	99.8	100.6	126636	<0.005	0.015	-	-	0.004	0.019	0.012
PRDD032	100.6	101.5	126637	0.01	0.025	-	-	0.002	0.037	0.006
PRDD032	101.5	102.2	126638	0.01	0.03	-	-	0.001	0.041	0.004
PRDD032	102.2	103.0	126639	0.005	0.025	-	-	0.018	0.048	0.010
PRDD032	103.0	104.0	126640	0.01	0.04	-	-	0.01	0.06	0.098

Note:

1. 40g Lead collection Fire Assay with ICP-OES determination.
  2. 50g Nickel Sulphide collection Fire Assay with ICP-MS determination
  3. Peroxide Fusion with laser ablation determination
- "P" - Pending

# JORC (2012) TABLE 1 SECTION 1: SAMPLING TECHNIQUES AND DATA

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
<b>SAMPLING TECHNIQUES</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<p><b>Metallurgical Drill Holes:</b></p> <ul style="list-style-type: none"> <li>Metallurgy samples were obtained as triple tube PQ3 diamond core. Samples were collected generally as consecutive 1m intervals which were reduced down to 0.2m or increased up to 1.2m to respect lithological boundaries. Quarter core samples were taken for analysis, with three quarter core sent for metallurgical test work.</li> </ul>
<b>DRILLING TECHNIQUES</b>	<ul style="list-style-type: none"> <li>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<p><b>Metallurgical Drill Holes:</b></p> <ul style="list-style-type: none"> <li>Metallurgical holes were drilled using mud rotary till the bedrock was competent, then triple tube PQ3 diamond coring was used to drill through the zone of interest in fresh rock and complete each hole.</li> </ul>
<b>DRILL SAMPLE RECOVERY</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Core recoveries are routinely logged and recorded in the database as a measure of length of core recovered versus the depth drilled. The global length weighted average core recovery is an average of 99.5% core recovery in the fresh (i.e. below the base of oxidation).</li> <li>There is no known relationship between sample recovery and grade.</li> </ul>

## LOGGING

- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.
- Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.
- The total length and percentage of the relevant intersections logged.
- Detailed geological logging of all Diamond core holes captured various qualitative parameters such as rock type, mineralogy, colour, texture and oxidation.
- Diamond core holes were logged at an appropriate level of detail.
- All Diamond core has been photographed.

## SUB-SAMPLING TECHNIQUES AND SAMPLE PREPARATION

- If core, whether cut or sawn and whether quarter, half or all core taken.
- If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.
- For all sample types, the nature, quality and appropriateness of the sample preparation technique.
- Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.
- Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.
- Whether sample sizes are appropriate to the grain size of the material being sampled.

## Metallurgical Drill Holes:

- Metallurgical Diamond Core was subdivided using autonomous core saw. Quarter core was used for bulk density measurements and before being sent for geochemical analysis; the remaining three quarter core was prepared for metallurgical test work. To reduce sample oxidation, metallurgical samples were sealed in airtight buckets with desiccant and oxygen absorber sachets. The quarter core metallurgical samples were subjected to the same analysis methods as the exploration samples (see below).
- At the laboratory the samples are sorted, dried at 105°C and weighed. They are crushed and a 2.5kg split taken using a riffle splitter, then pulverised in either an LM2 or LM5 to P80 -75µm.
- One or two certified blank samples, certified reference material (standard) samples were inserted into the sample sequence for each hole, at regular intervals.
- Internal laboratory duplicates and standards were also used as quality control measures at different subsampling stages. No significant issues have been identified.
- No formal analysis of sample size vs. grain size has been undertaken. However, the sampling techniques employed are industry standard practice.

## QUALITY OF ASSAY DATA AND LABORATORY TESTS

- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.
- For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.
- Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.
- Drill samples were delivered to Bureau Veritas Minerals Pty Ltd laboratory in Perth, Western Australia for sample preparation and analysis. The Bureau Veritas laboratory is NATA accredited for ISO17025.
- All assay methods used are considered total assay techniques.
- Standards were inserted by Podium into the sample batches at a nominal rate of 1:20.
- Commercial pulp standards were sourced from Ore Research and Exploration Pty Ltd (OREAS series standards), with a range of grades from approximately 0.20 g/tPt up to 1.76 g/tPt, 0.13g/tPd up to 0.85g/tPd, and 0.16g/tAu up to 0.2g/tAu.
- The assay results of the pulp standards show most of results fall within acceptable tolerance limits and no material bias is evident.
- All samples were analysed via lead collection fire assay with a 40g charge. The Pt, Pd and Au grade was determined by ICP-OES with a detection limit of 1ppb.
- All samples underwent multi-element analysis by lithium borate fusion with x-ray fluorescence spectrometry for all for Ni, Cu, Co, Fe, S, As, MgO, CaO, SiO<sub>2</sub>, Al<sub>2</sub>O<sub>3</sub>, Mn, Zn, Pb Cr, Cl and LOI. The fused bead was also analysed by laser ablation with inductively coupled plasma mass spectrometry for As, Bi, Cd, Co, Cr, Cu, Mn, Ni, Sb, Ti, V, Y, Zn and Zr.
- Additionally, pulps from mineralised intervals in selected holes have been submitted for a 25g Ni-sulphide collection fire assay for Pt, Pd, Rh, Ru, Os and Ir with determination by ICP-MS with a 5ppb detection limit.

## VERIFICATION OF SAMPLING AND ASSAYING

- The verification of significant intersections by either independent or alternative company personnel.
  - The use of twinned holes.
  - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.
  - Discuss any adjustment to assay data.
- Significant intersections have not been independently verified.
  - Primary data are captured in the field using standardised logging templates, including geological, geotechnical and sampling information recorded at the drill site by trained personnel. All sampling intervals, lithological descriptions and QAQC samples are recorded at the time of logging. Data verification includes routine checks for consistency, overlapping or missing intervals, out-of-range values, and validation against original field records and laboratory assay certificates. QAQC results (standards, blanks,) are reviewed to confirm data quality prior to database import.
  - Data are stored in a secure relational database with regular backups. Electronic data are maintained in the cloud for ease of access while in the field and on company servers with controlled access and routine backup protocols.
  - No adjustments were made to the data, other than converting ppb to ppm (g/t) by dividing by 1,000 and converting ppm to % by dividing by 10,000.

## LOCATION OF DATA POINTS

- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.
  - Specification of the grid system used.
  - Quality and adequacy of topographic control.
- The grid system used is GDA94 Zone 50.
  - Drill hole collar locations have been surveyed by a licenced surveyor using a Leica RTK GNSS with base station setup on control point WR\_MHR02.
  - Due to magnetic interference, downhole directional survey information was collected using a gyroscope, with measurements taken at approximately 25m to 30m intervals downhole.
  - The topographic surface is based on a GeoTEM survey conducted in 2004. The precision of the topographic surface is not known but matches the surveyed drill hole collar points well. Given the flat nature of the terrain and early stage of the Project, the topographic surface is considered to be reasonable.

## DATA SPACING AND DISTRIBUTION

- Data spacing for reporting of Exploration Results.
  - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.
  - Whether sample compositing has been applied.
- Metallurgical holes were drilled on previously drilled sections or intermediate sections modelled with the highest likelihood of intersecting a thick representative interval of the PGM Reef.
  - Holes were drilled on sections oriented approximately north-northwest to south-southeast space at 100 to 200m along a 1.6km strike extent.
  - On certain sections two or more holes have been drilled in close proximity to look at short range variability.
  - This level of drill spacing is sufficient for this style of mineralisation to establish the degree of geological and grade continuity required for metallurgical variability test work.
  - Samples were generally 1m in length but varied from 0.2 to 1.2m to honour lithological boundaries.

## ORIENTATION OF DATA IN RELATION TO GEOLOGICAL STRUCTURE

- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.
  - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.
- Holes were drilled at approximately -60° towards the north-northwest. The location and orientation of the Parks Reef drilling is appropriate given the strike and morphology of the reef, which strikes between azimuth 050° and 080° and dips approximately 80° to 65° to the south.
  - Drilling is oriented approximately orthogonal to the mineralisation and as such, the relationship between the drilling orientation and the orientation of the mineralisation is not considered to have introduced any sampling bias.

## SAMPLE SECURITY

- The measures taken to ensure sample security.
- The intervals of metallurgy core for analysis were palleted and strapped before being transported from Cue by commercial transport for processing in Perth. The core was cut by a contracted third party and was then sampled by Podium personnel before submission to the analytical laboratory.
  - Samples to be submitted to the laboratory were double bagged (five samples/bag) with the sample number range clearly marked on the bags. The tops of the bags were cable tied.
  - Podium personnel delivered the samples to the laboratory.

---

**AUDITS OR  
REVIEWS**

- *The results of any audits or reviews of sampling techniques and data.*

- Podium has no reason to believe that sample security poses a material risk to the integrity of the assay data.
  - No formal audits or reviews have been undertaken.
  - Newexco Exploration Pty Ltd reviewed the documented practices employed by Podium with respect to the drilling, sampling, assaying and QAQC, and believes that the processes are appropriate, and that the data is of a good quality.
-

# JORC (2012) TABLE 1 SECTION 2: REPORTING OF EXPLORATION RESULTS

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
<b>MINERAL TENEMENT AND LAND TENURE STATUS</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>All the tenements covering the Parks Reef Project been granted and are held 100% by Podium.</li> <li>Podium has an access agreement with Beebyn Station that covers the eastern portion of the Company's Weld Range Complex (WRC) Mining Leases and informal working arrangements with other pastoralists and landowners regarding the western portion of the WRC and other Exploration Licenses.</li> </ul>
<b>EXPLORATION DONE BY OTHER PARTIES</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>The WRC (in which the Parks Reef Project is located) was initially prospected by International Nickel Australia Ltd in 1969–1970. Australian Consolidated Minerals NL drilled in the area in 1970–1971 and subsequently entered a joint venture with Dampier Mining Company Ltd to investigate the area in 1972–1973. Approximately 4,500 m of rotary air blast (RAB) and percussion drilling was completed during this early phase, together with ground and airborne magnetics, line clearing, geological mapping and petrological studies. Conzinc Riotinto Australia Limited (CRA) briefly investigated the area during 1976–1977, taking an interest in elevated Cr values in the Ni laterite, but concluding at the time that it was not recoverable as chromite.</li> <li>In 1990 geologists recognised gabbroic rocks in the upper levels of the WRC, allowing for model comparisons with other ultramafic-mafic intrusive bodies. Weak Cu mineralisation identified by BHP in the 1970s was revisited and vertical RAB drilling intersected significant supergene and primary PGM mineralisation within Parks Reef.</li> <li>Extensive RAB, RC and DC drilling was completed between 1990 and 1995 to examine supergene Pt-Pd-Au mineralisation. Little attention was given to primary sulphide mineralisation, with 25 holes testing the Parks Reef below 40m depth, to a maximum depth of 200m. Pilbara Nickel's (1999–2000) focus was the Ni laterite and it carried out a programme of approximately 17,000m of shallow RC drilling to infill previous drilling and to estimate Ni-Co resources. Pilbara Nickel also embarked on bedrock studies of the WRC to consider the Ni sulphide, Cr and PGM potential.</li> <li>In 2009, Snowden completed an independent technical review of the WRC and updated estimates for the laterite Mineral Resources. A compilation of historical metallurgical data was completed.</li> <li>Snowden's work involved a validation of 60,040m of historical drilling and 23,779 assays with QAQC checks, where possible.</li> </ul>
<b>GEOLOGY</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The WRC corresponds to the basal part of the Gnanagooragoo Igneous Complex and forms a discordant, steeply dipping lopolith, up to 7 km thick, confined by an overlying succession of jaspilite and dolerite sills of the Madoonga Formation to the south. The WRC is divided into ultramafic and mafic endmembers.</li> <li>Parks Reef is situated 5-15m below the upper or southern contact with the upper mafic member. Near the Parks Reef PGM mineralisation, the magmatic stratigraphy comprises a sequence of olivine–pyroxene bearing cumulates terminating very abruptly at the ultramafic-mafic contact with the cessation of olivine crystallisation and the first appearance of cumulus plagioclase in a leucocratic gabbro. The mafic-ultramafic contact in the Western and Central sectors of Parks Reef dips consistently at approximately 80° to the south-southeast. This boundary effectively defines the upper limit of the hanging wall Cu-Au horizon of Parks Reef.</li> <li>The Parks Reef mineralisation displays a generalised pattern that can be described from the mafic-ultramafic contact downwards as follows:</li> </ul>

**CRITERIA JORC CODE EXPLANATION**

**COMMENTARY**

**GEOLOGY  
(continued)**

- Cu-Au Zone. The Cu-Au Zone is 1-12m true thickness in high MgO wehrlite with trace -3% disseminated chalcopyrite+/-pyrrhotite+/-pentlandite. Bounded at the top geologically by very sharp contact to gabbronorite or analytical at a 0.1% Cu cut-off. The lower boundary extends up to the PGM reef and is defined analytically as < 0.1% Cu content;
- High-grade Hanging wall PGM Zone. A 1-5m true thickness higher grade (typically ≥ 2g/t 5E PGM) zone. The upper boundary commonly coincides with the highest Au grades in the reef, in places exceeding 1g/t, and may include the lower limit of elevated Cu values. Sulphide concentrations are low, except at the very top of the zone. Pt:Pd ratio is >1;
- PGM Zone. A 3-14m true thickness zone of intermediate PGM concentrations, typically slightly greater than 1g/t 5E PGM. The base of the zone is defined by 5E PGM grades ≥ 1.0g/t. Cu-Au grades are insignificant and Pt:Pd ratio is generally <1. The bottom half of this zone always correlates with an elevated Rh zone (≥ 40ppb Rh);
- High-grade Footwall PGM Zone. A 0-3m true thickness wehrlite hosted sub-layer toward the base of the lower-reef PGM zone, with elevated PGM grades, including Rh, Ru, Os and Ir, and Pt:Pd ratio >1. No visible sulphides or Cu-Au mineralisation. The contacts are defined by a ≥ 2.0g/t 5E PGM threshold; and
- Oxidation extends from the surface to a vertical depth of approximately 30m to 50m in the Western sector and up to 70m in the Central and Eastern sectors. The ultramafic lithologies showing consistently deeper oxidation than the mafic hanging wall rocks.

**DRILL HOLE INFORMATION**

- *A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:*
- *easting and northing of the drill hole collar*
- *elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole*
- *down hole length and interception depth*
- *hole length.*
- *If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.*

- Drillhole details and diagrams are detailed in the body of this announcement.

**DATA AGGREGATION METHODS**

- *In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated.*
- *Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.*
- *The assumptions used for any reporting of metal equivalent values should be clearly stated.*

- No metal equivalent values have been reported. The company typically reports 3E PGM or 5E PGM concentrations. 3E PGM is calculated as the sum of Pt (g/t) + Pd (g/t) + Au (g/t) and expressed in units of g/t, and 5E PGM is calculated as the sum of Pt (g/t) + Pd (g/t) + Au (g/t) + Rh (g/t) + Ir (g/t) and expressed in units of g/t.

personal use only

## CRITERIA JORC CODE EXPLANATION

## COMMENTARY

### RELATIONSHIP BETWEEN MINERALISATION WIDTHS AND INTERCEPT LENGTHS

- *These relationships are particularly important in the reporting of Exploration Results.*
- *If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.*
- *If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').*

- All intersections are reported as down hole length..
- The true width of mineralisation is estimated to be approximately 65% of the reported downhole intercept lengths, assuming the Reef dips 80° south-southeast and the drilling is inclined 60° north-northwest.

### DIAGRAMS

- *Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views.*

- Drillhole locations and diagrams are detailed in the relevant previous ASX announcements related to the exploration results.

### BALANCED REPORTING

- *Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.*

- Podium's exploration progress results for 2022 drilling have been reported to the ASX on 19 May 2022, 9 June 2022, 29 June 2022, 15 July 2022, 22 July 2022, 29 July 2022, 18 August 2022, 6 September 2022, 4 October 2022 and 6 October 2022, 3 April 2024, 19 May 2025 and today.
- Podium's exploration results for the deep drilling undertaken in 2021/22 were reported on 14 April 2022.
- The results of Podium's 5E PGM assaying programme were reported to the ASX on 28 March 2022 and 14 April 2022.
- Podium's exploration results for 2021 drilling have been reported 25 May 2021 and 28 August 2021.
- Podium's exploration results for the Q3 2020 drilling in the Western sector were first released in ASX announcements dated 26 August 2020 and 29 September 2020.
- Podium's exploration results for the Western sector drilling were first released in ASX announcements dated 27 April 2018, 17 May 2018 and 28 August 2018. Podium's exploration results for the Central sector drilling were first released in ASX announcements dated 8 November 2018 and 4 December 2018.
- Podium's exploration results for the Eastern sector drilling were first released in ASX announcements dated 27 November 2019, 10 December 2019 and 7 January 2020.
- Historical exploration results were first released in the Independent Geologist's Report included in the Company's prospectus dated 30 November 2017 that highlighted significant intercepts with average grade above 2g/t 3E PGM. A full set of historical RC and DC exploration results with a cut-off grade of 1g/t 3E PGM was released in an ASX announcement dated 5 March 2019. Podium's progress reports for drilling have been previously reported to the ASX.

### OTHER SUBSTANTIVE EXPLORATION DATA

- *Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.*

- All exploration results received by the Company to date are included in previous releases to the ASX including in this specific announcement.
- Outcropping hanging wall gabbro-norites, while limited, supports the geological interpretation in these areas.
- Aeromagnetic data strongly supports the interpreted location and geometry of Parks Reef.

**CRITERIA JORC CODE EXPLANATION**

**COMMENTARY**

**FURTHER WORK**

- *The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling).*
- *Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.*

- Further infill drilling, including both along strike and at depth, across the defined Mineral Resource for Parks Reef will be required in future to improve confidence and for additional metallurgical test work.
- The current Parks Reef Mineral Resource area comprises approximately 15km of strike length, which is interpreted to cover the full length of the reef, except for approximately 1.4km in a faulted fragment of the western flank of the intrusive complex.

personal use only