

Drilling Program at Pampa Medina Continues to Demonstrate Continuity and Scale of Sediment-Hosted Copper System

Vancouver, British Columbia, May 19th, 2026 – Marimaca Copper Corp. (“Marimaca Copper” or the “Company”) (TSX:MARI, ASX:MC2) is pleased to report new assay results from its ongoing 2026 step-out exploration drilling programs at the Pampa Medina deposit, located at low altitude approximately 28km east of the Company's Marimaca Oxide Deposit (“MOD”) (Figure 1). The program includes drilling on 150m intervals to test the continuity between previous 300m scouting holes and continues to demonstrate the exceptional grade and continuity of the high-grade manto-type copper-silver mineralization, across the initial 3km x 1.5km area of interest. Results from the current exploration drilling further validates the consistency of both oxide and sulphide mineralisation across the high-grade central zone. Step-out drilling continues to expand the mineralized sedimentary horizon, with high-grade intercepts reported over 300m from previous drilling in the south-western area of interest (Figure 2).

- **SPRD-06 contains 5 high-grade vertically stacked mantos (each of strong grade-thickness) across a total mineralized package of sediments and tuffs exceeding 400m in thickness**
 - **Stacking of multiple high-grade mineralized sedimentary units is a key difference between other known sedimentary hosted copper deposits globally (e.g. Kupferschiefer, Kamoakakula)**
 - **Additional drilling at 150m spacing continues to demonstrate the continuity of the high-grade copper mantos with multiple holes returning high grades over significant thickness (Figure 3)**
- **SPRD-06 – drilled between previously released holes SMRD-16 and SMRD-20 on 150m spacing and intersected high-grade mineralization sections hosted in the upper and lower sediments**
 - **Broader intercept of 424m of 0.58% Cu and 2.2g/t Ag from 424m, containing five high-grade, stacked mantos**
 - 32m of 1.02% Cu and 3.1 g/t Ag from 432m (oxide)
 - 8m of 2.54% Cu and 21.0 g/t Ag from 494m within 22m of 1.23% Cu and 11.8 g/t Ag from 492m (mixed)
 - 12m of 2.23% Cu and 19.7 g/t Ag from 568m within 22m of 1.53% Cu and 13.6 g/t Ag from 564m (sulphide)
 - 10m of 1.38% Cu and 4.4 g/t Ag from 698m (sulphide)
 - 8m of 1.29% Cu and 10.8 g/t Ag from 752m (sulphide)
- **SPRD-02 – step-out drilling between previously released holes SMD-02 and SMRD-22 on 150m spacing intersected mineralization in the near-surface upper volcanics and lower sediments**
 - **166m of 0.50% Cu and 3.9 g/t Ag from 222m (oxide), including**
 - 24m of 1.17% Cu and 11.8g/t Ag from 222m, including
 - 10m of 2.47% Cu and 27.4g/t Ag from 228m (oxide)
 - 14m of 1.07% Cu and 6.6 g/t Ag from 300m (oxide)
 - **6m of 0.94% Cu from 520m (sulphide) within 12m of 0.64% Cu from 520m**
- **SWRD-05 drilled 300m south of previously released SWRD-02 intersected high-grade mineralization in the lower sediments**
 - **30m of 1.00% Cu and 7.3 g/t Ag (sulphide) from 536m, including**
 - 4m of 2.29% Cu and 29.0 g/t Ag from 596m (sulphide)
 - **Both within 68m of 0.73% Cu and 5.1 g/t Ag from 532m (sulphide)**
- **SPRD-01 – step-out drilling 150m north of previously released SMD-02 also intersected high-grade near-surface volcanics and upper sediments**

- 146m of 0.41% Cu and 1.9g/t Ag from 286m, including
 - 50m of 0.56% Cu and 2.4g/t Ag (oxide) from 290m, including
 - 10m of 1.90% Cu and 10.6g/t Ag from 306m
 - 24m of 0.61% Cu and 1.7g/t Ag from 372m (mixed), including
 - 14m of 0.79% Cu and 2.9g/t Ag from 382m
- SPRD-03 – step-out drilling 150m south of previously released hole SMRD-13 intersected mineralization in the near-surface volcanics and but was affected by pre and post mineral dyking
 - 14m of 0.31% Cu from 52m (oxide), including
 - 8m of 0.42% Cu from 56 m
- Further assays from the step-out program focused on the south-western extent of the sediment horizon partially affected by subparallel WNW late faulting and dyking. However, mineralization now extends to the upper volcanics adding continuity to the rock units covering the sediments.
- SWRD-07, drilled 300m west of SWRD-06B, intersected mineralization in the upper sediments and basement metasediments but was impacted by pre and post mineral dykes
 - 20m of 0.52% Cu and 5.1g/t Ag from 436m (sulphide)
- SWRD-06B, drilled 300m west of SWRD-05, intersected the lower manto in the interbedded siltstone, sandstone and tuff sequence
 - 4m of 1.15% Cu and 27.0g/t Ag from 644m (sulphide)
- SWRD-08A, drilled 300m west of previously released SWRD-04, intersected mineralization in the upper volcanics and upper sediment horizon
 - 28m of 0.52% Cu and 1.5g/t Ag from 202m (oxide)
 - 12m of 0.67% Cu and 3.2g/t Ag from 418m (mixed)
 - 6m of 1.01% Cu and 11.0g/t Ag from 454m (mixed)
- SWRD-09, drilled 300m west of previously released SMRD-33 intersected mineralization near-surface volcanics and the lower manto
 - 10m of 0.62% Cu and 7.8g/t Ag from 168m within 16m of 0.45% Cu and 5.3g/t Ag from 166m (oxide)
 - 6m of 0.82% Cu and 3.7g/t Ag from 594m (mixed)
- SMRD-14 drilled 300m north of hole SWRD-08A, intersected mineralization hosted by sandstones from the upper sedimentary unit
 - 8m of 0.52% Cu from 408 m within 12m of 0.40% Cu from 406 m (oxide)
 - 8m of 0.67% Cu from 432m within 14m of 0.54% Cu from 428 m (oxide)
 - 14m of 0.51% Cu and 1.12 g/t Ag from 478 m (mixed)

Sergio Rivera, VP Exploration of Marimaca Copper, commented:

“Our 2026 step-out drilling program continues to deliver exceptional results at Pampa Medina. We are not only seeing consistent, high-grade copper intersections, with multiple broad intervals returning above 2% copper across the western step-out holes, but also compelling continuity in the central high-grade zone (Figures 2, 3 and 4). Multiple holes in this release intersected >3 high-grade stacked mantos each reporting thick intersections of strong grades.

The copper and silver mineralisation we see across both the oxide and sulphide zones is consistent with our geological model and confirms the scale and grade potential of the Pampa Medina system. We are increasingly confident that we are dealing with a deposit of genuine district significance.”

Overview of Pampa Medina

Pampa Medina is a manto-style copper deposit dominantly hosted in Jurassic-Triassic sedimentary units (sandstones, conglomerates, tuffs and black shales) overlain by andesitic volcanics and underlain by an Upper Paleozoic complex of metamorphosed sediments, volcanics and intrusions. Key lithological units are intruded by a dyke swarm and affected by post mineral normal faulting. Copper was originally identified in near-surface oxide mineralization dominated by atacamite, chrysocolla and both secondary chalcocite, and has now been identified in high-grade zones of bornite, chalcopyrite, covellite and chalcocite which extend at depth beyond the oxide-primary transition. Elevated silver grades are present in in both oxide and sulphide copper-mineralized zones and are generally correlated with copper grade.

Following Marimaca's consolidation of the project area and surrounding land packages in 2024, the Company reinterpreted all available geological information and developed an updated geological model for Pampa Medina, which identified the lower sedimentary units of interbedded sandstones, shales, tuffs and conglomerates as the priority target horizons for future drilling. Marimaca's 2026 drilling campaign will focus on three priority goals: definition of the high-grade central zone, delineating the identified oxide extensions, and further step-out drilling to test potential extensions of the broader system identified in geophysical work completed to date.

For personal use only

For personal use only

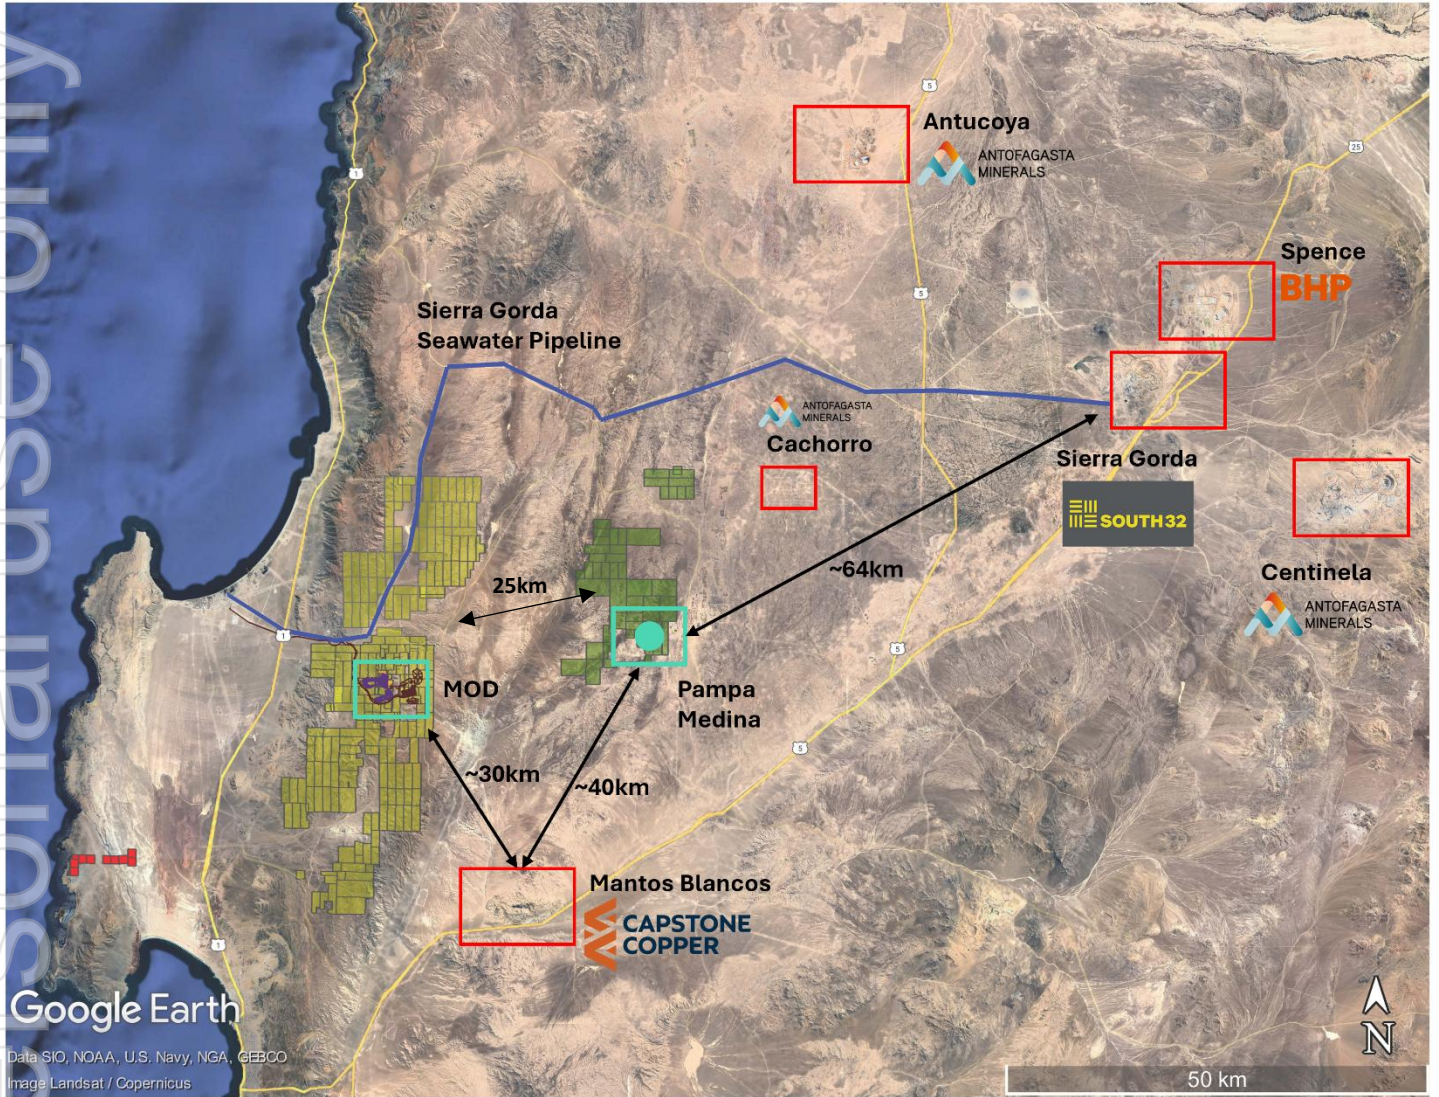


Figure 1: Regional Map – Marimaca, Pampa Medina and Regional Infrastructure

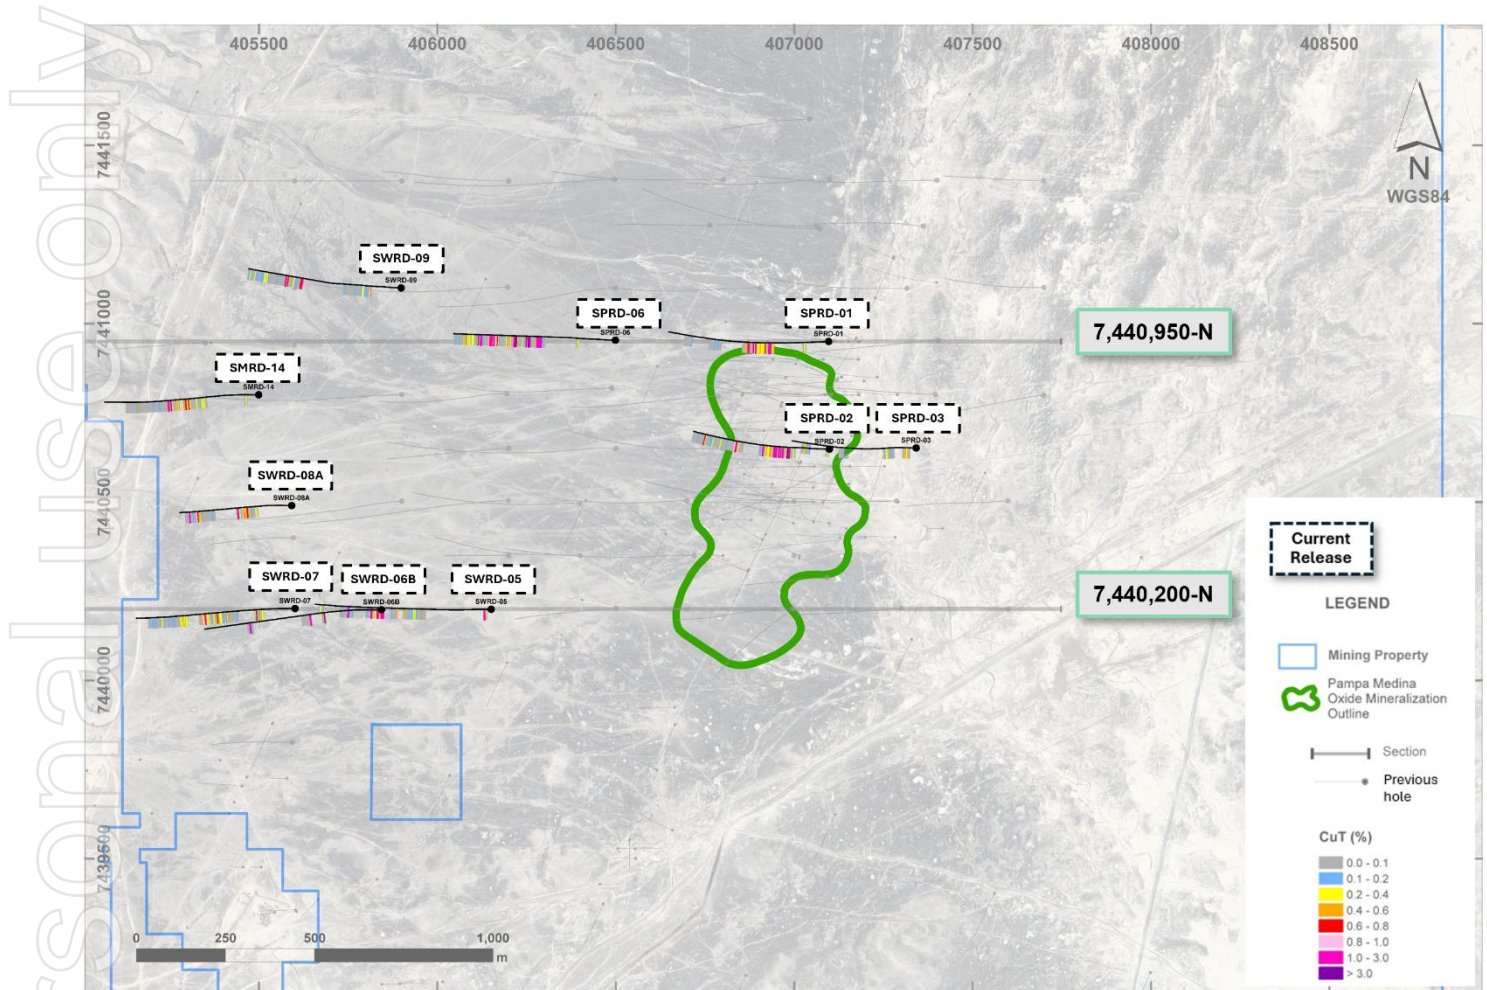


Figure 2 – Pampa Medina Historic Oxide Deposit and Current Drilling Locations (Previous Drilling in Grey Traces)

For personal use only

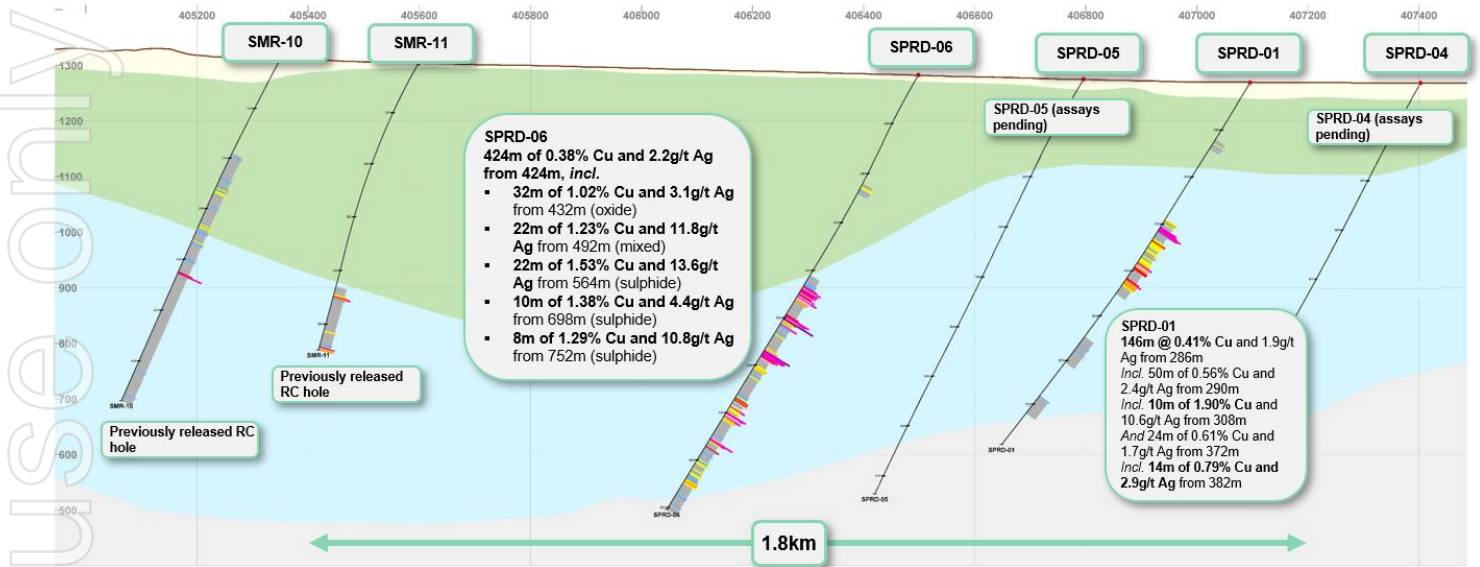


Figure 3 – Cross Section Looking North – Pampa Medina 7,440,950 N

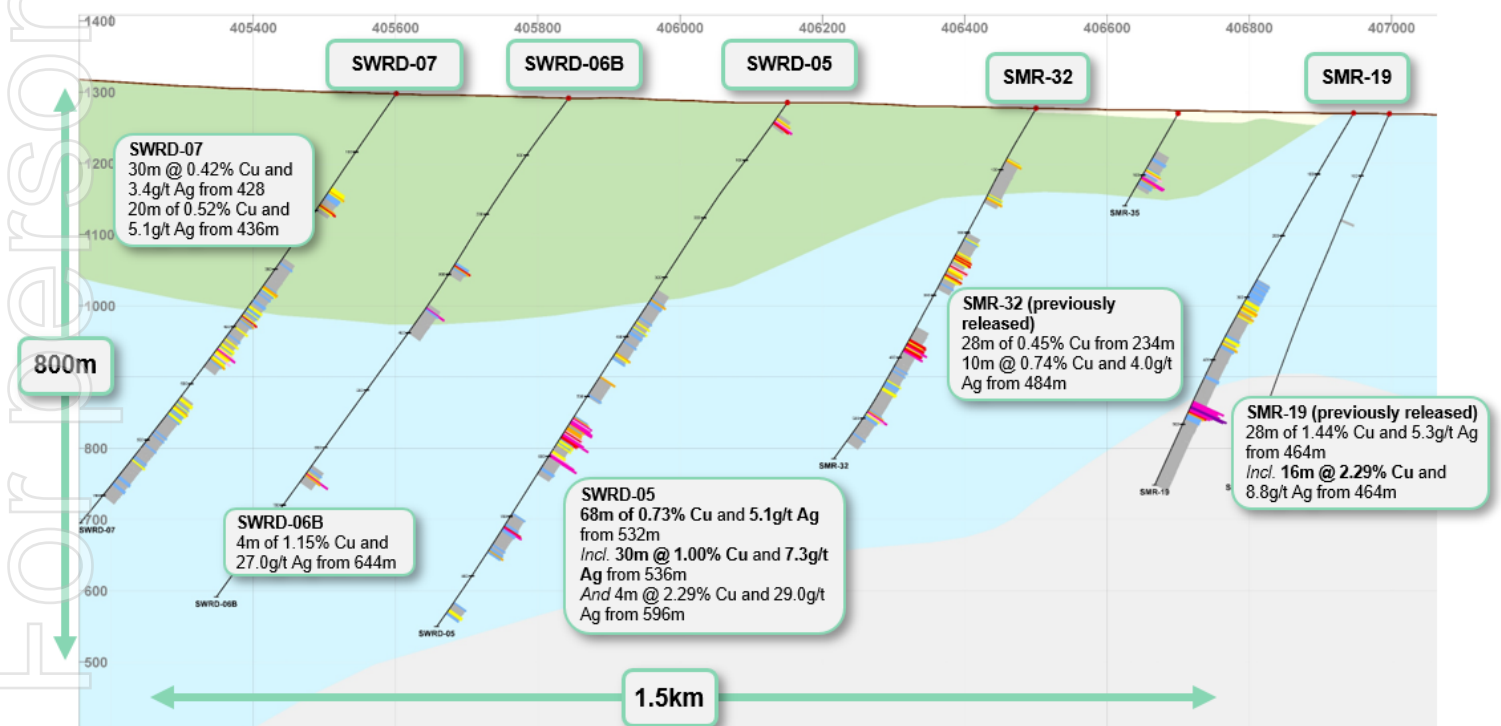


Figure 4 – Cross Section Looking North – Pampa Medina 7,440,200 N

Hole	Total Depth (m)		From (m)	To (m)	Intersection (m)	% CuT	g/t Ag
SPRD-01	792		286	432	146	0.41	1.9
		Including	290	340	50	0.56	2.4
		Including	306	316	10	1.90	10.6
		And	372	396	24	0.61	1.7
		Including	382	396	14	0.79	2.9
SPRD-02	750		222	388	166	0.50	3.9
		Including	222	246	24	1.17	11.8
		Including	228	238	10	2.47	27.4
		Including	234	238	4	4.60	50.5
		And	300	314	14	1.07	6.6
			520	532	12	0.64	-
		Including	520	526	6	0.94	-
SPRD-03	700		52	66	14	0.31	-
		Including	56	64	8	0.42	-
SPRD-06	904		424	848	424	0.38	2.2
		Including	432	464	32	1.02	3.1
		And	492	514	22	1.23	11.8
		Including	494	502	8	2.54	21.0
		Including	500	502	2	4.14	29.0
		And	562	584	22	1.53	13.6
		Including	568	576	8	2.70	24.5

For personal use only

		And	698	708	10	1.38	4.4
		Including	752	760	8	1.29	10.8
SWRD-05	886		26	36	10	0.64	-
			532	600	68	0.73	5.1
		Including	534	570	36	0.94	6.3
		Including	536	566	30	1.00	7.3
		Including	536	546	10	1.30	12.4
		And	564	566	2	2.36	26.0
		And	596	600	4	2.29	29.0
SWRD-06B	860		644	648	4	1.15	27.0
SWRD-07	750		428	458	30	0.42	3.4
		Including	436	456	20	0.52	5.1
			454	460	6	1.01	11.0
			538	544	6	0.35	-
SWRD-08A	500		202	230	28	0.52	1.5
			418	430	12	0.67	3.2
			454	460	6	1.01	11.0
SWRD-09	950		166	182	16	0.45	5.3
		Including	168	178	10	0.62	7.8
			592	608	16	0.68	3.4
		Including	594	600	6	0.82	3.7
SMRD-14	838		406	418	12	0.40	-
		Including	408	416	8	0.52	-

			428	442	14	0.54	-
		Including	432	440	8	0.67	-
			478	492	14	0.51	1.1

Table 1: Table of Intersections

Hole	Easting	Northing	Elevation	Azimuth	Inclination	Depth
SPRD-01	407096.31	7440949.82	1269.09	270	-60	792.2
SPRD-02	407098.68	7440648.05	1268.8	270	-60	750
SPRD-03	407341.64	7440651.25	1267.52	270	-60	700
SPRD-06	406499.04	7440953.32	1282.57	270	-60	904
SWRD-05	406150.79	7440199.24	1285.23	270	-55	886
SWRD-06B	405843.17	7440197.99	1291.39	270	-55	860
SWRD-07	405601.01	7440201.3	1297.84	270	-55	750
SWRD-08A	405591.6	7440489.96	1300.92	270	-55	500
SWRD-09	405898.26	7441100.06	1299.97	270	-55	950
SMRD-14	405498.93	7440800.38	1305.9	270	-60	838

Table 2: Drill Collars

Sampling and Assay Protocols

True widths are estimated as 80-90% of reported intervals, based on down-hole bedding and structural measurements. DDH holes were sampled on a 2m continuous basis, halved by a conventional core splitter on site with one half sent to the Andes Analytical Assay preparation laboratory in Copiapó and the pulps then sent to the same company laboratory in Santiago for assaying. Samples were prepared using the following standard protocol: drying; crushing all sample to -1/4" and passing through a secondary crusher to better than 80% passing -10#; homogenizing; splitting; pulverizing a 400-600g

subsample to 95% passing -150#; and a 125g split of this sent for assaying. All samples were assayed for sequential copper %CuT (total copper); %CuS (acid soluble copper), %CuCN (cyanide soluble copper) and CuRes (residual copper), In addition to copper analyses, multi-element analysis including silver (Ag) was undertaken using ICP (multi-element Optical Inductively Coupled Plasma). A full QA/QC program, involving insertion of appropriate blanks, standards and duplicates was employed with acceptable results. Pulps and sample rejects are stored by Marimaca Copper for future reference.

Qualified Person / Competent Person

The technical information in this news release, including the information that relates to geology, drilling and mineralization was prepared under the supervision of, or has been reviewed by Sergio Rivera, Vice President of Exploration, Marimaca Copper Corp, a geologist with more than 40 years of experience and a member of the Colegio de Geólogos de Chile and of the Institute of Mining Engineers of Chile, and who is the Qualified Person for the purposes of NI 43-101 responsible for the design and execution of the drilling program.

The information in this announcement which relates to exploration results for the Pampa Medina Project is based on, and fairly reflects, information and supporting documentation prepared by Sergio Rivera, VP Exploration of Marimaca, a Competent Person who is a member of the Comision Minera (Chilean Mining Commission), Colegio de Geólogos de Chile and of the Institute of Mining Engineers of Chile. Mr. Rivera has sufficient experience that is relevant to the style of mineralisation and types of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Rivera consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

Contact Information

For further information please visit www.marimaca.com or contact:

Tavistock

+44 (0) 207 920 3150

Emily Moss

marimaca@tavistock.co.uk

Forward Looking Statements

This news release includes certain “forward-looking statements” under (without limitation) applicable Canadian securities legislation, including, without limitation, statements regarding the development of activities at Pampa Medina, the potential growth of Pampa Medina, and the discovery’s potential to complement the MOD. There can be no assurance that such statements will prove to be accurate, and actual results and future events could differ materially from those anticipated in such statements. Forward-looking statements reflect the beliefs, opinions and projections on the date the statements are made and are based upon a number of assumptions and estimates that, while considered reasonable by Marimaca Copper, are inherently subject to significant business, economic, competitive, political and social uncertainties and contingencies. Many factors, both known and unknown, could cause actual results, performance or achievements to be materially different from the results, performance or achievements that are or may be expressed or implied by such forward-looking statements and the parties have made assumptions and estimates based on or related to many of these factors. Such factors include, without

limitation: risks that the development activities at Pampa Medina will not progress as anticipated, or at all, risks related to share price and market conditions, the inherent risks involved in the mining, exploration and development of mineral properties, the uncertainties involved in interpreting drilling results and other geological data, fluctuating metal prices, the possibility of project delays or cost overruns or unanticipated excessive operating costs and expenses, uncertainties related to the necessity of financing, uncertainties relating to regulatory procedure and timing for permitting submissions and reviews, the availability of and costs of financing needed in the future as well as those factors disclosed in the annual information form of the Company dated March 27, 2025 and other filings made by the Company with the Canadian securities regulatory authorities (which may be viewed at www.sedar.com). Readers should not place undue reliance on forward-looking statements. Marimaca Copper undertakes no obligation to update publicly or otherwise revise any forward-looking statements contained herein whether as a result of new information or future events or otherwise, except as may be required by law.

None of the TSX, ASX or the Canadian Investment Regulatory Organization accepts responsibility for the adequacy or accuracy of this release.

This announcement was authorised for release to the ASX by the Board of Directors of the Company.

Appendix 1 – JORC Code 2012 Table 1 (ASX Listing Rule 5.7.1)

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> • <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> • <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> • <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> • <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<p>All current drilling conducted at Sierra Medina, which includes the Pampa Medina deposit, was completed under the supervision of a registered professional geologist as a Competent Person/Qualified Person (QP) who is responsible and accountable for the planning, execution, and supervision of all exploration activity as well as the implementation of quality assurance programs and reporting.</p> <ul style="list-style-type: none"> • Drilling reported is Reverse Circulation "RC" collared and Diamond ("DDH") tailed drilling • Assay samples were prepared at a laboratory site in Copiapó and assayed by Andes Analytical Assay Ltd. (AAA) in Santiago. • Sierra Medina's DDH holes are drilled and sampled on a continuous 2-meter basis, halved by a conventional core splitter on site, with one half sent to the Andes Analytical Assay preparation laboratory in Copiapó and the pulps then sent to the same company laboratory in Santiago for assaying. • Sierra Medina RC holes are drilled and sampled on a continuous 2-meter basis and riffle split on site up to one-eighth (12.5%) of its volume, after which samples are sent for preparation and assaying. • Marimaca staff supervised all the drilling and sampling. • DD recoveries were controlled by accurate core recovery measurement control was extended toward the division process realized in the drill location. • DD recoveries were measured by core length measurement and compared with the effective core run. Marimaca technical staff checked all data. • Measured recoveries are over 95% for DDH drilling, without significant variations and unrelated to copper grades. • RC recoveries were controlled by weighing samples and accurate

Criteria	JORC Code explanation	Commentary
Drilling techniques	<ul style="list-style-type: none"> • <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<p>control was extended toward the division process realized in the drill location.</p> <ul style="list-style-type: none"> • RC recoveries were measured in weight percent as compared with a theoretical sample weight. Marimaca technical staff checked all data. • Measured recoveries are over 95% for RC drilling, without significant variations and unrelated to copper grades.
Drill sample recovery	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • Drilling reported RC collared and DDH-tailed drilling, DDH drilling commenced when the contact between the upper volcanics and upper sediments is encountered, which is variable in depth • DDH drilling is drilled in HQ and NQ standard core diameters • Sierra Medina’s DDH holes are drilled and sampled on a continuous 2-meter basis, halved by a conventional core splitter on site, with one half sent to the Andes Analytical Assay preparation laboratory in Copiapó and the pulps then sent to the same company laboratory in Santiago for assaying. • Sierra Medina RC holes are drilled and sampled on a continuous 2-meter basis and riffle split on site up to one-eighth (12.5%) of its volume, after which samples are sent for preparation and assaying. • Marimaca staff supervised all the drilling and sampling. • DD recoveries were controlled by accurate core recovery measurement control was extended toward the division process realized in the drill location. • DD recoveries were measured by core length measurement and compared with the effective core run. Marimaca technical staff checked all data. • RC recoveries were controlled by weighing samples and accurate control was extended toward the division process realized in the drill location.

Criteria	JORC Code explanation	Commentary
Logging	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • RC recoveries were measured in weight percent as compared with a theoretical sample weight. Marimaca technical staff checked all data. • Measured recoveries are over 95% for RC drilling, without significant variations and unrelated to copper grades. • All holes were geologically logged on digital data capture. • The data collected are rock, structure, alteration and mineralization based on drilling intervals, recoveries and analytical results. • After validation, the mineral and alteration zones were defined. • The results were entered in the database as a table with all mapped data and a consolidated log of the drill was prepared. • Most of this work was done by experienced senior consultant geologist supported by consultant junior geologist. • In addition to measuring deviations, most of the holes were surveyed using an optical tele viewer (OPTV or BHTV), with structures and orientation measurements, which continuously and thoroughly recorded the holes' walls and measured structures. • The structures were measured in ranks according to their width and the results were reported and plotted on stereographic networks and rosette diagrams.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material</i> 	<ul style="list-style-type: none"> • Sierra Medina's DDH holes are drilled and sampled on a continuous 2-meter basis, halved by a conventional core splitter on site, with one half sent to the Andes Analytical Assay preparation laboratory in Copiapó and the pulps then sent to the same company laboratory in Santiago for assaying • The last split yields "sample A", which is sent for preparation and assaying, and "sample B", which is used to obtain drill cuttings (1 kg) and coarse/preparation duplicates and then stored in special facilities on site. • DDH samples are obtained every 2 meters from a half-core, with the other half stored on site. • RC holes are drilled and sampled on a continuous 2-meter basis and

Criteria	JORC Code explanation	Commentary
	<p><i>being sampled.</i></p>	<p>its samples riffle split on site three times, up to one eighth (12.5%) of its volume.</p> <ul style="list-style-type: none"> • The last split yields “sample A”, which is sent for preparation and assaying, and “sample B”, which is used to obtain drill cuttings (1 kg) and coarse/preparation duplicates, and then stored in special facilities on site. • Samples are transferred by laboratory personnel from the project to Copiapó, and then the preparation pulps are returned to generate the analysis batches. Upon receipt, sample details are logged and insertion points for quality control samples in the sample flow are determined. • Samples were prepared using the following standard protocol: drying; crushing all sample to -1/4” and passing through a secondary crusher to better than 80% passing -10#; homogenizing; splitting; pulverizing a 400-600g subsample to 95% passing -150#; and a 125g split of this sent for assaying. All samples were assayed for sequential copper %CuT (total copper); %CuS (acid soluble copper), %CuCN (cyanide soluble copper) and CuRes (residual copper), and multi-element Optical Inductively Coupled Plasma (ICP).. A full QA/QC program, involving insertion of appropriate blanks, standards and duplicates was employed with acceptable results. Pulps and sample rejects are stored by Marimaca Copper for future • Laboratory results are loaded directly from digital assay certificates into the database, in order to minimize error sources.
<p>Quality of assay data and laboratory tests</p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels</i> 	<ul style="list-style-type: none"> • Samples are prepared at a laboratory site in Copiapó and assayed by Andes Analytical Assay Ltd. (AAA) in Santiago. • Samples were prepared using the following standard protocol: drying; crushing all sample to -1/4” and passing through a secondary crusher to better than 80% passing -10#; homogenizing; splitting; pulverizing a 400-600g subsample to 95% passing -150#; and a 125g split of this sent for assaying. All samples were assayed for %CuT (total copper); %CuS (acid soluble copper). A full QA/QC program, involving insertion of appropriate blanks, standards and duplicates was

Criteria	JORC Code explanation	Commentary
	<p><i>of accuracy (ie lack of bias) and precision have been established.</i></p>	<p>employed with acceptable results. Pulps and sample rejects are stored by Marimaca Copper for future. In addition to copper analyses, multi-element analysis including silver (Ag) was undertaken using ICP.</p> <ul style="list-style-type: none"> All samples were assayed for sequential copper %CuT (total copper); %CuS (acid soluble copper), %CuCN (cyanide soluble copper) and CuRes (residual copper). Silver and an additional 33 elements were analysed using a 0.5g pulp sample and measured by optical ICP. Laboratory results are loaded directly from digital assay certificates into the database, in order to minimize error sources. The analytical quality control programs implemented at Marimaca involve the use of coarse/preparation and pulp duplicates for precision analyses and standard reference materials (SRM). QA/QC procedures apply equally to silver and the multi-element suite. Marimaca has protocols in place for handling analytical results that exceed acceptable limits, which can ultimately trigger re-assays of entire or portions of sample batches.
<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> There are no twinned holes in the dataset All logging data was completed, and logging data was entered directly into the deposit database. Laboratory results are loaded directly from digital assay certificates into the database to minimize error sources.
<p>Location of data points</p>	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> Local contractors carried out the supervision of the drilling operation. An experienced topographer surveyed the collars. WGS84 UTM coordinates are used. Data Well Services carried out the downhole surveys for drill holes. Data collected is considered adequate for eventual use in mineral resource estimation.

Criteria	JORC Code explanation	Commentary
Data spacing and distribution	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • Due to the nature of mineralisation and the type of exploration discovery drilling program the hole spacing is highly variable. • Data spacing is not considered sufficient to establish geological and grade continuities for Mineral Resource Estimation at the Inferred and Indicated category. • No sample compositing was applied.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • Drill hole orientation was generally oriented to be sub perpendicular to the mineralisation but variable in places given the nature of the exploration program being conducted • Assays are reported on a downhole basis • True widths are estimated as 80-90% of reported downhole intersection widths
Sample security	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • All drilling assay samples are collected by company personnel or under the direct supervision of company personnel. • Samples from Marimaca were initially processed at the project site and shipped directly from the property to a laboratory facility for final preparation, and later, upon their return, to the laboratory for analysis. • Appropriately qualified staff at the laboratories collect assay samples. • Security protocols implemented maintain the chain of custody of samples to prevent unnoticed contamination or mixing of samples and to make active tampering as difficult as possible.
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • It is the Competent Persons opinion that these processes met acceptable industry standards, and that the information can be reported under both JORC and NI43-101 standards and, in the future, be used for geological and resource modelling.

personal use only

Criteria	JORC Code explanation	Commentary
----------	-----------------------	------------

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> Marimaca Copper Corp. owns a tenement package consisting of approximately 14,500 hectares at the broader Sierra de Medina project area and are a mix of mining concessions and exploration concessions. The Sierra de Medina Project are comprising 55 concessions owned by ICAL, a subsidiary of Marimaca Copper Corp. The Pampa Medina Project comprises 12 concessions owned by SCM Elenita over which the Company entered into an option agreement to acquire. The Madrugador Project comprises 10 concessions owned by SLM Juanita and SLM Madrugador over which the Company entered into an option agreement to acquire. There are no known impediments to operating exploration drilling campaigns on the project areas.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ol style="list-style-type: none"> Pampa Medina Concessions <ul style="list-style-type: none"> Between 1993 and 1996, Compañía Minera Doña Isabel and Rayrock Ltda carried out an extensive exploration program. The program included a geochemistry program with short Track Drill wells spaced every 50 m along several E–W lines between 2 km and 5 km in length, which extend throughout the district, covering the southeastern part of the Pampa concessions in an area of approximately 460 ha. The aim was to evaluate the rock below the caliche layer. In this area, approximately 600 samples were obtained, representing 40% of the total samples extracted throughout the district, of which 2% of the total have copper anomalies. For 2003 and 2004, the right to exploit the Pampa 81 (1/20 and

personal use only

Criteria	JORC Code explanation	Commentary
<p>Geology</p>	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<p>21/40) and Pampa 47 (1/20 and 21/40) concessions by Minera Rayrock Ltda was established.</p> <ul style="list-style-type: none"> • In 2008, Rayrock Ltda carried out two RC drilling campaigns. The first involved 15,729 m distributed in 38 holes with an approximate mesh of 500 m × 500 m and the second campaign involved 14,913 m in 35 holes with a mesh of 125 m × 125 m in an area of 1,000 × 350 m, recognising mainly copper oxides, with some mixed intervals and small amounts of primary mineralisation. • An exploration campaign was subsequently carried out in 2013, consisting of 45 diamond holes for a total of 18,707 m drilled. • During 2014, Rayrock Ltda continued with the latest exploration campaign, with the completion of 17 diamond drill holes for a total of 5,264 m drilled. <p>2. Madrugador Concessions</p> <ul style="list-style-type: none"> • The Madrugador concessions were previously the subject of limited exploration efforts since the 1980s. Most of the exploration on the Madrugador concessions was conducted by Rayrock from 1993 to 1996 and consisted of diamond and reverse circulation drilling. A total of 23,502 m of diamond and RC drilling in 223 holes had been completed on the property prior to 2005. Proyecta, a Chilean engineering company, conducted a short track RC drilling program on the Madrugador claim in 2005. • During the period 1994 to 1999, Rayrock conducted geological mapping of the property, a stream sediment and soil/road-cut sampling survey, as well as limited diamond drilling. • In 2007 and 2008, Apoquindo Minerals Inc. (Apoquindo) completed 21,177 m of RC drilling in 132 holes and 1,206 m of diamond drilling in eight holes. • In April 2009, Apoquindo entered into a JV agreement with Minera S.A. • The Pampa Medina mining district is characterised by Jurassic_Triassic volcanic and sediment hosted manto type copper mineralization. Characteristics volcanic hosted, such as shallow Madrugador mineralization, resembles the typical Coastal Belt copper

Criteria	JORC Code explanation	Commentary
	<p><i>results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <ul style="list-style-type: none"> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<p>intervals having a small number of poorly mineralized samples (<0.1% CuT) included in the calculation.</p> <ul style="list-style-type: none"> Silver assays reporting less than 3 gpt Ag detection limit in the ICP analysis were assigned a value of zero. No metal equivalents have been reported.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> True widths are estimated at 80-90% of the reported downhole intersection, however drilling generally targets subparallel intersections of the mineralized manto units as understood/interpreted at the time of drilling All intersections are reported on a downhole basis.
Diagrams	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> Please refer to the figures contained herein
Balanced reporting	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> All significant results have been reported Please refer to the tables herein
Other substantive exploration data	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> There is no meaningful and material exploration data to report other than the information disclosed in this release
Further work	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> Over the course of 2025, the Company intends to complete further exploration work at the project area including: <ul style="list-style-type: none"> Geophysical surveys Reverse circulation and diamond core drilling Of particular focus will be the potential for extensions from the Pampa Medina Deposit north and west

personal use only

Criteria

JORC Code explanation

Commentary

personal use only