



26 May 2026

## Completion of Iguana Drilling Program with Encouraging Results

### Highlights

- **Beacon has received assay results for a further 124 RC holes. Key results include the following:**
  - 19 metres @ 11.89 g/t gold from 111 metres (26IGRD0470)
    - Including 1 metre @ **152 g/t** gold from 111 metres
    - Including 1 metre @ **45.3 g/t** gold from 112 metres
    - Including 2 metres @ **4.71 g/t** gold from 113 metres
  - 5 metres @ 20.88 g/t gold from 165 metres (26IGRD0476)
    - Including 1 metre @ **96.2 g/t** gold from 166 metres
  - 10 metres @ 9.99 g/t gold from 82 metres (26IGRD0470)
    - Including 1 metre @ **50.1 g/t** gold from 82 metres
    - Including 1 metre @ **23.7 g/t** gold from 83 metres
  - 8 metres @ 12.36 g/t gold from 187 metres (26IGRD0469)
    - Including 1 metre @ **78.4 g/t** gold from 187 metres
  - 7 metres @ 13.86 g/t gold from 107 metres (26IGRD0504)
    - Including 1 metre @ **77.4 g/t** gold from 111 metres
  - 5 metres @ 18.44 g/t gold from 36 metres (26IGRD0479)
    - Including 1 metre @ **77.4 g/t** gold from 39 metres
- **Further High Grade 1 metre Intercepts include:**
  - 67.5 g/t from 104m (26IGRD0517)
  - 56.5 g/t from 90m (26IGRD0570)
  - 53.9/t from 32m (26IGRC0577)
- **Beacon has completed the current Resource Definition Drilling program. The results are expected to support an increased Mineral Resource Estimate.**
- **Entech Pty Ltd and MineComp Pty Ltd are now progressing updated Mineral Resource and Ore Reserve estimates incorporating the results of the completed Resource Definition Drilling program.**
- **Assays continue to be received, with a further announcement to be made when all assay results have been returned.**



**Figure 1:** Two RC Drill Rigs from Raglan Drilling on-site at Iguana as of 10 January 2026. Imagery looking south, with the Jamaican Rock test pit in background

**Beacon Minerals Executive Chairman and Managing Director Graham McGarry commented:**

“The Iguana Deposit has throughout the Resource Definition program indicated an extensive deposit. Drilling has not yet found the final extent of mineralisation in the southern and eastern directions or at depth. This confirms that the Iguana deposit is very likely far more extensive than previous evaluations suggested.

“Beacon has finalised the 2025-2026 Resource Definition Drilling at Iguana, and is now focused on evaluating the results, with a primary aim of providing an updated Resource and Reserve.”

For personal use only

## Overview

Beacon Minerals Limited (ASX: BCN) (“Beacon Minerals” or “the Company”) is pleased to announce another batch of assay results for the extensive FY2026 Resource Development drill program at Lady Ida – Iguana Deposit.

The Iguana deposit is a part of the Lady Ida Project, which sits on the inferred extension of the Ida Fault and is a part of the north-south striking Mount Ida Greenstone Belt. It is predominantly metamorphosed (upper greenschist-amphibolite facies) mafic and ultramafic rocks. The complex structural geology provides the space for mineralisation deposition. The mineralisation is controlled by structural and hydrothermal alteration.

On the deposit scale the depth of weathering increases significantly within shear zones and reaches depths of 90m in the centre of the deposit. Supergene gold enrichment is apparent from grade control drilling in the upper portion of the existing Jamaican Rock pit (mined by Delta Gold in 2000) where significantly higher grades were mined compared to the current resource model.


Recent Diamond Drilling has indicated two distinct “In situ” mineralisation styles within the Iguana deposit.

### Early Stage Mineralisation

- Dominant mineralisation style of the Iguana deposit
- Sulphide-rich gold mineralisation
- Quartz is notably absent

### Later Stage Mineralisation

- Quartz-Fuchsite mineralisation style locally includes coarse visible gold
- Relatively small percentage of Iguana’s mineralisation

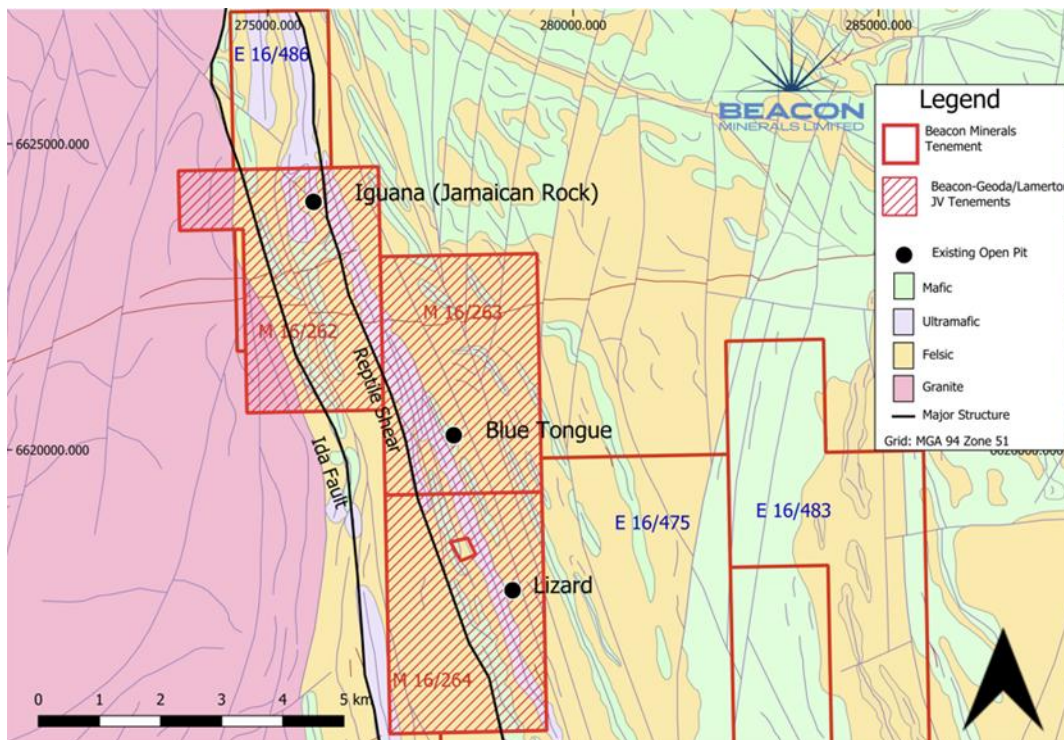


**Figure 2:** Iguana Local Geology and Tenements

For personal use only



**Figure 3: Collar Locations of Iguana Resource Development Drill Program**

For personal use only

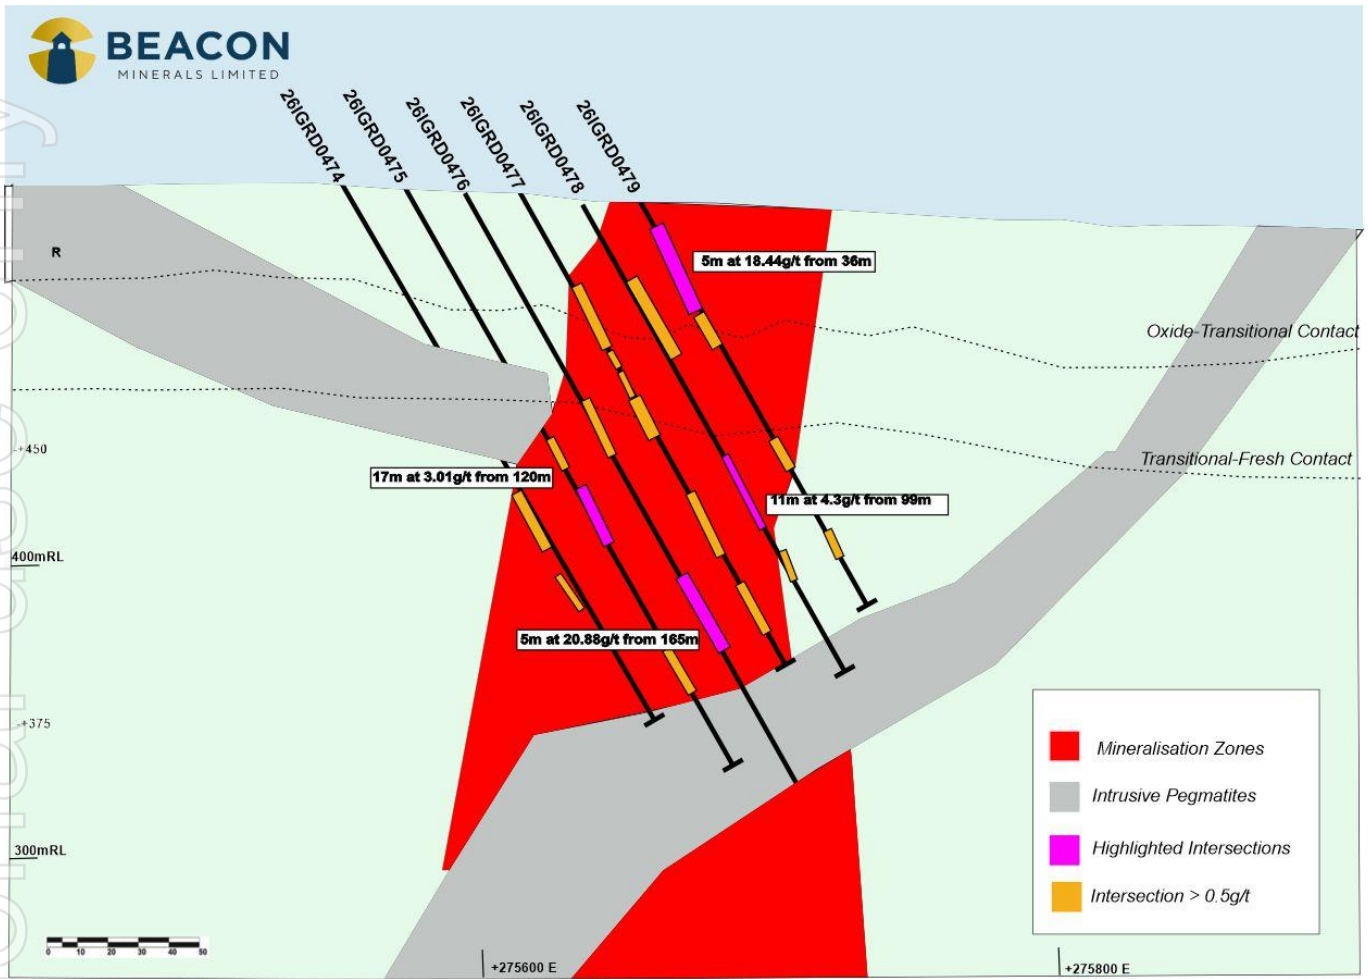


**Figure 4:** Cross Section of Iguana Resource Development Drill Program 662,392 Northing

### About the Lady Ida Project

The Lady Ida Project consist of M16/262 (the Iguana Deposit is located on M16/262), M16/263, M16/264, L15/224, L16/58, L16/62, L16/103, L16/142 and application L16/138 which is the ground the subject of the Earn-In, JV and Tenement Transfer Agreement between the Company, Beacon Mining Pty Ltd, Lamerton Pty Ltd and Geoda Pty Ltd.

For further details in relation to the Earn-In, JV and Tenement Transfer Agreement for the Lady Ida Project refer to ASX releases dated 6 December 2023 entitled "Beacon to Acquire an interest in the Lady Ida Gold Project" and 4 September 2024 "Lady Ida Completes and Appointment of New Director".

For personal use only

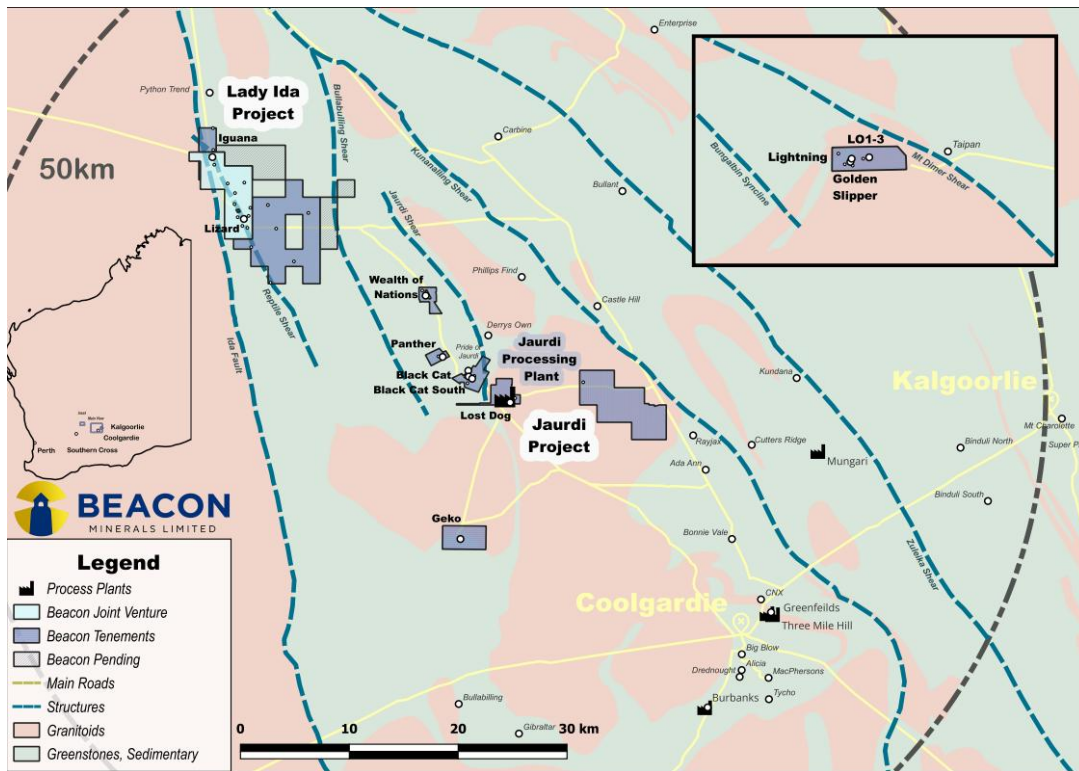

**Figure 5: Location of the Lady Ida Project (Iguana Deposit)**

Authorised for release by the Board of Beacon Minerals Limited.

**Graham McGarry**  
Managing Director/Chairman  
Beacon Minerals Limited  
+61 459 240 379

**Geoffrey Greenhill**  
Non-Executive Director  
Beacon Minerals Limited  
+61 419 991 713

For personal use only

**Competent Person Statement:**

The information in the report relating to the exploration results and targets have been compiled by Lachlan Kenna BSc (Hons) MAusIMM. Mr. Kenna has sufficient experience which is relevant to the style of mineralisation and types of deposits under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr. Kenna is a full-time employee of Beacon Minerals Limited.

Mr Kenna consents to the inclusion in the report of the matters based on this information in the form and context in which it appears.

**Previously released exploration results**

Specific exploration results referred to in this announcement were originally reported in the following Company announcements in accordance with ASX Listing Rule 5.7:

Title	Date
Further Resource Definition Drilling Results Demonstrate Continued Mineralisation at Depth	12-Jan-26
First Batch of Iguana Resource Development Assays Received	09-Dec-25
Laterite Ore Reserve Statement - Iguana Deposit	23-Oct-25
Resource Development Drill Program Commences at Iguana Deposit	08-Oct-25
Final Batch of Iguana Grade Control Assays Received	22-Sep-25
Third Batch of Iguana Grade Control Assays Received	08-Sep-25
Second Batch of Assay Results at Iguana Deposit	18-Aug-25
Stage 2 Grade Control Program Completed at Lady Ida Iguana Deposit	11-Aug-25
Updated Laterite Mineral Resource for Iguana Deposit	5-Aug-25
Results of the Iguana Diamond Drill Program	29-Jul-25
Stage 2 Grade Control Program Commences at Lady Ida Iguana Deposit	22-Jul-25
Extensive Near Surface Laterite Mineralisation Identified at Iguana	16-Jul-25
Extensive Mineralisation Confirmed in First Pass Drill Program at Iguana	18-Jun-25
Stage 2 Laterite Drill Program completed at Lady Ida Iguana Deposit	4-Jun-25
Core Drilling commences at Lady Ida Iguana Deposit	21-Jan-25

The Company confirms that it is not aware of any information or data that materially affects the information included in the original announcements and the form and context in which the Competent Persons' findings are presented have not materially modified from the original market announcements.

**Forward Looking Statements:**

This ASX announcement (Announcement) has been prepared by Beacon Minerals Limited ("Beacon" or "the Company"). It should not be considered as an offer or invitation to subscribe for or purchase any securities in the Company or as an inducement to make an offer or invitation with respect to those securities. No agreement to subscribe for securities in the Company will be entered into on the basis of this Announcement.

This Announcement contains summary information about Beacon, its subsidiaries and their activities which is current as at the date of this Announcement. The information in this Announcement is of a general nature and does not purport to be complete nor does it contain all the information which a prospective investor may require in evaluating a possible investment in Beacon.

For personal use only

By its very nature exploration for minerals is a high risk business and is not suitable for certain investors. Beacon's securities are speculative. Potential investors should consult their stockbroker or financial advisor. There are a number of risks, both specific to Beacon and of a general nature which may affect the future operating and financial performance of Beacon and the value of an investment in Beacon including but not limited to economic conditions, stock market fluctuations, gold price movements, regional infrastructure constraints, timing of approvals from relevant authorities, regulatory risks, operational risks and reliance on key personnel.

Certain statements contained in this announcement, including information as to the future financial or operating performance of Beacon and its projects, are forward-looking statements that:

- may include, among other things, statements regarding targets, estimates and assumptions in respect of mineral reserves and mineral resources and anticipated grades and recovery rates, production and prices, recovery costs and results, capital expenditures, and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions;
- are necessarily based upon a number of estimates and assumptions that, while considered reasonable by Beacon, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies; and,
- involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements.

Beacon disclaims any intent or obligation to update publicly any forward-looking statements, whether as a result of new information, future events or results or otherwise. The words 'believe', 'expect', 'anticipate', 'indicate', 'contemplate', 'target', 'plan', 'intends', 'continue', 'budget', 'estimate', 'may', 'will', 'schedule' and similar expressions identify forward-looking statements.

All forward looking statements made in this announcement are qualified by the foregoing cautionary statements. Investors are cautioned that forward-looking statements are not guarantees of future performance and accordingly investors are cautioned not to put undue reliance on forward-looking statements due to the inherent uncertainty therein. No verification: Although all reasonable care has been undertaken to ensure that the facts and opinions given in this Announcement are accurate, the information provided in this Announcement has not been independently verified.

#### **Disclaimer**

This ASX announcement (Announcement) has been prepared by Beacon Minerals Limited ("Beacon" or "the Company"). It should not be considered as an offer or invitation to subscribe for or purchase any securities in the Company or as an inducement to make an offer or invitation with respect to those securities. No agreement to subscribe for securities in the Company will be entered into on the basis of this Announcement.

This Announcement contains summary information about Beacon, its subsidiaries and their activities which is current as at the date of this Announcement. The information in this Announcement is of a general nature and does not purport to be complete nor does it contain all the information which a prospective investor may require in evaluating a possible investment in Beacon.

By its very nature exploration for minerals is a high risk business and is not suitable for certain investors. Beacon's securities are speculative. Potential investors should consult their stockbroker or financial advisor. There are a number of risks, both specific to Beacon and of a general nature which may affect the future operating and financial performance of Beacon and the value of an investment in Beacon including but not limited to economic conditions, stock market fluctuations, gold price movements, regional infrastructure constraints, timing of approvals from relevant authorities, regulatory risks, operational risks and reliance on key personnel.

Certain statements contained in this announcement, including information as to the future financial or operating performance of Beacon and its projects, are forward-looking statements that:

- may include, among other things, statements regarding targets, estimates and assumptions in respect of mineral reserves and mineral resources and anticipated grades and recovery rates, production and prices, recovery costs and results, capital expenditures, and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions;
- are necessarily based upon a number of estimates and assumptions that, while considered reasonable by Beacon, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies; and,
- involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements.

Beacon disclaims any intent or obligation to update publicly any forward-looking statements, whether as a result of new information, future events or results or otherwise. The words 'believe', 'expect', 'anticipate', 'indicate', 'contemplate', 'target', 'plan', 'intends', 'continue', 'budget', 'estimate', 'may', 'will', 'schedule' and similar expressions identify forward-looking statements.

All forward looking statements made in this announcement are qualified by the foregoing cautionary statements. Investors are cautioned that forward-looking statements are not guarantees of future performance and accordingly investors are cautioned not to put undue reliance on forward-looking statements due to the inherent uncertainty therein.

No verification: Although all reasonable care has been undertaken to ensure that the facts and opinions given in this Announcement are accurate, the information provided in this Announcement has not been independently verified.

For personal use only

**Appendix 1: Significant Intercepts Table for the Iguana Resource Development Drill program**

All intervals of greater than 0.5 g/t gold with intervals of 3m samples only shown. The highly deformed nature of the deposit, and extensive mineralized envelop prevent the effective use or calculation of True Widths.

Hole ID	From	To	Interval	Average Grade g/t	Gram Metres
26IGRD0073_RE	46	47	1	0.61	0.61
26IGRD0073_RE	49	51	2	0.84	1.67
26IGRD0073_RE	54	55	1	0.51	0.51
26IGRD0073_RE	66	67	1	0.69	0.69
26IGRD0073_RE	81	82	1	0.53	0.53
26IGRD0073_RE	94	96	2	0.58	1.16
26IGRD0073_RE	106	107	1	1.41	1.41
26IGRD0073_RE	118	121	3	4.08	12.23
26IGRD0073_RE	134	135	1	0.61	0.61
26IGRD0073_RE	149	150	1	0.67	0.67
26IGRD0073_RE	195	196	1	0.55	0.55
26IGRD0132	2	3	1	0.73	0.73
26IGRD0132	46	47	1	0.60	0.60
26IGRD0132	49	50	1	0.53	0.53
26IGRD0132	57	62	5	3.27	16.35
26IGRD0132	86	89	3	3.18	9.54
26IGRD0132	99	100	1	1.62	1.62
26IGRD0132	104	105	1	0.65	0.65
26IGRD0132	122	123	1	0.79	0.79
26IGRD0132	128	132	4	1.31	5.23
26IGRD0182	4	5	1	1.97	1.97
26IGRD0182	133	134	1	1.23	1.23
26IGRD0240	2	6	4	1.16	4.65
26IGRD0271	27	28	1	0.68	0.68
26IGRD0271	33	35	2	0.77	1.54
26IGRD0271	55	56	1	0.93	0.93
26IGRD0271	65	66	1	0.54	0.54
26IGRD0271	75	76	1	0.58	0.58
26IGRD0271	99	103	4	4.42	17.69
26IGRD0271	150	157	7	1.41	9.90
26IGRD0271	205	207	2	1.22	2.43
26IGRD0271	266	267	1	0.67	0.67
26IGRD0271	274	276	2	1.94	3.88
26IGRD0274	80	83	3	0.91	2.73
26IGRD0274	161	162	1	0.69	0.69
26IGRD0274	168	169	1	0.53	0.53
26IGRD0274	194	196	2	3.05	6.10
26IGRD0302	45	46	1	1.19	1.19

For personal use only

26IGRD0302	64	66	2	1.11	2.21
26IGRD0302	71	76	5	2.31	11.56
26IGRD0302	84	85	1	0.74	0.74
26IGRD0302	88	89	1	0.88	0.88
26IGRD0302	114	120	6	1.47	8.79
26IGRD0302	165	168	3	1.70	5.11
26IGRD0304	31	32	1	0.52	0.52
26IGRD0304	94	95	1	0.69	0.69
26IGRD0304	131	132	1	0.75	0.75
26IGRD0304	151	152	1	0.58	0.58
26IGRD0341	62	63	1	2.32	2.32
26IGRD0341	78	79	1	1.36	1.36
26IGRD0341	87	88	1	0.91	0.91
26IGRD0341	91	93	2	2.02	4.04
26IGRD0341	96	99	3	2.10	6.29
26IGRD0341	109	110	1	0.73	0.73
26IGRD0341	117	127	10	2.77	27.71
26IGRD0341	131	132	1	0.52	0.52
26IGRD0341	139	140	1	0.65	0.65
26IGRD0341	155	156	1	0.91	0.91
26IGRD0341	161	162	1	1.22	1.22
26IGRD0341	179	180	1	0.54	0.54
26IGRD0341	181	182	1	0.68	0.68
26IGRD0341	193	199	6	4.88	29.26
26IGRD0341	204	205	1	0.72	0.72
26IGRD0341	208	209	1	0.56	0.56
26IGRD0377	31	32	1	1.25	1.25
26IGRD0377	35	45	10	6.99	69.91
26IGRD0377	65	66	1	1.32	1.32
26IGRD0377	102	105	3	1.12	3.37
26IGRD0377	114	125	11	1.48	16.27
26IGRD0377	132	136	4	1.60	6.39
26IGRD0377	141	146	5	2.28	11.38
26IGRD0377	149	151	2	0.60	1.19
26IGRD0377	154	162	8	1.02	8.13
26IGRD0385	7	9	2	0.62	1.24
26IGRD0385	56	57	1	0.58	0.58
26IGRD0385	73	76	3	0.60	1.79
26IGRD0385	81	82	1	0.66	0.66
26IGRD0385	90	91	1	0.90	0.90
26IGRD0385	94	105	11	1.02	11.21
26IGRD0385	115	116	1	1.07	1.07
26IGRD0385	121	124	3	0.71	2.13
26IGRD0385	129	139	10	2.37	23.65

For personal use only

26IGRD0385	145	146	1	0.50	0.50
26IGRD0385	147	148	1	2.80	2.80
26IGRD0385	152	153	1	2.21	2.21
26IGRD0385	161	162	1	0.51	0.51
26IGRD0385	163	164	1	0.72	0.72
26IGRD0385	167	168	1	0.79	0.79
26IGRD0385	172	173	1	0.75	0.75
26IGRD0385	175	178	3	1.16	3.48
26IGRD0385	183	187	4	0.66	2.63
26IGRD0386	0	1	1	1.09	1.09
26IGRD0386	37	40	3	1.31	3.93
26IGRD0386	56	57	1	0.51	0.51
26IGRD0386	60	61	1	0.54	0.54
26IGRD0386	69	70	1	1.15	1.15
26IGRD0386	74	75	1	0.86	0.86
26IGRD0386	80	84	4	0.84	3.36
26IGRD0386	89	90	1	0.57	0.57
26IGRD0386	91	92	1	0.54	0.54
26IGRD0386	98	112	14	0.60	8.46
26IGRD0386	116	123	7	0.88	6.16
26IGRD0386	129	130	1	0.66	0.66
26IGRD0386	131	132	1	0.59	0.59
26IGRD0386	137	138	1	1.43	1.43
26IGRD0386	142	144	2	0.67	1.34
26IGRD0386	145	146	1	0.51	0.51
26IGRD0386	161	163	2	0.65	1.29
26IGRD0386	165	166	1	3.43	3.43
26IGRD0414	4	6	2	1.01	2.01
26IGRD0434	48	49	1	0.76	0.76
26IGRD0434	50	51	1	0.59	0.59
26IGRD0434	75	78	3	16.06	48.19
26IGRD0434	97	98	1	1.08	1.08
26IGRD0434	110	113	3	0.78	2.35
26IGRD0442	66	67	1	2.63	2.63
26IGRD0462	3	4	1	0.74	0.74
26IGRD0462	41	42	1	1.01	1.01
26IGRD0462	44	45	1	0.69	0.69
26IGRD0462	50	51	1	1.36	1.36
26IGRD0462	61	64	3	0.60	1.80
26IGRD0462	79	103	24	1.12	26.83
26IGRD0462	110	115	5	1.61	8.04
26IGRD0462	118	121	3	1.22	3.66
26IGRD0462	126	127	1	0.63	0.63
26IGRD0462	128	130	2	0.66	1.31

For personal use only

26IGRD0462	132	133	1	0.64	0.64
26IGRD0462	142	166	24	0.81	19.53
26IGRD0462	183	184	1	2.86	2.86
26IGRD0464	49	50	1	0.51	0.51
26IGRD0464	65	66	1	0.52	0.52
26IGRD0464	69	70	1	0.57	0.57
26IGRD0464	72	86	14	1.85	25.94
26IGRD0464	102	113	11	1.30	14.32
26IGRD0464	116	122	6	1.88	11.30
26IGRD0464	127	133	6	1.74	10.42
26IGRD0464	140	145	5	0.58	2.90
26IGRD0464	149	154	5	1.33	6.63
26IGRD0464	157	168	11	2.85	31.30
26IGRD0465	2	3	1	0.93	0.93
26IGRD0465	30	34	4	3.05	12.19
26IGRD0465	38	39	1	0.51	0.51
26IGRD0465	45	46	1	0.61	0.61
26IGRD0465	48	49	1	0.56	0.56
26IGRD0465	54	62	8	0.57	4.58
26IGRD0465	70	72	2	1.97	3.94
26IGRD0465	78	79	1	1.10	1.10
26IGRD0465	88	89	1	2.38	2.38
26IGRD0465	93	95	2	3.76	7.51
26IGRD0465	104	105	1	0.83	0.83
26IGRD0465	106	107	1	1.49	1.49
26IGRD0465	110	111	1	0.68	0.68
26IGRD0465	114	130	16	2.23	35.72
26IGRD0465	151	152	1	0.64	0.64
26IGRD0465	157	160	3	1.62	4.85
26IGRD0465	166	167	1	0.70	0.70
26IGRD0465	178	181	3	1.04	3.12
26IGRD0466	8	9	1	0.64	0.64
26IGRD0466	18	19	1	0.51	0.51
26IGRD0466	27	32	5	2.41	12.05
26IGRD0466	44	45	1	0.69	0.69
26IGRD0466	48	56	8	0.92	7.35
26IGRD0466	61	62	1	0.69	0.69
26IGRD0466	65	66	1	1.10	1.10
26IGRD0466	73	74	1	0.88	0.88
26IGRD0466	91	92	1	1.24	1.24
26IGRD0466	96	97	1	0.70	0.70
26IGRD0466	102	104	2	0.61	1.22
26IGRD0466	106	107	1	1.12	1.12
26IGRD0466	112	113	1	0.68	0.68

For personal use only

26IGRD0466	125	138	13	1.05	13.61
26IGRD0466	146	149	3	1.44	4.32
26IGRD0466	156	157	1	0.92	0.92
26IGRD0466	166	167	1	1.66	1.66
26IGRD0466	173	174	1	2.91	2.91
26IGRD0466	194	203	9	0.81	7.30
26IGRD0466	206	210	4	2.24	8.94
26IGRD0466	218	221	3	1.37	4.11
26IGRD0469	32	33	1	0.50	0.50
26IGRD0469	62	65	3	0.76	2.29
26IGRD0469	98	107	9	0.97	8.75
26IGRD0469	110	111	1	0.73	0.73
26IGRD0469	120	126	6	3.60	21.59
26IGRD0469	140	144	4	0.68	2.73
26IGRD0469	149	151	2	0.65	1.29
26IGRD0469	152	153	1	0.52	0.52
26IGRD0469	156	157	1	0.91	0.91
26IGRD0469	159	161	2	3.49	6.97
26IGRD0469	166	171	5	1.83	9.14
26IGRD0469	174	175	1	0.61	0.61
26IGRD0469	187	195	8	12.36	98.87
26IGRD0469	200	202	2	0.75	1.50
26IGRD0470	46	52	6	0.96	5.78
26IGRD0470	55	56	1	0.50	0.50
26IGRD0470	67	68	1	1.24	1.24
26IGRD0470	71	72	1	0.78	0.78
26IGRD0470	76	78	2	0.94	1.87
26IGRD0470	82	92	10	9.99	99.90
26IGRD0470	98	99	1	0.60	0.60
26IGRD0470	111	130	19	11.89	225.83
26IGRD0470	134	135	1	0.51	0.51
26IGRD0470	136	141	5	0.75	3.76
26IGRD0470	144	145	1	0.57	0.57
26IGRD0470	148	156	8	0.77	6.14
26IGRD0470	159	167	8	4.27	34.17
26IGRD0471	0	2	2	1.35	2.69
26IGRD0472	33	36	3	0.76	2.29
26IGRD0472	42	66	24	3.62	86.79
26IGRD0472	79	80	1	1.11	1.11
26IGRD0472	125	126	1	0.61	0.61
26IGRD0472	128	130	2	1.11	2.22
26IGRD0472	150	151	1	0.87	0.87
26IGRD0472	155	156	1	0.64	0.64
26IGRD0472	158	159	1	0.55	0.55

For personal use only

26IGRD0474	18	23	5	4.48	22.38
26IGRD0474	57	58	1	1.26	1.26
26IGRD0474	109	110	1	0.79	0.79
26IGRD0474	119	127	8	1.40	11.21
26IGRD0474	132	143	11	2.46	27.06
26IGRD0474	147	148	1	4.55	4.55
26IGRD0474	154	156	2	0.71	1.41
26IGRD0474	158	159	1	0.56	0.56
26IGRD0474	161	162	1	3.43	3.43
26IGRD0474	165	168	3	0.92	2.77
26IGRD0474	182	183	1	0.56	0.56
26IGRD0474	184	185	1	1.08	1.08
26IGRD0474	189	190	1	1.26	1.26
26IGRD0474	194	195	1	0.86	0.86
26IGRD0474	205	210	5	2.68	13.41
26IGRD0475	25	29	4	0.66	2.62
26IGRD0475	34	35	1	1.35	1.35
26IGRD0475	74	76	2	0.90	1.80
26IGRD0475	95	96	1	0.66	0.66
26IGRD0475	99	111	12	0.84	10.09
26IGRD0475	115	116	1	7.19	7.19
26IGRD0475	120	137	17	3.01	51.19
26IGRD0475	144	145	1	0.69	0.69
26IGRD0475	147	152	5	2.56	12.79
26IGRD0475	179	180	1	0.68	0.68
26IGRD0475	184	185	1	0.76	0.76
26IGRD0475	186	196	10	2.87	28.66
26IGRD0475	201	203	2	0.83	1.66
26IGRD0475	214	216	2	0.86	1.71
26IGRD0476	52	53	1	0.72	0.72
26IGRD0476	70	71	1	0.68	0.68
26IGRD0476	76	86	10	1.62	16.22
26IGRD0476	89	90	1	0.79	0.79
26IGRD0476	96	102	6	1.28	7.66
26IGRD0476	117	118	1	0.93	0.93
26IGRD0476	130	131	1	0.50	0.50
26IGRD0476	147	150	3	2.98	8.93
26IGRD0476	153	162	9	3.39	30.48
26IGRD0476	165	170	5	20.88	104.39
26IGRD0476	178	182	4	3.04	12.15
26IGRD0476	193	196	3	0.97	2.92
26IGRD0476	200	201	1	0.68	0.68
26IGRD0476	202	204	2	0.78	1.55
26IGRD0476	210	211	1	0.60	0.60

For personal use only



26IGRD0476	215	216	1	0.61	0.61
26IGRD0476	227	228	1	0.95	0.95
26IGRD0476	240	247	7	2.27	15.91
26IGRD0476	253	258	5	0.59	2.93
26IGRD0477	33	38	5	1.75	8.77
26IGRD0477	42	51	9	2.43	21.83
26IGRD0477	54	59	5	1.08	5.38
26IGRD0477	62	63	1	0.70	0.70
26IGRD0477	65	77	12	3.16	37.86
26IGRD0477	83	88	5	1.40	6.98
26IGRD0477	124	141	17	1.70	28.93
26IGRD0477	153	158	5	7.56	37.79
26IGRD0477	165	166	1	0.74	0.74
26IGRD0477	168	173	5	1.44	7.20
26IGRD0477	180	183	3	0.95	2.86
26IGRD0478	17	18	1	0.81	0.81
26IGRD0478	25	26	1	1.16	1.16
26IGRD0478	35	55	20	1.15	23.09
26IGRD0478	72	77	5	1.43	7.14
26IGRD0478	99	110	11	4.30	47.28
26IGRD0478	113	114	1	6.93	6.93
26IGRD0478	118	130	12	1.00	12.04
26IGRD0478	142	143	1	0.69	0.69
26IGRD0478	155	156	1	0.66	0.66
26IGRD0478	166	167	1	0.91	0.91
26IGRD0478	182	184	2	3.40	6.79
26IGRD0479	13	25	12	1.35	16.20
26IGRD0479	28	29	1	1.03	1.03
26IGRD0479	31	32	1	2.42	2.42
26IGRD0479	36	41	5	18.44	92.18
26IGRD0479	44	46	2	0.86	1.72
26IGRD0479	50	51	1	3.15	3.15
26IGRD0479	57	58	1	1.05	1.05
26IGRD0479	75	76	1	0.65	0.65
26IGRD0479	80	82	2	1.28	2.56
26IGRD0479	91	92	1	0.63	0.63
26IGRD0479	96	102	6	1.18	7.08
26IGRD0479	118	120	2	4.92	9.83
26IGRD0479	132	135	3	1.08	3.23
26IGRD0479	139	140	1	1.78	1.78
26IGRD0479	152	153	1	1.56	1.56
26IGRD0479	167	169	2	1.27	2.53
26IGRD0479	177	179	2	4.85	9.69
26IGRD0480	3	4	1	0.59	0.59

For personal use only

26IGRD0480	28	29	1	0.96	0.96
26IGRD0480	35	45	10	2.90	28.96
26IGRD0480	53	54	1	0.80	0.80
26IGRD0480	97	104	7	2.34	16.41
26IGRD0480	117	118	1	1.52	1.52
26IGRD0480	154	155	1	0.66	0.66
26IGRD0480	162	163	1	1.02	1.02
26IGRD0480	173	174	1	0.69	0.69
26IGRD0488A	0	3	3	0.57	1.70
26IGRD0488B	21	22	1	2.64	2.64
26IGRD0488B	26	27	1	0.82	0.82
26IGRD0488B	74	77	3	2.95	8.86
26IGRD0488B	81	82	1	1.41	1.41
26IGRD0488B	86	94	8	6.56	52.51
26IGRD0488B	97	98	1	0.94	0.94
26IGRD0488B	106	108	2	0.60	1.19
26IGRD0488B	112	113	1	4.82	4.82
26IGRD0488B	124	127	3	1.85	5.55
26IGRD0488B	140	143	3	0.77	2.30
26IGRD0488B	147	148	1	1.54	1.54
26IGRD0488B	151	152	1	0.53	0.53
26IGRD0488B	153	156	3	0.53	1.58
26IGRD0488B	159	164	5	2.71	13.56
26IGRD0488B	170	173	3	10.02	30.05
26IGRD0488B	183	185	2	1.17	2.33
26IGRD0488B	190	191	1	0.90	0.90
26IGRD0488B	193	194	1	1.03	1.03
26IGRD0488B	197	202	5	0.70	3.51
26IGRD0488B	224	225	1	0.53	0.53
26IGRD0488B	232	234	2	0.94	1.87
26IGRD0488B	237	238	1	0.68	0.68
26IGRD0488B	244	245	1	1.11	1.11
26IGRD0489	1	2	1	0.54	0.54
26IGRD0489	62	78	16	2.07	33.19
26IGRD0489	83	96	13	1.27	16.48
26IGRD0489	113	115	2	1.07	2.13
26IGRD0489	118	123	5	1.45	7.27
26IGRD0489	138	141	3	2.06	6.18
26IGRD0489	147	148	1	0.86	0.86
26IGRD0489	154	158	4	0.74	2.96
26IGRD0489	163	164	1	2.01	2.01
26IGRD0489	168	169	1	0.73	0.73
26IGRD0489	185	189	4	1.46	5.82
26IGRD0490	2	3	1	0.52	0.52

For personal use only

26IGRD0490	27	46	19	1.33	25.20
26IGRD0490	49	51	2	0.81	1.62
26IGRD0490	56	61	5	2.27	11.36
26IGRD0490	68	85	17	2.31	39.20
26IGRD0490	97	99	2	1.47	2.94
26IGRD0490	102	106	4	2.01	8.03
26IGRD0490	110	112	2	1.08	2.16
26IGRD0490	116	117	1	0.50	0.50
26IGRD0490	126	127	1	0.80	0.80
26IGRD0490	146	147	1	1.20	1.20
26IGRD0490	150	154	4	1.13	4.53
26IGRD0490	169	170	1	0.58	0.58
26IGRD0490	192	195	3	2.23	6.70
26IGRD0490	205	206	1	0.50	0.50
26IGRD0491	2	3	1	0.65	0.65
26IGRD0491	12	13	1	0.62	0.62
26IGRD0491	26	30	4	0.92	3.66
26IGRD0491	36	54	18	1.60	28.88
26IGRD0491	57	58	1	0.55	0.55
26IGRD0491	59	62	3	0.71	2.13
26IGRD0491	64	80	16	1.92	30.72
26IGRD0491	83	87	4	0.96	3.84
26IGRD0491	99	100	1	4.66	4.66
26IGRD0491	120	121	1	0.68	0.68
26IGRD0491	128	130	2	0.83	1.66
26IGRD0491	137	138	1	0.84	0.84
26IGRD0491	143	144	1	1.90	1.90
26IGRD0491	148	149	1	1.05	1.05
26IGRD0491	162	167	5	4.22	21.09
26IGRD0491	171	172	1	0.67	0.67
26IGRD0491	175	184	9	1.80	16.22
26IGRD0491	215	216	1	1.26	1.26
26IGRD0492	19	20	1	1.24	1.24
26IGRD0492	23	30	7	1.05	7.35
26IGRD0492	33	50	17	2.07	35.18
26IGRD0492	55	56	1	0.60	0.60
26IGRD0492	59	63	4	0.67	2.67
26IGRD0492	65	66	1	2.22	2.22
26IGRD0492	77	79	2	1.59	3.17
26IGRD0492	86	91	5	1.50	7.51
26IGRD0492	94	95	1	5.42	5.42
26IGRD0492	130	131	1	0.90	0.90
26IGRD0492	157	159	2	10.42	20.83
26IGRD0492	165	166	1	0.72	0.72

For personal use only

26IGRD0492	167	179	12	1.64	19.67
26IGRD0492	183	185	2	1.27	2.54
26IGRD0492	193	195	2	0.65	1.30
26IGRD0492	204	208	4	1.30	5.20
26IGRD0493	3	4	1	0.85	0.85
26IGRD0493	15	33	18	3.96	71.23
26IGRD0493	36	37	1	0.70	0.70
26IGRD0493	39	51	12	2.10	25.22
26IGRD0493	54	73	19	1.86	35.36
26IGRD0493	98	99	1	0.87	0.87
26IGRD0493	127	135	8	5.57	44.52
26IGRD0493	138	147	9	1.21	10.88
26IGRD0493	157	158	1	5.38	5.38
26IGRD0493	174	177	3	0.68	2.04
26IGRD0493	248	249	1	10.00	10.00
26IGRD0493	254	257	3	1.16	3.48
26IGRD0494	17	18	1	0.58	0.58
26IGRD0494	31	36	5	0.64	3.21
26IGRD0494	40	43	3	1.25	3.76
26IGRD0494	49	57	8	0.81	6.48
26IGRD0494	61	62	1	0.59	0.59
26IGRD0494	67	68	1	0.77	0.77
26IGRD0494	70	71	1	0.66	0.66
26IGRD0494	72	73	1	0.62	0.62
26IGRD0494	101	119	18	1.76	31.66
26IGRD0494	122	127	5	0.95	4.75
26IGRD0494	133	137	4	1.22	4.88
26IGRD0494	140	141	1	0.66	0.66
26IGRD0494	142	147	5	3.18	15.92
26IGRD0495A	3	5	2	1.44	2.87
26IGRD0495A	9	10	1	0.55	0.55
26IGRD0495A	21	22	1	3.18	3.18
26IGRD0495A	31	33	2	0.79	1.57
26IGRD0495A	36	44	8	1.62	12.96
26IGRD0495A	77	83	6	2.23	13.38
26IGRD0495A	86	90	4	1.10	4.41
26IGRD0495A	110	113	3	0.55	1.64
26IGRD0495A	114	117	3	1.17	3.51
26IGRD0495A	123	131	8	1.42	11.34
26IGRD0495A	139	141	2	2.30	4.60
26IGRD0498	49	50	1	2.10	2.10
26IGRD0498	57	58	1	1.50	1.50
26IGRD0498	78	79	1	1.89	1.89
26IGRD0504	25	26	1	2.63	2.63

For personal use only

26IGRD0504	33	35	2	0.71	1.42
26IGRD0504	39	40	1	0.52	0.52
26IGRD0504	53	54	1	0.70	0.70
26IGRD0504	89	90	1	0.83	0.83
26IGRD0504	107	114	7	13.86	97.02
26IGRD0504	117	118	1	0.55	0.55
26IGRD0504	120	122	2	2.66	5.31
26IGRD0504	125	145	20	1.14	22.71
26IGRD0504	156	158	2	3.31	6.62
26IGRD0504	162	163	1	0.86	0.86
26IGRD0504	175	183	8	0.87	6.96
26IGRD0504	186	188	2	1.41	2.81
26IGRD0504	191	192	1	4.93	4.93
26IGRD0504	209	210	1	0.92	0.92
26IGRD0505	34	35	1	0.68	0.68
26IGRD0505	52	54	2	0.97	1.94
26IGRD0505	60	62	2	0.96	1.91
26IGRD0505	68	69	1	0.84	0.84
26IGRD0505	71	72	1	0.87	0.87
26IGRD0505	86	89	3	0.66	1.99
26IGRD0505	98	99	1	0.80	0.80
26IGRD0505	119	123	4	0.60	2.41
26IGRD0505	125	126	1	0.61	0.61
26IGRD0505	127	129	2	0.62	1.24
26IGRD0505	131	140	9	1.83	16.50
26IGRD0505	144	151	7	1.06	7.42
26IGRD0505	154	156	2	0.54	1.07
26IGRD0505	158	161	3	4.36	13.09
26IGRD0505	171	172	1	1.55	1.55
26IGRD0505	185	189	4	0.94	3.76
26IGRD0505	200	202	2	9.01	18.01
26IGRD0505	231	233	2	0.95	1.90
26IGRD0505	236	240	4	0.76	3.03
26IGRD0505	249	250	1	0.61	0.61
26IGRD0506	26	27	1	0.77	0.77
26IGRD0506	44	52	8	2.04	16.33
26IGRD0506	59	60	1	0.69	0.69
26IGRD0506	62	63	1	0.79	0.79
26IGRD0506	73	74	1	5.46	5.46
26IGRD0506	83	84	1	0.87	0.87
26IGRD0506	86	88	2	0.64	1.28
26IGRD0506	93	94	1	0.68	0.68
26IGRD0506	95	96	1	1.81	1.81
26IGRD0506	105	108	3	1.64	4.92

For personal use only

26IGRD0506	115	116	1	1.79	1.79
26IGRD0506	123	126	3	1.00	3.01
26IGRD0506	133	136	3	2.39	7.17
26IGRD0506	141	143	2	1.62	3.23
26IGRD0506	148	149	1	1.70	1.70
26IGRD0506	158	160	2	0.81	1.61
26IGRD0506	163	164	1	0.60	0.60
26IGRD0506	167	168	1	1.05	1.05
26IGRD0506	175	178	3	2.67	8.01
26IGRD0506	198	200	2	0.77	1.54
26IGRD0506	203	204	1	0.79	0.79
26IGRD0506	215	216	1	0.73	0.73
26IGRD0507	21	22	1	1.12	1.12
26IGRD0507	27	29	2	0.89	1.77
26IGRD0507	32	35	3	1.43	4.29
26IGRD0507	38	40	2	5.85	11.69
26IGRD0507	47	63	16	1.41	22.61
26IGRD0507	72	91	19	0.92	17.47
26IGRD0507	94	105	11	1.15	12.63
26IGRD0507	111	112	1	0.87	0.87
26IGRD0507	119	120	1	0.71	0.71
26IGRD0507	122	123	1	0.54	0.54
26IGRD0507	124	125	1	0.55	0.55
26IGRD0507	128	131	3	1.22	3.67
26IGRD0507	141	142	1	0.61	0.61
26IGRD0507	160	161	1	1.22	1.22
26IGRD0507	172	175	3	6.06	18.18
26IGRD0507	187	189	2	0.68	1.35
26IGRD0507	192	196	4	0.69	2.76
26IGRD0507	198	199	1	0.64	0.64
26IGRD0507	221	222	1	0.97	0.97
26IGRD0508	5	7	2	2.13	4.25
26IGRD0508	20	21	1	0.83	0.83
26IGRD0508	24	33	9	0.72	6.47
26IGRD0508	37	42	5	0.65	3.25
26IGRD0508	48	51	3	4.71	14.13
26IGRD0508	54	55	1	0.63	0.63
26IGRD0508	57	58	1	1.12	1.12
26IGRD0508	60	81	21	1.32	27.70
26IGRD0508	93	117	24	1.36	32.61
26IGRD0508	129	130	1	0.64	0.64
26IGRD0508	133	134	1	0.92	0.92
26IGRD0508	160	171	11	1.15	12.66
26IGRD0508	178	179	1	1.36	1.36

For personal use only

26IGRD0508	187	191	4	1.02	4.08
26IGRD0508	218	219	1	0.63	0.63
26IGRD0509	18	20	2	0.69	1.38
26IGRD0509	25	26	1	4.38	4.38
26IGRD0509	29	48	19	0.91	17.23
26IGRD0509	54	55	1	0.57	0.57
26IGRD0509	56	59	3	0.97	2.92
26IGRD0509	63	64	1	0.54	0.54
26IGRD0509	66	67	1	0.50	0.50
26IGRD0509	70	72	2	1.74	3.47
26IGRD0509	76	78	2	1.54	3.07
26IGRD0509	90	102	12	5.49	65.90
26IGRD0509	144	147	3	1.91	5.73
26IGRD0509	150	151	1	0.57	0.57
26IGRD0509	152	162	10	0.95	9.49
26IGRD0509	194	195	1	2.75	2.75
26IGRD0510	3	4	1	0.58	0.58
26IGRD0510	10	11	1	0.68	0.68
26IGRD0510	12	13	1	0.61	0.61
26IGRD0510	26	27	1	1.03	1.03
26IGRD0510	30	35	5	0.62	3.11
26IGRD0510	39	50	11	1.13	12.41
26IGRD0510	54	60	6	0.60	3.60
26IGRD0510	72	75	3	1.77	5.31
26IGRD0510	78	79	1	8.21	8.21
26IGRD0510	111	112	1	0.53	0.53
26IGRD0510	113	114	1	0.61	0.61
26IGRD0510	115	118	3	4.20	12.59
26IGRD0510	123	124	1	0.92	0.92
26IGRD0510	133	138	5	0.75	3.76
26IGRD0510	142	147	5	1.09	5.43
26IGRD0510	151	152	1	0.50	0.50
26IGRD0510	169	170	1	3.09	3.09
26IGRD0511	29	31	2	0.96	1.92
26IGRD0511	34	36	2	1.96	3.92
26IGRD0511	48	59	11	1.30	14.25
26IGRD0511	100	109	9	1.77	15.89
26IGRD0511	115	118	3	8.02	24.05
26IGRD0511	122	127	5	1.33	6.63
26IGRD0511	130	138	8	2.69	21.48
26IGRD0511	142	143	1	0.55	0.55
26IGRD0511	148	149	1	1.19	1.19
26IGRD0512	17	18	1	0.86	0.86
26IGRD0512	19	31	12	3.57	42.79

For personal use only

26IGRD0512	34	35	1	0.63	0.63
26IGRD0512	82	84	2	1.13	2.26
26IGRD0512	97	98	1	0.73	0.73
26IGRD0512	100	115	15	0.85	12.69
26IGRD0512	118	119	1	1.70	1.70
26IGRD0512	132	133	1	0.81	0.81
26IGRD0512	142	143	1	0.76	0.76
26IGRD0513	51	56	5	0.88	4.42
26IGRD0513	84	92	8	1.57	12.53
26IGRD0513	98	99	1	2.79	2.79
26IGRD0513	102	103	1	0.86	0.86
26IGRD0513	105	106	1	1.02	1.02
26IGRD0514	19	20	1	0.68	0.68
26IGRD0514	24	25	1	0.52	0.52
26IGRD0514	37	56	19	1.56	29.67
26IGRD0514	63	66	3	0.94	2.82
26IGRD0514	69	74	5	2.38	11.90
26IGRD0514	77	78	1	1.09	1.09
26IGRD0514	86	87	1	0.81	0.81
26IGRD0514B	77	78	1	0.55	0.55
26IGRD0514B	96	106	10	1.18	11.81
26IGRD0514B	170	171	1	1.34	1.34
26IGRD0514B	175	177	2	3.24	6.48
26IGRD0514B	185	186	1	0.61	0.61
26IGRD0514B	188	201	13	2.11	27.43
26IGRD0514B	204	205	1	0.70	0.70
26IGRD0514B	207	210	3	1.15	3.46
26IGRD0514B	219	221	2	0.76	1.52
26IGRD0515	19	22	3	0.91	2.72
26IGRD0515	25	27	2	1.94	3.87
26IGRD0515	39	40	1	0.89	0.89
26IGRD0515	49	50	1	0.71	0.71
26IGRD0515	55	62	7	0.64	4.49
26IGRD0515	100	101	1	1.10	1.10
26IGRD0515	119	120	1	0.64	0.64
26IGRD0515	126	127	1	0.66	0.66
26IGRD0515	130	131	1	0.64	0.64
26IGRD0515	133	134	1	0.81	0.81
26IGRD0515	135	139	4	2.11	8.42
26IGRD0515	143	144	1	0.53	0.53
26IGRD0515	149	150	1	0.53	0.53
26IGRD0515	154	155	1	2.87	2.87
26IGRD0515	167	169	2	0.82	1.63
26IGRD0515	173	174	1	0.79	0.79

For personal use only

26IGRD0515	179	180	1	0.71	0.71
26IGRD0515	181	185	4	0.94	3.74
26IGRD0515	199	200	1	0.71	0.71
26IGRD0515	208	209	1	1.83	1.83
26IGRD0515	212	214	2	2.79	5.57
26IGRD0515	220	221	1	0.56	0.56
26IGRD0516	54	64	10	1.88	18.80
26IGRD0516	107	108	1	0.69	0.69
26IGRD0516	109	127	18	2.46	44.35
26IGRD0516	130	131	1	0.52	0.52
26IGRD0516	133	134	1	0.87	0.87
26IGRD0516	137	138	1	0.75	0.75
26IGRD0516	139	161	22	0.91	19.94
26IGRD0516	165	167	2	1.18	2.35
26IGRD0516	170	171	1	1.50	1.50
26IGRD0516	175	176	1	2.02	2.02
26IGRD0517	26	27	1	1.04	1.04
26IGRD0517	33	38	5	0.83	4.17
26IGRD0517	42	56	14	1.18	16.52
26IGRD0517	59	81	22	3.34	73.40
26IGRD0517	94	98	4	4.85	19.39
26IGRD0517	103	116	13	6.20	80.62
26IGRD0517	119	128	9	0.66	5.90
26IGRD0517	132	145	13	1.10	14.31
26IGRD0517	152	154	2	2.41	4.81
26IGRD0517	159	160	1	0.54	0.54
26IGRD0517	162	163	1	0.53	0.53
26IGRD0517	173	174	1	0.96	0.96
26IGRD0517	184	185	1	0.96	0.96
26IGRD0518	6	7	1	0.73	0.73
26IGRD0518	23	53	30	2.35	70.54
26IGRD0518	60	61	1	0.52	0.52
26IGRD0518	64	67	3	0.99	2.98
26IGRD0518	74	85	11	1.46	16.04
26IGRD0518	88	89	1	0.82	0.82
26IGRD0518	93	95	2	1.16	2.31
26IGRD0518	106	108	2	5.72	11.44
26IGRD0518	115	116	1	2.31	2.31
26IGRD0518	125	126	1	1.33	1.33
26IGRD0518	171	175	4	1.85	7.41
26IGRD0518	179	198	19	0.61	11.50
26IGRD0518	217	219	2	1.06	2.11
26IGRD0520	56	62	6	0.57	3.40
26IGRD0520	148	151	3	0.99	2.98

For personal use only

26IGRD0520	159	160	1	0.70	0.70
26IGRD0520	162	165	3	0.94	2.83
26IGRD0520	169	174	5	0.66	3.30
26IGRD0520	189	190	1	1.01	1.01
26IGRD0520	194	197	3	2.65	7.95
26IGRD0520	212	213	1	0.97	0.97
26IGRD0520	219	223	4	2.62	10.49
26IGRD0520	226	229	3	6.95	20.86
26IGRD0520	239	245	6	5.39	32.34
26IGRD0521	2	3	1	0.63	0.63
26IGRD0521	53	58	5	0.92	4.58
26IGRD0521	64	65	1	1.25	1.25
26IGRD0521	102	107	5	0.60	3.00
26IGRD0521	126	130	4	0.72	2.88
26IGRD0521	133	134	1	0.58	0.58
26IGRD0521	137	138	1	0.52	0.52
26IGRD0521	142	143	1	0.51	0.51
26IGRD0521	149	156	7	1.12	7.82
26IGRD0521	177	184	7	0.95	6.62
26IGRD0522	5	6	1	0.57	0.57
26IGRD0522	36	37	1	1.57	1.57
26IGRD0522	51	52	1	0.52	0.52
26IGRD0522	53	54	1	0.70	0.70
26IGRD0522	57	58	1	1.49	1.49
26IGRD0522	82	83	1	0.51	0.51
26IGRD0522	91	100	9	1.03	9.30
26IGRD0522	108	109	1	2.09	2.09
26IGRD0522	113	114	1	0.84	0.84
26IGRD0522	115	117	2	1.27	2.54
26IGRD0522	121	126	5	1.09	5.44
26IGRD0522	146	148	2	1.90	3.79
26IGRD0522	171	175	4	1.11	4.44
26IGRD0522	182	183	1	0.62	0.62
26IGRD0522	193	196	3	1.94	5.82
26IGRD0523	31	33	2	1.03	2.06
26IGRD0523	36	37	1	0.72	0.72
26IGRD0523	38	60	22	1.19	26.08
26IGRD0523	63	73	10	3.00	30.03
26IGRD0523	81	84	3	6.79	20.36
26IGRD0523	87	89	2	0.70	1.40
26IGRD0523	119	120	1	1.89	1.89
26IGRD0523	142	156	14	1.83	25.61
26IGRD0523	160	165	5	0.75	3.77
26IGRD0524A	33	42	9	8.10	72.92

For personal use only

26IGRD0524A	49	50	1	0.92	0.92
26IGRD0524A	58	59	1	0.61	0.61
26IGRD0524A	66	67	1	0.53	0.53
26IGRD0524A	70	74	4	1.23	4.93
26IGRD0524A	154	155	1	1.07	1.07
26IGRD0524A	195	196	1	0.50	0.50
26IGRD0526	59	62	3	0.71	2.14
26IGRD0526	83	89	6	3.32	19.91
26IGRD0526	92	93	1	0.78	0.78
26IGRD0527	55	56	1	0.82	0.82
26IGRD0528	4	5	1	0.53	0.53
26IGRD0528	49	50	1	0.56	0.56
26IGRD0528	141	142	1	2.00	2.00
26IGRD0528	178	179	1	1.03	1.03
26IGRD0528	188	189	1	3.20	3.20
26IGRD0528	193	194	1	0.50	0.50
26IGRD0528	209	210	1	1.65	1.65
26IGRD0529	56	57	1	0.53	0.53
26IGRD0529	120	122	2	23.38	46.76
26IGRD0529	165	166	1	0.76	0.76
26IGRD0529	182	183	1	0.59	0.59
26IGRD0529	187	188	1	0.91	0.91
26IGRD0530	48	49	1	1.33	1.33
26IGRD0530	53	54	1	0.70	0.70
26IGRD0530	55	57	2	0.81	1.62
26IGRD0530	76	80	4	1.14	4.56
26IGRD0530	83	85	2	1.00	1.99
26IGRD0530	98	99	1	0.61	0.61
26IGRD0530	105	106	1	2.02	2.02
26IGRD0530	115	121	6	0.86	5.18
26IGRD0530	125	126	1	0.54	0.54
26IGRD0531	0	1	1	1.13	1.13
26IGRD0531	15	18	3	0.60	1.81
26IGRD0531	38	39	1	0.95	0.95
26IGRD0531	48	50	2	0.92	1.83
26IGRD0531	60	61	1	2.38	2.38
26IGRD0531	72	82	10	2.90	29.00
26IGRD0533	50	51	1	0.54	0.54
26IGRD0533	136	137	1	0.62	0.62
26IGRD0534	46	48	2	0.92	1.83
26IGRD0534	77	78	1	1.12	1.12
26IGRD0535	98	99	1	0.52	0.52
26IGRD0536	158	162	4	2.82	11.27
26IGRD0537	71	72	1	0.52	0.52

For personal use only

26IGRD0537	76	77	1	0.59	0.59
26IGRD0537	89	91	2	0.62	1.23
26IGRD0537	123	124	1	0.50	0.50
26IGRD0537	125	126	1	0.53	0.53
26IGRD0537	127	130	3	1.09	3.26
26IGRD0538	75	76	1	0.81	0.81
26IGRD0538	100	101	1	2.21	2.21
26IGRD0538	104	105	1	0.91	0.91
26IGRD0539	30	33	3	1.05	3.15
26IGRD0539	39	41	2	3.29	6.57
26IGRD0539	44	45	1	0.60	0.60
26IGRD0539	48	49	1	0.60	0.60
26IGRD0539	65	66	1	1.22	1.22
26IGRD0539	70	71	1	2.25	2.25
26IGRD0539	141	142	1	0.55	0.55
26IGRD0540	7	12	5	1.81	9.06
26IGRD0540	38	39	1	0.52	0.52
26IGRD0540	43	45	2	1.76	3.51
26IGRD0540	48	49	1	0.55	0.55
26IGRD0540	111	112	1	2.28	2.28
26IGRD0543	48	49	1	1.14	1.14
26IGRD0543	63	64	1	0.60	0.60
26IGRD0543	87	88	1	0.61	0.61
26IGRD0543	133	134	1	0.50	0.50
26IGRD0544	38	39	1	0.61	0.61
26IGRD0544	61	63	2	15.92	31.84
26IGRD0544	114	115	1	0.50	0.50
26IGRD0544	162	167	5	1.69	8.44
26IGRD0544	195	197	2	1.77	3.54
26IGRD0545	46	47	1	0.60	0.60
26IGRD0545	52	53	1	0.51	0.51
26IGRD0545	97	98	1	0.96	0.96
26IGRD0546	118	119	1	3.33	3.33
26IGRD0546	131	132	1	0.75	0.75
26IGRD0547	67	69	2	0.66	1.31
26IGRD0547	99	100	1	1.15	1.15
26IGRD0547	106	107	1	0.60	0.60
26IGRD0547	116	119	3	2.03	6.09
26IGRD0548	50	51	1	0.53	0.53
26IGRD0548	58	60	2	5.22	10.43
26IGRD0548	81	85	4	1.12	4.49
26IGRD0549	42	44	2	0.67	1.33
26IGRD0549	55	60	5	2.55	12.77
26IGRD0550	1	4	3	1.38	4.14

For personal use only

26IGRD0550	30	41	11	2.10	23.11
26IGRD0551	54	55	1	0.98	0.98
26IGRD0552	2	4	2	0.69	1.38
26IGRD0552	20	21	1	0.62	0.62
26IGRD0553	4	5	1	0.58	0.58
26IGRD0560	52	53	1	0.64	0.64
26IGRD0560	65	66	1	0.86	0.86
26IGRD0560	84	85	1	4.20	4.20
26IGRD0560	109	113	4	1.50	5.99
26IGRD0560	134	135	1	2.78	2.78
26IGRD0560	184	185	1	0.62	0.62
26IGRD0561	54	57	3	2.39	7.16
26IGRD0561	96	97	1	0.75	0.75
26IGRD0561	99	100	1	1.31	1.31
26IGRD0563	12	13	1	0.56	0.56
26IGRD0563	14	20	6	1.12	6.70
26IGRD0563	23	24	1	2.07	2.07
26IGRD0563	36	42	6	1.03	6.16
26IGRD0563	47	48	1	0.98	0.98
26IGRD0564	2	5	3	0.84	2.51
26IGRD0566	6	7	1	0.57	0.57
26IGRD0567	31	32	1	1.27	1.27
26IGRD0567	45	46	1	0.72	0.72
26IGRD0567	106	109	3	1.03	3.10
26IGRD0567	116	117	1	3.69	3.69
26IGRD0567	123	125	2	1.83	3.66
26IGRD0567	138	141	3	1.59	4.77
26IGRD0567	149	150	1	0.63	0.63
26IGRD0567	153	154	1	0.90	0.90
26IGRD0567	156	160	4	4.04	16.17
26IGRD0567	164	174	10	1.36	13.59
26IGRD0567	178	189	11	1.90	20.92
26IGRD0567	194	195	1	0.67	0.67
26IGRD0567	196	197	1	0.67	0.67
26IGRD0567	201	202	1	0.98	0.98
26IGRD0567	207	208	1	0.60	0.60
26IGRD0567	254	255	1	0.66	0.66
26IGRD0568	28	31	3	0.56	1.67
26IGRD0568	40	41	1	0.51	0.51
26IGRD0568	44	45	1	0.71	0.71
26IGRD0568	49	50	1	0.66	0.66
26IGRD0568	58	59	1	0.86	0.86
26IGRD0568	62	64	2	2.68	5.35
26IGRD0568	67	69	2	2.41	4.81

For personal use only

26IGRD0568	72	74	2	0.75	1.50
26IGRD0568	76	77	1	0.72	0.72
26IGRD0568	78	79	1	0.58	0.58
26IGRD0568	81	87	6	6.87	41.24
26IGRD0568	94	95	1	0.52	0.52
26IGRD0568	103	105	2	0.66	1.31
26IGRD0568	111	114	3	1.05	3.15
26IGRD0568	117	123	6	1.23	7.37
26IGRD0568	126	128	2	1.19	2.37
26IGRD0568	131	168	37	1.90	70.41
26IGRD0568	174	175	1	0.53	0.53
26IGRD0568	176	177	1	0.54	0.54
26IGRD0568	178	184	6	0.56	3.33
26IGRD0568	189	193	4	1.16	4.63
26IGRD0568	225	229	4	1.37	5.49
26IGRD0568	235	236	1	0.89	0.89
26IGRD0568	240	241	1	0.60	0.60
26IGRD0568	242	245	3	1.06	3.17
26IGRD0568	255	256	1	0.97	0.97
26IGRD0569	29	30	1	0.64	0.64
26IGRD0569	33	34	1	0.69	0.69
26IGRD0569	43	46	3	0.62	1.85
26IGRD0569	51	52	1	0.73	0.73
26IGRD0569	55	61	6	1.16	6.93
26IGRD0569	65	66	1	2.23	2.23
26IGRD0569	82	87	5	2.07	10.37
26IGRD0569	93	97	4	1.60	6.39
26IGRD0569	106	120	14	1.21	16.88
26IGRD0569	123	124	1	1.40	1.40
26IGRD0569	131	132	1	1.02	1.02
26IGRD0569	156	161	5	8.69	43.45
26IGRD0569	164	166	2	0.57	1.14
26IGRD0569	169	170	1	0.52	0.52
26IGRD0569	173	177	4	4.59	18.37
26IGRD0569	212	217	5	2.30	11.52
26IGRD0569	220	221	1	0.96	0.96
26IGRD0570	24	35	11	1.81	19.89
26IGRD0570	42	43	1	0.81	0.81
26IGRD0570	45	50	5	0.64	3.22
26IGRD0570	53	54	1	1.13	1.13
26IGRD0570	60	68	8	0.80	6.36
26IGRD0570	83	84	1	0.93	0.93
26IGRD0570	86	88	2	0.75	1.49
26IGRD0570	90	93	3	19.51	58.53

For personal use only

26IGRD0570	97	107	10	2.37	23.69
26IGRD0570	118	122	4	3.19	12.77
26IGRD0570	129	130	1	0.63	0.63
26IGRD0570	131	132	1	1.42	1.42
26IGRD0570	145	146	1	1.42	1.42
26IGRD0570	195	201	6	0.54	3.23
26IGRD0570	202	203	1	2.53	2.53
26IGRD0570	206	207	1	2.27	2.27
26IGRD0571	2	3	1	0.59	0.59
26IGRD0571	5	6	1	1.65	1.65
26IGRD0571	26	27	1	0.62	0.62
26IGRD0571	29	32	3	3.44	10.33
26IGRD0571	35	40	5	0.60	3.00
26IGRD0571	43	59	16	4.06	64.91
26IGRD0571	65	74	9	2.98	26.78
26IGRD0571	81	82	1	0.79	0.79
26IGRD0571	85	87	2	0.58	1.16
26IGRD0571	95	102	7	1.10	7.73
26IGRD0571	105	106	1	0.92	0.92
26IGRD0571	181	184	3	1.67	5.00
26IGRD0571	193	194	1	1.31	1.31
26IGRD0571	202	203	1	0.53	0.53
26IGRD0571	207	208	1	0.74	0.74
26IGRD0571	210	211	1	1.11	1.11
26IGRD0571	217	218	1	0.87	0.87
26IGRD0571	241	242	1	0.57	0.57
26IGRD0571B	30	37	7	0.67	4.69
26IGRD0571B	52	53	1	0.59	0.59
26IGRD0571B	68	69	1	0.63	0.63
26IGRD0571B	99	100	1	0.95	0.95
26IGRD0571B	119	121	2	0.82	1.64
26IGRD0571B	126	127	1	0.52	0.52
26IGRD0571B	131	136	5	2.13	10.65
26IGRD0572	3	4	1	0.88	0.88
26IGRD0572	23	24	1	0.60	0.60
26IGRD0572	30	31	1	0.51	0.51
26IGRD0572	37	38	1	0.80	0.80
26IGRD0572	39	51	12	1.18	14.15
26IGRD0572	56	57	1	1.07	1.07
26IGRD0572	63	68	5	0.90	4.51
26IGRD0572	75	82	7	0.69	4.83
26IGRD0572	100	101	1	0.95	0.95
26IGRD0572	144	150	6	1.17	7.03
26IGRD0572	153	154	1	1.97	1.97

For personal use only

26IGRD0572	157	158	1	0.58	0.58
26IGRD0572	160	164	4	0.77	3.07
26IGRD0572	170	171	1	1.02	1.02
26IGRD0572	191	192	1	0.75	0.75
26IGRD0573	24	31	7	3.39	23.76
26IGRD0573	36	45	9	0.59	5.32
26IGRD0573	51	54	3	0.78	2.35
26IGRD0573	68	76	8	0.70	5.60
26IGRD0573	129	141	12	1.18	14.16
26IGRD0573	144	145	1	0.60	0.60
26IGRD0573	150	156	6	1.61	9.65
26IGRD0573	165	166	1	0.69	0.69
26IGRD0573	167	169	2	0.64	1.28
26IGRD0574	3	4	1	1.66	1.66
26IGRD0574	19	20	1	0.50	0.50
26IGRD0574	26	27	1	0.81	0.81
26IGRD0574	39	44	5	0.71	3.57
26IGRD0574	47	48	1	2.52	2.52
26IGRD0574	90	91	1	0.73	0.73
26IGRD0574	94	96	2	0.94	1.88
26IGRD0574	101	110	9	0.89	8.02
26IGRD0574	115	116	1	0.52	0.52
26IGRD0574	123	130	7	1.34	9.36
26IGRD0575	55	57	2	0.53	1.06
26IGRD0575	88	89	1	0.88	0.88
26IGRD0575	114	122	8	0.55	4.39
26IGRD0575	131	137	6	2.57	15.43
26IGRD0575	143	147	4	1.46	5.85
26IGRD0575	155	156	1	0.86	0.86
26IGRD0575	162	166	4	0.83	3.30
26IGRD0575	174	175	1	0.52	0.52
26IGRD0575	176	180	4	1.05	4.18
26IGRD0575	183	186	3	4.97	14.92
26IGRD0575	189	191	2	0.87	1.73
26IGRD0575	197	198	1	0.85	0.85
26IGRD0575	208	210	2	1.08	2.16
26IGRD0576	56	57	1	0.70	0.70
26IGRD0576	69	70	1	1.24	1.24
26IGRD0576	78	85	7	2.64	18.49
26IGRD0576	88	89	1	0.81	0.81
26IGRD0576	90	98	8	4.40	35.17
26IGRD0576	111	113	2	1.38	2.75
26IGRD0576	119	120	1	1.04	1.04
26IGRD0576	140	143	3	0.96	2.89

For personal use only

26IGRD0576	146	164	18	2.16	38.93
26IGRD0576	167	173	6	1.31	7.86
26IGRD0576	185	189	4	0.67	2.67
26IGRD0577	29	34	5	11.28	56.40
26IGRD0577	37	40	3	0.61	1.82
26IGRD0577	47	71	24	1.94	46.57
26IGRD0577	80	81	1	0.87	0.87
26IGRD0577	92	94	2	1.76	3.52
26IGRD0577	99	100	1	0.74	0.74
26IGRD0577	103	114	11	2.14	23.52
26IGRD0577	121	123	2	0.79	1.57
26IGRD0577	135	140	5	1.16	5.78
26IGRD0577	215	216	1	0.51	0.51
26IGRD0577	217	222	5	2.66	13.31
26IGRD0578	5	6	1	0.50	0.50
26IGRD0578	20	42	22	2.37	52.04
26IGRD0578	45	48	3	1.36	4.09
26IGRD0578	57	60	3	1.44	4.33
26IGRD0578	77	78	1	1.02	1.02
26IGRD0578	83	89	6	1.69	10.13
26IGRD0578	92	96	4	1.46	5.83
26IGRD0578	100	102	2	1.08	2.15
26IGRD0578	105	115	10	0.70	6.95
26IGRD0578	118	122	4	1.31	5.24
26IGRD0578	127	129	2	1.26	2.52
26IGRD0578	134	135	1	0.68	0.68
26IGRD0578	139	140	1	1.34	1.34
26IGRD0578	145	146	1	0.77	0.77
26IGRD0578	163	164	1	1.06	1.06
26IGRD0578	212	213	1	0.52	0.52
26IGRD0578	216	217	1	2.18	2.18
26IGRD0579	2	4	2	0.73	1.46
26IGRD0579	16	17	1	0.60	0.60
26IGRD0579	19	20	1	0.57	0.57
26IGRD0579	26	27	1	0.59	0.59
26IGRD0579	32	41	9	0.87	7.80
26IGRD0579	50	51	1	1.62	1.62
26IGRD0579	55	64	9	0.76	6.86
26IGRD0579	76	85	9	0.64	5.80
26IGRD0579	88	89	1	0.65	0.65
26IGRD0579	95	96	1	0.75	0.75
26IGRD0579	102	106	4	1.22	4.87
26IGRD0579	110	115	5	1.14	5.70
26IGRD0579	118	119	1	0.82	0.82

For personal use only

26IGRD0580	19	20	1	0.79	0.79
26IGRD0580	28	43	15	1.08	16.15
26IGRD0580	46	56	10	0.71	7.14
26IGRD0580	59	60	1	0.88	0.88
26IGRD0580	62	63	1	0.70	0.70
26IGRD0580	73	76	3	0.79	2.36
26IGRD0580	80	81	1	0.59	0.59
26IGRD0580	87	88	1	0.56	0.56
26IGRD0580	152	153	1	0.52	0.52
26IGRD0580	161	162	1	1.46	1.46
26IGRD0580	165	167	2	0.63	1.25
26IGRD0580	170	172	2	0.89	1.78
26IGRD0580	176	180	4	0.62	2.47
26IGRD0581	25	34	9	3.09	27.83
26IGRD0581	38	40	2	1.44	2.88
26IGRD0581	46	47	1	0.68	0.68
26IGRD0581	48	54	6	1.73	10.39
26IGRD0581	59	63	4	0.56	2.25
26IGRD0581	64	66	2	0.59	1.17
26IGRD0581	70	71	1	1.59	1.59
26IGRD0581	129	130	1	4.13	4.13
26IGRD0581	134	135	1	0.79	0.79
26IGRD0581	136	137	1	0.84	0.84
26IGRD0581	143	149	6	1.29	7.75
26IGRD0581	159	160	1	0.99	0.99
26IGRD0582	22	42	20	0.98	19.58
26IGRD0582	110	128	18	1.77	31.90
26IGRD0582	131	136	5	0.56	2.78
26IGRD0583	53	54	1	0.55	0.55
26IGRD0583	95	110	15	1.35	20.23
26IGRD0584	56	57	1	1.89	1.89
26IGRD0584	70	71	1	1.08	1.08
26IGRD0584	75	80	5	3.71	18.55
26IGRD0584	84	89	5	1.12	5.62
26IGRD0584	92	93	1	1.13	1.13
26IGRD0585	34	35	1	1.05	1.05
26IGRD0585	37	62	25	0.54	13.40
26IGRD0585B	15	20	5	2.84	14.20
26IGRD0585B	34	35	1	1.41	1.41
26IGRD0585B	52	53	1	0.60	0.60
26IGRD0586	11	17	6	2.11	12.66
26IGRD0586	21	51	30	2.70	80.91
26IGRD0586	54	55	1	0.60	0.60
26IGRD0586	56	71	15	2.22	33.37

For personal use only

26IGRD0586	106	107	1	2.55	2.55
26IGRD0586	110	113	3	3.26	9.77
26IGRD0586	137	140	3	0.80	2.40
26IGRD0586	154	155	1	0.54	0.54
26IGRD0586	161	162	1	1.17	1.17
26IGRD0586	205	208	3	1.40	4.21
26IGRD0586	211	212	1	0.73	0.73
26IGRD0587	71	72	1	0.97	0.97
26IGRD0587	78	81	3	0.78	2.34
26IGRD0587	86	87	1	0.52	0.52
26IGRD0587	102	115	13	1.86	24.12
26IGRD0587	118	119	1	0.55	0.55
26IGRD0588	2	3	1	1.54	1.54
26IGRD0588	27	32	5	1.30	6.50
26IGRD0588	35	40	5	1.86	9.30
26IGRD0588	44	54	10	0.84	8.38
26IGRD0588	61	70	9	1.61	14.45
26IGRD0588	76	77	1	6.35	6.35
26IGRD0588	81	82	1	1.75	1.75
26IGRD0589	17	19	2	0.68	1.35
26IGRD0589	30	31	1	0.63	0.63
26IGRD0589	36	37	1	0.58	0.58
26IGRD0589	44	48	4	0.67	2.68
26IGRD0590	20	21	1	0.53	0.53
26IGRD0590	109	110	1	0.76	0.76
26IGRD0590	112	113	1	1.52	1.52
26IGRD0591	73	76	3	1.18	3.55
26IGRD0591	87	88	1	0.62	0.62
26IGRD0592	51	58	7	0.64	4.46
26IGRD0592	61	67	6	1.14	6.83
26IGRD0593	15	25	10	2.03	20.34
26IGRD0593	35	36	1	1.72	1.72
26IGRD0593	40	47	7	0.62	4.37
26IGRD0593	56	57	1	0.92	0.92
26IGRD0593	75	76	1	0.65	0.65
26IGRD0594	1	7	6	0.64	3.84
26IGRD0594	12	13	1	0.58	0.58
26IGRD0594	18	20	2	0.57	1.14
26IGRD0594	24	25	1	0.60	0.60
26IGRD0594	43	44	1	0.87	0.87
26IGRD0594	109	110	1	10.80	10.80
26IGRD0595	2	5	3	0.88	2.64
26IGRD0595	48	49	1	1.23	1.23
26IGRD0595	109	110	1	1.74	1.74

For personal use only

26IGRD0596	93	94	1	2.28	2.28
26IGRD0597	4	5	1	0.68	0.68
26IGRD0598	2	3	1	1.85	1.85
26IGRD0598	25	26	1	0.55	0.55
26IGRD0598	33	45	12	1.50	17.95
26IGRD0598	125	132	7	3.27	22.89
26IGRD0599	16	19	3	1.62	4.86

**Appendix 2: Collar Data for Drillholes Included in this ASX Release**

*All Holes located on Tenement M 16/262.*

*All Collar locations are from survey pickups, planned dip and azimuth is currently provided. All Collar Coordinates are provided as MGA95\_Zone 51.*

Hole No	Max Depth (m)	Grid ID	East	Northing	RL
26IGRD0073_RE	225	MGA94_51	275664	6624260	518
26IGRD0132	132	MGA94_51	275730	6624139	516
26IGRD0182	168	MGA94_51	275816	6624019	516
26IGRD0240	20	MGA94_51	275767	6624038	515
26IGRD0271	288	MGA94_51	275640	6624240	518
26IGRD0274	216	MGA94_51	275693	6624240	518
26IGRD0302	192	MGA94_51	275673	6624220	517
26IGRD0304	156	MGA94_51	275715	6624220	518
26IGRD0341	222	MGA94_51	275491	6624180	523
26IGRD0377	168	MGA94_51	275503	6624079	522
26IGRD0385	223	MGA94_51	275510	6624060	522
26IGRD0386	186	MGA94_51	275519	6624060	522
26IGRD0414	222	MGA94_51	276050	6623680	514
26IGRD0431	222	MGA94_51	276070	6623660	514
26IGRD0434	162	MGA94_51	275731	6623638	520
26IGRD0442	168	MGA94_51	275929	6623640	517
26IGRD0462	186	MGA94_51	275570	6623980	521
26IGRD0464	168	MGA94_51	275570	6623960	520
26IGRD0465	222	MGA94_51	275591	6623960	520
26IGRD0466	222	MGA94_51	275629	6623958	520
26IGRD0469	222	MGA94_51	275571	6623940	520
26IGRD0470	168	MGA94_51	275591	6623940	520
26IGRD0471	222	MGA94_51	275611	6623940	520
26IGRD0472	168	MGA94_51	275634	6623940	520
26IGRD0474	210	MGA94_51	275568	6623920	522
26IGRD0475	222	MGA94_51	275591	6623920	521
26IGRD0476	258	MGA94_51	275611	6623919	521
26IGRD0477	186	MGA94_51	275629	6623920	521

For personal use only

26IGRD0478	186	MGA94_51	275651	6623921	520
26IGRD0479	222	MGA94_51	275669	6623920	520
26IGRD0480	186	MGA94_51	275691	6623920	519
26IGRD0488A	32	MGA94_51	275629	6623879	521
26IGRD0488B	258	MGA94_51	275632	6623880	521
26IGRD0489	221	MGA94_51	275650	6623880	521
26IGRD0490	222	MGA94_51	275670	6623882	520
26IGRD0491	222	MGA94_51	275690	6623880	520
26IGRD0492	221	MGA94_51	275711	6623880	519
26IGRD0493	257	MGA94_51	275730	6623881	519
26IGRD0494	186	MGA94_51	275750	6623880	518
26IGRD0495A	221	MGA94_51	275771	6623880	518
26IGRD0498	138	MGA94_51	275850	6623880	514
26IGRD0504	222	MGA94_51	275640	6623860	520
26IGRD0505	258	MGA94_51	275660	6623860	520
26IGRD0506	222	MGA94_51	275680	6623859	520
26IGRD0507	222	MGA94_51	275700	6623859	520
26IGRD0508	222	MGA94_51	275718	6623860	519
26IGRD0509	258	MGA94_51	275750	6623856	519
26IGRD0510	222	MGA94_51	275770	6623855	518
26IGRD0511	186	MGA94_51	275781	6623861	517
26IGRD0512	186	MGA94_51	275800	6623860	515
26IGRD0513	168	MGA94_51	275820	6623860	514
26IGRD0514	168	MGA94_51	275840	6623860	514
26IGRD0514B	222	MGA94_51	275637	6623810	520
26IGRD0515	222	MGA94_51	275670	6623811	520
26IGRD0516	186	MGA94_51	275690	6623810	518
26IGRD0517	186	MGA94_51	275710	6623808	517
26IGRD0518	222	MGA94_51	275750	6623811	517
26IGRD0520	258	MGA94_51	275661	6623791	519
26IGRD0521	186	MGA94_51	275679	6623791	519
26IGRD0522	222	MGA94_51	275700	6623791	517
26IGRD0523	186	MGA94_51	275720	6623791	517
26IGRD0524	6	MGA94_51	275789	6623786	516
26IGRD0524A	222	MGA94_51	275789	6623787	516
26IGRD0526	138	MGA94_51	275661	6623760	520
26IGRD0527	138	MGA94_51	275677	6623762	519
26IGRD0528	222	MGA94_51	275701	6623760	519
26IGRD0529	222	MGA94_51	275741	6623760	518
26IGRD0530	137	MGA94_51	275781	6623758	517
26IGRD0531	186	MGA94_51	275800	6623758	517
26IGRD0533	137	MGA94_51	275700	6623740	519
26IGRD0534	138	MGA94_51	275720	6623740	518
26IGRD0535	138	MGA94_51	275740	6623740	518

For personal use only

26IGRD0536	222	MGA94_51	275760	6623740	518
26IGRD0537	137	MGA94_51	275779	6623739	518
26IGRD0538	138	MGA94_51	275801	6623740	517
26IGRD0539	222	MGA94_51	275821	6623740	517
26IGRD0540	138	MGA94_51	275839	6623741	517
26IGRD0543	137	MGA94_51	275720	6623720	519
26IGRD0544	222	MGA94_51	275741	6623720	519
26IGRD0545	138	MGA94_51	275761	6623721	518
26IGRD0546	138	MGA94_51	275780	6623720	518
26IGRD0547	222	MGA94_51	275799	6623721	517
26IGRD0548	135	MGA94_51	275820	6623720	517
26IGRD0549	138	MGA94_51	275840	6623719	517
26IGRD0550	222	MGA94_51	275857	6623719	516
26IGRD0551	138	MGA94_51	275881	6623720	516
26IGRD0552	138	MGA94_51	275900	6623718	515
26IGRD0553	215	MGA94_51	275920	6623720	515
26IGRD0560	222	MGA94_51	275798	6623699	518
26IGRD0561	131	MGA94_51	275818	6623700	517
26IGRD0563	222	MGA94_51	275858	6623700	517
26IGRD0564	132	MGA94_51	275879	6623700	516
26IGRD0565	132	MGA94_51	275900	6623700	516
26IGRD0566	222	MGA94_51	275919	6623700	516
26IGRD0567	256	MGA94_51	275651	6623840	520
26IGRD0568	256	MGA94_51	275670	6623840	520
26IGRD0569	222	MGA94_51	275690	6623839	520
26IGRD0570	222	MGA94_51	275711	6623839	519
26IGRD0571	258	MGA94_51	275732	6623840	519
26IGRD0571B	180	MGA94_51	275730	6623840	519
26IGRD0572	222	MGA94_51	275753	6623842	519
26IGRD0573	222	MGA94_51	275769	6623838	518
26IGRD0574	138	MGA94_51	275794	6623841	516
26IGRD0575	222	MGA94_51	275669	6623820	520
26IGRD0576	222	MGA94_51	275690	6623820	519
26IGRD0577	222	MGA94_51	275709	6623817	518
26IGRD0578	222	MGA94_51	275729	6623817	517
26IGRD0579	186	MGA94_51	275747	6623818	517
26IGRD0580	186	MGA94_51	275772	6623819	518
26IGRD0581	186	MGA94_51	275790	6623819	517
26IGRD0582	168	MGA94_51	275810	6623821	516
26IGRD0583	168	MGA94_51	275831	6623821	515
26IGRD0584	168	MGA94_51	275849	6623821	514
26IGRD0585	168	MGA94_51	275869	6623822	513
26IGRD0585B	256	MGA94_51	275879	6623822	513
26IGRD0586	223	MGA94_51	275745	6623800	516

For personal use only

26IGRD0587	186	MGA94_51	275768	6623799	516
26IGRD0588	138	MGA94_51	275789	6623799	517
26IGRD0589	138	MGA94_51	275810	6623799	517
26IGRD0590	138	MGA94_51	275831	6623799	516
26IGRD0591	139	MGA94_51	275850	6623800	515
26IGRD0592	138	MGA94_51	275872	6623800	514
26IGRD0593	138	MGA94_51	275811	6623780	517
26IGRD0594	138	MGA94_51	275830	6623781	517
26IGRD0595	222	MGA94_51	275849	6623781	516
26IGRD0596	138	MGA94_51	275874	6623780	516
26IGRD0597	138	MGA94_51	275891	6623778	515
26IGRD0598	138	MGA94_51	275830	6623760	517
26IGRD0599	138	MGA94_51	275850	6623761	516

For personal use only

**Appendix 3: JORC Tables.**
**Section 1: Sampling Techniques and Data**

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
<b>Sampling techniques</b>	<p><i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representativity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>Aberfoyle:</p> <ul style="list-style-type: none"> <li>Reverse circulation (RC), rotary air blast (RAB) and aircore (AC) drilling with 1 m sampling from cyclone (BDRB prefix holes RAB drilling with 2 m sampling). Samples sent to accredited laboratories for drying, crushing and pulverising. Composite samples assayed by aqua regia/atomic absorption spectroscopy (AAS) (except in areas of elevated graphite – fire assay (FA) and those returning greater than 0.2–0.3 g/t were re-assayed as individual metres by FA to ALS Kalgoorlie for 50 g charge FA with 0.01 ppm detection limit. HQ triple diamond (DD) drilling was halved, 50 g charge FA with 0.01 ppm detection limit.</li> </ul> <p>EGL:</p> <ul style="list-style-type: none"> <li>RC samples collected from the riffle or cone splitter directly off rig into calico bags. Splitter maintained on level site to ensure sample representativity. 1 m samples are dried, crushed, pulverised and a 40 g charge is analysed by FA.</li> </ul> <p>Roper River Resources:</p> <ul style="list-style-type: none"> <li>RAB 1 m sampling with blade or hammer. Dried, crushed and pulverised samples analysed by aqua regia/AAS finish with 25 g charge.</li> </ul> <p>Monarch:</p> <ul style="list-style-type: none"> <li>AC, RAB and RC drilling on 1 m sampling basis with RAB samples being composited to 4 m for initial analysis by aqua regia/AAS. Individual AC and RC metres collected from cyclone, riffle split and submitted for aqua regia/AAS and FA/AAS respectively.</li> </ul> <p>Siberia Mining Corporation (SMC):</p> <ul style="list-style-type: none"> <li>1 m sampling of AC, RAB and RC drilling composites and individual re-assays dispatched for FA.</li> </ul> <p>Perilya:</p> <ul style="list-style-type: none"> <li>5 m composite RAB and AC assayed at Analabs Perth by method P649, 50 g aqua regia, DIBK, Carbon Rod.</li> </ul> <p>Croesus:</p>

Personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<ul style="list-style-type: none"> <li>RC 1 m samples collected under cyclone. RAB drilling on a 1 m basis. 3.5 kg samples were pulverised to make 50 g charge for analysis by FA/inductively coupled plasma-optical spectrometry (ICP-OS).</li> </ul> <p>Delta:</p> <ul style="list-style-type: none"> <li>1 m sampling of AC, RAB and RC. 5 m composites submitted to Genalysis and/or ALS laboratories Kalgoorlie for preparation, followed by aqua regia with 50 g charge with 0.01 ppm detection limit. Composite assays returning values <math>\geq</math> 0.1 ppm Au, corresponding single metre samples were collected and submitted.</li> </ul> <p>Ora Banda Mining Ltd (OBM):</p> <ul style="list-style-type: none"> <li>1 m RC samples using face sampling hammer with samples collected under cone splitter.</li> <li>4 m composite RC samples collected using a PVC spear from the sample piles at the drill site. For drilling up to April 2020, RC samples were submitted for pulverising and 50 g charge FA. 4 m composite samples with gold values greater than 0.2 g/t Au were re-sampled as 1 m split samples and submitted to the lab for further analysis. Half-core samples, cut by automated core saw. Core sample intervals selected by geologist and defined by geological boundaries. Samples are crushed, pulverised and a 40 g charge is analysed by FA.</li> <li>A total of 56 holes were drilled by OBM, including three RCDD holes and 53 RC holes.</li> </ul> <p>The information presented above is derived from OBM's JORC table for its 2022 Iguana MRE.</p> <p>Beacon Minerals</p> <ul style="list-style-type: none"> <li>1m RC samples using face hammer with samples collected under cone splitter.</li> <li>4m composite AC samples collected via scoop on sample piles. 4 m composite samples with gold values greater than 0.2 g/t Au were re-sampled as 1 m split samples and submitted to the lab for further analysis.</li> <li>DD logged and full hole sampled utilising geology defined sample intervals. Core was halved or quartered depending on use and dispatched to the BV Cunningham facility.</li> </ul>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
<b>Drilling techniques</b>	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<ul style="list-style-type: none"> <li>• All Assays conducted for Beacon Minerals were performed by BV Cunninham. Samples are crushed, pulverised and a 40 g charge is analysed by FA.</li> </ul> <p>Aberfoyle:</p> <ul style="list-style-type: none"> <li>• No details for early RAB drilling. Later drilling involved RAB drilling using 4–4.25-inch blade or hammer to blade refusal.</li> <li>• AC using 3.5-inch blade.</li> <li>• RC 5.25–5.5-inch diameter face sampling hammer.</li> </ul> <p>Croesus:</p> <ul style="list-style-type: none"> <li>• Undocumented details. Presumably industry standard at the time being 5.5-inch face sampling hammers for RC and 4-inch diameter RAB holes.</li> </ul> <p>Delta:</p> <ul style="list-style-type: none"> <li>• RC 5.5-inch face sampling hammers. At times, a stepped AC bit was used to drill through sand at beginning of hole which changed to face-sampling hammer when laterite encountered.</li> <li>• HQ triple twin DD holes at Lizard. LZD1-3 was oriented.</li> </ul> <p>EGL:</p> <ul style="list-style-type: none"> <li>• RC 5.25-inch diameter.</li> </ul> <p>Roper River Resources:</p> <ul style="list-style-type: none"> <li>• RAB with blade and/or hammer bit.</li> <li>• RC drilling with 5.25-inch diameter face sampling hammer.</li> </ul> <p>Monarch:</p> <ul style="list-style-type: none"> <li>• RC drilling 5.5-inch diameter with face sampling hammer.</li> <li>• RAB 4-inch diameter blade with occasional hammer bit usage.</li> <li>• AC details undocumented.</li> </ul> <p>SMC:</p> <ul style="list-style-type: none"> <li>• AC, RAB, RC details undocumented. Presumably industry standard at the time being 5.5-inch face sampling hammers for RC and 4-inch diameter RAB holes.</li> </ul>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<p>OBM:</p> <ul style="list-style-type: none"> <li>• 5.25–5.5-inch diameter RC holes using face sampling hammer with samples collected under cone splitter. HQ and HQ3 coring to approx. 40 m, then NQ2 to bottom of hole.</li> <li>• Metallurgical and geotechnical core holes drilled using HQ3 exclusively.</li> <li>• All core oriented by reflex instrument.</li> </ul> <p>The information presented above is derived from OBM's JORC table for its 2022 Iguana MRE.</p> <p>Beacon Minerals:</p> <ul style="list-style-type: none"> <li>• RC drilling conducted by 115mm Hammer face bit.</li> <li>• AC drilling conducted utilising both Blade and Hammer methods, varying in bit size due to ground conditions</li> <li>• DD drilling was conducted in PQ3 or HQ3. Two holes were collared in PQ3 before casing off at approx. 70m depth to HQ3. Remaining holes were drilled HQ3 from collar.</li> </ul>
<b>Drill sample recovery</b>	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p>Delta:</p> <ul style="list-style-type: none"> <li>• Recoveries for resource RC drilling made as a subjective estimate. Recoveries in resource drilling were generally in excess of 70% (Iguana laterite), 60% (Lizard). Poor recoveries occurred outside mineralised zones.</li> </ul> <p>OBM:</p> <ul style="list-style-type: none"> <li>• DD drill recoveries are recorded as a percentage calculated from measured core against downhole drilled intervals (core blocks).</li> <li>• RC samples are weighed at the laboratory to monitor recoveries.</li> </ul> <p>Other operators have not captured recovery data.</p> <p>There is no known relationship between sample recovery and grade.</p> <p>The information presented above is derived from OBM's JORC table for its 2022 Iguana MRE.</p> <p>Beacon Minerals:</p> <ul style="list-style-type: none"> <li>• DD drill recoveries were recorded in logging and sampling processes, with noted core loss existing in upper weathering profiles</li> </ul>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<ul style="list-style-type: none"> <li>RC sample had recoveries recorded by percentage of material, significant material loss was present near surface due to unconsolidated sands</li> <li>AC sample had recoveries recorded in percentage, material retention was good to excellent from surface.</li> </ul>
<b>Logging</b>	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>Aberfoyle:</p> <ul style="list-style-type: none"> <li>Logging on 1 m basis.</li> <li>Qualitative – lithology, oxidation, grain size.</li> <li>Quantitative – quartz.</li> </ul> <p>Croesus:</p> <ul style="list-style-type: none"> <li>Qualitative – lithology, colour, grain size, alteration, oxidation, texture, structures, regolith.</li> <li>Quantitative – estimates are made of quartz veining.</li> </ul> <p>Delta:</p> <ul style="list-style-type: none"> <li>Qualitative – lithology, colour, oxidation, structure, texture, alteration.</li> <li>Quantitative – estimates are made of quartz veining and minerals.</li> </ul> <p>EGL:</p> <ul style="list-style-type: none"> <li>Qualitative – alteration, colour, grain size, lithology, oxidation, mineralogy, structure, texture, vein style, vein assemblage, remarks.</li> <li>Quantitative – mineralisation intensity, vein percent.</li> </ul> <p>Roper River Resources:</p> <ul style="list-style-type: none"> <li>Qualitative – colour, lithology, oxidation, BOCO, texture, alteration, minerals, sulphides.</li> <li>Quantitative – quartz.</li> </ul> <p>Monarch:</p> <ul style="list-style-type: none"> <li>Qualitative – lithology, colour, oxidation, grain size, texture, structure, hardness, regolith.</li> <li>Quantitative – estimates are made of quartz veining, sulphide percentages.</li> </ul> <p>SMC:</p> <ul style="list-style-type: none"> <li>Qualitative – lithology, colour, oxidation, alteration.</li> <li>Quantitative – estimates are made of quartz veining.</li> </ul>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<p>OBM:</p> <ul style="list-style-type: none"> <li>Field logging was conducted using Geobank Mobile™ software on Panasonic Toughbook CF-31 ruggedised laptop computers.</li> <li>Qualitative logging – lithology, colour, oxidation, grain size, texture, structure, hardness, regolith.</li> <li>Quantitative – estimates are made of quartz veining, sulphide and alteration percentages. Core photographed both wet and dry.</li> <li>Magnetic susceptibility and rock quality designation (RQD) were also recorded for core holes.</li> </ul> <p>All holes were geologically logged in their entirety to a level of detail to support Mineral Resource estimation.</p> <p>The information presented above is derived from OBM's JORC table for its 2022 Iguana MRE.</p> <p>Beacon Minerals:</p> <ul style="list-style-type: none"> <li>Diamond Drilling- Logging was completed by competent contractors utilising Beacon logging template. Sampling was then conducted off the logging intervals.</li> <li>Reverse Circulation/ Air Core- Logging was conducted using chip samples, prepared by conducting both dry and wet sieves. Logging was done in accordance with the Beacon Logging code.</li> </ul>
<b>Subsampling techniques and sample preparation</b>	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all subsampling stages to maximise representativity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i></p>	<p>Aberfoyle:</p> <ul style="list-style-type: none"> <li>Early (~1990) drilling – 2 m samples composited to 6m by undocumented method. Results returning &gt;0.2 g/t re-sampled on a 2 m basis.</li> <li>Subsequent drilling – RAB/AC 2 m surface composites and 4 m composite thereafter. RC 1 m samples riffle split and composited to 4 m samples. Composite assays returning greater than 0.2 g/t re-sampled on a metre basis.</li> </ul> <p>Croesus:</p> <ul style="list-style-type: none"> <li>RAB drill samples were collected in buckets below a freestanding cyclone and laid out at 1 m intervals in rows of ten metres adjacent to the drill collar.</li> </ul>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
	<p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<ul style="list-style-type: none"> <li>• Composite analytical samples (~3.5 kg) were initially collected over 5 m intervals for each hole and a 1 m bottom of hole analytical sample. Analytical composite samples were collected by taking a representative scoop through each 1 m drill sample. Composite assays returning greater than 100 ppb Au were resampled on an individual basis by an undocumented method.</li> <li>• RC drill samples were riffle split at 1 m intervals off the rig into calico bags whilst excess material was placed on the ground in 1 m piles for logging. The analytical samples were dried, crushed and split to obtain a sample less than 3.5 kg, and then fine pulverised prior to a 50 g sample being taken for analysis.</li> </ul> <p>Delta:</p> <ul style="list-style-type: none"> <li>• RC: Samples collected on 1 m intervals via a cyclone into green plastic bags. Each bag was riffle split if dry to a 2–3 kg sample and retained on site. A PVC spear sample was taken from residues to create a 5 m composite. If composites returned values <math>\geq 0.1</math> g/t, geologically interesting or had elevated arsenic levels, the original 1 m splits were collected and submitted. Original wet samples were split at this stage using wet triple riffle splitter, washed between samples. Wet samples were rare and usually outside of main mineralisation.</li> <li>• RAB: Typically 1 m samples were composited to 5 m (occasionally 10 m) by PVC spear. Significant assay results were re-submitted on a single metre basis.</li> <li>• DD: Core was halved. Sample length typically 1 m.</li> </ul> <p>EGL:</p> <ul style="list-style-type: none"> <li>• RC samples riffle split into calico bags. Wet or moist samples are noted during sampling. Core was cut with diamond saw and half core sampled. All mineralised zones are sampled, including portions of visibly unmineralised hangingwall and footwall zones. Sample weights range from &gt;1.0 kg to 3.5 kg. Samples weighed by laboratory, dried and split to &lt;3 kg if necessary and pulverised by LM-5. Field duplicates, blanks and standards were submitted for QAQC analysis.</li> </ul> <p>Roper River Resources:</p> <ul style="list-style-type: none"> <li>• RAB and RC holes were composited to 6 m and 4 m respectively with anomalous zones of nickel or gold being resubmitted on a metre basis.</li> </ul>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<p>Monarch:</p> <ul style="list-style-type: none"> <li>• RAB: 2 – 4 m composites scoop sampled.</li> <li>• AC and RC 1 m splits via riffle splitter.</li> <li>• RAB samples were composited to 4 m by scoop for initial analysis. Samples were riffle split and prepared with single stage mix and grinding.</li> </ul> <p>SMC:</p> <ul style="list-style-type: none"> <li>• RAB samples were collected at 1 m intervals from the drillhole collar using a plastic bucket and laid on the ground. A scoop sample was taken from each sample to form 4 m or 5 m composite.</li> <li>• AC: Predominantly 4 m composite samples. Methods unknown.</li> <li>• RAB samples were collected at 1 m intervals from the drillhole collar using a plastic bucket and laid on the ground. A scoop sample was taken from each sample to form a 5 m composite.</li> <li>• AC: Predominantly 4 m composite samples.</li> <li>• RAB: Predominantly 5 m composite samples.</li> </ul> <p>OBM:</p> <ul style="list-style-type: none"> <li>• RC samples were submitted either as individual 1 m samples taken onsite from cone splitter or as 4 m composite samples speared from the onsite drill sample piles. Half-core samples, cut by saw. Core sample intervals selected by geologist and defined by geological boundaries.</li> <li>• For drilling up to April 2020, RC samples were dried, crushed, split, pulverised and a 50 g charge taken. 4 m composite samples with gold values greater than 0.2 g/t Au were re-sampled as 1 m split samples and submitted to the lab for further analysis.</li> <li>• Field duplicates, blanks and standards were submitted for quality assurance and quality control (QAQC) analysis. Repeat assays were undertaken on pulp samples at the discretion of the laboratory.</li> </ul> <p>The information presented above is derived from OBM’s JORC table for its 2022 Iguana MRE.</p> <p>Beacon Minerals:</p>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<ul style="list-style-type: none"> <li>RC/AC samples were submitted either as individual 1 m samples taken onsite from cone splitter or as 4 m composite samples scooped from the onsite drill sample piles. Any 4m composites which exceeded 0.3g/t or where otherwise noted as anomalous were selected for re-sample and had 1m sample bags dispatched to the lab with these results over-writing the prior composite results</li> <li>DD drill were half-core samples, cut by saw. Core sample intervals selected by geologist and defined by geological boundaries.</li> </ul> <p>Field duplicates, blanks and standards were submitted for quality assurance and quality control (QAQC) analysis. Repeat assays were undertaken on pulp samples at the discretion of the laboratory.</p>
<b>Quality of assay data and laboratory tests</b>	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<p>Aberfoyle:</p> <ul style="list-style-type: none"> <li>RC/RAB: composites assayed by aqua regia AAS. Composites returning &gt;0.2–0.3g/t Au re-submitted as 1 m samples by 50 g charge FA.</li> <li>AC: Composites by 50 g charge FA. Composites returning &gt;0.2–0.3g/t Au re-submitted as 1 m samples for FA again.</li> <li>In areas of elevated graphite (Burke Dam), RC composites were assayed by 50 g FA. Assayed at Genalysis.</li> </ul> <p>Croesus:</p> <ul style="list-style-type: none"> <li>50 g charge analysed for gold (FA/ICP-Os) by Analabs Kalgoorlie for RC and Ultratrace Perth for RAB. Lab repeats at discretion of laboratory.</li> </ul> <p>Delta:</p> <ul style="list-style-type: none"> <li>RC and RAB: 5 m composites dispatched to Genalysis and/or ALS laboratories Kalgoorlie for aqua regia with 50 g charge with 0.01 ppm detection limit. Composite assays returning values <math>\geq 0.1</math> ppm Au, corresponding single metre samples were collected and despatched to ALS Kalgoorlie for 50 g charge FA with 0.01 ppm detection limit. Core despatched to Genalysis Kalgoorlie for 50 g charge FA with 0.01ppm detection limit. Standards of an undocumented provenance and locally (uncertified) sourced blanks inserted but frequency undocumented. One in 20 pulp duplicate frequency. Blind pulp re-assays performed.</li> </ul> <p>EGL:</p>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<ul style="list-style-type: none"> <li>• Samples were sent to Kalgoorlie Assay Laboratories to be analysed for gold by 40 g FA. Samples were also analysed at Genalysis. Certified reference material (CRM) standards were submitted. Field duplicate samples taken at rate of 1:40.</li> </ul> <p>Roper River Resources:</p> <ul style="list-style-type: none"> <li>• 25 g sample by aqua regia/AAS finish at MiniLab Kalgoorlie. Lab repeats at discretion of laboratory.</li> </ul> <p>Monarch:</p> <ul style="list-style-type: none"> <li>• RAB and AC: Assayed by aqua regia/AAS with 10 ppb detection limit.</li> <li>• RC: 50 g charge FA/AAS at SGS Kalgoorlie.</li> </ul> <p>SMC:</p> <ul style="list-style-type: none"> <li>• FA, undocumented charge and laboratory.</li> </ul> <p>OBM:</p> <ul style="list-style-type: none"> <li>• Up to April 2020, all samples were sent to an accredited laboratory (Nagrom Laboratories in Perth, Intertek-Genalysis in Kalgoorlie or SGS in Kalgoorlie). The samples have been analysed by firing a 50 g portion of the sample. This is the classical fire assay process and will give total separation of gold. An ICP-OES finish is used. Commercially prepared standard samples and blanks are inserted in the sample stream at a rate of 1:12. Sizing results (percentage of pulverised sample passing a 75 µm mesh) are undertaken on approximately 1 in 40 samples. The accuracy (standards) and precision (repeats) of assaying are acceptable. Standards and blanks were inserted into the sample stream at a rate of approximately 1:12. Duplicates were submitted at a rate of approximately 1:30.</li> <li>• Fire assay is considered a total technique, aqua regia is considered partial.</li> </ul> <p>Beacon Minerals:</p> <ul style="list-style-type: none"> <li>• All assay work was conducted by BV Cunningham utilising FA/AAS analysis with 40g charge. Beacon Minerals submitted QA/QC samples every 20 samples utilising multiple different CRM providers.</li> </ul>
<b>Verification of sampling and assaying</b>	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p>	<p>Holes are not deliberately twinned in Iguana area.</p> <p>Monarch:</p>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
	<p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p>	<ul style="list-style-type: none"> <li>Geological and sample data was logged digitally and .csv or .xls files imported into Datashed SQL database with in-built validation. Samples bags were placed into numbered plastic bags and then cable tied. Samples collected daily from site by laboratory.</li> </ul> <p>EGL:</p> <ul style="list-style-type: none"> <li>Geological and sample data logged directly into field computer at the core yard using Field Marshall. Data is transferred to Perth via email and imported into Geobank SQL database by the database administrator (DBA). Assay files are received in .csv format and loaded directly into the database by the DBA. Hardcopy and/or digital copies of data are kept for reference if necessary.</li> </ul> <p>OBM:</p> <ul style="list-style-type: none"> <li>Geological and sample data logged directly into field computer at the drill rig or core yard using Field Marshall or Geobank Mobile. Data is transferred to Perth via email and imported into Geobank SQL database by the DBA. Assay files are received in .csv format and loaded directly into the database by the DBA. Hardcopy and/or digital copies of data are kept for reference if necessary.</li> </ul> <p>Data entry, verification and storage protocols for remaining operators is unknown.</p> <p>The information presented above is derived from OBM's JORC table for its 2022 Iguana MRE.</p> <p>Beacon Minerals:</p> <ul style="list-style-type: none"> <li>Geological and sampling data was entered directly into a formatted excel file in the field which was then verified. Data was then formatted and imported into a secured on-site database by a suitably qualified database geologist</li> </ul>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
<b>Location of data points</b>	<p><i>Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<p>Aberfoyle:</p> <ul style="list-style-type: none"> <li>All drilling not surveyed. Collars located on AMG Zone 51 Grid utilised.</li> </ul> <p>Croesus:</p> <ul style="list-style-type: none"> <li>TGRC holes were collar surveyed in AMG Zone 51 Grid. No downhole surveys.</li> </ul> <p>Delta:</p> <ul style="list-style-type: none"> <li>All drillholes used for resource definition surveyed by Minecomp. All post-1993 RC and DD holes downhole surveyed using EMS or Eastman single shot where possible. Where not possible, data from proximal holes was used. LAD and LZC, LZD, LAC, and selected G prefixed holes downhole surveyed by undocumented method approximately every 10 m. Many RAB holes appear to be collar surveyed.</li> <li>AMG Zone 51 Grid utilised except for holes in the Nyborgs region where a local grid (Lady Ida) was utilised.</li> </ul> <p>EGL:</p> <ul style="list-style-type: none"> <li>Collars were surveyed by differential global positioning system (GPS) in MGA Zone 51. No downhole surveying performed.</li> </ul> <p>Roper River Resources:</p> <ul style="list-style-type: none"> <li>No surveys post drilling. AMG Zone 51 Grid utilised.</li> </ul> <p>Monarch:</p> <ul style="list-style-type: none"> <li>RC and some AC collars surveyed by differential GPS. All remaining holes surveyed by GPS. MGA Zone 51 Grid utilised. IGRC holes were downhole surveyed by EMS every 5 m. RC drilling was surveyed by Electronic Multi-shot on selected holes.</li> </ul> <p>SMC:</p> <ul style="list-style-type: none"> <li>No evidence of post drilling surveys, MGA Zone 51 Grid utilised.</li> </ul> <p>OBM:</p> <ul style="list-style-type: none"> <li>(RC, DD) MGA94, Zone 51. Drillhole collar positions were picked up by a contract surveyor using RTK GPS subsequent to drilling.</li> <li>Drillhole, downhole surveys are recorded every 30 m using a reflex digital downhole camera. Some RC holes not surveyed if holes short and/or drilling an early-stage exploration project. DD drillholes completed in 2019 and 2020 by OBM were surveyed using a Gyro tool.</li> </ul>

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<p>The information presented above is derived from OBM's JORC table for its 2022 Iguana MRE.</p> <p>Beacon Minerals:</p> <ul style="list-style-type: none"> <li>• Collars were picked up by a qualified surveyor in MGA94 Z 51 format utilising a RTK GPS and appropriately set control. Locations were also cross checked with hand held GPS.</li> <li>• DD Holes were surveyed using a Reflex Continuous Gyro system.</li> <li>• RC Holes were surveyed at EOH depth only, with a partial portion of the program surveyed 6m (1 rod) from EOH to avoid loss of instrument or hole collapse.</li> </ul>
<b>Data spacing and distribution</b>	<p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p><i>Whether sample compositing has been applied.</i></p>	<ul style="list-style-type: none"> <li>• Exploration results are reported for single holes only.</li> <li>• Data spacing highly variable from wide spaced ~800 m x ~80 m regional RAB to close spaced resource drilling ~10 m x ~10 m and grade control drilling at ~5 m x ~5 m.</li> <li>• Drillhole spacing is adequate to establish geological and grade continuity for the Iguana deposit.</li> <li>• Drill composites have been length weighted, 0.5 g/t lower cut-off, not top cut, maximum 3 m internal dilution.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<ul style="list-style-type: none"> <li>• Deposits in the Lady Ida area are generally oriented on northwest trends. Once the orientation of mineralisation was established, drilling was mostly oriented towards 90° with Iguana grade control oriented towards 45°.</li> <li>• Drilling of laterite mineralisation is almost exclusively vertical in nature.</li> </ul> <p>The Iguana Deposit presents multiple orientations of mineralisation which include both near vertical sets and shallow dipping mineralisation zones.</p>

personal use only

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		<ul style="list-style-type: none"> <li>• Drilling in the Iguana region has primarily been focused on -60° dipping holes, either East or West orientated. Recent drilling by Beacon Minerals replicated prior RC drilling orientations in the region.</li> <li>• The narrowest orientation of the orezone is its east-west extents. In addition though many different mineralised orientations are present, they are predominantly steep in angle facilitating east and west orientation drilling being the most suitable approach for mineralisation defining.</li> </ul>
<b>Sample security</b>	<i>The measures taken to ensure sample security.</i>	Unknown for all drilling except for the following: <ul style="list-style-type: none"> <li>• Monarch: Sample calicos were placed into numbered plastic bags and cable tied. Any samples going to SGS were collected daily by the lab. Samples sent to ALS were placed into sample crates and sent via courier on a weekly basis.</li> <li>• EGL: Samples were bagged, tied and in a secure yard. Once submitted to the laboratories they are stored in cages within a secure fenced compound. Samples are tracked through the laboratory via their LIMS.</li> <li>• OBM: Samples were bagged, tied and stored in a secure yard on site. Once submitted to the laboratories they were stored in cages within a secure fenced compound. Samples are tracked through the laboratory via their LIMS.</li> <li>• Beacon Minerals: Samples were collected from the field and immediately recorded, and dispatched to BV Cunningham utilising Beacon employees or appropriately qualified contractors</li> </ul>
<b>Audits or reviews</b>	<i>The results of any audits or reviews of sampling techniques and data.</i>	OBM has reviewed historical digital data, particularly from the Iguana deposit, and compared it to hardcopy and digital (including WAMEX) records.

personal use only

**Section 2: Reporting of Exploration Results**

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<p>The Lady Ida Project consist of M16/262 (the Iguana Deposit is located on M16/262), M16/263, M16/264, L15/224, L16/58, L16/62, L16/103, L16/138 and application L16/142 which is the ground the subject of the Earn-In, JV and Tenement Transfer Agreement between the Company, Beacon Mining Pty Ltd, Lamerton Pty Ltd and Geoda Pty Ltd.</p>
<b>Exploration done by other parties</b>	<p><i>Acknowledgment and appraisal of exploration by other parties.</i></p>	<p>Drilling, sampling and assay procedures and methods as stated in the database and confirmed from WAMEX reports and hardcopy records are considered acceptable and to industry standards of the time. There is sufficient understanding of drilling, sampling and assay methodologies for the majority of drilling in the Lady Ida area. BCN is confident that previous operators completed work to standards considered acceptable for the time.</p>
<b>Geology</b>	<p><i>Deposit type, geological setting and style of mineralisation.</i></p>	<p>The project is located along the inferred trace of the Ida Fault, a north-south trending deep-seated crustal structure juxtaposing batholithic granites and subordinate basalt and banded iron formation of the Southern Cross Province against greenstones of the Eastern Goldfields Province.</p> <p>The Eastern Goldfields Province sequences are metamorphosed to amphibolite facies and dominated by tholeiitic to komatiitic basalts, tremolite-chlorite rich ultramafics and psammitic to pelitic sediments. The regional stratigraphy trends north-northwest, sub-parallel to the Ida Fault, and the regional dip is sub-vertical. The structural complexity of the area, including inferred thrusts, fault splays and crosscutting shears, presents good potential for additional trap sites.</p> <p>The resource at Iguana is dominantly hosted in a highly sheared, silica-muscovite-carbonate altered, tholeiitic metabasalt and sediments of lower to mid amphibolite facies. It is interpreted as being controlled by imbricate thrusts contained between two north-south trending faults. Ultramafic units lie to the west and the mafic-sedimentary package lies to the east. Post-mineralisation pegmatite dykes attain considerable thickness in places and stope out mineralisation.</p>
<b>Drillhole information</b>	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i></p> <ul style="list-style-type: none"> <li><i>easting and northing of the drillhole collar</i></li> <li><i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar</i></li> </ul>	<p>Refer to the collar information provided in this report for all Released RC Holes</p>

personal use only

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>dip and azimuth of the hole</li> <li>downhole length and interception depth</li> <li>hole length.</li> </ul>	
<b>Data aggregation methods</b>	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <p><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	<p>Mineral intercepts are reported as raw, with no top cutting conducted.</p> <p>Mineral intercepts reported have an Au value greater than 0.5g/t. Internal dilution is restricted to 3m or less within intercept intervals.</p> <p>Metal equivalent calculations are not required as the Iguana project is gold only</p>
<b>Relationship between mineralisation widths and intercept lengths</b>	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'downhole length, true width not known').</i></p>	<p>Mineral intercepts have been recorded as downhole widths. The multiple different orientations of mineralisation present, with not all visually identifiable means an accurate true width is not possible.</p>
<b>Diagrams</b>	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.</i></p>	<p>See plan and cross-section views provided in this report.</p>
<b>Balanced reporting</b>	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<p>Beacon Minerals is reporting only significant intercepts as prior outlined (greater than 0.5g/t zone, with less than 3m of internal dilution). All drillhole zones not tabularised in this report can be interpreted as being insignificant in relation to Au grades.</p>
<b>Other substantive exploration data</b>	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<p>Iguana has no known reported metallurgical issues. Primary ore was previously mined by Delta in the early 2000s with ore treated at the Greenfields processing plant in Coolgardie. Recovery and reconciliation figures are unknown.</p>
<b>Further work</b>	<p><i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p>	<p>Further resource work is ongoing, with new data currently being incorporated into an updated resource model.</p>

Criteria	JORC Code explanation	Commentary
	<i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	

personal use only