



GOLDEN
DRAGON
MINING

Date: 24/06/2026

Further High-Grade Gold at Behring Bore Confirms Expanding Gold System

Golden Dragon Mining Ltd ('Golden Dragon' or 'Company') is pleased to announce that the **second phase** of Reverse Circulation (RC) drilling has intersected **further high-grade gold close to surface** at the Behring Bore Prospect, one of the Company's advanced gold Prospects within the Cue Gold Project in the Murchison Goldfields of Western Australia.

Highlights:

- Gold mineralisation is hosted within the **upper portion of an altered, pyritic dolerite**, with mineralisation remaining **open to the north, south and east**
- Behring Bore represents a **large-scale gold target** with discrete high-grade lode-style mineralisation within a broader system, including **northeast-trending quartz lodes**
- A **high-grade** northeast trending **quartz lode** has been intersected:
4m @ 5.3 g/t Au from 44m (26BB041) within 20m @ 1.57 g/t Au
- Multiple holes intersected gold mineralisation within the **upper portion of an altered, pyritic dolerite**, including:
12m @ 1.07 g/t Au from 80m, including 4m @ 2.13 g/t Au (26BB044)
8m @ 2.92 g/t Au from 20m, including 4m @ 5.5 g/t Au from 20m (26BB024)
- Golden Dragon is finalising **drill design** at Behring Bore, with a rig secured for early July. The upcoming program will target both **Behring Bore and Coodardy**, located approximately **400 m** apart

The program has successfully intersected **high-grade gold associated with northeast trending quartz veining within a broader mineralised system**, confirming the presence and continuity of significant gold mineralisation. Gold is hosted within the **upper portion of an altered, pyritic dolerite and associated high-grade quartz lodes**. These results build on earlier first-pass drilling at Behring Bore, materially increasing geological confidence and supporting the interpretation that the prospect forms part of a **larger, coherent gold-bearing system** with significant potential for expansion.

The **mineralised altered, pyritic dolerite** has been consistently intersected along the eastern portion of all drill lines and represents a **compelling priority target area** for further exploration.

ASX: GDR

www.goldendragonmining.com.au

info@goldendragonmining.com.au

+61 3 9600 0877

Managing director Simon Buswell-Smith commented, “

“Behring Bore is rapidly emerging as a standout gold prospect, with these latest results further confirming the scale of this growing system. The consistent delivery of high-grade gold within a broader mineralised envelope, hosted in altered pyritic dolerite, significantly strengthens our confidence in the geological model. Importantly, the identification of northeast-trending quartz lodes opens a new and highly prospective exploration corridor, which we are also seeing at Coodardy.

Mineralisation has now been confirmed in the fresh rock and remains open to the east and south, where no drilling has yet been undertaken, highlighting substantial upside potential. The consistency of results across multiple drill sections reinforces our view that Behring Bore represents a coherent, large-scale gold system, with clear parallels to Coodardy located just 400 metres to the east.”

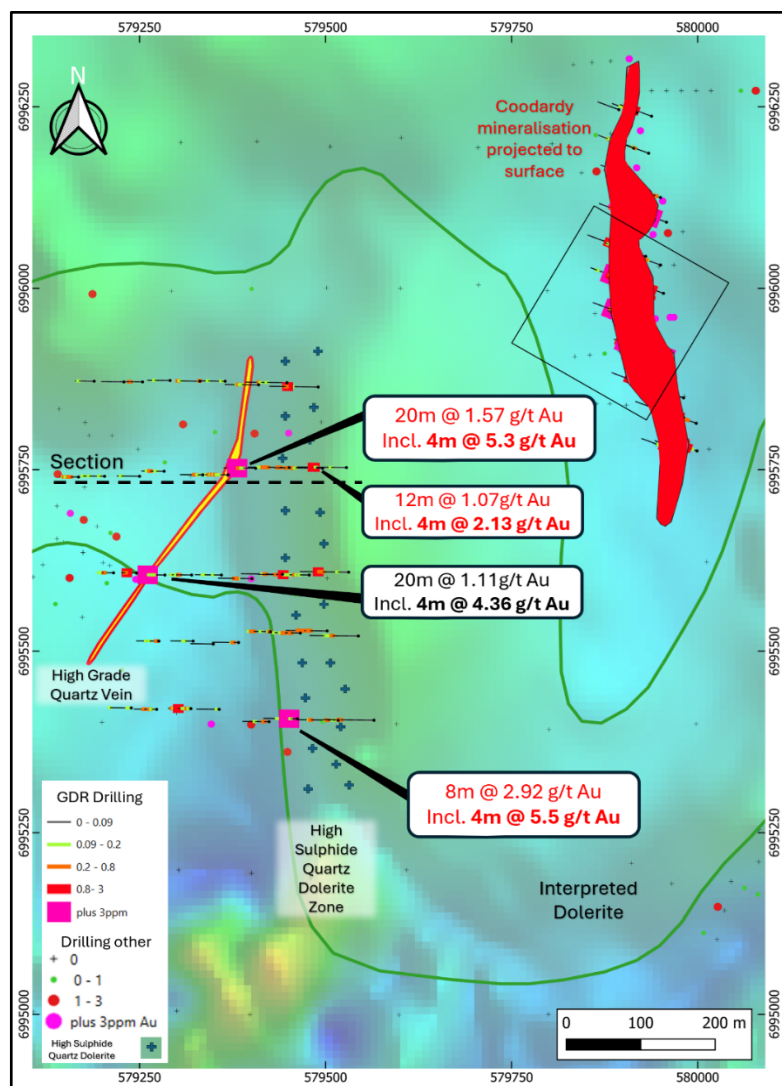


Figure 1 Highlighting significant intersections from recent drilling (red text) hosted in the upper portion of an altered, pyritic dolerite and associated high-grade gold within quartz veins.

Behring Bore Discussion

The 26-hole RC drill program comprised 2,102 m and was designed to test, moderately east-dipping gold lode-style targets within the upper portion of an altered, pyritic dolerite and the newly identified northeast trending high grade quartz veins.

The recent program was considered highly successful and intersected high-grade gold within a broader mineralised system, confirming the presence and continuity of significant mineralisation hosted within the upper portion of an altered, pyritic dolerite with associated high-grade quartz veining.

A high-grade quartz lode with a northeast trend has been identified in hole 26BB041 which returned **4m @ 5.3 g/t Au from 48m**, within a broader zone of **20m @ 1.57 g/t Au from 32m** (Figure 2). This quartz lode is interpreted to be the same vein that was intersected previously from Golden Dragon's maiden drill campaign in drillhole 26BB012, which returned **4m @ 4.36 g/t Au from 44m**, within a broader zone of **20m @ 1.11 g/t Au from 32m** (Figure 1).

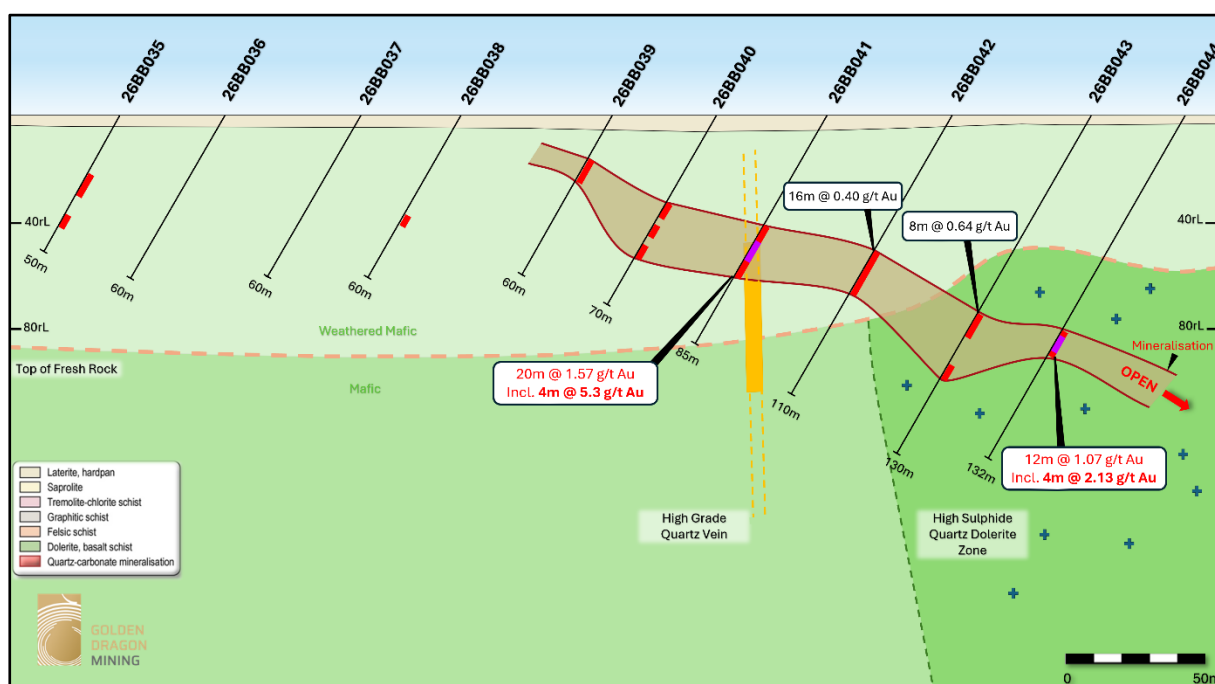


Figure 2. Drill Cross Section 69957750mN highlighting moderately east-dipping gold lode within the upper portion of an altered, pyritic dolerite and the newly identified northeast trending high grade quartz veins.

The program has successfully intersected significant gold mineralisation hosted within the upper portion of an altered, pyritic dolerite. This dolerite unit is a key control on mineralisation, consistently hosting high-grade quartz lodes and forming the primary focus of current exploration. These results build on earlier first-pass drilling at Behring Bore and materially increase geological confidence, supporting the interpretation of a larger, coherent gold-bearing system with strong potential for expansion.



GOLDEN
DRAGON
MINING

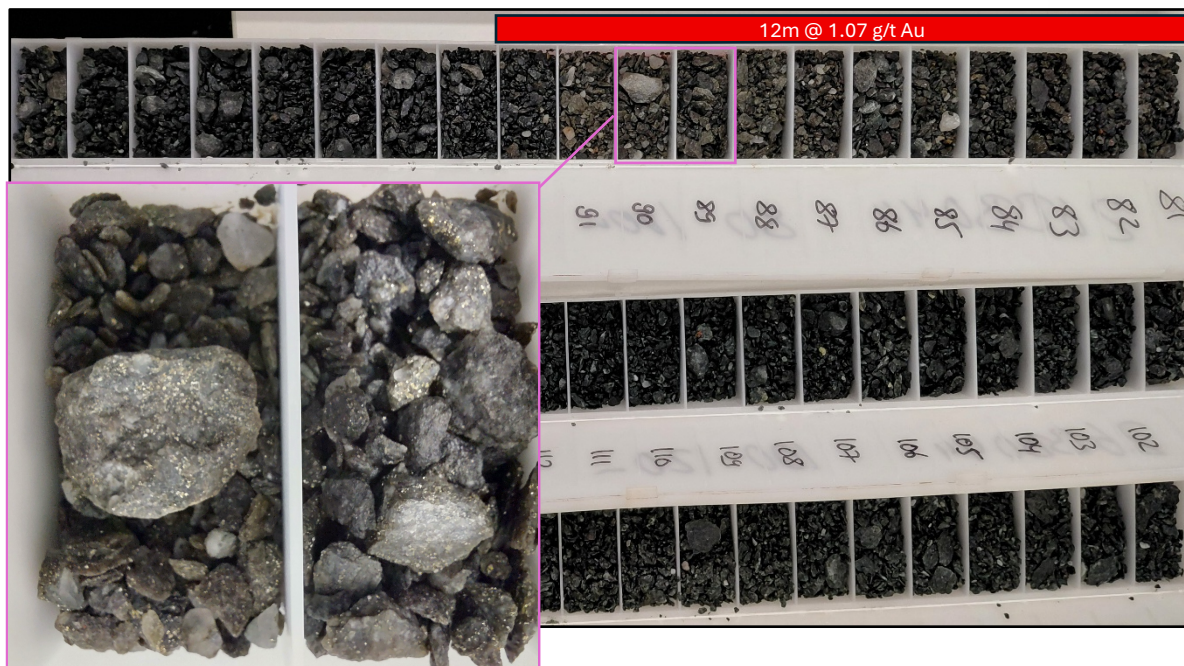


Figure 3. Drill hole chip tray of 26BB044 highlighting (88-90m insert) the altered quartz pyrite rich high-grade interval of 4m @ 2.13 g/t Au from 88m within the broader zone of mineralisation of 12m @ 1.07 g/t Au from 80m

The altered, pyritic dolerite has been consistently intersected along the eastern portion of all drill lines and represents a compelling priority target area for further exploration. Multiple drill holes have confirmed gold mineralisation within this unit, including **12m @ 1.07 g/t Au from 80m**, including **4m @ 2.13 g/t Au** (26BB044), and **4m @ 5.5 g/t Au from 20m** (26BB024) **within 8m @ 2.92 g/t Au**, highlighting the dolerite as a key host to both broad mineralisation and discrete high-grade zones (Figure 3).

Mineralisation within the dolerite unit is open to the north, south and to the east as multiple drill lines end in mineralisation as seen in section 69957750mN (Figure 2). Exploration in these areas is limited and will be the focus of upcoming exploration.

Next Steps

Behring Bore is considered highly prospective for the discovery of moderately east-dipping gold lodes and warrants **systematic extensional drilling** to better define mineralisation geometry and continuity, with a particular focus on the **eastern corridor extension**.

Golden Dragon is currently finalising drill design at Behring Bore, with a rig secured for drilling in early July. The upcoming program will target both **Behring Bore and Coodardy**, which are located approximately **400 m apart**, highlighting the potential for a **larger, interconnected gold system** across the project area.

Recent drilling at Coodardy returned strong results, including **12m @ 6.5 g/t Au from 44m**, incorporating a higher-grade interval of **4m @ 17.6 g/t Au**. These results correlate with previously

ASX: GDR

www.goldendragonmining.com.au

info@goldendragonmining.com.au

+61 3 9600 0877



identified high-grade mineralisation, including **8m @ 10.82 g/t Au from 25m**, with a standout interval of **4m @ 21.37 g/t Au¹**.

Mineralisation at Coodardy has now been defined over approximately **500 m of strike** and remains **open to the north and south**, further reinforcing the potential for continued growth and supporting the broader scale opportunity across both prospects.

Table 1. Significant Intersections from Recent Drilling at Behring Bore

(**>0.2 g/t gold**, all assays' results are 4m composites)

Hole ID	Depth from	Depth to	Interval	Au (g/t)
26BB020	16	20	4	0.37
26BB020	32	36	4	0.33
26BB021	4	16	12	0.31
incl.	8	12	4	0.54
26BB021	32	36	4	1.07
26BB021	48	52	4	0.26
26BB023	12	16	4	0.25
26BB024	20	28	8	2.92
26BB024	20	24	4	5.5
26BB025	28	32	4	0.32
26BB025	72	76	4	0.34
26BB026	88	96	8	0.62
26BB027	4	8	4	0.26
26BB030	12	16	4	0.5
26BB031	0	4	4	0.27
26BB031	44	52	8	0.27
26BB032	24	28	4	0.29
26BB032	40	48	8	0.4
26BB033	44	52	8	0.29
26BB033	60	80	20	0.29
26BB034	68	72	4	0.4
26BB035	20	28	8	0.47
26BB035	36	40	4	0.25
26BB038	36	40	4	0.34
26BB039	16	24	8	0.47
26BB040	32	36	4	0.26
26BB040	40	52	12	0.29
26BB041	40	60	20	1.57
incl.	48	52	4	5.32
26BB042	24	32	8	0.27
26BB042	56	72	16	0.4

¹ Outstanding High Grade 4m @ 17.6 g/t Gold



GOLDEN
DRAGON
MINING

26BB043	28	32	4	0.33
26BB043	76	84	8	0.64
26BB044	80	92	12	1.07
incl.	88	92	4	2.13

Table 2. Golden Dragon Recent RC Drill Collar Data

Hole ID	Depth	Easting MGA	Northing MGA	RL	Dip	Azi
26BB019	60	579239	6995422	434	-60	270
26BB020	60	579273	6995420	435	-60	270
26BB021	60	579319	6995421	434	-60	270
26BB022	60	579357	6995420	434	-60	270
26BB023	70	579424	6995403	434	-60	270
26BB024	90	579462	6995407	434	-60	270
26BB025	110	579517	6995405	434	-60	270
26BB026	135	579565	6995405	434	-60	270
26BB027	60	579276	6995514	435	-60	270
26BB028	60	579322	6995514	435	-60	270
26BB029	60	579349	6995510	435	-60	270
26BB030	70	579383	6995512	436	-60	270
26BB031	60	579426	6995527	433	-60	270
26BB032	90	579466	6995525	434	-60	270
26BB033	110	579502	6995528	435	-60	270
26BB034	130	579544	6995521	434	-60	270
26BB035	50	579168	6995740	434	-60	270
26BB036	60	579203	6995741	434	-60	270
26BB037	60	579250	6995741	435	-60	270
26BB038	60	579283	6995748	434	-60	270
26BB039	60	579335	6995743	435	-60	270
26BB040	70	579369	6995743	434	-60	270
26BB041	85	579406	6995752	434	-60	270
26BB042	110	579451	6995753	439	-60	270
26BB043	130	579496	6995752	435	-60	270
26BB044	132	579528	6995753	436	-60	270

ASX: GDR

www.goldendragonmining.com.au

info@goldendragonmining.com.au

+61 3 9600 0877

Cue Project

The Cue project comprises, two granted exploration licence (E20/1071 and E1072 (80%)), one exploration licence under application (E20/1073 (80%)) two granted mining leases (M20/455 and M20/3271(100%)) and new exploration licence application E20/1122 (100%).

Following successful grant of E20/1073 and newly applied E20/1122, Golden Dragon will secure control of a dominant ~619 km² landholding in the highly prospective Murchison Region. The project hosts over 50 km of mineralised shear zones, providing multiple high-priority targets for systematic exploration and potential resource growth.

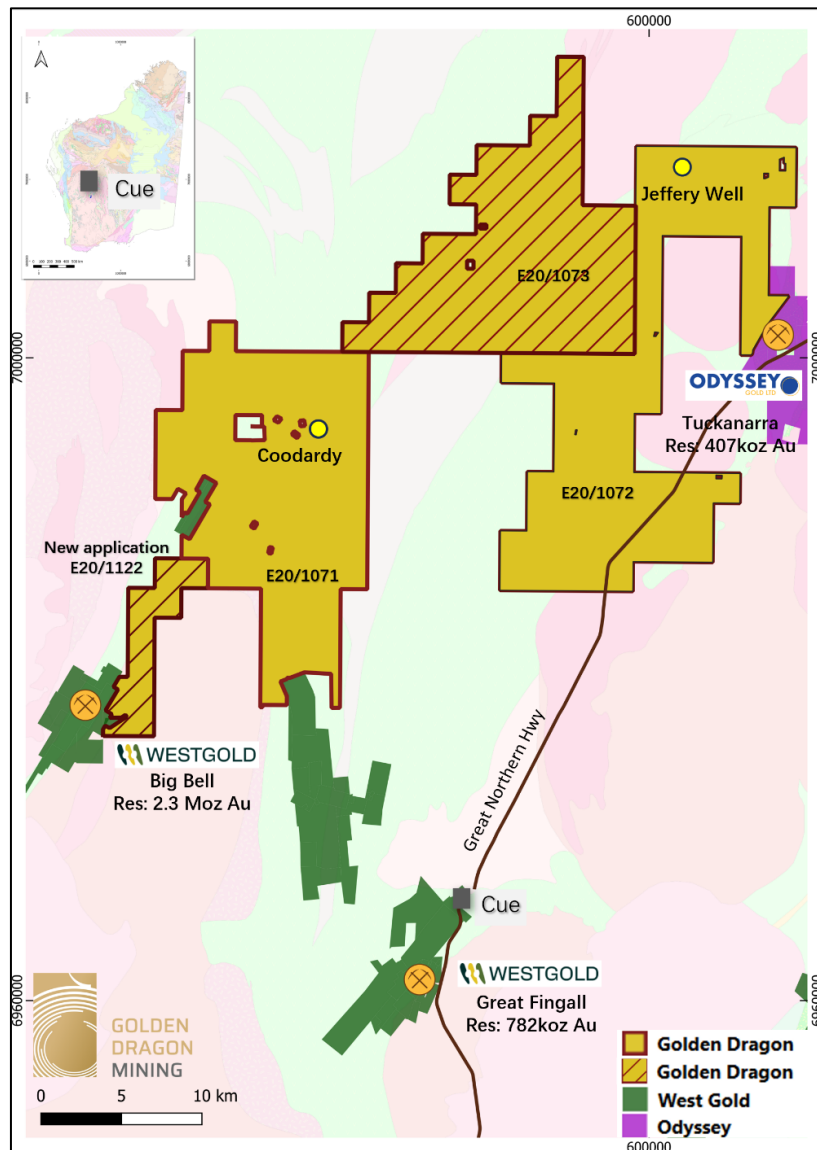


Figure 4 Golden Dragon's tenement Holding, highlighting proximity to Westgold's operations and Odyssey's Tuckanarra resources.



**GOLDEN
DRAGON
MINING**

This announcement has been Authorised for release by the Board of Golden Dragon Mining Ltd.

Company enquiries:

Managing Director

Simon Buswell

Ph: +61 3 96000877

info@goldendragonmining.com.au

Investor & Media Relations

NWR Communications

Peter Taylor

peter@nwrcommunications.com.au

References to Previous Announcements

The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements, and that all material assumptions and technical parameters have not materially changed. The Company also confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

Competent Person Statement

The technical information in this announcement that relates to Exploration Results is based on, and fairly represents, information compiled by Mr Simon Buswell-Smith. Mr Buswell-Smith is a professional geologist with over 17 years' experience in the mineral exploration industry across Australia, specialising in gold, base-metals and critical minerals. He is a Member of the Australian Institute of Geoscientists (Member No. 4802) and has more than five years' relevant experience in mineral exploration. Mr Buswell-Smith is a "Competent Person" as defined in the 2012 Edition of the JORC Code. He has reviewed the technical information in this announcement, consents to being named as Competent Person, and has authorised the inclusion of all Exploration Results in the form and context in which they appear.

ASX: GDR

www.goldendragonmining.com.au

info@goldendragonmining.com.au

+61 3 9600 0877



APPENDIX 1

JORC Code, 2012 Edition – Table 1 Report Section 1 Sampling Techniques and Data

Criteria	Explanation	Commentary
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representation and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are material to the Public Report. - In cases where 'industry standard' work has been completed this would be relatively simple (e.g. reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems, or unusual commodities/mineralisation types (e.g. submarine nodules).	- Sampling of Au mineralisation at Cue Project in the Murchison was undertaken using Slimline Reverse-Circulation (RC) Drilling (85mm / 3.5") drilling. - RC sampling drill cuttings were collected over 1 m intervals via cyclone into buckets and placed in piles on the ground (2-15 kg of sample material): 0.5-3 kg duplicate original samples were split from each 1-metre sample length via the rig's inbuilt cyclone and splitter system. The cyclone was manually cleaned at the completion of each rod and thoroughly cleaned at the completion of each hole. Sampling was carried out according to GDR protocols and QAQC procedures. - Up to 4 m composite samples collected using a spear, sampling the one metre piles to produce a 2-3kg sample which was sent to ALS laboratory in Perth. The sample was crushed and pulverised to produce a 50g subsample for fire assay. - The sampling and assaying methods are appropriate for the orogenic mineralised system and are representative for the mineralisation style. The sampling and assaying suitability was validated using GDR's QAQC protocol and no instruments or tools requiring calibration were used as part of the sampling process. - Anomalous gold composites samples will be revisited and 1 m intervals via the rig splitter taken and sent to ALS laboratory for gold fire assay as above.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	- The drilling operation was undertaken by experienced drilling contractor, Gyro Drilling. - RC drilling was conducted with a modern truck-mounted rig (Gyro Rig 11). RC samples were obtained utilizing high pressure and high-volume compressed air using RC 85 mm hammer. - Collar orientations were surveyed using a handheld GPS and sighting compass.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	- Samples were produced from a cyclone and collected in buckets that were tipped into 1 m piles on the ground for visual assessment. - Sample recoveries of less than approximately 100% are noted in the geological/sampling log with a visual estimate of the actual recovery. - Drill samples are dry until ground water is intersected. Samples are



Criteria	Explanation	Commentary
	- Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	generally wet where high volumes of ground water were intersected. The sample size and condition (wet, damp, dry) is recorded every metre. - The cyclone and sample buckets are routinely cleaned to reduce the likelihood of cross sample contamination. - The sample and size (2kg to 3kg) relative to the particle size (90% passing 75um) of the material sampled is a commonly utilised practice for effective sample representation for most early-stage exploration projects of this nature. - Quality control procedures adopted to maximise sample representation for all sub-sampling stages include the collection of field and laboratory duplicates and the insertion of certified reference material as assay standards and the insertion of blank samples and duplicates. - Sample sizes are considered appropriate and in line with industry standards - No relationship has been identified between sample recovery and grade
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel etc.) photography. The total length and percentage of the relevant intersections logged.	- All AC drilling was logged at the rig by an experienced geologist. - Lithology, veining, mineralisation, alteration, weathering and oxidation were recorded - Evidence for structural features is noted. - Logging is qualitative and descriptive in nature and representative portions of samples were retained in chip trays for future reference. - All data was recorded/logged in the field in MS Excel logging platform developed by Geobase Australia Pty Ltd and transferred to our database held by Geobase Australia Pty Ltd (now Core Geoscience.)
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- Samples (2-15 kg weight) were split through the rig's inbuilt cyclone splitter to produce duplicate original 0.5-3 kg sub-samples as one-metre originals in their entirety as the primary sample for assay. - Up to 4 m composite samples were collected by spear sampling the one metre piles to produce a 2-3kg composite sample. For any anomalous 4m composite sample assays, the corresponding one-meter samples are also collected and assayed. - Field duplicates were taken every 50 samples as a control on sample representivity. - Sample preparation of samples was undertaken by external laboratories according to the sample preparation and assaying protocol established to maximise the representation of potential orogenic mineralisation. Laboratories performance was monitored as part of GDR's QAQC procedure. - The sample and size (2.5kg to 3kg) relative to the particle size (90% passing 75um) of the material sampled is a commonly utilised practice for effective sample representation for most exploration projects of this nature. - Quality control procedures adopted to maximise sample representation for all sub-sampling stages include the collection of field and laboratory duplicates and the insertion of certified reference material as assay standards and the insertion of blank samples. - For all samples, sample size is regarded as appropriate.



Criteria	Explanation	Commentary
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments etc. the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	- Assay technique for gold is Fire assay and is regarded as total. - Fire assay is designed to measure the total gold within a sample. Fire assay has been confirmed as a suitable technique for orogenic type mineralisation. It has been widely used in early-stage exploration programs of this nature in the Murchison region. - The technique utilised a 50g sample charge with a lead flux, which is decomposed in a furnace with the prill being totally digested by 2 acids (HCl and HN03) before the gold content is determined by an AAS machine. - No geophysical tools or other remote sensing instruments were utilised for reporting or interpretation of gold mineralisation. - Quality control samples were routinely inserted into the sampling sequence. The intent of the procedure for reviewing the performance of certified standard reference material is to examine for any erroneous results (a result outside of the expected statistically derived tolerance limits) and to validate if required; the acceptable levels of accuracy and precision for all stages of the sampling and analytical process. Typically, batches which fail quality control checks are re-analysed.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification and data storage (physical and electronic) protocols. - Discuss any adjustment to assay data	- Results are verified by the geologist before importing into our externally managed database. - No twin holes have been drilled. - Data is collected by tablet in the field and is imported into our externally managed database (Core Geoscience Australia). - RC Field QC procedures involved the use of Certified Reference Materials (CRMs) as assay standards and blanks. - Field duplicates were collected also undertaken. - Assay data is reviewed prior to being imported directly into the database and no adjustments are made to raw assay files.
Location of data points	- Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- Datum: Geodetic Datum of Australia 94 (GDA94) Projection: Map Grid of Australia (MGA) Zone: Zone 50 - All collar surveys were completed using handheld GPS (+/- 5m accuracy). - Drill rig alignment was attained using a handheld compass. - Downhole surveys were not taken. - The 3D location of individual samples is considered to be adequately established and in line with industry standards for this stage of exploration. - Topography is nominal at this stage holes will be picked up using a DGPS in the future.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	- The drilling in this program has been designed to collect geological information from covered and undrilled areas. The holes are located to test mineralisation, geology and structures based on interpretation of geophysics and mapping as well as below previous anomalous aircore results. - The current drill hole spacing and distribution may be sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure and classification, however further work is recommended prior to an estimation. - Sampling of RC cuttings was undertaken at 4m intervals. One-metre splits of high-grade composites are yet to be submitted.



Criteria	Explanation	Commentary
	Whether sample compositing has been applied.	
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- The drill holes have been designed to crosscut the main stratigraphy, to maximise structural, geotechnical and geological data. - No drilling orientation and/or sampling bias has been recognised at this time. - The relationship between the drilling orientation and the orientation of key mineralised structures intersected in this early-stage exploration is not considered to have introduced a sampling bias and is not considered to be material.
Sample security	The measures taken to ensure sample security.	- Chain of custody protocols to ensure the security of samples are followed. All Samples are removed from site on the day of drilling and stored at a secured yard. The samples are transported to ALS Laboratories in Perth. The samples are not left unattended, and a chain of custody is maintained throughout the transport process. - The laboratories are contained within a secured/fenced compound. Access into the laboratory is restricted and movements of personnel and the samples are tracked under supervision of the laboratory staff. - All sample information is kept in paper and digital form. Digital data is backed up onto the Company server regularly and then externally backed up daily.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews have been conducted.

Section 2 Reporting of Exploration Results

Criteria	Explanation	Commentary				
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The Cue Project is comprised of 2 Granted and 1 Pending Exploration Licenses in the name of Fastfield Pty Ltd which Golden Dragon own 80% of the company with the remining 20% owned by Bruce Legendre. - Golden Dragon Limited has entered a joint venture with Bruce Legendre over the tenement package which is termed the Cue Project. Golden Dragon is sole funding and managing the project. - Golden Dragon is the 100% legal and beneficial owner of M20/327 and M20/455 - Golden Dragon has applied for E20/1122				
		Lease	Project	Registered holder	Status	Area
		M20/327	Cue	Golden Dragon	Granted	205.75 ha.
		M20/455	Cue	Golden Dragon	Granted	4.594 ha.
		E20/1071	Cue	Fastfield Pty Ltd	Granted	21,700 ha.
		E20/1072	Cue	Fastfield Pty Ltd	Granted	21,700 ha.
		E20/1073	Cue	Fastfield Pty Ltd	Application	17,670 ha.
		E20/1122	Cue	Golden Dragon	Application	2,804ha.



Criteria	Explanation	Commentary
		- Native title is held by Wajarri Yamatji Group. The Group is engaged to undertake Cultural Heritage Surveys across drill programs prior to drilling. Any historical sites are registered, and Cultural Heritage reports are made public. Historical sites do exist within the lease package. - All tenements are pending and or are in good standing and no known impediments exist.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- From the early 1970's to about 1990, the main exploration focus was a base metal (Cu, Zn) search within the felsic volcanic suite that lies on the eastern side of the project area, between the Wattagee VMS Horizon and the Emily Well VMS Horizon. The main explorers at this time were Shell, Esso, Chevron and Outokompu utilising extensive RAB drilling, with follow up percussion and diamond core drilling. - From the late 1980's gold explorers including Freeport, Homestake, Newcrest, Normandy, Eagle Mining, Jindalee Resources, Alchemy Resources and Big Bell Operations Pty Ltd focused on the area between the Big Bell Shear Zone and the Cuddingwarra Shear Zone. - These companies made extensive use of shallow RAB drilling, and later shallow air core drilling and RC. Much of this drilling was grid based and was too shallow and in some places in-effective in penetrating the thick cover sequence. In particular, there is very little drilling along the Cuddingwarra mine sequence Corridor, and the area where the Cuddingwarra mine sequence intersects the Big Bell Shear Zone. - Most recently Victory Metals Victory Goldfields completed 31 RC drill holes for 3821 m at Coodardy, Emily Wells and Nemesis, during the period October to November 2021.
Geology	Deposit type, geological setting and style of mineralisation.	- The Cue Project leases sit within the Archean Watagee Hill Greenstone Belt in the North Western part of the Murchison Domain of the Yilgarn Craton. Regional geology is based upon GSWA regional airborne magnetic surveys and previous GSWA geological mapping. Mineralisation in the area is mainly shear hosted but other styles of mineralisation are present. - Note: there is very little exposed bedrock in much of the area of the drilling program as basement rock is obscured by alluvium, laterite and a transported sequence.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes: - o easting and northing of the drillhole collar - o elevation or RL of the drillhole collar - o dip and azimuth of the hole - o downhole length and interception depth - o hole length.	- All assay and collar information are tabulated in this report. - Significant intercepts are reported and tabulated in this report
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually material and should be stated. - Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	- Significant assay intervals are recorded above 0.2 g/t Au with a maximum internal dilution of 4m. - No top cuts applied. - A breakdown of the high-grade intervals is shown in the body of the report. - No metal equivalent values are used.



Criteria	Explanation	Commentary
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. 'downhole length, true width not known')	- All significant intersections are quoted as downhole widths. - Holes are drilled at a -60-degree dip which is industry standard. All lengths are reported as downhole and the section in the body of the report displays the relationship between drill hole angle and mineralisation interpretation.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plan view of drill hole.	Drill hole location diagrams and representative sections of reported exploration results are provided in the body of this report.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	- Intersection lengths and grades are reported as down-hole, length weighted averages of grades above a cut-off. - Numbers of drill holes and metres are included in the body of the report, both low and high grades have been reported.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All relevant information has been reported
Further work	- The nature and scale of planned future work (e.g. tests for lateral extensions or depth extensions or largescale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Further Exploration work on the Cue tenements may include but not limited to, follow-up drilling (as stated in the report) testing of new targets with aircore or other exploration methods.