

30 June 2026

## KEY POINTS

- Assay results returned for Hustler infill drill program
- Includes 6.8m @ 2.75 g/t Au, 10.4m @ 1.39 g/t Au, 11m @ 2.41 g/t Au and 9m @ 2.37 g/t Au
- Metallurgical drill holes also completed for test work to suit Gold Fields' plant
- Mineral Resource estimation update and permitting activities in full swing

Lunnon Metals Limited (ASX: LM8) (the **Company** or **Lunnon Metals**) is pleased to provide an update on definition drilling results at the Hustler gold deposit, located just 400m southeast of the Company's active Lady Herial gold open pit at the Foster-Baker gold project (**FBA**), all located in the middle of the highly prospective St Ives gold camp.

### Hustler Infill Program

With successful open pit mining ongoing at the Company's first gold discovery, Lady Herial, the Company's recent exploration activities have focused on de-risking the adjacent Hustler gold deposit, via a program of infill drilling. Assay results have now been returned for a 36-hole, reverse circulation (**RC**) drill program that was designed to achieve a nominal 20m x 20m spacing, with select areas drilled to a closer 10m x 10m spacing (see **Figure 1**).

Significant results, above a 0.5 g/t Au cut-off include (true widths approximate drilled widths – see **Figure 2**):

- **HUS26RC\_002: 1m @ 22.22 g/t Au from 1 metre**
- **HUS26RC\_004: 5m @ 2.18 g/t Au from 54 metres**
- **HUS26RC\_010: 1m @ 63.65 g/t Au from 18 metres**
- **HUS26RC\_022: 5m @ 3.01 g/t Au from 14 metres**
- **HUS26RC\_037: 11m @ 2.41 g/t Au from 24 metres**
- **HUS26RC\_039: 9m @ 2.37 g/t Au from 38 metres**
- **HUS26RC\_048: 13m @ 1.63 g/t Au from 30 metres**
- **HUS26RC\_049: 10m @ 1.38 g/t Au from 65 metres**

Numerous other RC holes recorded 1.0 metre intervals returning a range of low, medium and high-grade gold assays, with many holes returning multiple such intercepts. Full results of the RC program are contained in the annexures to this announcement.

Three diamond drill (**DD**) holes were also drilled for metallurgical test work purposes. These DD holes were designed to collect sufficient sample for the testwork program in the grade ranges and material type represented in the current Mineral Resource estimation (**MRE**) model. This objective was successfully achieved, with high, mid-range and low-grade intervals generated. The test work designed to simulate the process flow at the nearby Lefroy Gold Plant is underway. Significant results for each of the three DD holes, above a 0.5 g/t Au cut-off, were (true widths approximate drilled widths):

- **HUS26DD\_001: 10.4m @ 1.39 g/t Au from 57.1 metres**
- **HUS26DD\_002: 6.8m @ 2.75 g/t Au from 28.5 metres**
- **HUS26DD\_003: 7.4m @ 0.64 g/t Au from 25.0 metres**

Finally, four DD holes were drilled in the location of the expected pit walls for geotechnical studies. These holes, by design, are not expected to intersect or influence the Mineral Resource.

### Mineral Resource Update, Open Pit Optimisations & Next Steps

These results conform with the existing Hustler MRE<sup>1</sup> which will now be updated. In general terms, the Company notes that Hustler is lower grade than the current Lady Herial open pit and the remaining Lady Herial MRE in the area under consideration for a potential cut-back (termed **LDH2**), whilst Hustler does not outcrop to the same extent as Lady Herial.

The new MRE will be reported once complete. In parallel, Lunnon Metals is working closely with its current open pit mining contractor, Hampton Mining & Civil, to generate appropriate unit operating costs for a scenario that potentially could see Hustler mined in parallel to any LDH2 cut-back. The potential combination of both pits may afford the opportunity to apply lower unit costs when compared to the current rates being experienced in the lower volume Lady Herial pit.

<sup>1</sup> See ASX announcement dated 12 March 2026 and page 11 of this report for details of the current Hustler MRE.




In light of recent movements in the A\$ gold price, the Company is also reviewing the timeline to mine both open pits concurrently, versus mining them sequentially, and the subsequent gold price that would need to be considered under both scenarios. The Company intends to complete this analysis and subject to the outcomes, report the results in a Scoping Study for Hustler and LDH2 gold deposits when complete.

Permitting activities are underway in earnest and optimisation shells generated during the above analysis can be used to guide the development footprint of both open pits and any associated survey or approval requirements in the interim.

In the ordinary course of business, the Company maintains a strong ongoing dialogue with St Ives Gold Mining Co. Pty Ltd (**St Ives**) in relation to the current Lady Herial Ore Purchase Agreement (**OPA**). These commercial arrangements will be assessed for their applicability to these new opportunities and discussions initiated with St Ives to determine their level of interest in working collaboratively with Lunnon Metals again, on one or both opportunities.


Commenting on the Hustler results and the work programs under way at LDH2 and Hustler, Lunnon Metals' Managing Director, **Edmund Ainscough**, said:

*"The recent Lady Herial process demonstrated just how quickly the Lunnon Metals team can identify, define and then deliver on the potential of these modest sized, but near surface gold deposits. The current operating experience stands us in good stead to complete the analysis of Hustler as quickly as possible and progress permitting activities in parallel, just as we did with Lady Herial. FY2027 is now upon us, and with the progressive cash build from a successful Lady Herial, our goal is always to make a significant gold discovery. The Lunnon Metals team though remains ever mindful of the opportunity to be nimble and ready to turn to account anything that the discovery effort throws up in the meantime – big or small".*

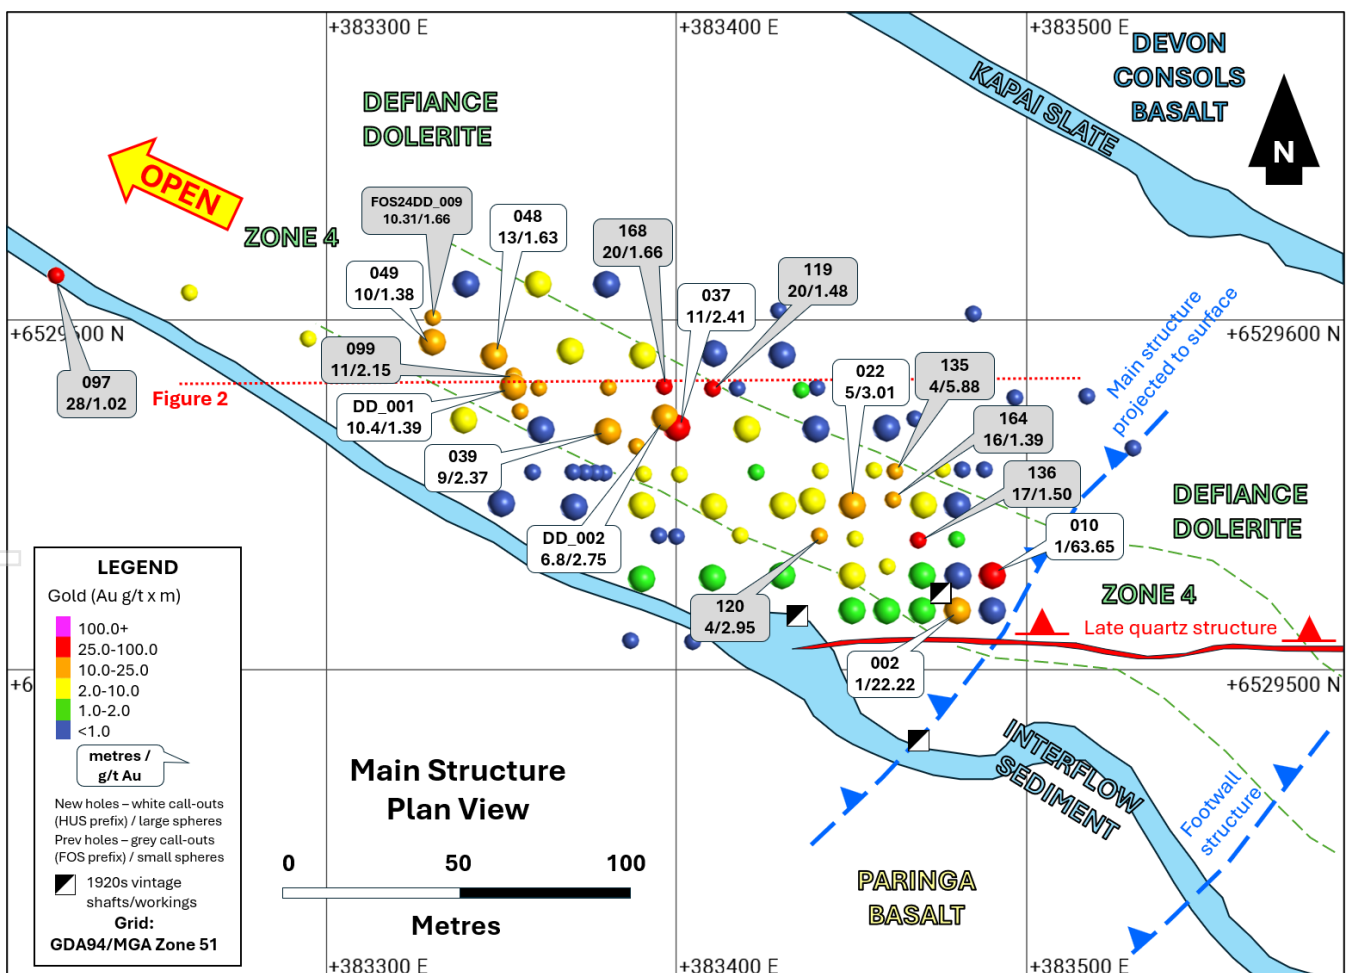

**Figure 1:** Plan view of the Hustler area showing today's results (large spheres), recent prior results<sup>2</sup> (small spheres) and interpreted geology at surface.

<sup>2</sup> See ASX announcements dated 18 March 2025, 9 September 2025 and 28 January 2026.

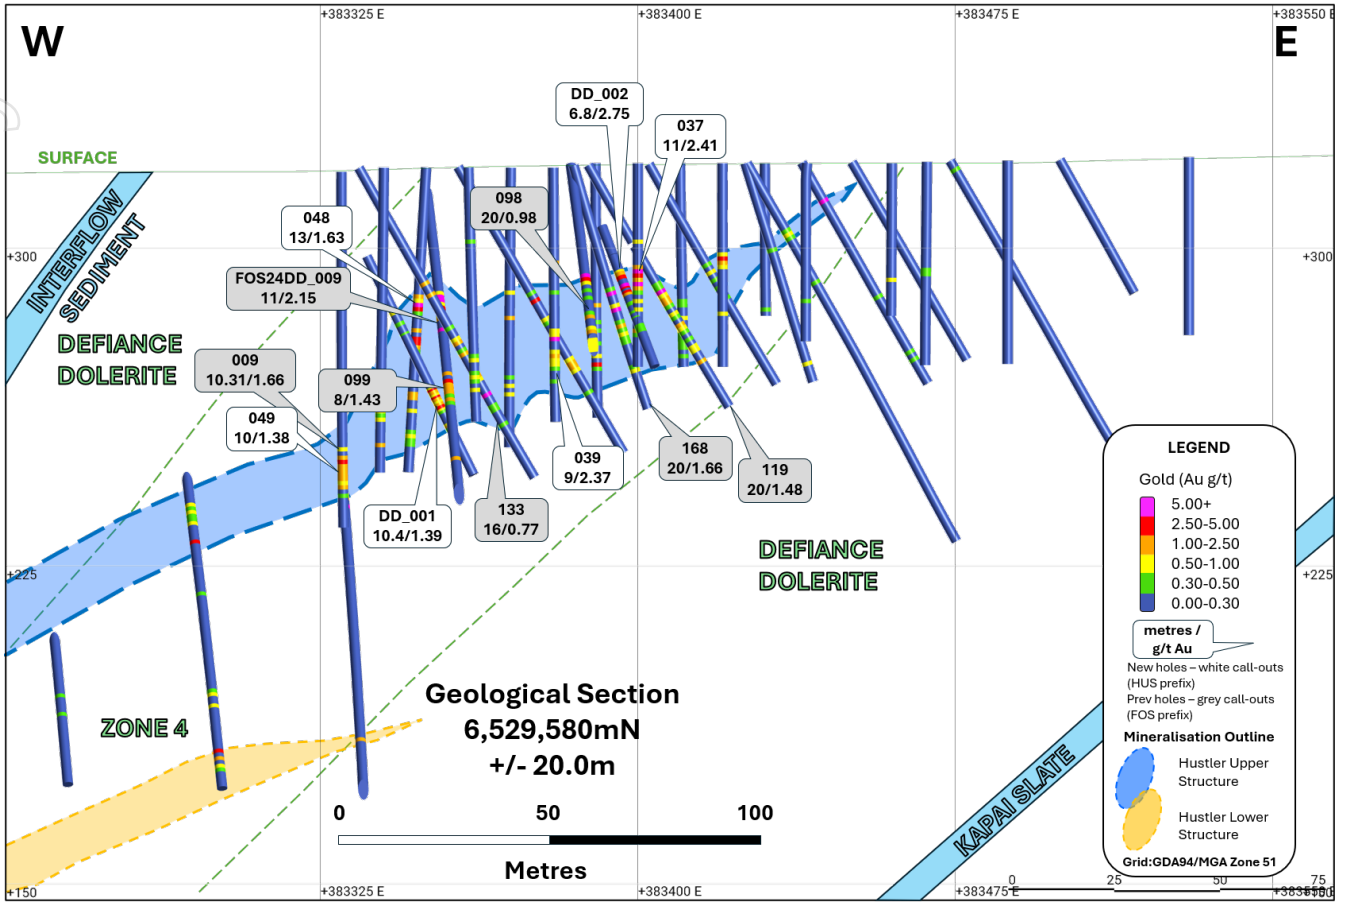

**Figure 2:** Cross sectional view looking to the north of a 40m wide slice illustrating results from the infill program and select recent other results<sup>3</sup>.

This announcement has been approved for release by the Board.

Edmund Ainscough  
 Managing Director  
 Phone: +61 8 6424 8848  
 Email: [info@lunnonmetals.com.au](mailto:info@lunnonmetals.com.au)

<sup>3</sup> See ASX announcements dated 18 March 2025, 9 September 2025 and 28 January 2026.



## ANNEXURE 1: COLLAR DETAILS - HUSTLER

| Hole ID     | Easting   | Northing    | Elevation (m ASL) | Dip   | Azimuth | EOH Depth (m) | Hole Type | Grid     |
|-------------|-----------|-------------|-------------------|-------|---------|---------------|-----------|----------|
| HUS26DD_001 | 383,326.0 | 6,529,586.0 | 318.2             | -63.6 | 100.4   | 80.2          | DD        | MGA94_51 |
| HUS26DD_002 | 383,386.0 | 6,529,583.0 | 319.5             | -60.8 | 136.0   | 54.1          | DD        | MGA94_51 |
| HUS26DD_003 | 383,434.0 | 6,529,542.0 | 320.2             | -74.4 | 35.6    | 42.5          | DD        | MGA94_51 |
| HUS26DD_004 | 383,398.0 | 6,529,591.0 | 319.7             | -69.6 | 45.5    | 60.4          | DD        | MGA94_51 |
| HUS26DD_005 | 383,366.0 | 6,529,544.0 | 319.8             | -70.6 | 216.7   | 60.6          | DD        | MGA94_51 |
| HUS26DD_006 | 383,459.0 | 6,529,542.0 | 320.2             | -70.0 | 115.0   | 66.0          | DD        | MGA94_51 |
| HUS26DD_007 | 383,319.0 | 6,529,615.0 | 318.5             | -70.0 | 290.0   | 60.0          | DD        | MGA94_51 |
| HUS26RC_001 | 383,490.0 | 6,529,517.0 | 322.0             | -90.0 | 0.0     | 18.0          | RC        | MGA94_51 |
| HUS26RC_002 | 383,480.0 | 6,529,517.0 | 322.0             | -90.0 | 0.0     | 24.0          | RC        | MGA94_51 |
| HUS26RC_003 | 383,470.0 | 6,529,517.0 | 322.0             | -90.0 | 0.0     | 24.0          | RC        | MGA94_51 |
| HUS26RC_004 | 383,460.0 | 6,529,517.0 | 322.0             | -90.0 | 65.6    | 66.0          | RC        | MGA94_51 |
| HUS26RC_005 | 383,450.0 | 6,529,517.0 | 323.0             | -90.0 | 0.0     | 30.0          | RC        | MGA94_51 |
| HUS26RC_010 | 383,490.0 | 6,529,527.0 | 322.0             | -90.0 | 0.0     | 24.0          | RC        | MGA94_51 |
| HUS26RC_011 | 383,480.0 | 6,529,527.0 | 322.0             | -89.3 | 118.3   | 60.0          | RC        | MGA94_51 |
| HUS26RC_012 | 383,470.0 | 6,529,527.0 | 321.0             | -90.0 | 0.0     | 30.0          | RC        | MGA94_51 |
| HUS26RC_013 | 383,450.0 | 6,529,527.0 | 321.0             | -90.0 | 0.0     | 30.0          | RC        | MGA94_51 |
| HUS26RC_015 | 383,430.0 | 6,529,527.0 | 322.0             | -90.0 | 0.0     | 30.0          | RC        | MGA94_51 |
| HUS26RC_017 | 383,410.0 | 6,529,527.0 | 322.0             | -88.7 | 148.8   | 36.0          | RC        | MGA94_51 |
| HUS26RC_019 | 383,390.0 | 6,529,527.0 | 321.0             | -88.2 | 165.5   | 36.0          | RC        | MGA94_51 |
| HUS26RC_020 | 383,480.0 | 6,529,547.0 | 320.0             | -90.0 | 0.0     | 30.0          | RC        | MGA94_51 |
| HUS26RC_021 | 383,470.0 | 6,529,547.0 | 320.0             | -88.8 | 83.1    | 36.0          | RC        | MGA94_51 |
| HUS26RC_022 | 383,450.0 | 6,529,547.0 | 320.0             | -90.0 | 24.2    | 36.0          | RC        | MGA94_51 |
| HUS26RC_024 | 383,430.0 | 6,529,547.0 | 320.0             | -90.0 | 116.6   | 36.0          | RC        | MGA94_51 |
| HUS26RC_026 | 383,410.0 | 6,529,547.0 | 320.0             | -89.3 | 126.1   | 42.0          | RC        | MGA94_51 |
| HUS26RC_028 | 383,390.0 | 6,529,547.0 | 320.0             | -89.8 | 76.0    | 48.0          | RC        | MGA94_51 |
| HUS26RC_030 | 383,370.0 | 6,529,547.0 | 320.0             | -89.1 | 101.1   | 48.0          | RC        | MGA94_51 |
| HUS26RC_031 | 383,460.0 | 6,529,569.0 | 320.0             | -89.9 | 275.2   | 36.0          | RC        | MGA94_51 |
| HUS26RC_033 | 383,440.0 | 6,529,569.0 | 320.0             | -83.2 | 252.7   | 42.0          | RC        | MGA94_51 |
| HUS26RC_035 | 383,420.0 | 6,529,569.0 | 320.0             | -89.3 | 198.1   | 48.0          | RC        | MGA94_51 |
| HUS26RC_037 | 383,400.0 | 6,529,569.0 | 320.0             | -88.8 | 0.0     | 48.0          | RC        | MGA94_51 |
| HUS26RC_039 | 383,380.0 | 6,529,569.0 | 319.0             | -89.0 | 136.4   | 60.0          | RC        | MGA94_51 |
| HUS26RC_040 | 383,430.0 | 6,529,590.0 | 320.0             | -89.9 | 26.0    | 36.0          | RC        | MGA94_51 |
| HUS26RC_042 | 383,410.0 | 6,529,590.0 | 320.0             | -89.3 | 34.8    | 48.0          | RC        | MGA94_51 |
| HUS26RC_043 | 383,350.0 | 6,529,547.0 | 320.0             | -89.0 | 356.9   | 54.0          | RC        | MGA94_51 |
| HUS26RC_044 | 383,360.0 | 6,529,569.0 | 319.0             | -88.5 | 97.3    | 60.0          | RC        | MGA94_51 |
| HUS26RC_045 | 383,340.0 | 6,529,569.0 | 319.0             | -88.2 | 342.1   | 72.0          | RC        | MGA94_51 |
| HUS26RC_046 | 383,390.0 | 6,529,590.0 | 320.0             | -89.5 | 34.4    | 60.0          | RC        | MGA94_51 |
| HUS26RC_047 | 383,370.0 | 6,529,590.0 | 319.0             | -88.9 | 323.7   | 66.0          | RC        | MGA94_51 |
| HUS26RC_048 | 383,350.0 | 6,529,590.0 | 319.0             | -86.6 | 262.2   | 72.0          | RC        | MGA94_51 |
| HUS26RC_049 | 383,330.0 | 6,529,590.0 | 318.0             | -87.8 | 342.9   | 84.0          | RC        | MGA94_51 |
| HUS26RC_050 | 383,380.0 | 6,529,610.0 | 320.0             | -89.9 | 179.8   | 48.0          | RC        | MGA94_51 |
| HUS26RC_051 | 383,360.0 | 6,529,610.0 | 319.0             | -89.5 | 69.1    | 54.0          | RC        | MGA94_51 |
| HUS26RC_052 | 383,340.0 | 6,529,610.0 | 319.0             | -89.7 | 297.4   | 54.0          | RC        | MGA94_51 |



## ANNEXURE 2: ASSAY RESULTS - HUSTLER

| Hole ID       | From (drill depth) (m)              | Width (m)   | Au g/t       | Cut-off Au g/t | Comment / internal zones below cut-off |                                    |
|---------------|-------------------------------------|-------------|--------------|----------------|--|------------------------------------|
| HUS26DD_001   | 37.0                                | 1.0         | 0.59         | 0.5            |  |                                    |
| and           | <b>57.1</b>                         | <b>10.4</b> | <b>1.39</b>  | <b>0.5</b>     | Upper Structures                       | Maximum of 3.18m internal dilution |
| including     | 57.6                                | 5.2         | 2.32         | 1.0            |  |                                    |
| HUS26DD_002   | <b>28.5</b>                         | <b>6.8</b>  | <b>2.75</b>  | <b>0.5</b>     | Upper Structures                       | Maximum of 1.18m internal dilution |
| including     | 29.0                                | 2.0         | 2.69         | 1.0            |  |                                    |
| and including | 32.2                                | 3.1         | 4.13         | 1.0            |  |                                    |
| HUS26DD_003   | 25.0                                | 7.4         | 0.64         | 0.5            | Upper Structures                       | Maximum of 2.77m internal dilution |
| HUS26RC_001   | No significant assay (NSA) >0.5 g/t |             |              |                |  |                                    |
| HUS26RC_002   | <b>1.0</b>                          | <b>1.0</b>  | <b>22.22</b> | <b>0.5</b>     | Upper Structures                       |                                    |
| and           | 9.0                                 | 1.0         | 3.22         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_003   | 7.0                                 | 1.0         | 1.22         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_004   | 0.0                                 | 1.0         | 3.26         | 0.5            | Other                                  |                                    |
| and           | 21.0                                | 1.0         | 1.33         | 0.5            | Upper Structures                       |                                    |
| and           | <b>54.0</b>                         | <b>5.0</b>  | <b>2.18</b>  | <b>0.5</b>     | Lower Structure                        |                                    |
| including     | 54.0                                | 1.0         | 5.79         | 1.0            |  |                                    |
| and including | 56.0                                | 1.0         | 1.74         | 1.0            |  |                                    |
| and including | 58.0                                | 1.0         | 2.01         | 1.0            |  |                                    |
| HUS26RC_005   | 14.0                                | 1.0         | 1.64         | 0.5            | Upper Structures                       |                                    |
| and           | 23.0                                | 1.0         | 0.96         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_010   | 0.0                                 | 1.0         | 0.50         | 0.5            | Other                                  |                                    |
| and           | <b>18.0</b>                         | <b>1.0</b>  | <b>63.65</b> | <b>0.5</b>     | Upper Structures                       |                                    |
| HUS26RC_011   | 13.0                                | 1.0         | 0.75         | 0.5            | Upper Structures                       |                                    |
| and           | 39.0                                | 1.0         | 1.58         | 0.5            | Other                                  |                                    |
| HUS26RC_012   | 23.0                                | 1.0         | 1.94         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_013   | 0.0                                 | 1.0         | 0.61         | 0.5            | Other                                  |                                    |
| and           | 23.0                                | 2.0         | 1.65         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_015   | 8.0                                 | 1.0         | 0.86         | 0.5            | Upper Structures                       |                                    |
| and           | 24.0                                | 1.0         | 1.99         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_017   | 19.0                                | 1.0         | 1.02         | 0.5            | Upper Structures                       |                                    |
| and           | 24.0                                | 3.0         | 0.64         | 0.5            | Upper Structures                       |                                    |
| and           | 32.0                                | 1.0         | 1.11         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_019   | 27.0                                | 1.0         | 1.19         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_020   | NSA                                 |             |              | 0.5            |  |                                    |
| HUS26RC_021   | 13.0                                | 4.0         | 0.63         | 0.5            | Upper Structures                       | Maximum of 1.0m internal dilution  |
| and           | 28.0                                | 1.0         | 1.29         | 0.5            | Upper Structures                       |                                    |
| HUS26RC_022   | <b>14.0</b>                         | <b>5.0</b>  | <b>3.01</b>  | <b>0.5</b>     | Upper Structures                       | Maximum of 1.0m internal dilution  |
| including     | 15.0                                | 3.0         | 4.62         | 1.0            |  |                                    |
| and           | 27.0                                | 3.0         | 0.67         | 0.5            | Upper Structures                       | Maximum of 1.0m internal dilution  |
| including     | 28.0                                | 1.0         | 1.00         | 1.0            |  |                                    |
| HUS26RC_024   | <b>23.0</b>                         | <b>8.0</b>  | <b>0.98</b>  | <b>0.5</b>     | Upper Structures                       | Maximum of 2.0m internal dilution  |
| including     | 23.0                                | 1.0         | 1.08         | 1.0            |  |                                    |
| and including | 28.0                                | 1.0         | 2.16         | 1.0            |  |                                    |
| and including | 30.0                                | 1.0         | 1.63         | 1.0            |  |                                    |
| HUS26RC_026   | <b>24.0</b>                         | <b>12.0</b> | <b>0.53</b>  | <b>0.5</b>     | Upper Structures                       | Maximum of 7.0m internal dilution  |
| including     | 25.0                                | 1.0         | 1.60         | 1.0            |  |                                    |



For personal use only

| Hole ID       | From (drill depth) (m) | Width (m)   | Au g/t      | Cut-off Au g/t | Comment / internal zones below cut-off |                                   |
|---------------|------------------------|-------------|-------------|----------------|--|-----------------------------------|
| and including | 35.0                   | 1.0         | 1.31        | 1.0            |  |                                   |
| HUS26RC_028   | <b>24.0</b>            | <b>16.0</b> | <b>0.62</b> | <b>0.5</b>     | Upper Structures                       | Maximum of 3.0m internal dilution |
| including     | 25.0                   | 1.0         | 1.31        | 1.0            |  |                                   |
| and including | 36.0                   | 1.0         | 1.23        | 1.0            |  |                                   |
| and including | 39.0                   | 1.0         | 1.12        | 1.0            |  |                                   |
| HUS26RC_030   | 32.0                   | 1.0         | 0.54        | 0.5            | Upper Structures                       |                                   |
| and           | 38.0                   | 1.0         | 0.61        | 0.5            | Upper Structures                       |                                   |
| HUS26RC_031   | 27.0                   | 1.0         | 0.51        | 0.5            | Upper Structures                       |                                   |
| HUS26RC_033   | NSA                    |             |             | 0.5            |  |                                   |
| HUS26RC_035   | 21.0                   | 4.0         | 1.47        | 0.5            | Upper Structures                       |                                   |
| including     | 22.0                   | 2.0         | 2.09        | 1.0            |  |                                   |
| and           | 35.0                   | 1.0         | 0.55        | 0.5            | Upper Structures                       |                                   |
| HUS26RC_037   | 18.0                   | 1.0         | 0.64        | 0.5            | Upper Structures                       |                                   |
| and           | <b>24.0</b>            | <b>11.0</b> | <b>2.41</b> | <b>0.5</b>     | Upper Structures                       | Maximum of 2.0m internal dilution |
| including     | 24.0                   | 6.0         | 4.01        | 1.0            |  |                                   |
| and           | 39.0                   | 1.0         | 2.01        | 0.5            | Upper Structures                       |                                   |
| HUS26RC_039   | 22.0                   | 1.0         | 1.45        | 0.5            |  |                                   |
| and           | <b>38.0</b>            | <b>9.0</b>  | <b>2.37</b> | <b>0.5</b>     | Upper Structures                       | Maximum of 2.0m internal dilution |
| including     | 40.0                   | 1.0         | 15.99       | 1.0            |  |                                   |
| and including | 44.0                   | 1.0         | 1.87        | 1.0            |  |                                   |
| HUS26RC_040   | NSA                    |             |             | 0.5            |  |                                   |
| HUS26RC_042   | 36.0                   | 1.0         | 0.58        | 0.5            | Upper Structures                       |                                   |
| and           | 39.0                   | 1.0         | 0.57        | 0.5            | Upper Structures                       |                                   |
| HUS26RC_043   | NSA                    |             |             | 0.5            |  |                                   |
| HUS26RC_044   | 45.0                   | 1.0         | 0.73        | 0.5            | Upper Structures                       |                                   |
| and           | 49.0                   | 1.0         | 0.57        | 0.5            | Upper Structures                       |                                   |
| and           | 52.0                   | 1.0         | 0.54        | 0.5            | Upper Structures                       |                                   |
| HUS26RC_045   | 50.0                   | 1.0         | 0.80        | 0.5            | Upper Structures                       |                                   |
| and           | 55.0                   | 5.0         | 0.62        | 0.5            | Upper Structures                       | Maximum of 1.0m internal dilution |
| and           | 65.0                   | 1.0         | 1.06        | 0.5            | Upper Structures                       |                                   |
| HUS26RC_046   | 33.0                   | 1.0         | 1.34        | 0.5            | Upper Structures                       |                                   |
| and           | 45.0                   | 3.0         | 1.32        | 0.5            | Upper Structures                       | Maximum of 1.0m internal dilution |
| including     | 47.0                   | 1.0         | 3.15        | 1.0            |  |                                   |
| HUS26RC_047   | 29.0                   | 1.0         | 0.59        | 0.5            | Upper Structures                       |                                   |
| and           | 35.0                   | 1.0         | 1.15        | 0.5            | Upper Structures                       |                                   |
| and           | 51.0                   | 3.0         | 0.70        | 0.5            | Upper Structures                       | Maximum of 1.0m internal dilution |
| HUS26RC_048   | <b>30.0</b>            | <b>13.0</b> | <b>1.63</b> | <b>0.5</b>     | Upper Structures                       | Maximum of 4.0m internal dilution |
| including     | 30.0                   | 1.0         | 1.31        | 1.0            |  |                                   |
| and including | 32.0                   | 2.0         | 4.96        | 1.0            |  |                                   |
| and including | 38.0                   | 1.0         | 2.05        | 1.0            |  |                                   |
| and including | 40.0                   | 3.0         | 2.14        | 1.0            |  |                                   |
| and           | 53.0                   | 5.0         | 0.80        | 0.5            | Upper Structures                       | Maximum of 2.0m internal dilution |
| including     | 53.0                   | 2.0         | 1.56        | 1.0            |  |                                   |
| and           | 63.0                   | 1.0         | 0.50        | 0.5            | Upper Structures                       |                                   |
| HUS26RC_049   | <b>65.0</b>            | <b>10.0</b> | <b>1.38</b> | <b>0.5</b>     | Upper Structures                       | Maximum of 1.0m internal dilution |
| including     | 67.0                   | 6.0         | 1.81        | 1.0            |  |                                   |
| and including | 74.0                   | 1.0         | 1.61        | 1.0            |  |                                   |



For personal use only

| Hole ID     | From (drill depth) (m)   | Width (m) | Au g/t | Cut-off Au g/t | Comment / internal zones below cut-off |
|-------------|--|-----------|--------|----------------|--|
| HUS26RC_050 |  | NSA       |        | 0.5            |  |
| HUS26RC_051 | 43.0   | 1.0       | 7.18   | 0.5            | Upper Structures                       |
| HUS26RC_052 |  | NSA       |        | 0.5            |  |
| HUS26DD_004 | Assays pending, geotechnical logging and testwork to be completed prior to sampling. |           |        |                |  |
| HUS26DD_005 |  |           |        |                |  |
| HUS26DD_006 |  |           |        |                |  |
| HUS26DD_007 |  |           |        |                |  |



## BACKGROUND: ST IVES / KAMBALDA - ONE OF AUSTRALIA'S MOST PROLIFIC GOLD CAMPS

The Kambalda / St Ives gold camp is one of Australia's most prolific gold production and discovery centres. Gold has been produced in the area since the discovery of the Red Hill gold mine in 1896 (adjacent to the Company's historical Silver Lake nickel mine at Kambalda). The area immediately encompassing and surrounding the FBA project produced gold from the 1920s onwards, but this goldfield came to prominence in the early 1980s when WMC commenced dedicated gold production from the adjacent Victory-Defiance Complex and the Hunt nickel mine, approximately 15km to the north near Kambalda.

The St Ives Gold Mine was sold by WMC to Gold Fields Limited (**Gold Fields**) in December 2001 after 5.6Moz<sup>4a</sup> of gold had been produced. With an expanded exploration budget requisite with being one of the world's major gold companies, Gold Fields has gone on to mine over 11Moz<sup>4b</sup> of gold itself and has found what is shaping to be the most significant discovery in the camp's history, the Invincible deposit (see **Figure 3**), suggesting that the biggest deposits are not always found first in the discovery cycle. The Company holds all mineral rights over the FBA, except gold in specific "Excluded Areas"<sup>5</sup>.

The Company highlights that all gold prospects being tested and evaluated are 100% owned by Lunnon Metals. The FBA project is located on granted mining tenements with significant existing infrastructure in place. Nearby gold plants include the Lefroy plant, a few kilometres to the north and owned and operated by the Company's major shareholder Gold Fields, Lakewood (ASX:BC8) and Higginsville plants (ASX:WGX).

The gold prospects of the Foster Gold Belt are typically hosted in the Defiance Dolerite, a known favourable host for gold in the immediate vicinity of Foster-Baker at the Victory-Defiance gold complex a few kilometres to the north. High-grade quartz veins were mined by prospectors in the 1920s in what was then called the Cooe/St Ives field (see ASX announcement dated 22 April 2024) with gold ore won from these workings treated at either the nearby historical State Battery or the privately owned Ives Reward battery, the relic sites of which are both located on what are now Lunnon Metals' leases.

## ABOUT THE KAMBALDA GOLD & NICKEL PROJECT (KGNP)

The KGNP features approximately 47sqkm of tenements in the Kambalda/St Ives district. KGNP is located approximately 570km east of Perth and 50-70km south-southeast of Kalgoorlie, in the Eastern Goldfields of Western Australia. KGNP comprises two project areas, Foster and Baker\* (19 contiguous mining leases) and Silver Lake and Fisher\* (20 contiguous mining leases). This world-renowned district has produced in excess of 1.6 million tonnes<sup>6</sup> of nickel metal since its discovery in 1966 by WMC. In addition, over 18Moz of gold<sup>6</sup> in total has been mined, making Kambalda/St Ives a globally significant gold camp in its own right.

The KGNP is accessed via public roads, well-established mine road infrastructure and the main St Ives causeway over Lake Lefroy. The KGNP is broadly surrounded by tenements held by SIGM, a wholly owned subsidiary of Gold Fields Limited (JSE:GFI) and the Company's major shareholder.

\*SIGM retains right<sup>5</sup> to explore for and mine gold in the "Excluded Areas" at the FBA, as defined in the subsisting agreements between Lunnon Metals and SIGM, and on the remaining area of the tenements, has select rights to gold in limited circumstances.

\*The Company has the exclusive rights to nickel on 19 mining leases and related access rights on one additional tenure. Gold Fields retains the rights to the other minerals (except to the extent minerals occur in conjunction with nickel mineralisation or nickel bearing ore but excluding gold).

<sup>4</sup> (a) sum of historical WMC production records to Dec 2001 and (b) sum of Gold Fields Annual Report filings thereafter.


<sup>5</sup> Refer to the Company's Prospectus (lodged 11 June 2021) for further details. SIGM has a pre-emptive right over gold material from the FBA (other than the Excluded Areas and the Lady Herial deposit).

<sup>6</sup> **Gold:** Sum of historical WMC production records to December 2001, sum of Gold Fields Ltd's, Karora Resources and Westgold Resources report filings thereafter. **Nickel:** Sum of historical WMC production records and relevant ASX company nickel production figures.



### DISCLAIMER

References in this announcement may have been made to certain previous ASX announcements, which in turn may have included Exploration Results, Exploration Targets, Mineral Resources, Ore Reserves and the results of Scoping and Pre-Feasibility or Feasibility Studies. For full details, please refer to the said announcement on the said date. The Company is not aware of any new information or data that materially affects this information. Other than as specified in this announcement and mentioned announcements, the Company confirms it is not aware of any new information or data that materially affects the information included in the original market announcement(s), and in the case of estimates of Mineral Resources and Ore Reserves (if reported) that all material assumptions and technical parameters underpinning the estimates in the relevant announcement continue to apply and have not materially changed. The Company confirms that the Competent Person's findings in relation to the estimates of Mineral Resources and Ore Reserves (if reported) have not been materially modified from the original announcements reporting those estimates.

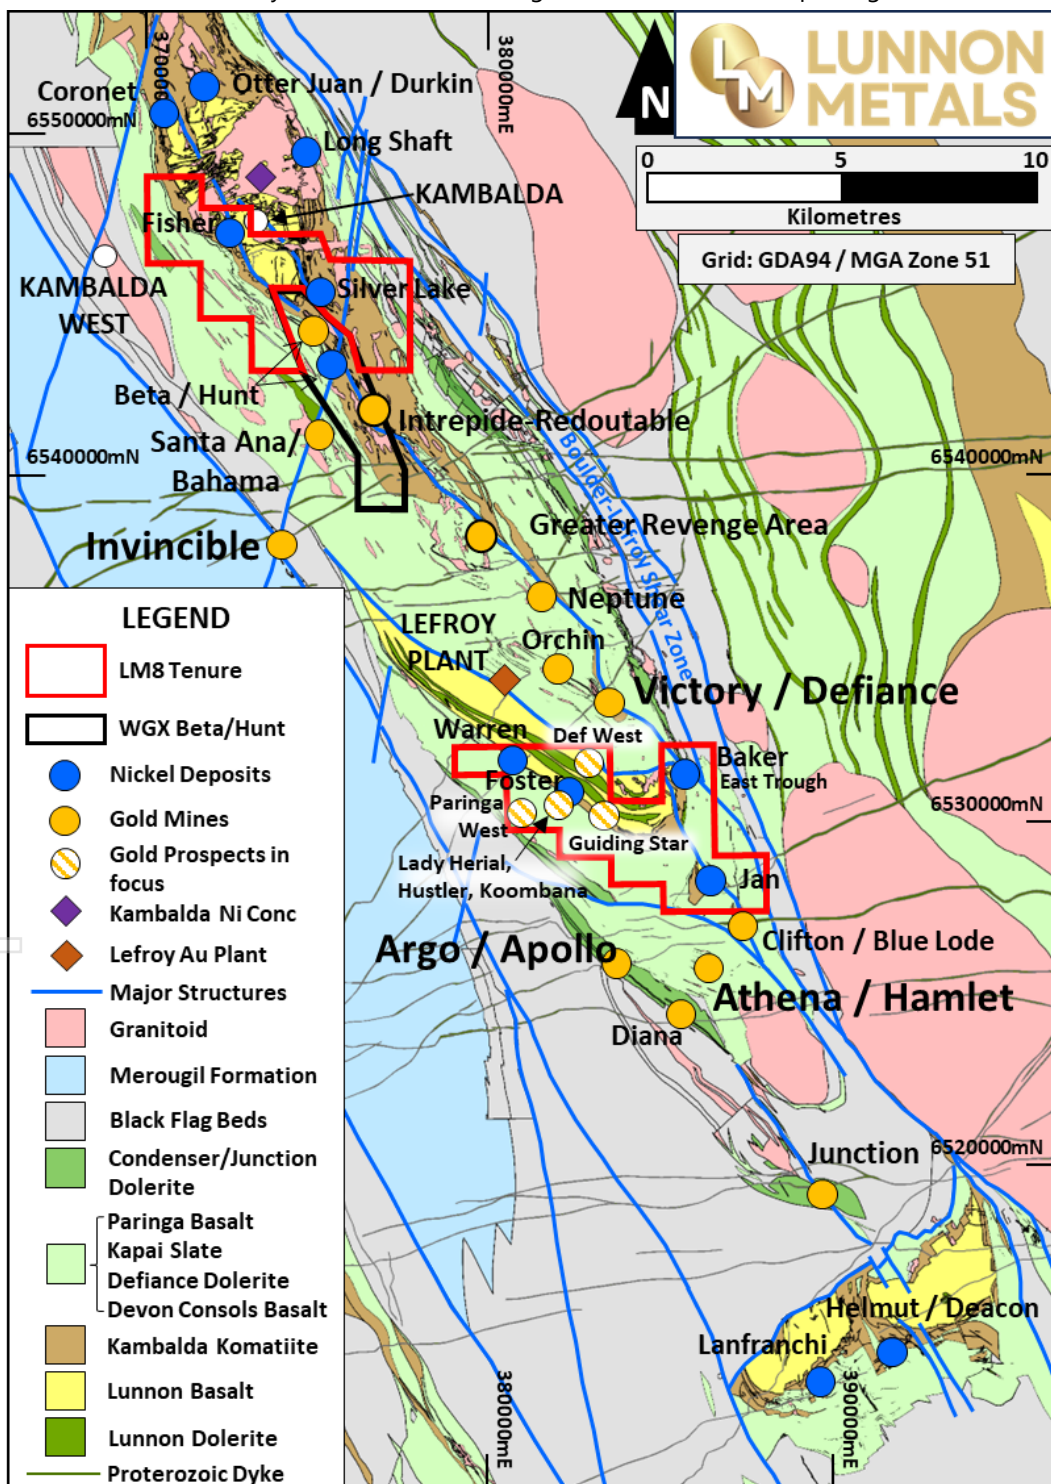

**Figure 3:** Location of the KGNP (red outlines) at the local Kambalda Nickel District / St Ives Gold Camp scale; showing surface geology and structure of this significant Australian gold camp.



## COMPETENT PERSONS' STATEMENTS

Any information in this or previous announcements that relates to gold and nickel geology, or informed gold and nickel Mineral Resources, **the Exploration Target reported today**, Exploration Results and the Company's Historical Core Program, which includes the accessing, re-processing, re-logging, cutting and assaying of historical WMC diamond core and the appropriateness of the use of this data and other historical geoscience hard copy data such as cross sections, underground level mapping plans, longitudinal projections and long sections, including commentary relying on personal experience whilst employed at Kambalda by WMC and Gold Fields, is based on, and fairly represents, information and supporting documentation prepared by Mr. Aaron Wehrle, who is a Member of the Australasian Institute of Mining and Metallurgy (**AusIMM**).

Mr. Wehrle is a full-time employee of the Company, a shareholder and holder of employee options/performance rights; he has sufficient experience that is relevant to the style of mineralisation and types of deposit under consideration and to the activity that he is undertaking to qualify as Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (**JORC Code**). Mr. Wehrle is the Company's **principal Competent Person** and consents to the inclusion in this announcement of the matters relating to the **Exploration Target** based on his information in the form and context in which it appears.

Any information in this or previous announcements that relates to, or informed, the Lady Herial or Hustler Mineral Resource estimate, geostatistics, methodology and estimation is based on, and fairly represents, information and supporting documentation prepared by Mr. Stephen Law, who is a Fellow of the AusIMM and also holds current Chartered Professional (Geology) status. Mr Law is a full-time employee of Lunnon Metals Ltd, a shareholder and holds employee performance rights; he has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that he is undertaking to qualify as Competent Person as defined in the JORC Code. Mr. Law consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

Any information in this or previous announcements that relates to or informed the previous Lady Herial area gold metallurgical testwork program, was based on, and fairly represents, information and supporting documentation prepared by Mr. Barry Cloutt, who is a Member of the AusIMM. Mr. Cloutt is an external and independent consultant to the Company and has sufficient experience that is relevant to the activity that he is undertaking to qualify as Competent Person as defined in the JORC Code. Mr. Cloutt consented to the inclusion in this Study of the matters based on his information in the form and context in which it appears.

Any information in this or previous announcements that relates to the mining, metallurgical and environmental Modifying Factors or assumptions (including information in prior Table 1, sections 1,2,3 and 4), as they may apply was based on, and fairly represents, information and supporting documentation prepared by Mr. Wehrle, Mr. Max Sheppard and Mr. Edmund Ainscough. Messrs. Sheppard and Ainscough are also Competent Persons and Members of the AusIMM. Mr Ainscough is a full-time employee, and Mr Sheppard is a permanent, part-time employee, both of Lunnon Metals Ltd. Both Messrs. Ainscough and Sheppard are shareholders and hold employee performance rights in Lunnon Metals Ltd.

Messrs. Wehrle, Sheppard and Ainscough have sufficient experience that is relevant to the style of mineralisation, both gold and nickel, the types of deposit under consideration, the activity that they are undertaking and the relevant factors, in particular regarding Lady Herial and Hustler specifically and the Foster-Baker project area more generally, the historical Foster mine and the KGNP regionally, to qualify as Competent Persons as defined in the JORC Code. Messrs. Sheppard, Wehrle and Ainscough consent to the inclusion in this announcement of the matters based on their information in the form and context in which it appears.

The information in this announcement or previous announcements that relates to Ore Reserves at Lady Herial is also based on information compiled by Mr. Sheppard, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr. Sheppard's details are as above. Mr. Sheppard has sufficient experience relevant to the style of mineralisation and type of deposit under consideration, and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Sheppard consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.



## GOLD MINERAL RESOURCES

The detailed breakdown, by deposit and mineralised structure, of the Company's gold Mineral Resources<sup>7</sup>, above a 0.5g/t Au cut-off, at 12 March 2026, is as follows:

|                    | Measured       |            |               | Indicated      |            |               | Inferred       |            |               | Total            |            |               |
|--------------------|----------------|------------|---------------|----------------|------------|---------------|----------------|------------|---------------|------------------|------------|---------------|
|                    | Tonnes         | Au g/t     | Au Ounces     | Tonnes         | Au g/t     | Au Ounces     | Tonnes         | Au g/t     | Au Ounces     | Tonnes           | Au g/t     | Au Ounces     |
| <b>LADY HERIAL</b> |                |            |               |                |            |               |                |            |               |                  |            |               |
| Upper              | 118,000        | 3.2        | 12,200        | 71,000         | 2.7        | 6,200         | 61,000         | 1.0        | 1,900         | 250,000          | 2.5        | 20,300        |
| Middle             | 20,000         | 2.7        | 1,700         |                |            |               |                |            |               | 20,000           | 2.7        | 1,700         |
| Lower              | 116,000        | 2.0        | 7,500         | 157,000        | 1.5        | 7,300         | 93,000         | 2.7        | 8,000         | 367,000          | 1.9        | 22,800        |
| Sed/Paringa Basa   | 11,000         | 1.5        | 600           | 3,000          | 1.6        | 200           |                |            |               | 14,000           | 1.6        | 800           |
| MZ Surface         | 11,000         | 0.8        | 300           | -              |            |               |                |            |               | 11,000           | 0.8        | 300           |
| Northwest          | 34,000         | 1.7        | 1,800         | 58,000         | 2.1        | 3,800         | 36,000         | 2.3        | 2,700         | 128,000          | 2.0        | 8,300         |
| <b>HUSTLER</b>     |                |            |               |                |            |               |                |            |               |                  |            |               |
| Upper              |                |            |               | 153,000        | 1.5        | 7,200         | 431,000        | 1.4        | 20,000        | 584,000          | 1.4        | 27,200        |
| Lower              |                |            |               |                |            |               | 98,000         | 1.0        | 3,000         | 98,000           | 1.0        | 3,000         |
| <b>TOTAL</b>       | <b>310,000</b> | <b>2.4</b> | <b>24,100</b> | <b>442,000</b> | <b>1.7</b> | <b>24,700</b> | <b>719,000</b> | <b>1.5</b> | <b>35,600</b> | <b>1,472,000</b> | <b>1.8</b> | <b>84,400</b> |

The Mineral Resources are inclusive of the Ore Reserves.

## GOLD ORE RESERVES

Gold Ore Reserves as declared on 16 January 2026.

| Category     | tonnes         | Au g/t      | Au Oz         |
|--------------|----------------|-------------|---------------|
| Proved       | 268,250        | 1.89        | 16,270        |
| Probable     | -              | -           | -             |
| <b>Total</b> | <b>268,250</b> | <b>1.89</b> | <b>16,270</b> |

## NICKEL MINERAL RESOURCES

The detailed breakdown of the Company's nickel Mineral Resources<sup>7</sup>, above a 1.0% Ni cut-off, restated at 30 June 2025, is as follows:

|                       | Measured Ni    |            |              | Indicated Ni     |            |               | Inferred Ni      |            |               | Total Ni         |            |                |
|-----------------------|----------------|------------|--------------|------------------|------------|---------------|------------------|------------|---------------|------------------|------------|----------------|
|                       | Tonnes         | %          | Ni Tonnes    | Tonnes           | %*         | Ni Tonnes     | Tonnes           | %*         | Ni Tonnes     | Tonnes           | %*         | Ni Tonnes      |
| <b>FOSTER MINE</b>    |                |            |              |                  |            |               |                  |            |               |                  |            |                |
| Warren                |                |            |              | 345,000          | 2.6        | 8,800         | 100,000          | 2.4        | 2,400         | 445,000          | 2.5        | 11,200         |
| <b>Foster Central</b> |                |            |              |                  |            |               |                  |            |               |                  |            |                |
| 85H                   |                |            |              | 395,000          | 3.2        | 12,800        | 294,000          | 1.2        | 3,600         | 689,000          | 2.4        | 16,400         |
| N75C                  |                |            |              | 271,000          | 2.6        | 6,900         | 142,000          | 1.9        | 2,600         | 413,000          | 2.3        | 9,500          |
| S16C/N14C             |                |            |              | -                | -          | -             | 64,000           | 5.7        | 3,700         | 64,000           | 5.7        | 3,700          |
| South                 |                |            |              | 264,000          | 4.7        | 12,400        | 111,000          | 4.7        | 5,200         | 375,000          | 4.7        | 17,600         |
| Sub total             |                |            |              | <b>1,275,000</b> | <b>3.2</b> | <b>40,900</b> | <b>711,000</b>   | <b>2.5</b> | <b>17,500</b> | <b>1,986,000</b> | <b>2.9</b> | <b>58,400</b>  |
| <b>BAKER AREA</b>     |                |            |              |                  |            |               |                  |            |               |                  |            |                |
| Baker                 | 110,000        | 3.4        | 3,700        | 622,000          | 3.7        | 22,900        | 298,000          | 2.4        | 7,100         | 1,030,000        | 3.3        | 33,700         |
| East Trough           |                |            |              | -                | -          | -             | 108,000          | 2.7        | 3,000         | 108,000          | 2.7        | 3,000          |
| Sub total             | <b>110,000</b> | <b>3.4</b> | <b>3,700</b> | <b>622,000</b>   | <b>3.7</b> | <b>22,900</b> | <b>406,000</b>   | <b>2.5</b> | <b>10,100</b> | <b>1,138,000</b> | <b>3.2</b> | <b>36,700</b>  |
| <b>SILVER LAKE</b>    |                |            |              |                  |            |               |                  |            |               |                  |            |                |
| 25H                   |                |            |              | 336,000          | 1.6        | 5,300         | 488,000          | 1.7        | 8,500         | 824,000          | 1.7        | 13,800         |
| Sub total             |                |            |              | <b>336,000</b>   | <b>1.6</b> | <b>5,300</b>  | <b>488,000</b>   | <b>1.7</b> | <b>8,500</b>  | <b>824,000</b>   | <b>1.7</b> | <b>13,800</b>  |
| <b>FISHER</b>         |                |            |              |                  |            |               |                  |            |               |                  |            |                |
| F Zone                |                |            |              | 56,000           | 2.7        | 1,500         | 196,000          | 1.6        | 3,200         | 252,000          | 1.9        | 4,700          |
| Sub total             |                |            |              | <b>56,000</b>    | <b>2.7</b> | <b>1,500</b>  | <b>196,000</b>   | <b>1.6</b> | <b>3,200</b>  | <b>252,000</b>   | <b>1.9</b> | <b>4,700</b>   |
| <b>TOTAL</b>          | <b>110,000</b> | <b>3.4</b> | <b>3,700</b> | <b>2,289,000</b> | <b>3.1</b> | <b>70,600</b> | <b>1,801,000</b> | <b>2.2</b> | <b>39,300</b> | <b>4,200,000</b> | <b>2.7</b> | <b>113,600</b> |

<sup>7</sup> As defined in the Joint Ore Reserves Committee of the Australian Institute of Mining and Metallurgy, Australian Institute of Geoscientists and Minerals Council of Australia (JORC): 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves.



## JORC TABLE 1

The following tables address historical WMC and Gold Fields exploration activities/methods and Lunnon Metals' reverse circulation, diamond drilling and aircore programs as well as covering the Company's Historical Core Program, again where relevant. This report may by necessity also then references past DD, RC, Aircore and grab sampling results, which are therefore covered in this Table 1 for completeness.

### SECTION 1: SAMPLING TECHNIQUES AND DATA

| Criteria                   | JORC Code explanation   | Commentary  |
|----------------------------|---|---|
| <b>Sampling techniques</b> | <p><i>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down-hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i></p> | <ul style="list-style-type: none"> <li>All drilling and sampling are undertaken in an industry standard manner both by Lunnon Metals Ltd (<b>Lunnon Metals</b> or the <b>Company</b>) since 2021 and historically by both Gold Fields Ltd (<b>Gold Fields</b>) from 2001 to 2014 and WMC Resources Ltd (<b>WMC</b>) from 1966 to 2001 (collectively <b>Previous Owners</b>).</li> <li>Lunnon Metals' aircore (<b>AC</b>), diamond drill (<b>DD</b>) and reverse circulation (<b>RC</b>) holes are completed by Blue Spec Drilling Pty Ltd (<b>Blue Spec</b>) following protocols and QAQC procedures aligned with industry best practice.</li> <li>Any DD holes on the surface of the salt lake, Lake Lefroy, were drilled by Ausdrill Pty Ltd (<b>Ausdrill</b>), using a track-mounted lake rig.</li> </ul> <p><b>RC Lunnon Metals</b></p> <ul style="list-style-type: none"> <li>RC samples are collected directly into calico sample bags on a 1.0m basis from a cone splitter mounted on the drill rig cyclone. 1.0m sample mass typically averages 3.0kg splits.</li> <li>Sub-sampling techniques and sample preparation are described further below in the relevant section.</li> <li>Sample sizes are considered appropriate for the material sampled.</li> <li>The samples are considered representative and appropriate for this type of drilling.</li> <li>RC samples are appropriate for use in a Mineral Resource estimate.</li> </ul> <p><b>DD Lunnon Metals</b></p> <ul style="list-style-type: none"> <li>Core samples are collected with a DD rig typically drilling HQ (63.5mm core diameter) and/or NQ2 (51mm core diameter) either from surface or as tails from RC pre-collars. Occasionally PQ (83mm core diameter) is drilled in shallow holes which have the additional purpose of collecting material and data for metallurgical and geotechnical studies. HQ3 (61mm core diameter) is occasionally used for shallow geotechnical holes.</li> <li>All DD core is stored in industry standard plastic core trays labelled with the drill hole ID and core depth intervals.</li> <li>Sub-sampling techniques and sample preparation are described further below in the relevant section.</li> <li>Sample sizes are considered appropriate for the material sampled.</li> <li>The samples are considered representative and appropriate for this type of drilling.</li> <li>DD core samples are appropriate for use in a Mineral Resource estimate.</li> </ul> <p><b>Historical data</b></p> <ul style="list-style-type: none"> <li>Sampling procedures followed by Previous Owners in the drilling, retrieval, and storage of AC, RC and DD samples and core were in line with industry standards at the time.</li> <li>Surface diamond drill obtaining NQ (48mm) and/or BQ (37mm) diameter drill core, were the standard exploration sample techniques employed by WMC. Underground DD was also used extensively in the operating environment, with drilling of both up and down holes, retrieving typically BQ diameter drill core and to a lesser extent AQ (22mm) diameter drill core.</li> <li>The core trays were labelled with the drill hole number and numbered with the downhole meterage for the start of the first 1 m run and the end of the last 1 m run on the lip of the core tray and typically included core blocks within the core trays demarcating the depth meterage of rod pull breaks.</li> </ul> |



For personal use only

| Criteria                               | JORC Code explanation   | Commentary  |
|--|---|---|
| <b>Sampling techniques (continued)</b> |   | <ul style="list-style-type: none"> <li>The earlier drilling was collected in wooden, and hybrid wooden/steel core trays and occasionally depths recorded in feet.</li> </ul> <p><b>Handheld XRF</b></p> <ul style="list-style-type: none"> <li>Where a handheld XRF tool was used to collect any exploration data reported, it was done so to assess the levels of key chemical elements. The individual XRF results themselves are not reported and any element values or ratios are used as a guide only for lithological and alteration logging/sampling and to assist vectoring to potential mineralisation. No XRF results are used in any MRE.</li> </ul> <p><b>Surface rock chip and grab Sampling</b></p> <ul style="list-style-type: none"> <li>Rock chip samples are taken manually from outcrop exposures using geological pick / crack hammer while grab samples are collected from loose rock material proximal to its original source such as spoils from historical sample pits and surface rock float.</li> <li>Larger rock samples may be reduced in size using geological pick / crack hammer for representative sample compositing purposes.</li> <li>Individual samples comprise several rock chips / grab samples from the area of interest, typically totalling 1.0 to 3.0kg collected in pre-numbered calico bags.</li> <li>The sampling methodology is considered to be appropriate for the intended purpose of the data.</li> <li>Sub-sampling techniques and sample preparation are described further below in the relevant section.</li> <li>Sample sizes are considered appropriate for the material sampled and the intended use of the assay data in exploration planning only.</li> <li>The samples are not considered appropriate for use, and will not be used, in any MRE.</li> </ul>   |
| <b>Drilling techniques (continued)</b> | <p><i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i></p> | <p><b>RC Lunnon Metals</b></p> <ul style="list-style-type: none"> <li>RC holes are typically drilled with a 5 1/2-inch bit and face sampling hammer. Holes are drilled dry with use of booster/auxiliary air when/if ground water is encountered.</li> <li>In the case of short holes not likely to intersect the water table and thus not requiring the use of booster/auxiliary air, a 4-inch bit and face sampling hammer may be used.</li> </ul> <p><b>DD Lunnon Metals</b></p> <ul style="list-style-type: none"> <li>Core samples are collected with a DD rig typically drilling HQ (63.5mm core diameter) and/or NQ2 (51mm core diameter) from surface, or as tails from RC pre-collars, or as wedge holes off parent DD holes. Occasionally PQ (83mm core diameter) or HQ3 (61mm core diameter) is drilled in shallow holes which have the additional purpose of collecting material and data for metallurgical and geotechnical studies.</li> <li>Triple tube HQ or PQ drilling techniques may be used where maximum recovery and preservation of core is required through the weathered zone from surface until competent fresh rock ground conditions are reached.</li> <li>To help accurately test the targets, "navi" or motor drilling is sometimes used over short runs to control the direction of the drill hole. In these instances, no drill core or sample is returned from that portion of the drill hole. No navi drilling is undertaken within expected intervals of mineralisation.</li> <li>Wedge holes, where present, utilise the parent hole to a given depth then branch off from the parent hole using either a casing wedge, a Hall-Rowe wedge, or a natural elbow, or navi bend, in the parent hole from where a lip can be cut with the diamond drill bit and the wedge hole drilled straight off the parent.</li> <li>The DD core is orientated during the drilling process by the drill contractor, using a down hole Reflex ACTIITM Rapid Descent Digital Core Orientation Tool, and then reconstructed over zones of interest by Lunnon Metals field staff for structural and geotechnical logging.</li> </ul> <p><b>Historical Drilling</b></p> |





For personal use only

| Criteria   | JORC Code explanation   | Commentary  |
|--|---|---|
|  |   | <ul style="list-style-type: none"> <li>• The geological logs document lithology, textures, structures, alteration, and mineralisation observed in drill core captured both graphically and in a five-character logging code (Lunnon Metals notes that a previous logging legend employed at WMC's Kambalda Nickel Operations utilised a 3-letter code which is often represented on hard copy plans and cross sections of an older vintage and which was converted by WMC to the latter 5-character code at some later time).</li> <li>• Stratigraphy is also captured in a three-character logging code. Sample intervals are recorded on the graphical log. These logging legends are well documented in lieu of a recorded procedure and are utilised by Lunnon Metals in current logging practices.</li> <li>• In regard geotechnical logging or procedures, there is no record of any formal relevant procedures or logging and based on personal experience of the Competent Person, such logging was not routinely completed prior to the introduction of Regulation 10:28 in the WA Mine Safety and Inspection Act, requiring the same in approximately 1996.</li> <li>• Based on the personal experience of the relevant Competent Person to this announcement, having worked for WMC in Kambalda between 1996 and 2001, and Gold Fields between 2001 and 2006, it is known that the Previous Owners had a rigorous and regimented system for storing and archiving the graphical logs physically, microfilmed, and drafted on to master cross sections, plans, and long sections.</li> <li>• Starting in the early 2000s under Gold Fields ownership drillhole logging information was captured digitally via rugged tablet, field- based laptops (known as "Toughbooks") using a newly developed in-house (and industry standard) geological logging legend which was overseen by the Competent Person who was Exploration Manager for the St Ives Gold Mining Co Pty Ltd (<b>SIGM</b>) at that time.</li> <li>• Both the graphically captured interval data and the more recently digitally captured geological logging information was stored in a secure digital database.</li> <li>• Lunnon Metals sourced historical diamond core from the SIGM Kambalda core yard on Durkin Road where relevant to its investigations.</li> </ul> <p><b>Optical Televiewer downhole surveys</b></p> <ul style="list-style-type: none"> <li>• For additional information regarding Optical Televiewer surveys please refer to Table 1 section 2 'Other substantive exploration data' criteria.</li> </ul> <p><b>Surface rock chip and grab sampling</b></p> <ul style="list-style-type: none"> <li>• All rock chip / grab samples have been geologically described and recorded by a qualified geologist.</li> <li>• The geological logging was to a level appropriate for exploration planning purposes.</li> <li>• Geological logging of the samples is qualitative in nature.</li> </ul> |
| <p><b>Sub-sampling techniques and sample preparation</b></p> | <p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> | <p><b>Lunnon Metals RC</b></p> <ul style="list-style-type: none"> <li>• Dry RC samples are collected directly into calico sample bags on a 1.0m basis from a cone splitter mounted on the drill rig cyclone. 1.0m sample mass typically averages 3.0kg splits.</li> <li>• Duplicate samples are collected directly from the drill rig cyclone, at a rate of 1 in every 25 samples and more frequently in the expected mineralised zones.</li> <li>• After receipt of the RC samples by the independent laboratory the samples submitted for fire assay or multielement analysis are typically dried and pulverised with &gt;85% pulverised to 75micron or better. For sample weights &gt; 3kg the sample is dried, split and pulverised up to 3kg.</li> <li>• RC samples submitted for Chryso PhotonAssay™ (<b>PhotonAssay</b>) method of gold analysis, are dried and crushed to ~2-3mm and loaded into 330mL plastic jars (typically 400-650g) ready for analysing.</li> </ul> <p><b>Lunnon Metals DD (and re-sampling of Historical DD where relevant)</b></p> <ul style="list-style-type: none"> <li>• DD core samples are most typically collected with a diamond drill rig drilling HQ and/or NQ2 size core. After logging, sample interval mark-</li> </ul>  |
| <p><b>Sub-sampling techniques and sample</b></p>             | <p><i>Measures taken to ensure that the sampling is representative of the in-situ material collected,</i></p>   |   |



For personal use only

| Criteria   | JORC Code explanation  | Commentary   |
|--|--|--|
| <p><b>preparation (continued)</b></p>            | <p><i>including for instance results for field duplicate/second half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p> | <p>up, photographing, and geotechnical rock property test work, selected sample intervals of drill core are cut in half along the length of the drill core with a diamond saw in a Discoverer® Automatic Core Cutting Facility using a Corewise Auto Core Saw.</p> <ul style="list-style-type: none"> <li>• Typically, one half of the drill core is sent to the laboratory for assay and the other half retained in its original core tray.</li> <li>• The PQ metallurgical holes had one quarter sent to the assay laboratory and the remaining three-quarters is saved for metallurgical testwork samples.</li> <li>• Holes are marked up and sampled for assaying over mineralised and surrounding intervals at a typical minimum sample interval of 0.3m to ensure adequate sample weight and a typical maximum sample interval of 1.0m, constrained by geological boundaries.</li> <li>• Specific Gravity – Sufficient density measurements are taken for each mineralised DD sample for the Lunnon Metals drill holes.</li> <li>• Sample weights vary depending on core diameter, sample length and density of the rock. Regolith zonation is taken into account.</li> <li>• Field duplicate samples are collected at a rate of 1 in 25 samples, and more frequently in the identified mineralised zones, by cutting the core into quarters and submitting both quarters to the laboratory for analysis as two separate samples.</li> <li>• In the case of the metallurgical holes no field duplicates are collected to preserve a consistent amount of core for metallurgical testwork.</li> <li>• After receipt of the DD core samples by the independent laboratory the samples are dried, crushed to ~2mm, and pulverised with &gt;85% pulverised to 75micron or better. For sample weights &gt;3kg the sample is dried, crushed to ~2mm, split, and pulverised up to 3kg.</li> <li>• DD core samples submitted for PhotonAssay method of gold analysis, are dried and crushed to ~2-3mm and loaded into 330mL plastic jars (typically 400-650g) ready for analysing.</li> <li>• Sample sizes are considered appropriate for the style of mineralisation.</li> <li>• Samples are submitted to Intertek Genalysis in Kalgoorlie for sample preparation i.e. drying, crushing where necessary, and pulverising. Pulverised samples are then transported to Intertek Genalysis in Perth for analysis.</li> </ul> <p><b>Historical data</b></p> <ul style="list-style-type: none"> <li>• All historical core that was relevant to the mineralisation drilled and sampled by WMC as sighted by Lunnon Metals was sawn with half or quarter core sampling practices. It is assumed that all samples otherwise contributing to any estimation of mineralisation by Lunnon Metals were processed with this standard methodology.</li> <li>• In regard historical core if used in a future MRE, subsampling techniques for WMC drilled NQ and BQ and occasionally AQ size drill holes typically involved half and quarter sawn drill core with the quarter core dispatched for assaying in the case of NQ and BQ, and half core in the case of AQ.</li> <li>• Portions of drill core distal to the main high-grade mineralisation were sometimes 'chip sampled' by WMC. Lunnon Metals has chosen not to utilise such samples in any estimation of grade or mineralisation.</li> <li>• WMC typically sampled in interval lengths relevant to the underlying lithology and mineralisation such that sample interval lengths may vary from between minima of 0.05m and maxima up to 2.00m approximately within any mineralised zone.</li> <li>• Intervals of no mineralisation or interest were typically not sampled.</li> <li>• Review of historical drill core by Lunnon Metals indicated that the sample sizes were appropriate for the type, style and thickness of mineralisation being tested with sample breaks corresponding to lithological or mineralisation breaks being the norm. Although faded through time, sample depth intervals are evident as marked on the remaining half core as observed by Lunnon Metals and these correlate</li> </ul> |
| <p><b>Sub-sampling techniques and sample</b></p> |  |  |



For personal use only

| Criteria   | JORC Code explanation   | Commentary  |
|--|---|---|
| <p><b>preparation (continued)</b></p>                    |   | <p>to sample interval depths in the original paper graphical drill logs and the historical database.</p> <ul style="list-style-type: none"> <li>• While the Previous Owners' procedures for logging, sampling, assaying and QAQC of drillhole programs was not available at the time of this announcement it is interpreted that it was of high quality and in line with industry standards at that time.</li> <li>• It is the opinion of the relevant Competent Person that the sample preparation, security, and analytical procedures pertaining to the above-mentioned historical drilling by Previous Owners were adequate and fit for purpose based on:             <ul style="list-style-type: none"> <li>- Both WMC and Gold Fields' reputation in geoscience, in WMC's case stemming from their discovery of nickel sulphides in Kambalda in the late 1960s;</li> <li>- identification of procedures entitled "WMC QAQC Practices for Sampling and Analysis, Version 2 – adapted for St Ives Gold" dated February 2001 and which includes practices for gold and nickel; and</li> <li>- the first-hand knowledge and experience of the Competent Person of this announcement whilst working for WMC and Gold Fields at Kambalda between 1996 and 2006.</li> </ul> </li> </ul> <p><b>Surface rock chip and grab sampling</b></p> <ul style="list-style-type: none"> <li>• As the rock chip / grab samples are intended for exploration planning purposes only no Company sample preparation QAQC processes were undertaken (insertion of CRM's or blanks). Laboratory QAQC protocols were utilized in the sample preparation and analysis phase.</li> <li>• After receipt of the rock chip / grab samples by the independent laboratory the samples are dried, crushed to ~2mm, and pulverised with &gt;85% pulverised to 75micron or better. For sample weights &gt;3kg the sample is dried, crushed to ~2mm, split, and pulverised up to 3kg.</li> <li>• Rock chip / grab samples submitted for PhotonAssay method of gold analysis, are dried and crushed to ~2-3mm and loaded into 330mL plastic jars (typically 400-650g) ready for analysing.</li> <li>• Samples are submitted to Intertek Genalysis in Kalgoorlie for sample preparation i.e. drying, crushing where necessary, and pulverising. Pulverised samples are then transported to Intertek Genalysis in Perth for analysis.</li> </ul> |
| <p><b>Quality of assay data and laboratory tests</b></p> | <p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p> | <p><b>For Lunnon Metals RC and DD (and re-assaying of Historical DD where relevant) and surface rock chip / grab samples</b></p> <ul style="list-style-type: none"> <li>• Samples are submitted to Intertek Genalysis in Kalgoorlie for sample preparation such as drying, crushing where necessary, and pulverising.</li> <li>• Prepared samples are then transported to Intertek Genalysis in Perth for analysis.</li> <li>• For the purpose of gold exploration, samples have been typically submitted for 50g charge lead collection fire assay, while samples specifically located in weathered regolith and mineralised zones are submitted for the same multi-element suite as above for the purpose of assessing potential gold path finder elements.</li> <li>• From 2024 the Company has moved to PhotonAssay™ as its preferred methods of gold analysis. PhotonAssay is a high-energy X-ray source that is used to irradiate large mineral samples, typically about 0.5 kg. The X-rays induce short-lived changes in the structure of any gold nuclei present. As the excited gold nuclei return to their ground state, they emit a characteristic gamma-ray signature, the intensity of which is directly proportional to the concentration of gold. The penetrating nature of PhotonAssay provides much higher energy than those used in conventional X-ray fluorescence (XRF), which provides a true bulk analysis of the entire sample. Samples are presented into a fully automatic process where samples are irradiated, measured, data collected and reported.</li> </ul>   |



For personal use only

| Criteria  | JORC Code explanation  | Commentary  |
|---|--|---|
|   |  | <ul style="list-style-type: none"> <li>• Samples are analysed for a multi-element suite (typically 33 or 48 elements) including, as a minimum, Ni, Cu, Co, Cr, As, Fe, Mg, Pb, S, Ti, Zn. Analytical techniques used a four-acid digest (with ICP-OES or ICP-MS finish) of hydrofluoric, nitric, perchloric and hydrochloric acids, suitable for near total dissolution of almost all mineral species including silica-based samples.</li> <li>• Within the regolith portion of selected holes, the Triple Quad 53 Element Aqua Regia ICP-MS method may be used.</li> <li>• Within selected gold mineralised zones and all nickel mineralised zones, the platinum group elements (Pd, Pt, Au) are also analysed using a 50g charge lead collection fire assay method with ICP-MS finish.</li> <li>• These techniques are considered quantitative in nature.</li> <li>• Industry prepared certified reference material (<b>CRM</b>), or standard samples, of various grades appropriate to the mineralisation expected are inserted into the sample batches, approximately every 50 samples and more frequently in the expected mineralised zones.</li> <li>• Lunnon Metals prepared blank samples are inserted, approximately every 50 samples and more frequently in the identified mineralised zones. At present blank samples are prepared from CRM Bunbury Basalt. In the past blanks were prepared from barren non-ultramafic RC chips as verified by laboratory analysis or barren non-ultramafic Proterozoic Dyke DD core acquired locally and verified by geological logging.</li> <li>• The independent laboratory also carries out numerous internal standards in individual batches.</li> <li>• The resultant Lunnon Metals and laboratory QAQC data is reviewed upon receipt to determine that the accuracy and precision of the data has been identified as acceptable prior to being cleared for upload to the project-wide Lunnon Metals KGNP Geobank® (Micromine) database (<b>Database</b>).</li> </ul> <p><b>Historical data</b></p> <ul style="list-style-type: none"> <li>• There is no data available at the time of this announcement pertaining to the assaying and laboratory procedures nor the historical field or laboratory quality assurance and quality control (QAQC), if any, undertaken by Previous Owners' drilling programs in the KGNP area; however, it is expected that industry standards as a minimum were likely to have been adopted in the KGNP area and the analytical laboratory.</li> </ul> |
| <p><b>Verification of sampling and assaying</b></p>             | <p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p> | <p><b>For Lunnon Metals RC and DD</b></p> <ul style="list-style-type: none"> <li>• In the case of current gold exploration, previous lodgements have specifically documented the results of drilling DD holes adjacent to previous Company RC holes.</li> <li>• Specific assayed gold interval samples nominated for verification are either re-split in the field via riffle splitter in the case of RC samples, or in the case of DD core the remaining half of core from the core trays are sampled. These full intervals of duplicate samples are assayed via the original and/or alternative methods as a means of verifying the original gold assays.</li> <li>• Prior to drilling, all planned collar data is captured in a digital drillhole collar register stored on a secure site-based server which is backed up to Perth based server continuously. The collar register is updated as drilling progresses and is completed.</li> <li>• Sample intervals are captured in digital QAQC'd spreadsheets via Toughbooks.</li> <li>• Since September 2023 the data collected on the Toughbooks synchronises directly to the Database stored on a separate secure sequel server. A set of buffer tables store the data before the database administrator does a second validation of the data (driven by in-built validation rules in the Database) before loading to the production data tables.</li> <li>• Assays from the laboratory are sent directly to the database administrator via a dedicated Lunnon Metals assays email address where</li> </ul>   |
| <p><b>Verification of sampling and assaying (continued)</b></p> |  |   |





For personal use only

| Criteria  | JORC Code explanation   | Commentary   |
|---|---|--|
|   |   | <ul style="list-style-type: none"> <li>• Downhole surveys of select historical surface DD have been conducted using modern gyro systems as described above and no significant errors or inconsistencies were deemed present.</li> <li>• Lunnon Metals has corrected where necessary incorrect data in the Database where down hole measurements from the hardcopy data were incorrectly processed.</li> <li>• No other significant errors or inconsistencies were deemed present or capable of being detrimental to any interpretation of gold or nickel mineralisation, including any MRE work.</li> </ul> <p><b>Surface rock chip and grab sampling</b></p> <ul style="list-style-type: none"> <li>• The rock chip / grab sampling points are located by handheld GPS to a typical accuracy of +/- 3m.</li> </ul>  |
| <p><b>Data spacing and distribution</b></p>             | <p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the drill spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied</i></p> <p><i>Whether sample compositing has been applied</i></p> | <p><b>For Lunnon Metals RC and DD</b></p> <ul style="list-style-type: none"> <li>• The AC, RC and DD programs at KGNP comprise drillhole spacings that are dependent on the expected target style and size, orientation and depth. Drillholes are not necessarily drilled to set patterns or spacing at the exploration stage of the program.</li> <li>• Previous drill spacing varies greatly, again subject to the target style, dimensions, orientation and depth and inherent geological variability and complexity.</li> <li>• All holes have been geologically logged and provide a strong basis for geological control and continuity of mineralisation.</li> <li>• No sample compositing has been applied other than to AC drilling where typically a single sample composite is produced from 2 individual metres of drilling however AC results are not appropriate for use, and have not been used, in any mineral resource estimate.</li> <li>• Assay results for all drill types are composited at the reporting stage of drill intercepts within a single hole.</li> <li>• In the case of drilling intended to serve as grade control on which future open pit production could be designed and scheduled, such as is the case at the Lady Herial gold deposit, the drill spacing aims to approximate 8m x 6m to 10m x 10m depending on the scale and variability of the mineralisation being defined.</li> </ul> <p><b>Historical data</b></p> <ul style="list-style-type: none"> <li>• The typical spacing for the early WMC DD surface drill traverses varies but is typically approximately 200m to 400m apart with drillhole spacing along the traverses at 100m to 50m. In areas of shallower RC drilling this drill spacing is sometimes improved to 100m by 50m or even 50m by 50m.</li> <li>• The drill spacing for areas the subject of underground DD holes was variable but was on average spaced at approximately 20m along the strike of a mineralised zone with fans or rings of DD holes that deliver pierce points in the dip orientation at variable spacing, but typically 10m to 20m apart.</li> <li>• The drill spacing for the gold prospects reported, with both Lunnon Metals surface DD and RC and Previous Owners surface DD, RC and AC, is variable but ranges typically from 320m, 160m, 80m, 40m, to 20m hole spacing depending on the maturity or state of advancement of the prospect by those Previous owners.</li> </ul> <p><b>Surface rock chip and grab sampling</b></p> <ul style="list-style-type: none"> <li>• Not relevant to the reporting of rock chip / grab samples.</li> <li>• Spacing of sample location is arbitrary, and dependent on the surface exposures identified in the field.</li> <li>• The location, assay results and geological descriptions of the rock chip / grab samples reported is not appropriate for use, and will not be used, in any mineral resource estimate.</li> </ul> |
| <p><b>Data spacing and distribution (continued)</b></p> |   |  |
| <p><b>Orientation of data in relation to</b></p>        | <p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is</i></p>   | <ul style="list-style-type: none"> <li>• The preferred orientation of drilling at KGNP is designed to intercept the target approximately perpendicular to the strike and dip of the mineralisation where/if known. Subsequent sampling is therefore considered representative of the mineralised zones if/when intersected.</li> </ul>   |





For personal use only

| Criteria | JORC Code explanation | Commentary  |
|----------|-----------------------|---|
|          |                       | <ul style="list-style-type: none"><li>• Cube were also requested to review and comment on the protocols developed by Lunnon Metals to deal with, and thereafter utilise, the historical WMC Resources' data, in particular the re-sampling and QAQC exercise completed by Lunnon Metals such that the data is capable of being used in accordance with current ASX Listing Rules where applicable and JORC 2012 guidelines and standards for the generation and reporting of MREs.</li><li>• Cube documented no fatal flaws in that work completed by Lunnon Metals in this regard.</li></ul> |



## SECTION 2: REPORTING OF EXPLORATION RESULTS

| Criteria                                       | JORC Code explanation   | Commentary   |
|--|---|--|
| <b>Mineral tenement and land tenure status</b> | <p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p> | <ul style="list-style-type: none"> <li>• The property is located on granted Mining Leases. Although all the tenements wholly or partially overlap with areas the subject of determined native title rights and interests, the Company notes that the original grant of the right to mine pre-dates 23 December 1996 and as such section 26D of the Native Title Act may be applied to exempt any future renewals or term extensions from the right to negotiate in Subdivision P of the Act.</li> <li>• Notwithstanding the above, on January 9, 2025, the Company announced that it had executed a Mining Agreement with the Ngadju Native Title Aboriginal Corporation RNTBC (<b>NNTAC</b>), covering the relevant parts of the KGNP that fall on Ndadju Determination Area country. The renewal of the Company's mining licences has now been confirmed with the new expiry date being 23 December 2046.</li> <li>• The complete area of contiguous tenements on which the Silver Lake-Fisher project and rights is located is, together with the wholly owned Foster-Baker project area on the south side of Lake Lefroy, collectively referred to as the Kambalda Gold &amp; Nickel Project ("KGNP") area.</li> <li>• Gold Fields Ltd's wholly owned subsidiary, SIGM, remains the registered holder and the beneficial owner of the Silver Lake- Fisher area.</li> <li>• Lunnon Metals holds:             <ul style="list-style-type: none"> <li>- 100% of the rights and title to the Foster-Baker (FBA) area of KGNP, its assets and leases, subject to certain select reservations and excluded rights retained by SIGM, principally relating to the right to gold in defined areas and the rights to process any future gold ore mined at their nearby Lefroy Gold Plant;</li> <li>- The FBA project area of KGNP comprises 19 tenements, each approximately 1,500 m by 800 m in area, and three tenements on which infrastructure may be placed in the future. The tenement numbers are as follows:<br/>M15/1546; M15/1548; M15/1549; M15/1550; M15/1551; M15/1553; M15/1556; M15/1557; M15/1559; M15/1568; M15/1570; M15/1571; M15/1572; M15/1573; M15/1575; M15/1576 M15/1577; M15/1590; M15/1592;</li> <li>- and additional infrastructure tenements:</li> <li>- M15/1668; M15/1669; M15/1670; and</li> <li>- 100% of the mineral rights to nickel and associated metals in the Silver Lake-Fisher (SLF) project area of KGNP, subject to the rights retained by SIGM as tenement holder and as detailed in the Mineral Rights Agreement (MRA). The tenement numbers are as follows (note select tenements are not wholly within the MRA area):<br/>M15/1497; M15/1498; M15/1499; M15/1505; M15/1506; M15/1507; M15/1511; M15/1512; M15/1513; M15/1515; M15/1516; M15/1523; M15/1524; M15/1525; M15/1526; M15/1528; M15/1529; M15/1530; M15/1531;<br/>and access rights to ML15/0142.</li> </ul> </li> <li>• There are no known impediments to potential future development or operations, subject to relevant regulatory approvals, over the leases where significant results have been reported.</li> <li>• The tenements are in good standing with the Western Australian Department of Mines, Petroleum and Exploration</li> </ul> |



For personal use only

| Criteria                                 | JORC Code explanation  | Commentary   |
|--|--|--|
| <b>Exploration done by other parties</b> | <i>Acknowledgement and appraisal of exploration by other parties.</i>  | <ul style="list-style-type: none"> <li>• In relation to nickel mineralisation, WMC, now BHP Nickel West Pty Ltd and a wholly owned subsidiary of BHP Group Ltd, conducted all relevant exploration, resource estimation, development and mining of the mineralisation at Foster, Jan, Silver Lake and Fisher mines from establishment of the mineral licences through to sale of the properties to SIGM in December 2001. Whilst the majority of this prior work had a nickel focus, some gold exploration did occur.</li> <li>• Approximately over 550,000m of DD was undertaken on the properties the subject of the FBA and SLF area by WMC prior to 2001.</li> <li>• SIGM has conducted later, limited gold exploration activities on the KGNP area since 2001, however until nickel focused work recommenced under Lunnon Metals management, no meaningful nickel exploration has been conducted since the time of WMC ownership and only one nickel focused surface diamond core hole (with two wedge holes), was completed in total since WMC ownership and prior to Lunnon Metals' IPO.</li> <li>• In relation to gold exploration, Lunnon Metals adopted a 100% gold focussed strategy in early 2024. Since that time over 34km of drilling has been completed by the Company, with over 500 RC holes and 25 DD holes completed.</li> <li>• In relation to past gold production, no modern gold production has occurred on FBA leases where Lunnon Metals has the gold rights. 1920s vintage gold production occurred and is understood to have totalled approximately 50k short tons, for 23.4koz of gold (source: "WA Government List of Cancelled Gold Mining Leases (which have produced gold)" WA DMP 1954).</li> <li>• On the KGNP, past total production from underground mining was conducted by WMC and was solely focused on nickel, recording in contained nickel metal terms:               <ul style="list-style-type: none"> <li>- Foster 61,129 nickel tonnes;</li> <li>- Jan 30,270 nickel tonnes;</li> <li>- Fisher 38,070 nickel tonnes; and</li> <li>- Silver Lake 123,318 nickel tonnes.</li> </ul> </li> </ul> |
| <b>Geology</b>                           | <i>Deposit type, geological setting and style of mineralisation.</i>   | <ul style="list-style-type: none"> <li>• The KGNP area is host to both typical Archaean greenstone gold deposits and 'Kambalda' style, komatiitic hosted, nickel sulphide deposits as routinely discovered and mined in the Kambalda/St Ives district.</li> <li>• The project area is host to gold mineralisation as evidenced by the past mining activities noted above and also nickel mineralisation and elements associated with this nickel mineralisation, such as Cu, Co, Pd and Pt.</li> </ul>   |
| <b>Drillhole information</b>             | <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i> <ul style="list-style-type: none"> <li>• easting and northing of the drillhole collar</li> <li>• elevation or RL (elevation above sea level in metres) of the drillhole collar</li> <li>• dip and azimuth of the hole</li> <li>• down hole length and</li> <li>• interception depth hole length</li> </ul> | <ul style="list-style-type: none"> <li>• Drill hole collar location and downhole directional information has been provided for all material drill holes within the body of this, or related previous ASX reports and also within the relevant Additional Details Table in the Annexures of this, or those reports.</li> <li>• Cross sections are often only able to be presented once sufficient pierce points on the same section have been generated and the interpretation sufficiently well advanced to present such sections in a meaningful manner.</li> </ul>   |

| Criteria  | JORC Code explanation  | Commentary  |
|---|--|---|
| <b>Data aggregation methods</b>   | <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>  | <ul style="list-style-type: none"> <li>Grades have been reported as intervals recording down-hole length and interpreted true width where this estimation is able to be made.</li> <li>Any grades composited and reported to represent an interpreted mineralised intercept of significance are reported as sample-length weighted averages over that drill intercept.</li> </ul> <p><b>Gold Exploration Results</b></p> <ul style="list-style-type: none"> <li>The Company currently considers that grades above 0.5 g/t Au and/or 1.0 g/t Au are worthy of consideration for individual reporting in any announcement of Exploration Results in additional details tables provided.</li> <li>Composite grades may be calculated typically to a 0.5 g/t Au cut-off with intervals greater than 1.0 g/t reported as "including" in any zones of broader lower grade mineralisation.</li> <li>Reported intervals may contain variable widths of internal waste (samples with values below stated cut-off grade) depending on the style of gold mineralisation being investigated however the resultant composite must be greater than either the 0.5 g/t Au or 1.0 g/t Au as relevant (or the alternatively stated cut-off grade).</li> <li>No top-cuts have been applied to reporting of drill assay results, and no metal equivalent values have been reported.</li> <li>Where present, historical SIGM drilling in the project area was typically only assayed for Au.</li> </ul> <p><b>Surface rock chip and grab sampling (where relevant)</b></p> <ul style="list-style-type: none"> <li>Only individual rock chip assay results have been released in the past.</li> <li>Results have not been aggregated.</li> <li>No metal equivalent values are reported.</li> <li>Results are from surface outcrops, existing historical sample pit spoils as relevant, and/or surface rock float and no estimate of width or geometry of the sampled medium is provided</li> </ul> |
| <b>Relationship between mineralisation widths and intercept lengths</b> | <p><i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p> | <ul style="list-style-type: none"> <li>In regard to the gold prospects reported, subject to the stage of maturity and thus understanding of the prospect and target mineralisation, again, if possible, drillholes are designed to intersect target surfaces at approximately perpendicular to the strike of mineralisation.</li> <li>Earlier stage or conceptual gold targets however may not be sufficiently well understood to allow this to be the case.</li> </ul>   |
| <b>Diagrams</b>   | <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to, a plan view of drillhole collar locations and appropriate sectional views.</i>  | <ul style="list-style-type: none"> <li>The Competent Person decides on the appropriate sectional representation, if one is possible.</li> <li>The one chosen may not be a cross section, if a longitudinal section or projection is considered more appropriate.</li> <li>If long plunge extents are present, long projections are often considered the most appropriate format to present most results, especially if there are insufficient drill hole intercepts to present meaningful, true cross sections.</li> <li>Isometric and plan views are also utilised to place drill results in context if possible.</li> <li>In regard the gold prospects reported, plan, isometric, long projection and/or cross section views are presented if sufficient data or individual drill intercepts are present to make this meaningful.</li> </ul>  |
| <b>Balanced reporting</b>   | <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>   | <ul style="list-style-type: none"> <li>Drill collar locations of Previous Owners Historical drilling and current drilling completed by Lunnon Metals have been previously lodged on the ASX platform and all results of the drilling have also been previously reported.</li> </ul>   |



For personal use only

| Criteria   | JORC Code explanation   | Commentary  |
|--|---|---|
| <p><b>Other substantive exploration data</b></p> | <p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p> | <ul style="list-style-type: none"> <li>• The KGNP has a long history of geological investigation, primarily for nickel, but also gold to a lesser degree.</li> <li>• Datasets pertinent to the KGNP that represent other meaningful and material information include:</li> <li>• Geophysics - multiple ground and aerial based surveys of magnetic, gravity, Sub Audio Magnetics, electro magnetics, and down hole transient electromagnetic surveys along with more limited 2D and 3D seismic surveys.</li> <li>• Geochemistry - gold and nickel soil geochemistry datasets across the KGNP and rock chip sampling in areas of outcrop.</li> <li>• Geotechnical test work on drill core is carried out by independent consultants MGT involving on-site geotechnical logging of the DD core and off-site rock property testing of selected DD core samples.</li> <li>• Downhole Transient Electro-magnetic (<b>DHTEM</b>) surveys, when conducted, use the DigiAtlantis system and DRTX transmitter. The readings are typically recorded at 2.5m to 10m intervals. The survey used loops ranging from 300m x 200m to 690m x 290m in orientations designed relative to the target and stratigraphic setting.</li> <li>• If required, the Company generally retains ABIM Solutions Pty Ltd (<b>ABIMS</b>) to use the latest generation QL40 OBI Optical Televiewer (<b>OTV</b>) and a customized logging vehicle, to conduct OTV wireline surveys in the project area in select RC or DD holes.</li> <li>• The OTV survey generates an oriented 360-degree image of the borehole wall by way of a CCD camera recording the image reflected from a prism.</li> <li>• ABIMS provide in-house OTV data interpretation techniques which include structural feature classifications along with structural feature dip and dip direction determination.</li> <li>• The OTV wireline surveys in RC holes, if applicable, are particularly useful in defining geological and structural orientation data, data that is otherwise unobtainable from RC drill chips.</li> <li>• Where completed, these OTV surveys can identify the downhole locations of geological and structural features potentially associated with gold mineralisation such as veining and shearing, such that the positions and intensity of these features can be reconciled with the RC chips used by the geologist for geological logging.</li> <li>• If required, ABIMS are also used to collected down-hole imaging data using the latest generation ABI40 Acoustic Televiewer (<b>ATV</b>) and a customised logging vehicle. The ATV wireline survey in DD holes provides down-hole geological definition, geotechnical rock mass characterisation, determination of fracture frequency and orientation, and primary stress orientation. The ABI40 ATV generates an image of the drillhole wall by transmitting ultrasound pulses from a rotating sensor and recording the amplitude and travel time of the signals reflected from the drillhole wall. Data is transferred back to the surface via a wireline in real time. Such data collected is used by the Company's geologists in support of deposit geological and structural modelling and by geotechnical consultants for geotechnical assessment purposes.</li> <li>• If required, Southern Geoscience Consultants Pty Ltd (<b>SGC</b>) provide an ultrasonic velocity meter for the collection of velocity data measurements on DD. Data from this coupled with density measurements will provide acoustic impedance information, enabling the reflectivity in the seismic section to be tied to the geology in the borehole.</li> </ul> <p><b>Commentary specific to previous metallurgical test work</b></p> <ul style="list-style-type: none"> <li>• Detailed metallurgical test work has been completed by the Company at its Lady Herial deposit to simulate the operating conditions at the SIGM Lefroy Plant.</li> </ul> |



For personal use only

| Criteria  | JORC Code explanation   | Commentary   |
|---|---|--|
| <b>Other substantive exploration data (continued)</b> |   | <ul style="list-style-type: none"> <li>• By commercial agreement with SIGM in the OPA, the metallurgical recovery factor has been set at 91.0% on the basis of this extensive test work.</li> <li>• The average metallurgical response from the test work was an overall gold recovery of 91.4% (for a 12-hour residence) and 94.6% (24-hour residence) at P80 passing 150µm.</li> <li>• The results of this test work have been previously reported on 17 February 2025 and 14 August 2025.</li> <li>• Given the extensive direct experience of the Competent Persons at St Ives, exploring and mining multiple deposits of similar mineralogical characteristics, they consider it reasonable to assume that other nearby and local prospects, will display a similar metallurgical response to Lady Herial itself.</li> <li>• Therefore, both the principal and relevant Competent Persons have concluded that there are reasonable prospects that the gold mineralisation reported will also be amenable to treatment at the gold processing facilities closest to the KGNP i.e. Lefroy.</li> <li>• More detailed, Hustler specific test work is underway.</li> </ul>  |
| <b>Further work</b>                                   | <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> | <ul style="list-style-type: none"> <li>• Since the Company's IPO through to end of May 2026, over 140,000m of diamond, RC or aircore drilling has now been completed at FBA and SLF, initially focused on nickel exploration until a shift of focus to gold in early 2024.</li> <li>• Nearly 33,000m of historical core has also been reprocessed in the Company's Historical Core Program (<b>HCP</b>) over that same period, for a total of 170km combined.</li> <li>• All Company work programs are continuously assessed against, and in comparison to, ongoing high priority programs elsewhere at the KGNP.</li> <li>• This report relates to an infill drilling at Hustler, a more advanced target. Further work will be an iterative process with assay, geological, geochemical, geophysical and litho-structural observations and results all contributing to a continuous assessment of the merits of the deposit, and how, or whether, to continue to pursue further data collection and further definition, potentially by continuing to drill.</li> <li>• Subject to further drilling results and success, future metallurgical and geotechnical assessment will be required and additional infill drilling of required prior to seeking to again update the MRE.</li> <li>• Thereafter, subject to positive ongoing results and external market and price variables, updates and future additions to the Company's MRE may then form the basis for development studies that may lead to the future declaration of a Probable Ore Reserve from those portions of the MRE at the Indicated (or higher) classification.</li> <li>• Any such Ore Reserves then in turn may form the basis of technical and economic studies to investigate the potential to exploit Hustler in the future.</li> </ul> |