

ASX Release

9 July 2026

FINAL ASSAYS CONFIRM GOLD MINERALISATION ALONG FULL 730M STRIKE AT BANSHEE, COONAMBULA

Dart Mining NL (ASX:DTM) (Dart Mining or the Company) is pleased to announce the assays of drill holes CBADD023 through CBADD039 (including re-drill CBADD031a), received from the Coonambula antimony (Sb) – gold (Au) project near Eidsvold in Central Queensland. These are the final outstanding assays from Dart Mining's recently completed 4,100m drilling program at the Banshee Prospect ([ASX: DTM 10 June 2026](#)). The project is a Farm-In Joint Venture with **Great Divide Mining (ASX:GDM)** ([ASX: DTM Mar 2025](#)).

HIGHLIGHTS

Assays from CBADD023 to CBADD039 complete the assay dataset for Dart Mining's maiden 4,000m drilling program at Banshee and confirm gold ($\pm$ silver) mineralisation over the full 730m of strike drilled to date. Highlight assays from the final batch include:


- **12.0m @ 1.03 g/t Au** + 1.01 g/t Ag from 128.0m (CBADD037) including:
 - **3.4m @ 1.78 g/t Au** + 2.20 g/t Ag from 128.0m; and
 - **0.9m @ 2.20 g/t Au** + 1.33 g/t Ag from 133.7m.
- **3.0m @ 1.96 g/t Au** from 33.0m (CBADD032) including:
 - **0.7m @ 6.64 g/t Au** from 34.7m.
- 2.75m @ 1.15 g/t Au from 39.2m (CBADD032);
- **1.45m @ 1.19 g/t Au + 21.55 g/t Ag from 10.0m** (CBADD032) including:
 - **0.45m @ 55.0 g/t Ag** from 10.0m.
- **1.1m @ 3.81 g/t Au** from 8.4m (CBADD028) including:
 - **0.5m @ 7.56 g/t Au** from 9.0m.
- **0.4m @ 3.01 g/t Au** from 29.3m (CBADD029);
- 1.9m @ 0.81 g/t Au + **16.04 g/t Ag** from 38.0m (CBADD026) including:
 - **0.6m @ 1.58 g/t Au + 48.94 g/t Ag** from 38.7m.

These results, together with the lesser gold intercepts returned from the balance of the batch (Table 1), confirm the Banshee gold-antimony-silver system remains open along the full drilled strike. Consistent with results reported from CBADD011 through CBADD022, the richest silver-antimony grades continue to be concentrated within discrete, shoot-like zones closer to the historical Banshee workings, rather than being uniformly distributed along strike like the gold is. A map showing these new results in relation to Banshee historical mine is shown in Figure 1.

Dart Mining's Chairman, James Chirnside, commented: "These final assays from our 4,100m program tell us a great deal about the scale of the system we're dealing with at Banshee. Having now tested a full 730m of strike, we're seeing gold mineralisation present from end to end, including in CBADD037, drilled well to the west and at depth, which returned our best result from this batch at 12 metres of consistent gold.

With the 4,100m program now fully assayed, the team is turning to compositing samples for metallurgical test-work and building out the 3D model that will underpin our maiden Mineral Resource Estimate, which will also see us move to 51% equity in the Project once complete. As always, thank you to our partners at Great Divide Mining and to the Dart exploration and drilling teams for another important step forward at Coonambula."

Figure 1: Location plan showing CBADD023–CBADD039 drill hole collars relative to previously reported holes and the interpreted Banshee mineralisation zone.

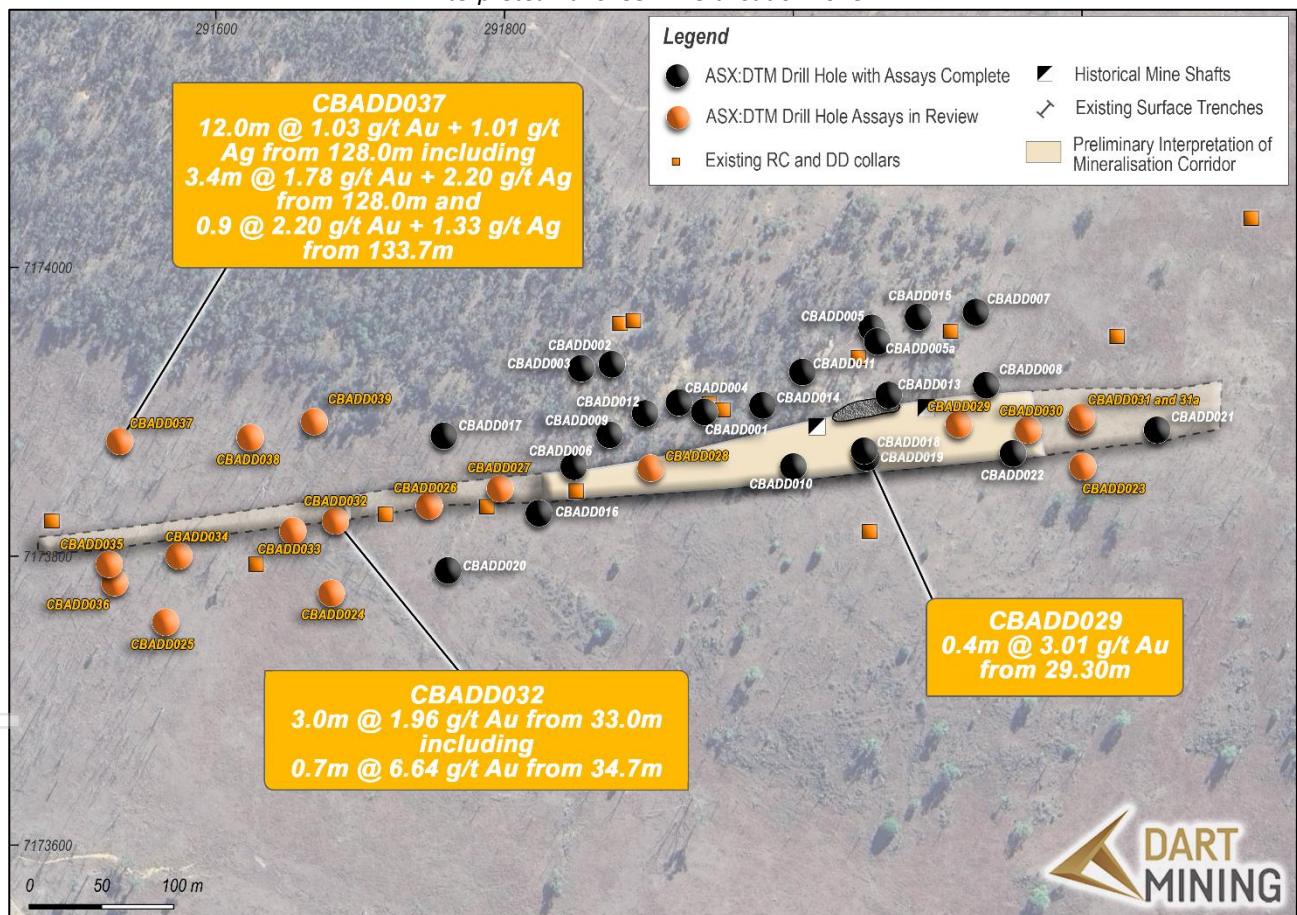

With the completion of these final assays, Dart Mining has now received and reported results for all 41 holes (4,100m) drilled under the first phase of the Coonambula farm-in, confirming the Company's increase to 45% equity in the Project ([ASX: DTM 10 June 2026](#)). A further 6% equity (to 51%) will be earned on completion of a maiden Mineral Resource Estimate which is planned following metallurgical sighter studies currently underway. Table 1 outlines the key intercepts from CBADD023 through CBADD039 and Appendix 1 provides the complete assay results. A long section of the drilling to date is shown in Figure 2.

Figure 2: Long section through the drilling showing gold grades intercepted to date and interpretation of high grade antimony and silver zone.

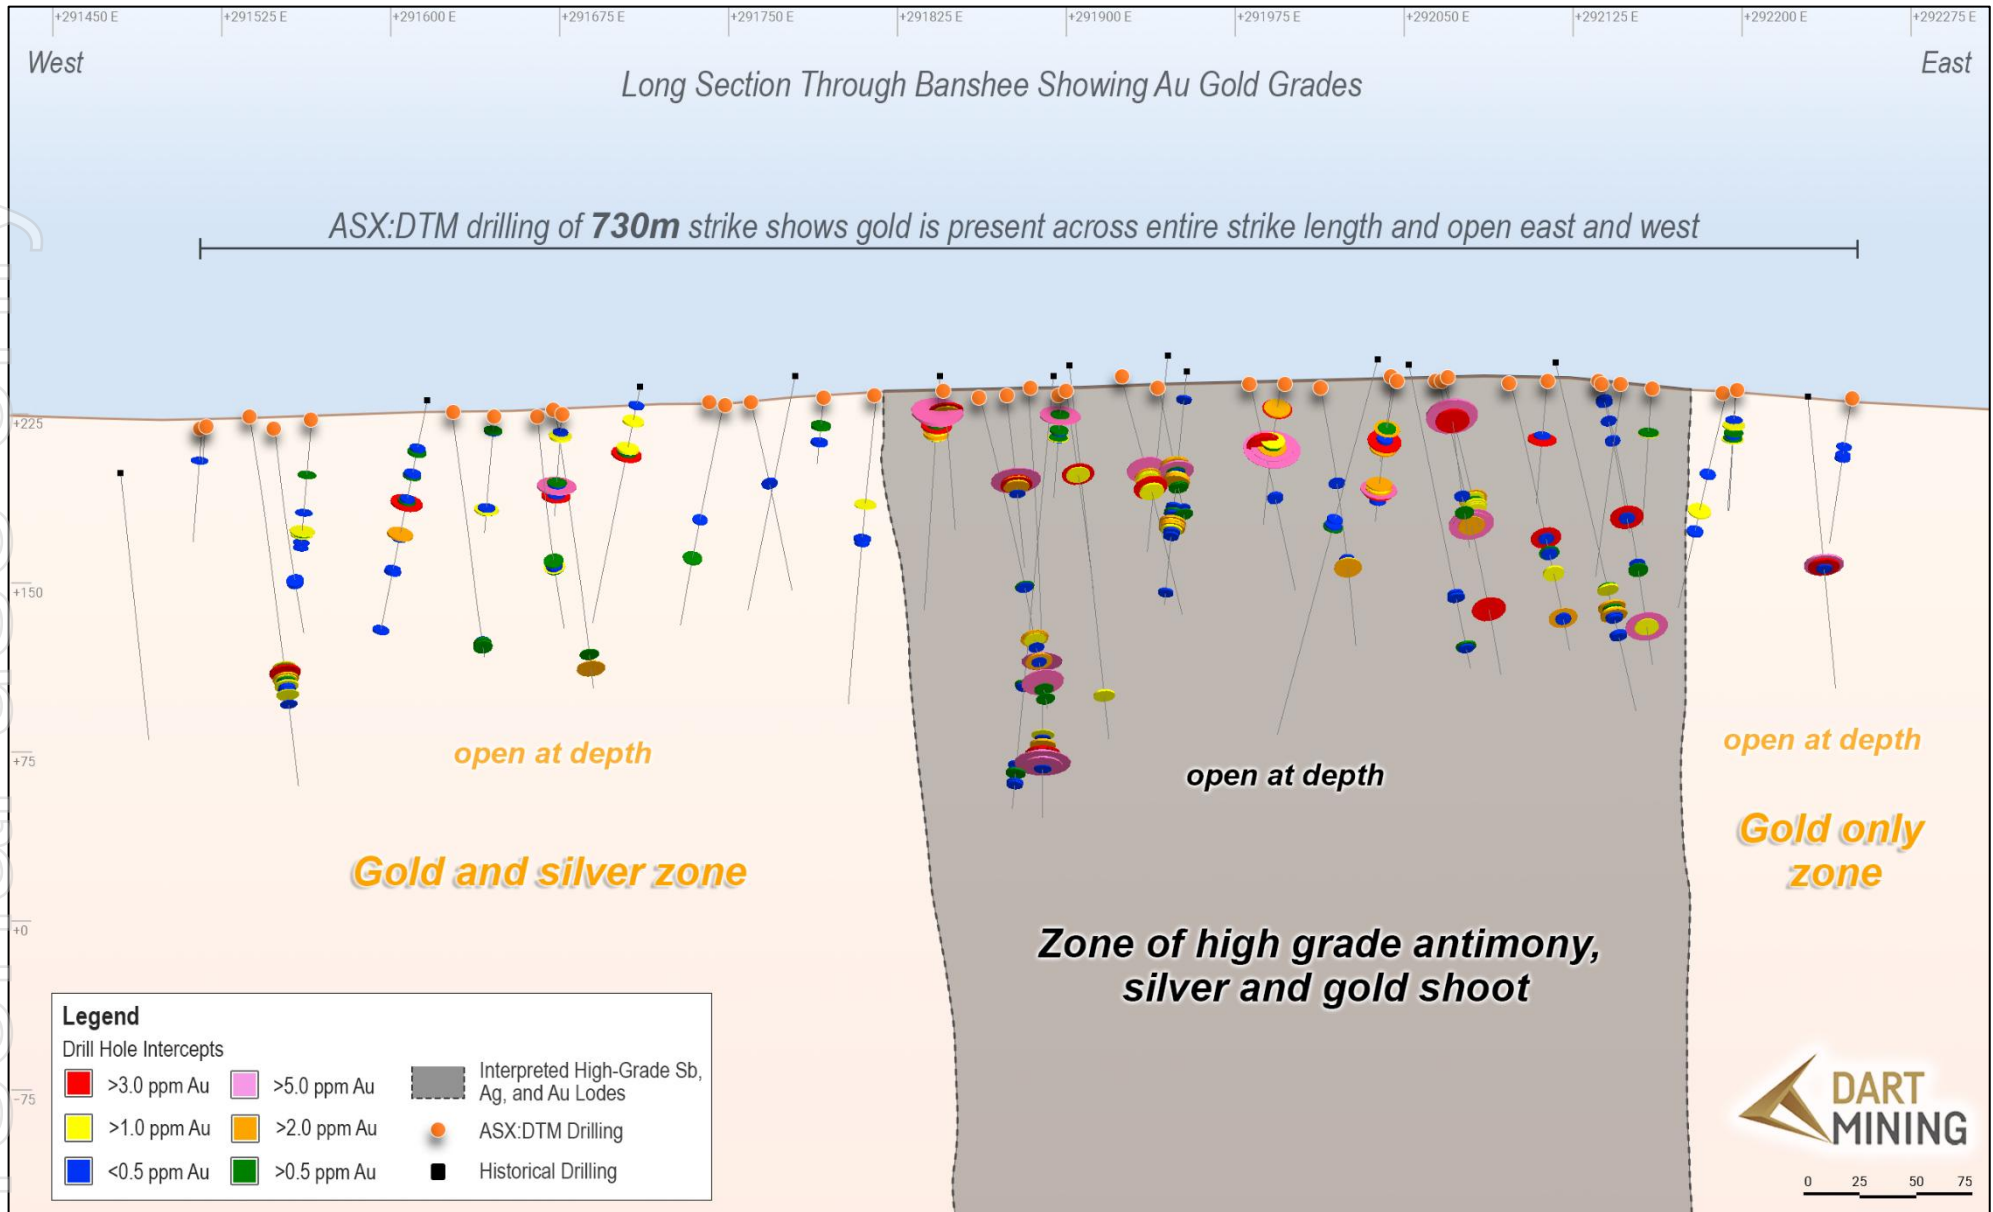


Table 1: Key drill intercepts from Dart's recent diamond drilling at the Coonambula project.

Drill Hole Name	From Depth (m)	Thickness (m)	Au g/t	Ag g/t	Sb %
CBADD023	69.00	1.10	1.27	1.67	0.00
CBADD024	85.60	0.70	0.85	0.79	0.00
CBADD024	87.80	2.70	0.50	0.63	0.00
Including	89.20	0.30	1.24	1.15	0.00
CBADD025	91.80	0.50	0.41	0.45	0.00
CBADD025	93.00	0.90	0.31	0.52	0.00
CBADD026	35.10	0.30	0.42	0.42	0.00
CBADD026	36.40	1.00	0.45	0.78	0.00
CBADD026	38.00	1.90	0.81	16.04	0.03
Including	38.70	0.60	1.58	48.94	0.09
CBADD027	12.60	1.50	0.84	0.71	0.00
CBADD027	21.00	1.00	0.36	0.28	0.00
CBADD028	8.40	1.10	3.81	0.20	0.02
Including	9.00	0.50	7.56	0.27	0.02
CBADD028	16.00	1.00	0.64	0.35	0.02
CBADD028	19.90	1.10	0.68	0.59	0.02
CBADD029	27.30	0.50	0.30	0.17	0.00
CBADD029	29.30	0.40	3.01	0.93	0.02
CBADD030	21.80	0.90	0.98	0.33	0.00
CBADD031	16.30	0.60	1.41	2.17	0.00
CBADD031	19.90	0.50	0.81	0.22	0.00
CBADD031a	13.70	0.50	0.38	0.61	0.00
CBADD031a	22.30	1.40	0.80	0.26	0.00
Including	23.30	0.40	1.26	0.25	0.00
CBADD032	10.00	1.45	1.19	21.55	0.01
Including	10.00	0.45	1.52	55.00	0.02
CBADD032	33.00	3.00	1.96	1.06	0.00
Including	34.70	0.70	6.64	1.41	0.00
CBADD032	39.20	2.75	1.15	0.83	0.00
Including	39.70	0.60	3.06	1.40	0.00
CBADD033	5.00	1.60	0.48	1.15	0.00
CBADD033	43.30	2.60	0.90	0.57	0.00
Including	44.10	0.80	1.84	0.84	0.00
CBADD034	25.40	0.30	0.71	0.73	0.00
CBADD034	43.90	0.20	0.45	0.77	0.00
CBADD034	52.80	0.50	1.97	1.22	0.00
CBADD034	54.00	1.00	0.94	1.09	0.00
CBADD035	14.40	0.40	0.01	11.34	0.01
CBADD035	16.30	1.10	0.10	25.93	0.01
Including	16.30	0.20	0.49	41.16	0.02
CBADD036	15.90	0.40	0.03	26.98	0.01
CBADD037	128.00	12.00	1.03	1.01	0.00
Including	128.00	3.40	1.78	2.20	0.00

Drill Hole Name	From Depth (m)	Thickness (m)	Au g/t	Ag g/t	Sb %
Including	133.70	0.90	2.20	1.33	0.00
CBADD037	142.00	0.50	1.35	0.77	0.00
CBADD037	146.80	0.50	0.36	0.96	0.00
CBADD038	119.40	0.90	0.57	1.07	0.00
CBADD038	121.30	0.80	0.74	0.68	0.00
CBADD039	125.10	0.55	0.77	2.08	0.01
CBADD039	132.10	0.90	1.71	0.79	0.00
Including	132.60	0.40	2.87	0.98	0.01


Drill holes CBADD023 through CBADD039 were drilled with two focuses envisioned. These include

1. A program of shallow, closely spaced holes testing the strike extent of the Banshee corridor both east (CBADD023, CBADD029 to CBADD031a) and west (CBADD024, CBADD025 and CBADD032 to CBADD036) of the previously drilled footprint; and
2. Three deeper holes (CBADD037 to CBADD039) that followed up the western step-out at depth.

Collectively, this drilling has extended the tested strike of the Banshee mineralisation to approximately 730m. Logging of this batch shows the same broad mineralisation style recorded previously at Banshee which is characterised as disseminated arsenopyrite, with local fine-grained stibnite along fracture surfaces and thin quartz–stibnite veinlets, hosted within coarse-grained granodiorite affected by pervasive sericite (± chlorite) alteration.

This is well illustrated in CBADD037, where the 12.0m gold intercept sits within a package of pervasively sericite-altered granodiorite cut by quartz–stibnite veining and disseminated arsenopyrite (Figure 3). Core photos of the large intersection in CBADD037 is shown in Figure 4.


Figure 3: Cross section through CBADD037 showing gold assays and interpreted mineralised zones.

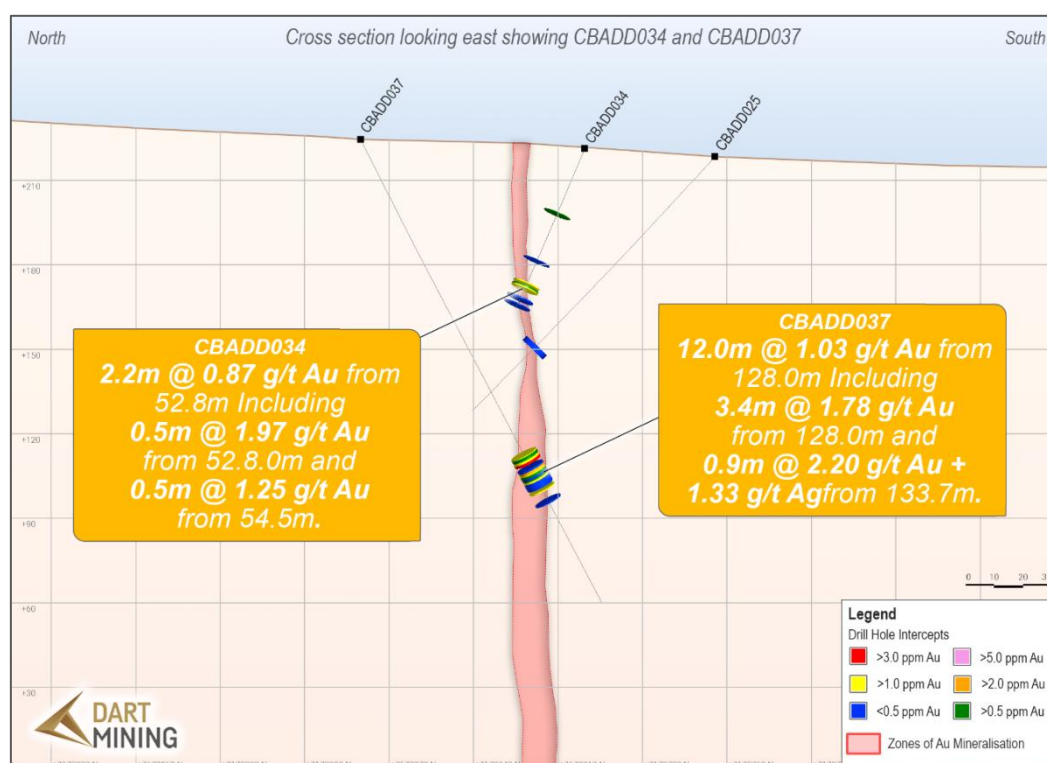

Despite the presence of stibnite in hand specimen through this and several other holes in the batch, assayed antimony grades are low (generally under 0.1% Sb), reinforcing Dart Mining's earlier interpretation that the high-grade Sb-Ag mineralisation at Banshee occurs as discrete, shoot-like zones within a more continuous gold-bearing structure.

The silver-only anomalism identified at CBADD035 and CBADD036, at the current western limit of drilling, is hosted within a shallow, iron-oxide altered zone with no significant sulphide mineralisation logged and no associated gold. This may reflect near-surface supergene remobilisation of silver and, together with the gold results from the adjacent CBADD032 to CBADD034, highlights this western corridor as an area warranting follow-up as Dart Mining plans its next phase of drilling.

Figure 4: Core photos from CBADD037 highlighting key gold-mineralised intervals and alteration/veining.

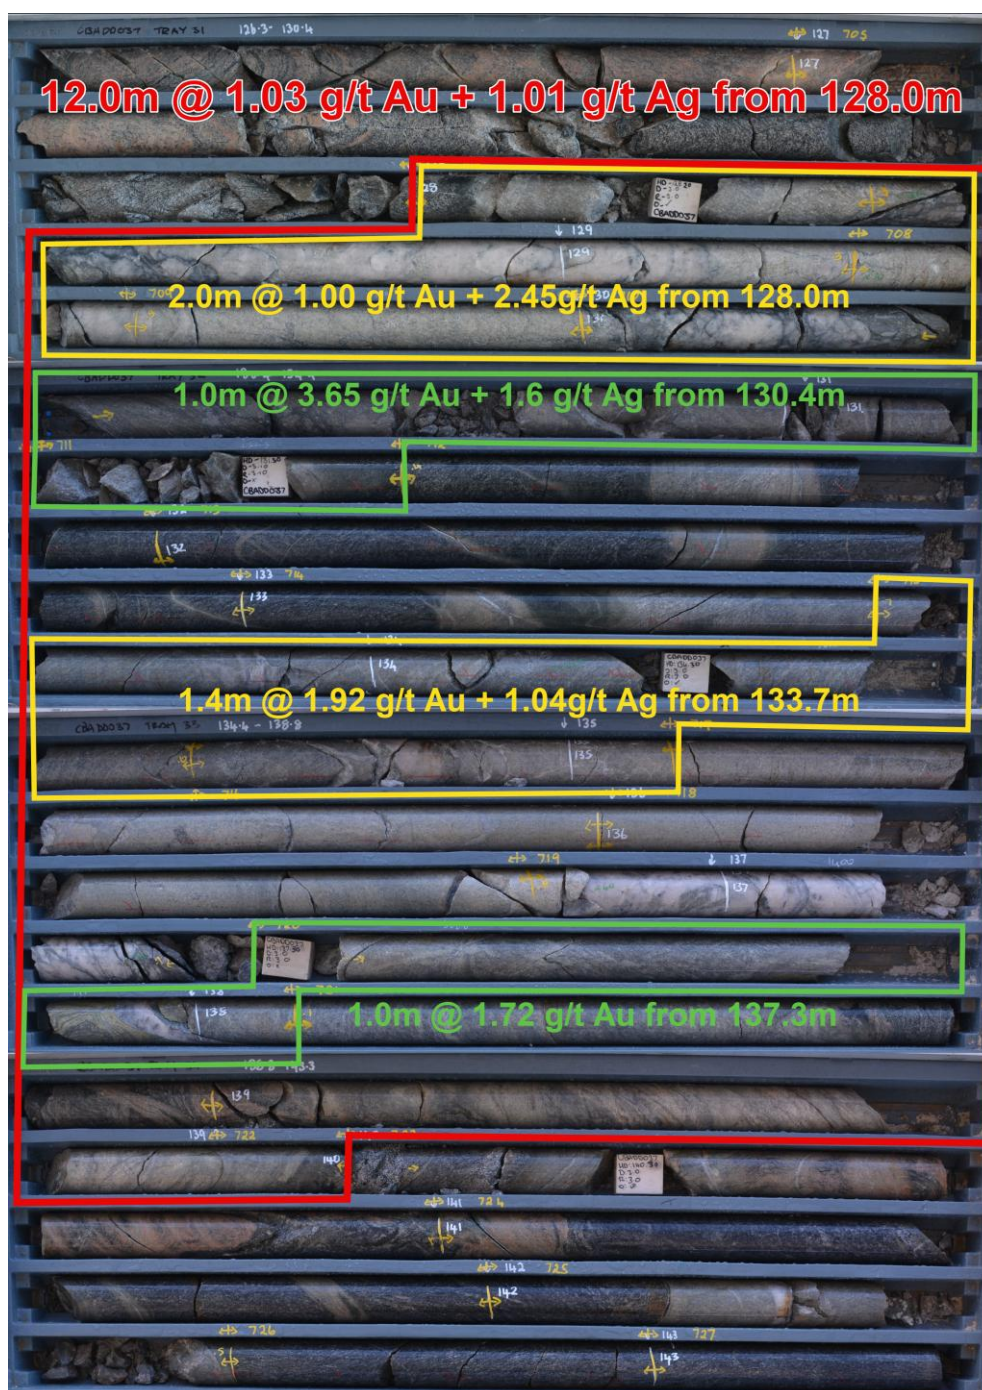

Previous Dart Results

Highlight assays from Dart's first hole, CBADD001, ([ASX: DTM 10 November 2025](#)) include:

- **5.0m @ 4.33% Sb + 1.69 g/t Au + 23.65 g/t Ag** from 41.5m;
 - including **0.65m @ 32.20% Sb + 2.91 g/t Au + 10.50 g/t Ag** from 42.0;
 - 0.5m @ 2.53 g/t Au from 42.65m and
 - **0.7m @ 5.61 g/t Au + 154 g/t Ag** from 45.4m.
- **1.6m @ 9.47% Sb + 0.35 g/t Au + 4.09 g/t Ag** from 68.2m;
 - including **0.5m @ 29.60% Sb + 0.65 g/t Au + 12.60 g/t Ag** from 68.7.

Highlight assays from CBADD002 ([ASX: DTM 15 December 2025](#)) include:

- Broader gold zones containing antimony mineralised zones
- 1.4m @ 2.00 g/t Au + **0.97% Sb** from 134.0m including:
 - **0.3m @ 7.33 g/t Au + 4.40% Sb** from 134.5m.
- 1.0m @ 2.15 g/t Au from 175.5m;
- **6.5m @ 5.1 g/t Au + 0.15% Sb** from 180.0m including:
 - **1.5m @ 7.32 g/t Au** from 182.5m;
 - **0.5m @ 18.30 g/t Au** from 184.5m; and
 - **1.0m @ 6.38 g/t Au + 0.92% Sb** from 185.5m.
 -

Highlight assays from CBADD003 through CBADD010 ([ASX: DTM 19 February 2026](#)) include:

- **9.0m @ 2.67g/t Au + 16.8 g/t Ag + 5.8% Sb** from **32.5m (CBADD010)** including;
 - 1.2m @ **5.5 g/t Au + 85.1 g/t Ag + 18.8% Sb** from 37.7m; and
 - 0.6m @ 1.62 g/t Au + 17.2 g/t Ag + **44.6% Sb** from 37.9m; and
 - 0.5m @ **10.75 g/t Au + 3.5 g/t Ag + 4.7% Sb** from 39.0m.
- **4.3m @ 3.61 g/t Au + 3.3 g/t Ag + 0.2% Sb** from 43.2m (**CBADD009**) including;
 - **0.9m @ 9.44 g/t Au + 2.3 g/t Ag + 0.5% Sb** from 43.2m; and
 - 0.3m @ **4.02 g/t Au + 27.6 g/t Ag + 1.3% Sb** from 46.1m.
- **2.2m @ 4.29 g/t Au + 4.0 g/t Ag + 0.2% Sb** from 82.9m (**CBADD005**) including;
 - 0.5m @ **10.05 g/t Au + 1.3 g/t Ag** from 84.6m; and
 - 0.4 @ **6.18 g/t Au + 4.3 g/t Ag + 1.0% Sb** from 85.1m.
- 1.3m @ **3.80 g/t Au + 131.9 g/t Ag + 10.5% Sb** from **8.7m (CBADD006)**;
- 1.3m @ 2.12 g/t Au + **68.5 g/t Ag + 10.2% Sb** from 131.4m (**CBADD003**) including;
 - 0.5m @ 2.74 g/t Au + **145.0 g/t Ag + 24.9% Sb** from 131.4m.
- 2.1m @ 1.61 g/t Au + **71.5 g/t Ag + 0.5% Sb** from 57.5m (**CBADD004**) including;
 - 0.6m @ 2.45 g/t Au + 234.0 g/t Ag + 1.8% Sb from 58.0m.

Highlight assays from CBADD011 through CBADD013 ([ASX: DTM 16 April 2026](#)) include:

- **4.9m @ 5.27 g/t Au** from **21.0m (CBADD013)** including;
 - **1.0m @ 14.6 g/t Au** from 22.2m; and
 - **1.2m @ 4.49 g/t Au** from 24.7m.
- **1.8m @ 1.98 g/t Au** from 44.90m (**CBADD012**) including;
 - 0.3m @ **4.04 g/t Au** from 45.9m.
- **0.4m @ 2.63 g/t Au** from 107.0m (**CBADD011**) including.

Highlight assays from CBADD014 through CBADD022 ([ASX: DTM 4 June 2026](#)) included:

- **5.8m @ 1.73 g/t Au + 11.57 g/t Ag + 4.76% Sb** from 53.70m (CBADD019) including **0.85m @ 2.18 g/t Au + 71.12 g/t Ag + 26.66% Sb** from 54.25m; and 1.30m @ 3.43 g/t Au + 2.15 g/t Ag + 3.75% Sb from 56.20m;
- **6.1m @ 1.11 g/t Au + 0.5% Sb** from 33.00m (CBADD018) including **0.7m @ 4.59 g/t Au** from 35.00m; and 0.8m @ 2.75 g/t Au + 3.74% Sb from 38.30m; and
- **2.4m @ 2.66 g/t Au + 6.44 g/t Ag + 0.76% Sb** from 34.60m (CBADD014) including **0.9m @ 4.34 g/t Au + 14.66 g/t Ag + 2.02% Sb** from 35.40m.

Dart Mining rock chip sampling revealed high grade antimony, gold and silver ([ASX: DTM 10 October 2025](#)). Assays received across 9 samples of float and in situ veins across the historic Banshee antimony mine area include:

- **Antimony results up to 65.3% Sb and 55.5% Sb**
- **Gold grades up to 17.0g/t Au and 15.05g/t Au**
- **Silver assays up to 97.9g/t Ag and 66.7g/t Ag**

Trench sampling conducted immediately south of the Banshee mine confirmed high grade gold, silver and antimony ([ASX: DTM 15 January 2026](#)). Samples from regular 1m intervals returned:

- **Gold grades up to 10.45g/t Au and 8.92g/t Au**
- **Silver assays up to 125g/t Ag and 121g/t Ag**
- **Antimony results up to 5.14% Sb**

Prior to Dart Mining, previous highlights across the project include:

- Highlights from 2014 drilling as per the GDM Prospectus (ASX: [GDM Prospectus 2023](#)):
 - **3m @ 9.18% Sb** in hole CNRC03 from 158m including **1m @ 25% Sb from 158m**;
 - **6m @ 5.12% Sb & 1.55 g/t Au** in hole CNRC04 from 77m;
 - **3m @ 1.50% Sb & 8.53 g/t Au** in hole CNRC05 from 18m;
- Rock chips of **44.9% Sb, 24.1% Sb, 39.9% Sb, and 39.4% Sb** (ASX: [GDM Prospectus 2023](#)):
- Surface trenching includes **4m @ 3.09 g/t Au and 1.14% Sb** and **1m @ 6.15 g/t Au and 3.1% Sb**. While trenching, selective rock chips returned **3.65 g/t Au with 23.9% Sb, and 9.93 g/t Au with 7.56% Sb** (ASX: [GDM Nov 2024](#)).

NEXT STEPS

Dart Mining and its Joint Venture partner, Great Divide Mining, will progress farm-in exploration at the Coonambula project including:

- Continue with composite drill cores for metallurgical test-work to support concepts on ore types and recoveries; and
- Develop a 3D model and declare a JORC resource at the earliest possible opportunity subject to drill results.

Approved for release by the Board of Directors.

For more information contact:

James Chirnside

Managing Director

Dart Mining NL

jchirnside@dartmining.com.au

+61 419 605 842

[InvestorHub Link](#)

Terry Bates

Director

Dart Mining NL

tbates@dartmining.com.au

COONAMBULA ANTIMONY-GOLD PROJECT

The Coonambula Antimony-Gold Project (**Coonambula** or **Project**) is located approximately 390km by road north-northwest of Brisbane, Queensland. Coonambula is 70km southeast of the multi-million-ounce Cracow gold mine and 25km southwest of the Eidsvold goldfield (Figure 5). The Project is comprised of five granted Exploration Permits: EPM 15203, EPM 16216, EPM 25260, EPM 26743 and EPM 28433 covering 282 sq.km., and application EPM 29186 covering an area of 227sq.km.

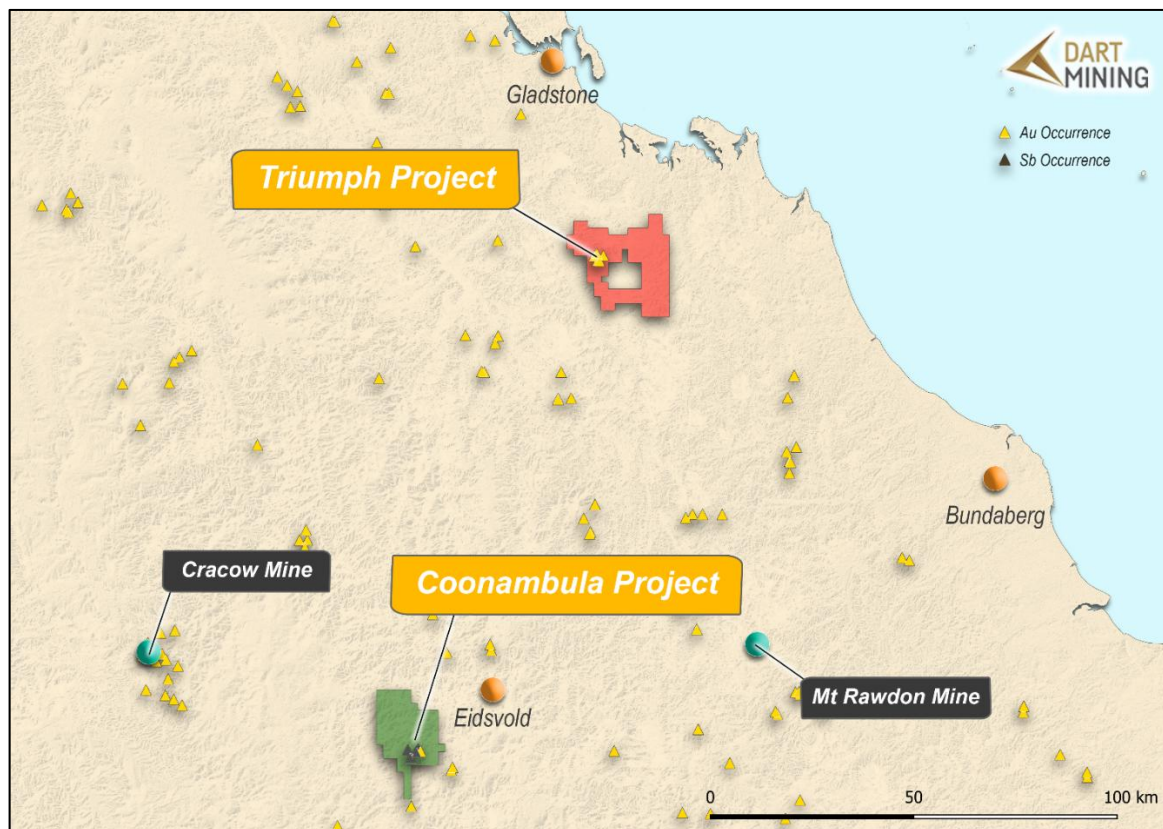


Figure 5: Project Location Plan.

Geology – New England Fold Belt geology hosts high grade quartz veins containing Sb-Au at Hillgrove and Wild Cattle Creek in NSW, and Antimony at Neardie near Gympie QLD. Mineralisation at Coonambula is hosted within intrusive granodiorites and holds the potential to host a large intrusion related gold system, with attractive magnetic signature and structural geology.

Two distinct types of reef mineralisation occur: Gold associated with arsenopyrite in quartz and high-grade antimony with calcite in quartz. Disseminated stibnite is recorded in the gold lodes (Malnic, 1985).

Banshee is one of the largest historical antimony mining complexes in Central Queensland, located 70km Southeast of the Cracow gold mine and 25km SW of Eidsvold. Banshee is a historic high-grade direct shipping ore antimony mine (worked variously between 1876 and 1983, The Banshee Mine when reopened in 1983 produced 20t of ore containing 4t of Antimony ([GDM Prospectus 2023](#)). 12 RC and 1 diamond drill hole have been drilled over 650m of strike length at Banshee.

Directly east of Banshee lies another Antimony-Gold prospect called Lady Mary (previously called Lady May). This prospect lies 1km along strike from Banshee, potentially along the same E-W Banshee structure. Surface rock chip samples from old mine dumps at Lady Mary have returned up to 49.6% Sb and 1.3 g/t Au ([GDM Sep 2024](#)). The area between Banshee and Lady Mary has not yet been explored and is a high priority target being assessed by the current IP survey.

The Perseverance mine was mined to 132m depth with mining widths up to 10m wide ([GDM Prospectus 2023](#)). Past production of gold from the mine was reported as 20kt @ 20g/t Au (Malnic, 1985) however only 3 drill holes have been completed to date.

Total strike of the prospective antimony zone is approximately 5km with historic mines either side of Banshee. Lady Mary located 900m east of Banshee with additional historic mines occurring some 3km west of Banshee giving a potential E-W strike of 5km. Individual high grade antimony shoots are interpreted as having a strike length of 30-100m each based upon Banshee drilling where 3 shoots of this length exist in the central core zone.

In GDM's 2023 prospectus ([GDM Prospectus 2023](#)) consulting company Derisk stated that it: *"Considers that the Coonambula project tenements are prospective for mesothermal vein and stockwork gold and gold-antimony deposits, as well as intrusion-related and epithermal gold deposits. Most work at this project has focused on areas in and around historical mine workings. Derisk considers there is potential to define extensions or repetitions of known mineralisation at some of the historical workings. There is also potential to discover new mineralisation but exploration for these targets is at a very early stage."*



Figure 6: Banshee mine waste dump material observed (unsampled) by Dart Mining in January 2025 showing antimony mineral (70% stibnite*) with encasing vein quartz.*

**Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations*

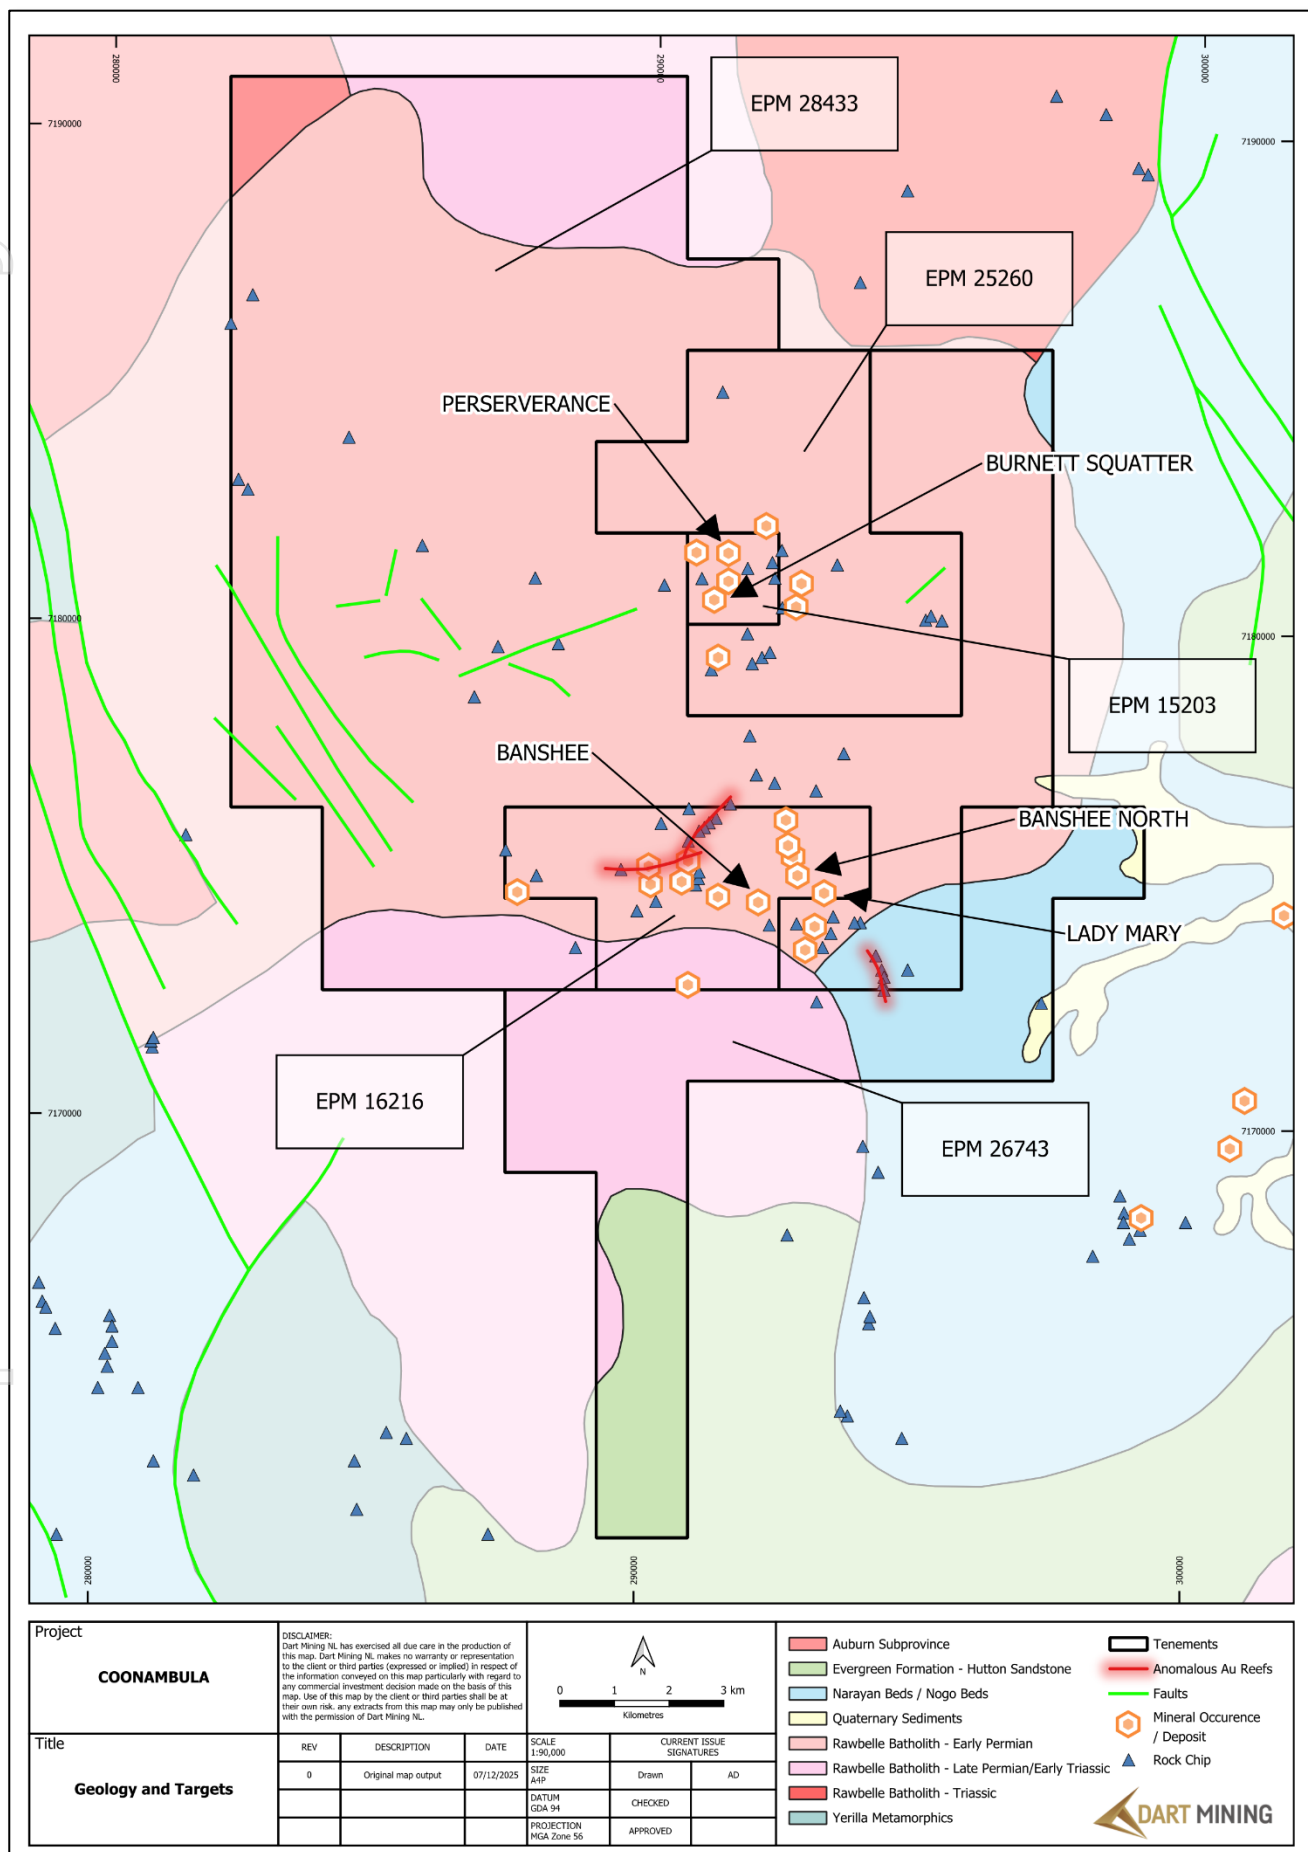


Figure 7: Coonambula geology and key prospects.

About Dart Mining

The Triumph Gold Project is Dart's first step into an advanced intrusion related gold system project in Queensland. Dart will look to develop a regional presence in Queensland through advanced stage intrusion related and epithermal gold projects. Dart is farming into the Coonambula Antimony-Gold Project in Central Queensland. Dart Mining will continue to evaluate several historic goldfields in Central and Northeast Victoria including the Rushworth Goldfield and the new porphyry and lithium province in Northeast Victoria identified by Dart. The area is prospective for precious, base, and strategic metals. Dart Mining has built a strategic and highly prospective gold exploration portfolio in Central and Northeast regions of Victoria, where historic surface and alluvial gold mining indicates the existence of potentially large gold endowment.

Competent Person's Statement

The information in this report has been prepared, compiled, and verified by Mr Andrew Dawes, who is a Member of the Australasian Institute of Mining and Metallurgy and a Member of the Australian Institute of Geoscientists. Mr Andrew Dawes is employed by AHD Resources and consults to Dart Mining NL. Mr Dawes has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity being undertaken to qualify as a competent person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr. Dawes takes responsibility for the exploration results, and consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Forward-Looking Statement

Certain statements contained in this document constitute forward-looking statements. Forward-looking statements include, but are not limited to, Dart Mining's current expectations, estimates and projections about the industry in which Dart Mining operates, and beliefs and assumptions regarding Dart Mining's future performance. Such forward-looking statements are based on a number of estimates and assumptions made by the Company and its consultants in light of experience, current conditions and expectations of future developments which the Company believes are appropriate in the current circumstances. When used in this document, words such as; "anticipate", "could", "intends", "estimate", "potential", "plan", "seeks", "may", "should", and similar expressions are forward-looking statements. Although Dart Mining believes that its expectations presented in these forward-looking statements are reasonable, such statements are subject to known and unknown risks, uncertainties and other factors, which may cause the actual results, achievements and performance of the Company to be materially different from the future results and achievements expressed or implied by such forward-looking statements. Investors are cautioned that forward-looking information is no guarantee of future performance and accordingly, investors are cautioned not to place undue reliance on these forward-looking statements.

No new information has been included in this release, all exploration results have been previously reported by Great Divide Mining (ASX: GDM) and are available on their website. Dart Mining is not aware of any new information or data that materially affects the information included in the original announcements.

APPENDIX ONE:

TABLE 1: DRILL HOLE SUMMARY OF REPORTED DRILLING

Drill Hole	Easting (m)	Northing (m)	RL (m)	Azimuth (Deg)	Dip (Deg)	Total Depth (m)
CBADD023	292200.44	7173862.5	234.67	345	-50	128
CBADD024	291680.06	7173774.5	223.91	345	-50	128
CBADD025	291565.09	7173754.5	218.02	345	-50	124.5
CBADD026	291747.78	7173835.5	229.27	350	-65	47.1
CBADD027	291796.69	7173847	231.78	350	-65	32.2
CBADD028	291901.53	7173861	232.56	350	-65	50.3
CBADD029	292115.09	7173891	240.11	350	-65	61.9
CBADD030	292162.75	7173887	236.77	350	-65	68.2
CBADD031	292199.47	7173894	234.94	350	-65	58.9
CBADD031a	292199.5	7173893.5	234.91	350	-65	32.3
CBADD032	291682.66	7173824.5	224.6	350	-65	49.9
CBADD033	291653.28	7173817.5	222.62	350	-65	56.3
CBADD034	291573.88	7173800.5	221.27	350	-65	62.2
CBADD035	291525.78	7173794.5	219.12	350	-65	56.4
CBADD036	291529.25	7173783	220.11	350	-65	18.7
CBADD037	291532.88	7173880	224.21	165	-60	188.8
CBADD038	291623.88	7173881.5	224.51	165	-60	127.8
CBADD039	291668.16	7173894	226.18	165	-60	143.4

TABLE 2 ASSAY RESULTS CBADD023 – CBADD039

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Ag (ppm)	Sb (ppm)
CBADD023	16.8	17.1	0.3	0.0025	0.025	1.82
CBADD023	17.1	18	0.9	0.0025	0.06	1.32
CBADD023	32	32.45	0.45	0.0025	0.025	1.99
CBADD023	32.45	32.65	0.2	0.0025	0.06	5.95
CBADD023	32.65	33.4	0.75	0.0025	0.025	1.97
CBADD023	44.6	45	0.4	0.0025	0.06	0.88
CBADD023	45	46	1	0.0025	0.025	0.55
CBADD023	46	47	1	0.0025	0.025	0.62
CBADD023	47	47.4	0.4	0.0025	0.025	0.85
CBADD023	47.4	48.1	0.7	0.208	0.11	4.55
CBADD023	48.1	49.1	1	0.0025	0.025	0.76
CBADD023	49.1	50.1	1	0.0025	0.08	0.84
CBADD023	50.1	51	0.9	0.0025	0.13	1.65
CBADD023	51	52	1	0.0025	0.06	1.18
CBADD023	52	53	1	0.0025	0.05	1.65
CBADD023	53	54	1	0.0025	0.06	1.86
CBADD023	54	55	1	0.0025	0.05	4.77
CBADD023	63.1	64.1	1	0.0025	0.06	0.83
CBADD023	64.1	65.1	1	0.0025	0.07	7.25
CBADD023	65.1	65.6	0.5	0.028	0.08	26.37
CBADD023	65.6	66.5	0.9	0.028	0.11	18.6
CBADD023	66.5	67	0.5	0.006	0.07	9.37
CBADD023	67	68	1	0.0025	0.06	4.57
CBADD023	68	69	1	0.0025	0.08	8.31
CBADD023	69	69.7	0.7	1.48	1.7	34.21
CBADD023	69.7	70.1	0.4	0.903	1.62	39.71
CBADD023	70.1	71	0.9	0.0025	0.07	8.44
CBADD023	71	72	1	0.0025	0.05	6.02
CBADD023	79.2	80.1	0.9	0.0025	0.07	1.35
CBADD023	80.1	80.9	0.8	0.0025	0.06	1.8
CBADD023	80.9	81.9	1	0.271	0.16	8.59
CBADD023	81.9	82.6	0.7	0.021	0.1	4.77
CBADD023	101.1	101.8	0.7	0.0025	0.08	5.02
CBADD023	101.8	102.4	0.6	0.0025	0.025	1.92
CBADD023	102.4	103	0.6	0.0025	0.06	2.67
CBADD023	103	104	1	0.0025	0.07	2.86
CBADD023	104	104.5	0.5	0.0025	0.07	8.81
CBADD023	108.8	109.4	0.6	0.0025	0.025	2.69
CBADD023	124.6	124.9	0.3	0.0025	0.025	3.78
CBADD024	12.3	12.6	0.3	0.0025	0.06	2.23
CBADD024	17	17.8	0.8	0.0025	0.025	0.65
CBADD024	21	21.9	0.9	0.0025	0.025	1.46
CBADD024	21.9	22.4	0.5	0.0025	0.05	2.33

CBADD024	22.4	22.9	0.5	0.0025	0.07	1.21
CBADD024	22.9	23.2	0.3	0.0025	0.1	4.68
CBADD024	23.2	23.7	0.5	0.0025	0.07	1.32
CBADD024	33	34	1	0.0025	0.025	0.46
CBADD024	39	40	1	0.0025	0.08	0.24
CBADD024	42.3	42.8	0.5	0.005	0.025	2.88
CBADD024	45.9	46.7	0.8	0.0025	0.06	1.42
CBADD024	57.4	58.4	1	0.0025	0.06	0.26
CBADD024	68.9	69.4	0.5	0.0025	0.06	2.08
CBADD024	80	80.5	0.5	0.0025	0.05	1.37
CBADD024	80.5	81.3	0.8	0.014	0.09	6.49
CBADD024	81.3	82	0.7	0.0025	0.025	1.08
CBADD024	82	82.8	0.8	0.012	0.07	4.46
CBADD024	82.8	83.3	0.5	0.0025	0.07	5.99
CBADD024	83.3	84	0.7	0.019	0.07	3.73
CBADD024	84	84.9	0.9	0.061	0.27	20.93
CBADD024	84.9	85.6	0.7	0.0025	0.05	7.96
CBADD024	85.6	86.3	0.7	0.852	0.79	32.94
CBADD024	86.3	87.1	0.8	0.057	0.1	14.35
CBADD024	87.1	87.8	0.7	0.0025	0.06	7.6
CBADD024	87.8	88.6	0.8	0.358	0.35	25.53
CBADD024	88.6	89.2	0.6	0.421	0.61	43.54
CBADD024	89.2	89.5	0.3	1.236	1.15	39.78
CBADD024	89.5	90	0.5	0.066	0.42	37.83
CBADD024	90	90.5	0.5	0.81	0.99	39.95
CBADD024	90.5	91.5	1	0.011	0.07	5.68
CBADD024	91.5	92	0.5	0.0025	0.07	5.73
CBADD024	92	93	1	0.0025	0.08	2.01
CBADD024	102	103	1	0.0025	0.025	0.46
CBADD024	103	103.3	0.3	0.0025	0.025	0.6
CBADD024	103.3	104	0.7	0.0025	0.06	0.84
CBADD024	109.6	110	0.4	0.0025	0.05	0.38
CBADD024	110	110.7	0.7	0.0025	0.05	0.44
CBADD024	110.7	111.3	0.6	0.0025	0.06	0.42
CBADD024	114.3	114.6	0.3	0.0025	0.05	0.96
CBADD024	114.6	115.6	1	0.0025	0.025	0.84
CBADD024	115.6	116.3	0.7	0.0025	0.05	1.46
CBADD024	120.4	120.7	0.3	0.0025	0.05	1.49
CBADD024	127	128	1	0.0025	0.06	0.19
CBADD025	32.4	32.8	0.4	0.0025	0.07	0.42
CBADD025	34	35	1	0.0025	0.07	0.46
CBADD025	44.25	44.4	0.15	0.0025	0.05	0.42
CBADD025	48	48.9	0.9	0.0025	0.07	0.26
CBADD025	48.9	49.3	0.4	0.0025	0.07	0.36
CBADD025	49.3	50	0.7	0.0025	0.05	0.21
CBADD025	54	54.3	0.3	0.0025	0.07	0.17
CBADD025	58	58.5	0.5	0.0025	0.07	0.66
CBADD025	58.5	59.5	1	0.0025	0.06	0.66
CBADD025	59.5	60.2	0.7	0.0025	0.08	1.72
CBADD025	60.2	61	0.8	0.039	0.11	6.24
CBADD025	61	62	1	0.0025	0.13	0.98
CBADD025	62	63	1	0.0025	0.09	0.94
CBADD025	63	64	1	0.01	0.09	0.85
CBADD025	64	65	1	0.0025	0.08	0.81
CBADD025	65	66	1	0.008	0.08	1.76
CBADD025	66	67	1	0.08	0.11	2.19
CBADD025	67	67.7	0.7	0.0025	0.07	1.15
CBADD025	67.7	68.4	0.7	0.0025	0.06	0.45
CBADD025	76.3	77.2	0.9	0.0025	0.09	0.88
CBADD025	82.4	82.8	0.4	0.0025	0.05	1.29
CBADD025	82.8	83.4	0.6	0.0025	0.025	0.76
CBADD025	83.4	84.4	1	0.0025	0.08	0.62
CBADD025	84.4	84.9	0.5	0.0025	0.025	3.63
CBADD025	89	90	1	0.0025	0.23	5.25
CBADD025	90	90.8	0.8	0.0025	0.025	4.2
CBADD025	91.4	91.8	0.4	0.006	0.07	3.31
CBADD025	91.8	92.3	0.5	0.411	0.45	11.33
CBADD025	92.3	93	0.7	0.112	0.21	5.5
CBADD025	93	93.9	0.9	0.313	0.52	13.28
CBADD025	95	96	1	0.0025	0.07	3.01
CBADD025	96	97	1	0.0025	0.025	4.54
CBADD025	97	98	1	0.0025	0.025	4.66

CBADD025	98	98.5	0.5	0.0025	0.06	3.63
CBADD025	98.5	99.5	1	0.0025	0.07	1.2
CBADD025	99.5	100.3	0.8	0.0025	0.1	0.87
CBADD025	100.3	101.3	1	0.0025	0.07	0.97
CBADD025	101.3	102.3	1	0.0025	0.06	8.68
CBADD025	102.3	103	0.7	0.0025	0.07	1.12
CBADD025	114	115	1	0.0025	0.05	0.12
CBADD025	115	115.55	0.55	0.0025	0.06	0.14
CBADD025	115.55	115.85	0.3	0.0025	0.11	0.17
CBADD025	115.85	116.3	0.45	0.0025	0.06	0.11
CBADD025	116.3	116.8	0.5	0.0025	0.06	0.12
CBADD025	116.8	117.5	0.7			
CBADD026	2.6	2.9	0.3	0.0025	0.025	1.29
CBADD026	12.85	13.7	0.85	0.0025	0.11	1.05
CBADD026	13.7	14.7	1	0.0025	0.12	2.19
CBADD026	14.7	15	0.3	0.0025	0.08	0.92
CBADD026	15	16	1	0.0025	0.06	0.57
CBADD026	16	16.5	0.5	0.0025	0.07	0.67
CBADD026	16.5	17	0.5	0.0025	0.08	1.49
CBADD026	17	17.3	0.3	0.0025	0.06	5.86
CBADD026	17.3	18	0.7	0.0025	0.06	0.94
CBADD026	25.2	26.2	1	0.0025	0.07	0.93
CBADD026	26.2	27.2	1	0.0025	0.06	0.74
CBADD026	27.2	28.2	1	0.0025	0.07	15.72
CBADD026	28.2	29	0.8	0.126	0.07	13.79
CBADD026	29	30	1	0.018	0.1	6.38
CBADD026	30	30.4	0.4	0.0025	0.07	24.79
CBADD026	30.4	31.1	0.7	0.009	0.2	53.84
CBADD026	31.1	31.7	0.6	0.0025	0.15	44.5
CBADD026	31.7	32.2	0.5	0.007	0.07	5.06
CBADD026	32.2	33.2	1	0.0025	0.05	17.33
CBADD026	33.2	33.7	0.5	0.029	0.17	20.53
CBADD026	33.7	34.3	0.6	0.282	0.43	34.4
CBADD026	34.3	35.1	0.8	0.0025	0.08	9.7
CBADD026	35.1	35.4	0.3	0.42	0.42	36.03
CBADD026	35.4	36.4	1	0.16	0.68	33.29
CBADD026	36.4	37.4	1	0.448	0.78	36.81
CBADD026	37.4	38	0.6	0.207	1.06	31.82
CBADD026	38	38.4	0.4	0.31	1.16	29.5
CBADD026	38.4	38.7	0.3	0.789	1.42	39.49
CBADD026	38.7	39.3	0.6	1.58	48.94	899.94
CBADD026	39.3	39.9	0.6	0.38	0.38	26.93
CBADD026	39.9	40.9	1	0.0025	0.1	7.39
CBADD026	40.9	41.9	1	0.0025	0.07	4.92
CBADD026	41.9	42.9	1	0.0025	0.07	3.4
CBADD026	42.9	43.9	1	0.0025	0.06	5.66
CBADD026	43.9	44.9	1	0.0025	0.025	4.65
CBADD027	9	10	1	0.0025	0.1	7.47
CBADD027	10	10.9	0.9	0.0025	0.07	2.46
CBADD027	10.9	11.8	0.9	0.0025	0.09	5.34
CBADD027	11.8	12.4	0.6	0.0025	0.11	9.19
CBADD027	12.4	12.6	0.2	0.019	0.2	56.75
CBADD027	12.6	13.6	1	0.88	0.75	31.1
CBADD027	13.6	14.1	0.5	0.75	0.62	41.42
CBADD027	14.1	14.9	0.8	0.023	0.25	25.11
CBADD027	14.9	15.5	0.6	0.0025	0.06	5.3
CBADD027	15.5	16	0.5	0.0025	0.07	15.78
CBADD027	16	17	1	0.008	0.15	28.83
CBADD027	17	18	1	0.0025	0.06	17.6
CBADD027	18	19	1	0.017	0.09	25.53
CBADD027	19	20	1	0.0025	0.09	25.25
CBADD027	20	20.6	0.6	0.0025	0.09	33.39
CBADD027	20.6	21	0.4	0.268	0.59	61.47
CBADD027	21	22	1	0.36	0.28	33.79
CBADD027	22	23	1	0.0025	0.07	4.55
CBADD027	23	24	1	0.0025	0.06	3.65
CBADD027	24	25	1	0.0025	0.07	2.94
CBADD027	28.75	29.25	0.5	0.0025	0.05	2.05
CBADD027	29.25	30	0.75	0.0025	0.06	1.41
CBADD027	30	30.8	0.8	0.0025	0.06	1.65
CBADD027	30.8	31.2	0.4	0.0025	0.12	4.69
CBADD027	31.2	31.7	0.5	0.0025	0.07	2.97

CBADD027	31.7	32.2	0.5	0.0025	0.09	1.16
CBADD028	2.3	3	0.7	0.034	0.025	67.87
CBADD028	3	3.5	0.5	0.005	0.025	22.81
CBADD028	3.5	4	0.5	0.0025	0.025	15.79
CBADD028	4	5	1	0.005	0.025	14.51
CBADD028	5	6	1	0.0025	0.025	13.37
CBADD028	6	7	1	0.008	0.05	12.22
CBADD028	7	7.4	0.4	0.035	0.08	12.63
CBADD028	8	8.4	0.4	0.082	0.08	71.36
CBADD028	8.4	9	0.6	0.684	0.14	166.58
CBADD028	9	9.5	0.5	7.561	0.27	190.5
CBADD028	9.5	10	0.5	0.086	0.11	30.77
CBADD028	10	11	1	0.099	0.13	56.23
CBADD028	11	11.7	0.7	0.09	0.08	55.72
CBADD028	12	13	1	0.0025	0.11	41.51
CBADD028	13	14	1	0.015	0.13	60.6
CBADD028	14	15	1	0.043	0.14	221.55
CBADD028	15	16	1	0.011	0.12	133.8
CBADD028	16	17	1	0.636	0.35	174.69
CBADD028	17	18	1	0.131	0.13	125.54
CBADD028	18	19	1	0.014	0.16	135.06
CBADD028	19	19.9	0.9	0.022	0.12	398.84
CBADD028	19.9	20.1	0.2	0.605	1.18	74.11
CBADD028	20.1	20.5	0.4	1.024	0.3	112.75
CBADD028	20.5	21	0.5	0.434	0.58	250.13
CBADD028	21	22	1	0.0025	0.025	26.88
CBADD028	22	23	1	0.0025	0.1	33.55
CBADD028	23	24	1	0.0025	0.06	57.11
CBADD028	24	25	1	0.0025	0.025	30.05
CBADD028	25	26	1	0.0025	0.025	15.83
CBADD028	37.4	37.7	0.3	0.0025	0.025	9.39
CBADD029	16	17	1	0.0025	0.07	12.53
CBADD029	17	18	1	0.0025	0.06	2.79
CBADD029	18	18.5	0.5	0.0025	0.24	27.05
CBADD029	18.5	19	0.5	0.0025	0.16	17.12
CBADD029	19	19.5	0.5	0.0025	0.08	6.26
CBADD029	19.5	20.5	1	0.0025	0.07	22.92
CBADD029	20.5	21.5	1	0.0025	0.025	3.54
CBADD029	21.5	22.5	1	0.0025	0.08	4.89
CBADD029	22.5	23.5	1	0.0025	0.09	5.76
CBADD029	23.5	24.4	0.9	0.0025	0.06	11.69
CBADD029	24.4	24.7	0.3	0.0025	0.05	4.01
CBADD029	24.7	25.7	1	0.0025	0.07	13.4
CBADD029	25.7	26.3	0.6	0.0025	0.06	11.96
CBADD029	26.3	27.3	1	0.0025	0.06	8.06
CBADD029	27.3	27.8	0.5	0.3	0.17	14.09
CBADD029	27.8	28.8	1	0.0025	0.025	9.5
CBADD029	28.8	29.3	0.5	0.008	0.025	162.07
CBADD029	29.3	29.7	0.4	3.008	0.93	145.29
CBADD029	29.7	30.6	0.9	0.094	0.19	143
CBADD029	30.6	31.6	1	0.0025	0.05	33.4
CBADD029	31.6	32.6	1	0.0025	0.1	15.65
CBADD029	32.6	33.6	1	0.0025	0.1	13.73
CBADD029	33.6	34.3	0.7	0.0025	0.07	11.45
CBADD029	34.3	35	0.7	0.0025	0.06	4.04
CBADD030	16.9	17.8	0.9	0.032	0.09	19.97
CBADD030	17.8	18.8	1	0.0025	0.08	9.82
CBADD030	18.8	19.8	1	0.0025	0.08	12.92
CBADD030	19.8	20.8	1	0.05	0.06	11.36
CBADD030	20.8	21.8	1	0.0025	0.11	9.32
CBADD030	21.8	22.4	0.6	0.927	0.36	16.58
CBADD030	22.4	22.7	0.3	1.099	0.27	18.26
CBADD030	22.7	23.7	1	0.0025	0.09	4.5
CBADD030	23.7	24.5	0.8	0.0025	0.025	5.56
CBADD030	24.5	25.2	0.7	0.0025	0.08	5.25
CBADD030	25.2	26.2	1	0.0025	0.06	3.86
CBADD030	26.2	27.2	1	0.0025	0.08	1.8
CBADD030	27.2	28.2	1	0.0025	0.07	1.39
CBADD030	28.2	29.2	1	0.0025	0.06	2.65
CBADD030	29.2	29.7	0.5	0.0025	0.05	7.28
CBADD030	29.7	30.5	0.8	0.0025	0.06	1.72
CBADD030	30.5	31	0.5	0.0025	0.07	1.68

CBADD030	31	31.7	0.7	0.0025	0.05	3.37
CBADD030	31.7	32.7	1	0.0025	0.05	2.05
CBADD030	32.7	33.7	1	0.0025	0.05	5.13
CBADD030	33.7	34.7	1	0.0025	0.025	3.63
CBADD030	38.8	39.8	1	0.0025	0.025	3.33
CBADD030	39.8	40.4	0.6	0.0025	0.08	25.33
CBADD030	40.4	41.4	1	0.0025	0.06	1.6
CBADD030	41.4	42	0.6	0.0025	0.06	1.52
CBADD030	42	43	1	0.0025	0.06	5.96
CBADD030	47.5	48	0.5	0.0025	0.025	6.64
CBADD030	48	49	1	0.0025	0.08	13.21
CBADD030	49	50	1	0.0025	0.12	27.97
CBADD030	50	51	1	0.0025	0.06	5.03
CBADD031	13.3	14.3	1	0.0025	0.1	1.04
CBADD031	14.3	14.8	0.5	0.018	0.15	3.23
CBADD031	14.8	15.7	0.9	0.016	0.13	6.04
CBADD031	15.7	16.3	0.6	0.044	0.2	4.97
CBADD031	16.3	16.9	0.6	1.408	2.17	22.69
CBADD031	16.9	17.9	1	0.011	0.08	1.98
CBADD031	17.9	18.9	1	0.0025	0.07	1.51
CBADD031	18.9	19.9	1	0.0025	0.025	2.08
CBADD031	19.9	20.4	0.5	0.813	0.22	10.04
CBADD031	20.4	21	0.6	0.0025	0.08	2.36
CBADD031	23.3	24.3	1	0.032	0.06	6.57
CBADD031	24.3	25.1	0.8	0.0025	0.05	3.74
CBADD031	25.1	25.9	0.8	0.07	0.17	12.49
CBADD031	25.9	26.9	1	0.0025	0.06	3.38
CBADD031	26.9	27.9	1	0.011	0.07	4.82
CBADD031	27.9	28.6	0.7	0.0025	0.025	4.46
CBADD031	28.6	29.6	1	0.024	0.1	9.35
CBADD031	29.6	30	0.4	0.0025	0.05	6.13
CBADD031	30	30.9	0.9	0.0025	0.05	1.58
CBADD031	30.9	31.1	0.2	0.0025	0.05	17.57
CBADD031	37.4	38.4	1	0.0025	0.06	3.76
CBADD031	38.4	38.8	0.4	0.0025	0.025	1.06
CBADD031	38.8	39.5	0.7	0.0025	0.06	2.5
CBADD031	39.5	39.8	0.3	0.0025	0.15	3.56
CBADD031	39.8	40.45	0.65	0.008	0.08	4.15
CBADD031	40.45	41.5	1.05	0.0025	0.08	0.99
CBADD031	41.5	42.5	1	0.0025	0.11	19.31
CBADD031	42.5	43.5	1	0.0025	0.08	1.19
CBADD031	43.5	44.5	1	0.0025	0.08	1
CBADD031	44.5	45.5	1	0.0025	0.1	2.66
CBADD031	45.5	46.4	0.9	0.0025	0.13	1.97
CBADD031	46.4	47.4	1	0.0025	0.05	1.45
CBADD031a	11	11.3	0.3	0.0025	0.09	3.33
CBADD031a	11.3	11.7	0.4	0.0025	0.07	3.12
CBADD031a	11.7	12.7	1	0.0025	0.07	0.87
CBADD031a	12.7	13.7	1	0.0025	0.15	2.17
CBADD031a	13.7	14.2	0.5	0.376	0.61	16.52
CBADD031a	14.2	14.7	0.5	0.049	0.11	4.48
CBADD031a	14.7	15.7	1	0.0025	0.07	1.41
CBADD031a	15.7	16.7	1	0.0025	0.08	1.56
CBADD031a	16.7	17.6	0.9	0.0025	0.08	2.27
CBADD031a	17.6	18.6	1	0.0025	0.07	3.71
CBADD031a	18.6	19.6	1	0.0025	0.06	6.96
CBADD031a	19.6	20.5	0.9	0.0025	0.1	3.98
CBADD031a	20.5	21.5	1	0.0025	0.06	2.86
CBADD031a	21.5	22.3	0.8	0.112	0.29	5.98
CBADD031a	22.3	23.3	1	0.621	0.26	8.7
CBADD031a	23.3	23.7	0.4	1.255	0.25	12.51
CBADD031a	23.7	24.6	0.9	0.0025	0.05	3.11
CBADD031a	24.6	25	0.4	0.008	0.08	7.11
CBADD031a	25	25.5	0.5	0.015	0.1	9.16
CBADD031a	25.5	26	0.5	0.0025	0.07	3.81
CBADD031a	26	26.7	0.7	0.0025	0.07	1.81
CBADD031a	26.7	27.3	0.6	0.0025	0.06	2.32
CBADD031a	27.3	28	0.7	0.0025	0.11	1.9
CBADD031a	28	29	1	0.0025	0.06	1.09
CBADD031a	29	30	1	0.0025	0.07	1.07
CBADD031a	30	30.4	0.4	0.0025	0.07	2.37
CBADD032	8	9	1	0.119	2.78	59.91

CBADD032	9	10	1	0.031	0.25	69.3
CBADD032	10	10.45	0.45	1.519	55	163.47
CBADD032	10.45	11.45	1	1.046	6.5	58.57
CBADD032	11.45	12.2	0.75	0.017	0.26	46.74
CBADD032	12.2	13	0.8	0.0025	0.23	7.08
CBADD032	13	14	1	0.0025	0.06	3.26
CBADD032	14	15	1	0.0025	0.06	2.48
CBADD032	15	16	1	0.0025	0.06	1.86
CBADD032	16	17	1	0.0025	0.05	3.93
CBADD032	23.7	24.3	0.6	0.012	0.13	30.77
CBADD032	30	31	1	0.0025	0.05	1.23
CBADD032	31	32	1	0.0025	0.06	1.66
CBADD032	32	33	1	0.0025	0.07	9.88
CBADD032	33	33.5	0.5	0.876	1.76	40.5
CBADD032	33.5	34.2	0.7	0.257	0.47	30.63
CBADD032	34.2	34.7	0.5	0.488	0.76	22.41
CBADD032	34.7	35.4	0.7	6.639	1.41	30.23
CBADD032	35.4	36	0.6	0.598	1.02	30.62
CBADD032	36	37	1	0.008	0.09	46.47
CBADD032	37	37.7	0.7	0.012	0.05	27.64
CBADD032	37.7	38.2	0.5	0.011	0.05	34.79
CBADD032	38.2	39.2	1	0.03	0.13	37.99
CBADD032	39.2	39.7	0.5	0.445	1.16	42.98
CBADD032	39.7	40.3	0.6	3.059	1.4	36.83
CBADD032	40.3	41	0.7	1.194	0.71	25.28
CBADD032	41	41.5	0.5	0.39	0.42	26.48
CBADD032	41.5	41.95	0.45	0.17	0.36	32.76
CBADD032	41.95	42.6	0.65	0.0025	0.06	11.92
CBADD032	42.6	43.6	1	0.0025	0.06	2.66
CBADD032	43.6	44.6	1	0.0025	0.05	0.9
CBADD033	3	4	1	0.012	0.62	29.96
CBADD033	4	5	1	0.021	0.39	30.63
CBADD033	5	5.5	0.5	0.597	0.88	32.35
CBADD033	5.5	6	0.5	0.579	0.95	24.91
CBADD033	6	6.6	0.6	0.309	1.55	35.06
CBADD033	6.6	7	0.4	0.068	0.4	42.68
CBADD033	7	7.6	0.6	0.034	0.37	66.61
CBADD033	8	9	1	0.0025	0.15	77.06
CBADD033	14.6	14.8	0.2	0.0025	0.025	1.75
CBADD033	14.8	15.8	1	0.0025	0.85	1.74
CBADD033	15.8	16.2	0.4	0.0025	0.05	2.43
CBADD033	23.4	24	0.6	0.0025	0.025	2.14
CBADD033	39.1	40.1	1	0.0025	0.025	5.36
CBADD033	40.1	41.1	1	0.0025	0.05	9.69
CBADD033	41.1	42.1	1	0.0025	0.08	9.22
CBADD033	42.1	42.7	0.6	0.006	0.025	74.56
CBADD033	42.7	43.3	0.6	0.006	0.09	44.17
CBADD033	43.3	44.1	0.8	0.418	0.45	33.58
CBADD033	44.1	44.9	0.8	1.842	0.84	29.25
CBADD033	44.9	45.9	1	0.539	0.46	30.72
CBADD033	45.9	46.3	0.4	0.0025	0.06	14.73
CBADD033	46.3	46.9	0.6	0.0025	0.05	4.29
CBADD033	46.9	47.9	1	0.0025	0.06	13.11
CBADD033	47.9	48.7	0.8	0.0025	0.06	5.16
CBADD033	48.7	49	0.3	0.0025	0.025	9.67
CBADD033	49	49.5	0.5	0.0025	0.025	4.05
CBADD033	49.5	50	0.5	0.0025	0.025	3.64
CBADD034	0	0.8	0.8	0.033	0.35	25.44
CBADD034	2.4	3	0.6	0.0025	0.025	3.19
CBADD034	3	4	1	0.0025	0.39	5.88
CBADD034	5.4	6	0.6	0.0025	0.05	5.08
CBADD034	23.6	24.4	0.8	0.084	0.53	3.43
CBADD034	24.4	24.9	0.5	0.081	0.07	4.11
CBADD034	25.4	25.7	0.3	0.71	0.73	17.25
CBADD034	25.7	26.7	1	0.0025	0.025	1.04
CBADD034	42.9	43.9	1	0.0025	0.025	0.77
CBADD034	43.9	44.1	0.2	0.451	0.77	16.52
CBADD034	44.1	45.2	1.1	0.01	0.05	2.93
CBADD034	45.2	46.1	0.9	0.0025	0.025	0.57
CBADD034	46.1	47.2	1.1	0.05	0.025	1.61
CBADD034	47.2	47.8	0.6	0.0025	0.025	0.77
CBADD034	47.8	48.8	1	0.024	0.025	0.8

CBADD034	48.8	49.8	1	0.012	0.025	1.22
CBADD034	49.8	50.8	1	0.0025	0.025	1.18
CBADD034	50.8	51.8	1	0.007	0.025	0.7
CBADD034	51.8	52.8	1	0.0025	0.16	2.06
CBADD034	52.8	53.3	0.5	1.968	1.22	25.72
CBADD034	53.3	54	0.7	0.005	0.025	28.57
CBADD034	54	54.5	0.5	0.624	1.25	34.21
CBADD034	54.5	55	0.5	1.248	0.93	23.98
CBADD034	55	56	1	0.0025	0.025	24.38
CBADD034	56	57	1	0.0025	0.06	20.76
CBADD034	57	58	1	0.0025	0.025	11.46
CBADD034	58	58.4	0.4	0.032	0.14	20.25
CBADD034	58.4	59	0.6	0.22	0.25	22.32
CBADD034	59	60	1	0.0025	0.025	4.38
CBADD034	60	61	1	0.0025	0.025	4.93
CBADD034	61	61.4	0.4	0.101	0.1	8.68
CBADD034	61.4	62.2	0.8	0.0025	0.025	11.27
CBADD035	14.4	14.8	0.4	0.014	11.34	68.68
CBADD035	16.3	16.5	0.2	0.49	41.16	172.75
CBADD035	16.5	17.4	0.9	0.012	22.55	17.45
CBADD035	20.3	21.3	1	0.024	0.15	1.65
CBADD035	21.3	21.9	0.6	0.006	0.29	2.25
CBADD035	21.9	22.7	0.8	0.0025	0.13	1.28
CBADD035	49.7	50	0.3	0.0025	0.07	1.06
CBADD035	50	51	1	0.0025	0.28	0.77
CBADD035	51	52	1	0.0025	0.07	0.52
CBADD035	52	53	1	0.0025	0.025	0.48
CBADD035	53	53.8	0.8	0.0025	0.06	0.5
CBADD036	0	1	1	0.0025	0.2	19.94
CBADD036	1	1.5	0.5	0.0025	0.47	8.4
CBADD036	2.3	3	0.7	0.0025	2.55	10.35
CBADD036	3	4	1	0.0025	0.32	3.24
CBADD036	4	5	1	0.0025	0.66	2.38
CBADD036	5	6	1	0.0025	0.51	2.75
CBADD036	6	7	1	0.0025	0.61	2
CBADD036	7	8	1	0.0025	0.59	6.38
CBADD036	8	9	1	0.0025	0.79	2.97
CBADD036	9	10	1	0.0025	1	11.89
CBADD036	10	11	1	0.0025	2.03	8.37
CBADD036	11	12.1	1.1	0.0025	3.08	10.97
CBADD036	14.3	14.5	0.2	0.007	3.39	10.6
CBADD036	15.9	16.3	0.4	0.034	26.98	135.6
CBADD036	17.3	18	0.7	0.0025	0.96	9.14
CBADD036	18	18.5	0.5	0.0025	0.48	3.6
CBADD036	18.5	18.7	0.2	0.0025	8.59	6.08
CBADD037	57.2	58.2	1	0.0025	0.06	0.7
CBADD037	58.2	59	0.8	0.0025	0.08	2.14
CBADD037	59	60	1	0.0025	0.08	2.38
CBADD037	60	60.7	0.7	0.0025	0.21	1.59
CBADD037	125	126	1	0.0025	0.09	1.61
CBADD037	126	127	1	0.0025	0.12	2.33
CBADD037	127	128	1	0.0025	0.09	1.36
CBADD037	128	128.3	0.3	1.607	1.09	15.33
CBADD037	128.3	129.3	1	0.633	4.63	28.98
CBADD037	129.3	129.5	0.2	0.766	0.73	13.38
CBADD037	129.5	130	0.5	1.072	0.87	13.37
CBADD037	130	130.4	0.4	1.482	0.85	25.88
CBADD037	130.4	131.4	1	3.653	1.6	26.67
CBADD037	131.4	132	0.6	0.015	0.09	11.71
CBADD037	132	133	1	0.031	0.24	10.01
CBADD037	133	133.7	0.7	0.459	0.58	17.51
CBADD037	133.7	134.6	0.9	2.202	1.33	22.63
CBADD037	134.6	135.1	0.5	1.411	0.53	16.93
CBADD037	135.1	136	0.9	0.708	0.35	15.59
CBADD037	136	136.8	0.8	0.27	0.34	15.81
CBADD037	136.8	137.3	0.5	0.573	0.74	26.1
CBADD037	137.3	138.1	0.8	1.717	0.63	22.22
CBADD037	138.1	139	0.9	0.323	0.59	16.82
CBADD037	139	140	1	0.44	0.53	13.39
CBADD037	140	141	1	0.116	0.13	4.48
CBADD037	141	142	1	0.04	0.12	3.7
CBADD037	142	142.5	0.5	1.354	0.77	12.19

CBADD037	142.5	143	0.5	0.094	0.1	0.74
CBADD037	143	144	1	0.0025	0.08	0.5
CBADD037	144	145	1	0.0025	0.06	0.59
CBADD037	145	146	1	0.0025	0.07	0.47
CBADD037	146	146.8	0.8	0.0025	0.07	0.84
CBADD037	146.8	147.3	0.5	0.362	0.96	13.16
CBADD037	147.3	148	0.7	0.005	0.12	1.38
CBADD037	148	149	1	0.0025	0.08	0.87
CBADD037	184.6	185.6	1	0.022	0.06	11.87
CBADD037	185.6	186.2	0.6	0.0025	0.09	7.83
CBADD037	186.2	186.8	0.6	0.0025	0.08	3.68
CBADD037	186.8	187.6	0.8	0.0025	0.1	2.38
CBADD037	187.6	188.3	0.7	0.0025	0.09	3.8
CBADD038	16	16.8	0.8	0.0025	0.06	0.27
CBADD038	75	76	1	0.0025	0.025	0.13
CBADD038	76	76.5	0.5	0.0025	0.06	0.25
CBADD038	102	102.5	0.5	0.0025	0.07	0.26
CBADD038	102.5	103	0.5	0.0025	0.13	0.31
CBADD038	106.2	106.6	0.4	0.0025	0.025	0.52
CBADD038	106.6	107.4	0.8	0.0025	0.08	0.4
CBADD038	107.4	107.9	0.5	0.0025	0.09	1.04
CBADD038	107.9	108.6	0.7	0.0025	0.1	4.43
CBADD038	113.7	114.1	0.4	0.0025	0.1	28.83
CBADD038	114.1	115	0.9	0.0025	0.07	16.96
CBADD038	115	116	1	0.0025	0.08	16.16
CBADD038	116	117	1	0.0025	0.07	10.35
CBADD038	117	117.8	0.8	0.0025	0.025	13.38
CBADD038	117.8	118.6	0.8	0.0025	0.07	18.02
CBADD038	118.6	119.4	0.8	0.23	0.86	54.38
CBADD038	119.4	120.3	0.9	0.572	1.07	34.6
CBADD038	120.3	121.3	1	0.012	0.18	17.63
CBADD038	121.3	122.1	0.8	0.74	0.68	27.19
CBADD038	122.1	123	0.9	0.0025	0.16	10.64
CBADD038	123	124	1	0.0025	0.06	4.4
CBADD038	124	124.4	0.4	0.0025	0.08	5.07
CBADD038	124.4	125.2	0.8	0.0025	0.07	2.15
CBADD038	125.2	126.1	0.9	0.0025	0.06	5.09
CBADD038	126.1	127	0.9	0.009	0.07	3.32
CBADD038	127	127.8	0.8	0.0025	0.08	0.88
CBADD039	13	14	1	0.0025	0.07	0.25
CBADD039	32.1	32.8	0.7	0.0025	0.025	0.32
CBADD039	32.8	33.3	0.5	0.0025	0.07	1.14
CBADD039	93.2	93.4	0.2	0.0025	0.09	0.15
CBADD039	96	97	1	0.0025	0.08	0.14
CBADD039	109.4	109.7	0.3	0.0025	0.025	0.27
CBADD039	121.1	122	0.9	0.0025	0.07	7.75
CBADD039	122	122.9	0.9	0.0025	0.06	2.82
CBADD039	122.9	123.9	1	0.0025	0.06	3.06
CBADD039	123.9	124.6	0.7	0.0025	0.06	7.46
CBADD039	124.6	125.1	0.5	0.006	0.1	13.86
CBADD039	125.1	125.65	0.55	0.768	2.08	48.41
CBADD039	125.65	126.5	0.85	0.01	0.11	16.44
CBADD039	126.5	127.1	0.6	0.019	0.19	28.59
CBADD039	127.1	128	0.9	0.017	0.07	2.29
CBADD039	128	129	1	0.008	0.08	2.93
CBADD039	129	130	1	0.0025	0.07	3.49
CBADD039	130	130.5	0.5	0.0025	0.09	14.14
CBADD039	130.5	131.5	1	0.0025	0.1	16.08
CBADD039	131.5	132.1	0.6	0.0025	0.08	10.14
CBADD039	132.1	132.6	0.5	0.779	0.63	32.26
CBADD039	132.6	133	0.4	2.872	0.98	48.6
CBADD039	133	133.7	0.7	0.01	0.09	19.95
CBADD039	133.7	134.4	0.7	0.0025	0.11	10.51
CBADD039	134.4	135	0.6	0.0025	0.08	9.35
CBADD039	135	136	1	0.0025	0.09	2.03
CBADD039	136	137	1	0.0025	0.07	0.99

JORC Code, 2012 Edition – Table 1 report template

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- Sampling has been made on NQ diamond drilled core. - Sampling is half core sampling based on the geologist's sub sampling (down to 30cm) logging definition. - Samples are prepared by dry crush at 10mm and then pulverised to p75um (3kg sample).
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Drilling is diamond drilling NQ core size and is triple tube drilling. Core is oriented where possible using the Reflex ACT III tool.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- Core is measured after each run and core recovery based on the drill metres is recorded. - Once in the transition and fresh material, Coonambula experiences limited to no core loss with the exception of intensely broken zones where recovery is still > 95%. - No relationship has been observed between sample recovery and gold grade.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support	The drill core has been geologically and geotechnically logged to a level to support appropriate mineral

Criteria	JORC Code explanation	Commentary
	<i>appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	resource estimation, mining studies and metallurgical studies. Core is logged both qualitatively and quantitatively. Core tray photography is both wet and dry photography. Sampling is discrete based on observed mineralisation, alteration, key structural features.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	- Core is cut to ½ core before being dispatched to the laboratory. - The pulverise method includes an initial crush to 10mm and a 3kg split is then pulverised to -75um. - Sampling size is suitable to represent the mineralisation intersected.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	- All samples were analysed at Intertek Genalysis (Intertek, Townsville). - All samples were assayed for Au using a 50g fire assay with FA50/OE04 determination as well as 4A/MS48 for multi element. Over range elements for Au, Ag, Cu, Zn, As, and Sb are tested with appropriate over range analysis. Where Sb is > 10,000 ppm, Hg is also analysed. - The three types of QAQC samples were used were Certified Reference Material (CRM/Standards), Field Duplicates, and Blank material. - The Blanks consist of store-bought sand which has been shown to be barren based on previous work. The Blanks are used to provide information of any possible contamination or calibration issues during the crush, pulverisation, and analytical phases. The field duplicates utilised the spear to collect a second sample to test repeatability (precision) of the original sample. The standards

Criteria	JORC Code explanation	Commentary
		samples are used to test the accuracy of the analyses. • Three CRMs were OREAS standards and include: OREAS 277, OREAS 292, and OREAS 233. • QAQC samples were entered into the sample stream at a rate of 1 in 20. • Where lower detection limits were reported for assay results these were replaced by half the lower detection limit for geological interpretation and modelling purposes.
Verification of sampling and assaying	• <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i>	• All core photos are reviewed by the Competent Person and also visited site during early drilling. • No twinned holes have been undertaken. • Data from the field log sheets is entered into a digital database, primarily an Excel spreadsheet with subsequent conversion into an SQL database maintained by EarthSQL at the completion of the hole. The Excel spreadsheet has been created with a series of validation criteria in the form of pulldown menus for each data entry that restricts what can be entered into each field and significantly reduces the error associated with data entry. • Assay results are received from the laboratory in electronic (via email) format onsite and sent to Sample Data importing to the EarthSQL database. The electronic results are provided in a CSV file.
Location of data points	• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i>	• Collars are collected by Dart Geologists using a dGPS Trimble device and is suitable for collecting collar XYZ. • All collar coordinates are in MGA94 Z56. • Downhole survey has been surveyed using Reflex survey tool.
Data spacing and distribution	• <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve</i>	• Report is of a single drill hole and spacing is not relevant. • Proximity to historical holes is within 100m and intercepts show good correlation with respect to alteration and grade (Au, Ag, and

Criteria	JORC Code explanation	Commentary
	<i>estimation procedure(s) and classifications applied.</i> Whether sample compositing has been applied.	Sb). Samples have not been composited.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- Drilling is typically orientated perpendicular to the interpreted strike of mineralization where possible. - Observations of the structural logging highlight all striking mineralised veins and top and bottom orientations of the stibnite veins was able to be collected.
Sample security	The measures taken to ensure sample security.	Samples are under the care of Dart Geologists from logging through to delivery to Followmont freight company where they are delivered to Intertek Townsville.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No external reviews of audits on this drilling have been completed. Drilling has been reviewed internally within Dart.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The Coonambula Project consists of six contiguous Queensland exploration permits for minerals (EPMs): - EPM 15203 (Widbury), - EPM 16216 (Lady Margaret), - EPM 25260 (Coonambula), - EPM 26743 (Eidsvold), and - EPM 28433 (Coonambula Extended). - Each of the granted Coonambula tenements is currently held 100% by wholly owned subsidiaries of Great Divide Mining Ltd (GDM), namely GDM Coonambula Pty Ltd and GDM Yellow Jack Pty Ltd. Dart Mining Ltd has a joint venture agreement (Coonambula Joint Venture) to complete exploration works on the EPMs.

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	- Historical exploration in the Coonambula area has been undertaken by a number of parties since the 1970s, primarily targeting epithermal-style gold and base metal mineralisation. - Work included regional geological mapping, soil and rock chip geochemistry, and limited geophysical surveys. More detailed exploration was carried out in the early 2000s by junior explorers, with emphasis on gold and antimony mineralisation associated with quartz veining. - In 2013–2014, drilling programs were completed at the Banshee prospect under the direction of Paul Byrne. These programs tested near-surface quartz–sulphide veining and returned anomalous gold and antimony results. - Data from these programs, including drill collar locations, assay results, and geological logs which were reported to the ASX by GDM - Trenching programs were completed across the Banshee prospect to test surface geochemical anomalies and quartz–sulphide veining. These trenches exposed mineralised structures and returned anomalous gold and antimony values, providing key targets for subsequent drilling. The trenches themselves are historic (pre-GDM), but GDM sampled and reported those trenches in 2024.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	- The Coonambula Project is located ~25 km southwest of Eidsvold in southeast Queensland, within the northern New England Orogen. - Bedrock geology is dominated by Carboniferous to Permian–Triassic granitoid intrusions of the Rawbelle Batholith, intruding older metasedimentary sequences. - Mineralisation at the Banshee

Criteria	JORC Code explanation	Commentary
		Prospect is hosted within east–west trending shear zones and lodes developed in and adjacent to the granitoid intrusives. - The Banshee system is characterised by antimony–gold (Sb–Au) mineralisation, with geological similarities to the Hillgrove Sb–Au deposit in New South Wales. - Mineralisation occurs as stibnite ± quartz veins and breccia zones, with associated gold enrichment.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Drillhole information has been included in the release in Appendix 1.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	No data aggregation methods have been applied.
Relationship between mineralisation	These relationships are particularly important in the reporting of Exploration Results.	Mineralisation widths are reported as the downhole length. Final interpretation and inclusion

Criteria	JORC Code explanation	Commentary
widths and intercept lengths	- If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	of sample results will allow for true width calculations to be applied.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Included in the body of the announcement.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All mineralisation intersected in the completed hole has been included
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No other material data is presented in this announcement.
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Plans for further work are outlined in the body of the announcement which include analysis of the drill core and continued drilling of Dart Mining's planned locations.