

### HORSESHOE CHANNEL RE-ASSAYS CONFIRM MATERIALLY HIGHER GRADE FLUORSPAR FROM SURFACE

**Re-assays supersede and materially increase  
Horseshoe channel results reported on 8 July 2026**

#### Highlights

- ALS Global laboratories informed OD6 that the original assay technique used for the Horseshoe channel samples can exhibit a negative bias for this specific high-grade fluor spar matrix, resulting in under-estimation of fluorine and calculated  $\text{CaF}_2$  grades
- **Re-assaying by ALS confirms a material uplift in  $\text{CaF}_2$  grades compared with the original.**
- Horseshoe Channel Sampling results originally reported on [8 July 2026](#), are now re-reported herein
- Standout results of re-assayed results, from expanded in-pit channel sampling:
  - SE Wall: **50m @ 79.3%  $\text{CaF}_2$**  (previously reported as 63.9%)
  - North Pit: **27m @ 65.1%  $\text{CaF}_2$**  (previously reported as 54.4%)
  - NW Wall **combined 22m @ 78.8%  $\text{CaF}_2$**  (previously reported as 70.7%) **including:**
    - **9m @ 84.5%  $\text{CaF}_2$**  (previously reported as 74.4%)
    - **8m @ 80.0%  $\text{CaF}_2$**  (previously reported as 71.2%)
    - **5m @ 66.7%  $\text{CaF}_2$**  (previously reported as 62.4%)
  - Central Bench: **15m @ 85.8%  $\text{CaF}_2$**  (previously reported as 65.8%)
- **31 samples at Horseshoe return >90% with peak value of 98.8%  $\text{CaF}_2$**
- **An average increase of 12.9%  $\text{CaF}_2$**  using the updated ALS assay method
- **New assay results align with the recent large-format metallurgical samples returning 90% and 76.2%  $\text{CaF}_2$**  (refer release dated [12 August 2026](#))
- Channel Sampling within **mapped 80m wide exposed zone**, with previous reported drilling and open pit exposure **indicating a tabular zone 15 to 30m thick**
- **Mineralisation remains open-up-dip beneath the silicified cap and down-dip beneath talus cover, highlighting significant expansion potential**
- Outstanding consistency demonstrated across all **120 channel samples averaging 74.8%  $\text{CaF}_2$** , with **85% of samples grading above 50%  $\text{CaF}_2$  at an average of 90.4%  $\text{CaF}_2$** .

#### Managing Director Brett Hazelden, commented:

"Establishing the appropriate assay technique for the ultra high grade fluor spar mineralisation being encountered has been essential. ALS advised that the original method can under-estimate fluorine for this specific high-grade matrix, and the re-assays now confirm that the previously reported Horseshoe grades were materially under-called - an average uplift of 12.9%.

Grades approaching 80%  $\text{CaF}_2$ , over significant widths, are exceptional in a global fluor spar context, particularly when they occur from surface within a broad replacement-style mineralised system. Importantly, Horseshoe is not presenting as a conventional narrow-vein fluor spar deposit. The mineralisation is exposed across an approximately

80-metre-wide zone, with previous drilling and pit exposure indicating a tabular body approximately 15 to 30 metres thick that remains open.

For investors, the significance is the combination of **grade, width and scale**. These latest results, together with the exceptional grades being returned from our metallurgical samples, continue to strengthen our view that Horseshoe has the potential to become a significant high-grade fluor spar deposit.

We are now focused on demonstrating the scale of the system through drilling and advancing the metallurgical and ore-sorting programs to determine the most efficient pathway to Metspar and premium Acidspar products.

Acidspar prices in the US reached approximately US\$654/t in July 2026<sup>1</sup>, highlighting the potential value of producing a premium-grade fluor spar product into a strategically important and import-dependent US market."

<sup>1</sup> Source: ChemAnalyst, Fluorspar Price Trend and Forecast, data accessed 5 August 2026. July 2026 US Acidspar price

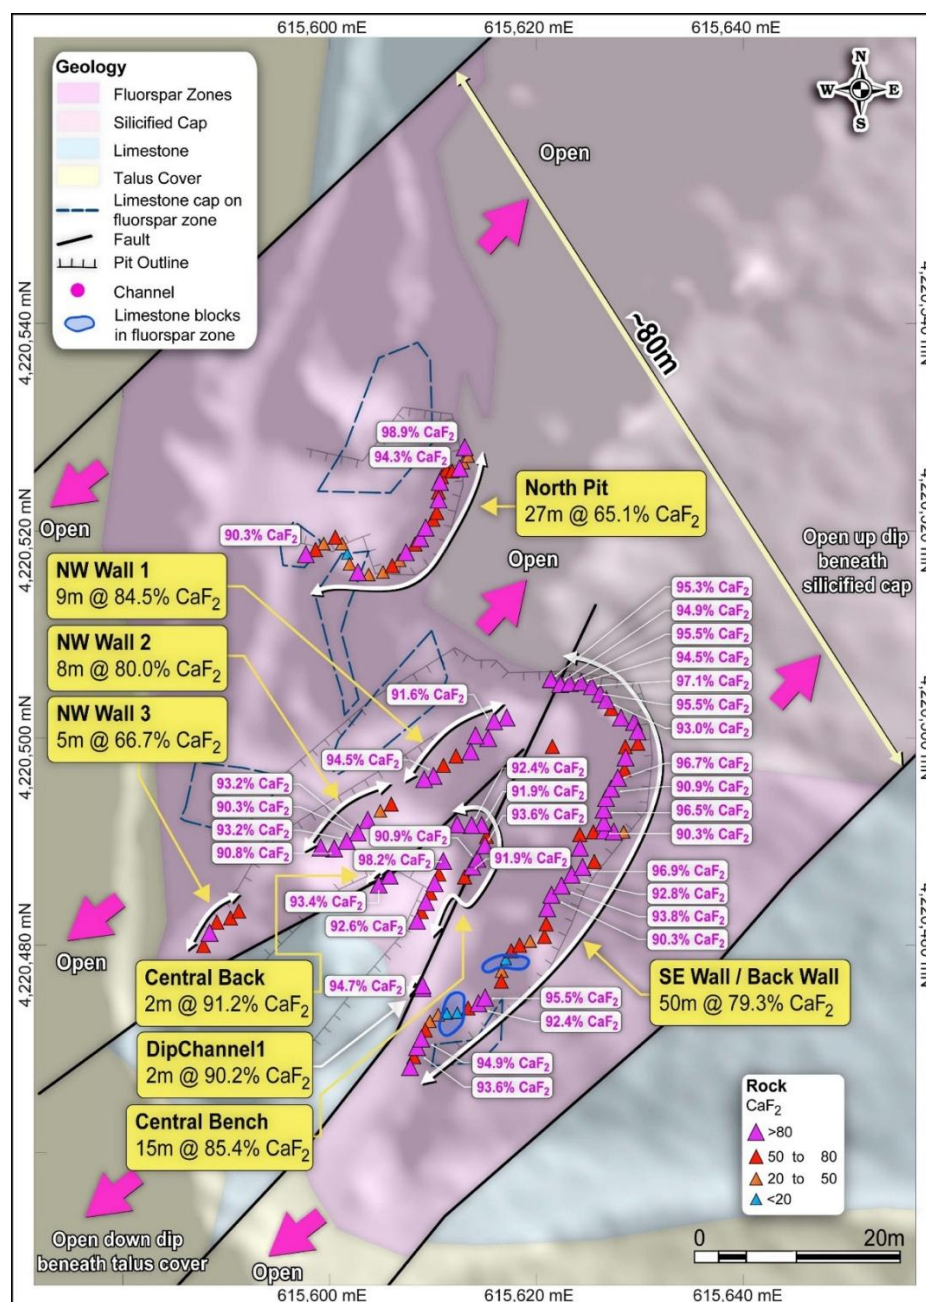


Figure 1 Horseshoe channel sample results re-assayed on background geology, assays >90% CaF<sub>2</sub> labelled (geology modified after Evans, 1975). Coordinates NAD83 Zone 11

**OD6 Metals Limited (ASX: OD6, "OD6" or "the Company") is pleased to announce the re-assay results from expanded channel sampling completed at the Horseshoe Prospect, part of the Company's exciting Quinn Fluorspar Project in Nevada, USA**

### Re-assay program and why

At the commencement of work on this project the Company approached ALS Global Ltd to establish appropriate assay techniques. ALS Global is the world's largest mineral exploration testing company, is renowned for precision and reliability and has been the preferred laboratory for OD6 Metals since the company's inception. The preferred technique for fluorine analysis is ME-XRF24 (F-XRF24) and is the **technique used by Tivan Ltd for its Speewah Project in Western Australia**. This is a highly reliable technique using an initial oxidation to remove volatiles ( $H_2O$  and  $CO_2$ ) and then a fusion at  $1100^{\circ}C$  to dissolve sample metal into a glass bead before high-powered X-Ray Fluorescence performed under laboratory conditions. F-XRF24 is not available via ALS Global laboratories in North America, and as such an alternate assay method was proposed, F-ELE82, which uses a fusion by sodium hydroxide and a leach of citric acid, before analysing the F through analysis of the selective ion electrode.

OD6 Metals Competent Person, Darren Holden, contacted ALS with queries when a sample containing apparent high-grade fluorspar returned assay results less than expected. ALS conducted some investigations into the F-ELE82 technique. ALS advised that due to matrix limitations with these specific high-grade samples, the F-ELE82 method exhibits a negative bias, meaning the true fluorine concentrations in previously reported high grades were possibly **underestimated** (this was noted in the original release JORC table by the Company on [8 July 2026](#))

The Company requested ALS to send residual pulps of all samples that reported  $>50,000ppm$  fluorine ( $\sim 10\%$  fluorspar) to Perth, Western Australia for re-assay with the F-XRF24 technique as a comparison. Following the recent metallurgical assay results from Core Metallurgy, which also used F-XRF24, returned higher than expected grades, the Company accelerated the re-assay program with the results presented herein. The re-assayed results set out in this announcement supersede the corresponding channel sampling results reported on 8 July 2026 and therefore the superseded assay results should no longer be relied upon. Figure 2 presents a comparison of results in the two techniques, noting how the largest variation is in the higher-grade results.

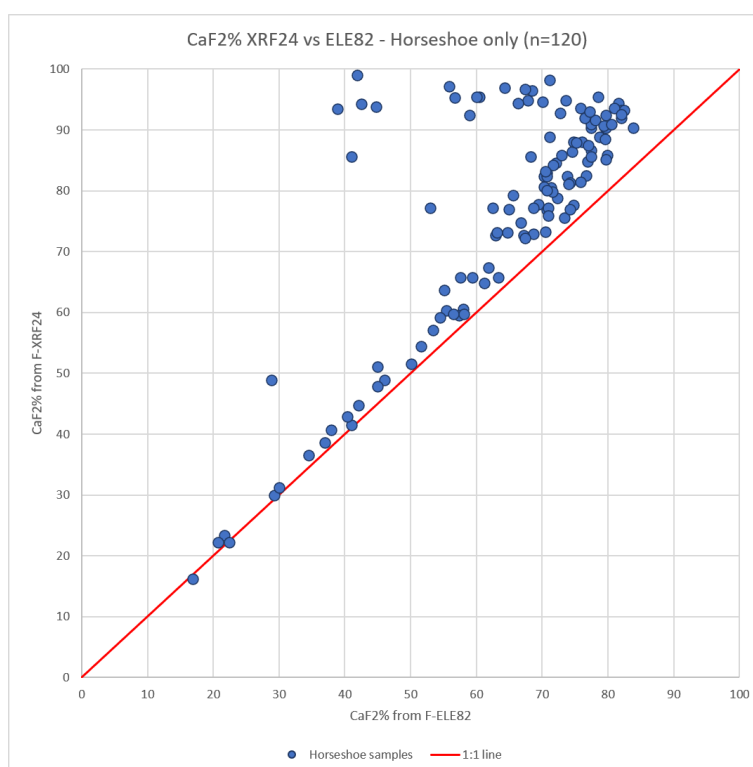


Figure 2 Re-assay program with F-XRF24 versus the original F-ELE82

Following advice from ALS that the F-ELE82 method is semi-quantitative for this specific high-grade fluorspar matrix, the Company has elected to utilize F-XRF24 for all samples going forward.

## Channel Sampling

Channel sampling is a systematic method in which samples are collected using a hammer drilling and the excavated material is collected as a series of contiguous samples over set intervals. Because each sample represents a fixed width, the technique delivers a representative measure of grade across the sampled interval, and — where the channel is oriented as close as practicable to perpendicular to the strike of mineralisation. It is a well-established approach for characterising exposed mineralisation in pit walls, trenches and outcrop. Collapse areas of pit wall, with no observed or safely reachable exposed rock were not sampled.

## Significance of these results

These results are an outstanding outcome for the Horseshoe deposit, confirming broad zones of exceptionally high-grade fluorspar at surface. Standout channel intervals of **22m at 78.8% CaF<sub>2</sub>** in the north-west wall, **15m at 85.8% CaF<sub>2</sub>** on the central bench, **50m at 79.3% CaF<sub>2</sub>** in the south-east/back wall and **27m at 65.1% CaF<sub>2</sub>** in the north pit — including individual samples grading **up to 98.8% CaF<sub>2</sub>** — demonstrate both the very high tenor and the impressive width and continuity of mineralisation across the historic pit. Grades of this magnitude sit well above the 40% CaF<sub>2</sub> threshold that defines high-grade fluorspar and confirm the potential for Horseshoe to deliver premium, high-value product.

Critically, these results reinforce Horseshoe as a genuinely significant, near-surface, high-grade fluorspar opportunity in Nevada — one of the world's premier mining jurisdictions. With the United States currently 100% reliant on imported fluorspar and the mineral firmly established on the US Critical Minerals list, the scale and quality of mineralisation emerging at Horseshoe position the Quinn Fluorspar Project to play a meaningful role in securing domestic supply. The Company is highly encouraged by these results and views Horseshoe as developing into an outstanding opportunity, with clear momentum to advance the project through the next phases of work.

Initial development concepts will evaluate a staged approach targeting early Metspar production opportunities, with subsequent beneficiation studies assessing the potential production of higher-value Acidspar products.

## Quinns Fluorspar Project U.S Strategic Advantage

The **Quinn Fluorspar Project**, located in Nevada, USA, provides OD6 with direct exposure to a strategically important critical mineral within the United States. The Project's key attributes include:

- location in **Nevada, USA**, one of the world's established mining jurisdictions
- a historical fluorspar mining district containing multiple known fluorspar occurrences
- OD6 has now consolidated 100% ownership of **226 mining claims covering ~1,890 hectares**
- **+20 Fluorspar occurrences**, supporting a future hub-and-spoke development strategy
- **exceptionally high-grade fluorspar mineralisation** demonstrated through OD6's recent exploration and sampling programs
- **Multiple high-priority drill targets defined** from integrated geological mapping, fluorine geochemistry, structural interpretation and historical drilling
- **8km fertile mineralised corridor** confirmed with additional high-grade fluorine anomalies identified outside known deposits
- **Low impurity mineralisation** supports potential production of premium **Acidspar** (>97% CaF<sub>2</sub>) and **Metspar** products following beneficiation

- **Permitting program underway**, including environmental baseline, archaeological studies and preparation of drilling and bulk sample approvals
- **Metallurgical testwork advancing** with optical sorting and beneficiation studies to optimise premium product recoveries
- **Potential Gold Upside** identified in soil sampling across Mammoth, Horseshoe and Dress Circle

Together, these results reinforce OD6's view that Quinn has the potential to emerge as a strategically significant domestic source of high-grade fluor spar in a U.S. market that remains 100% net import reliant.

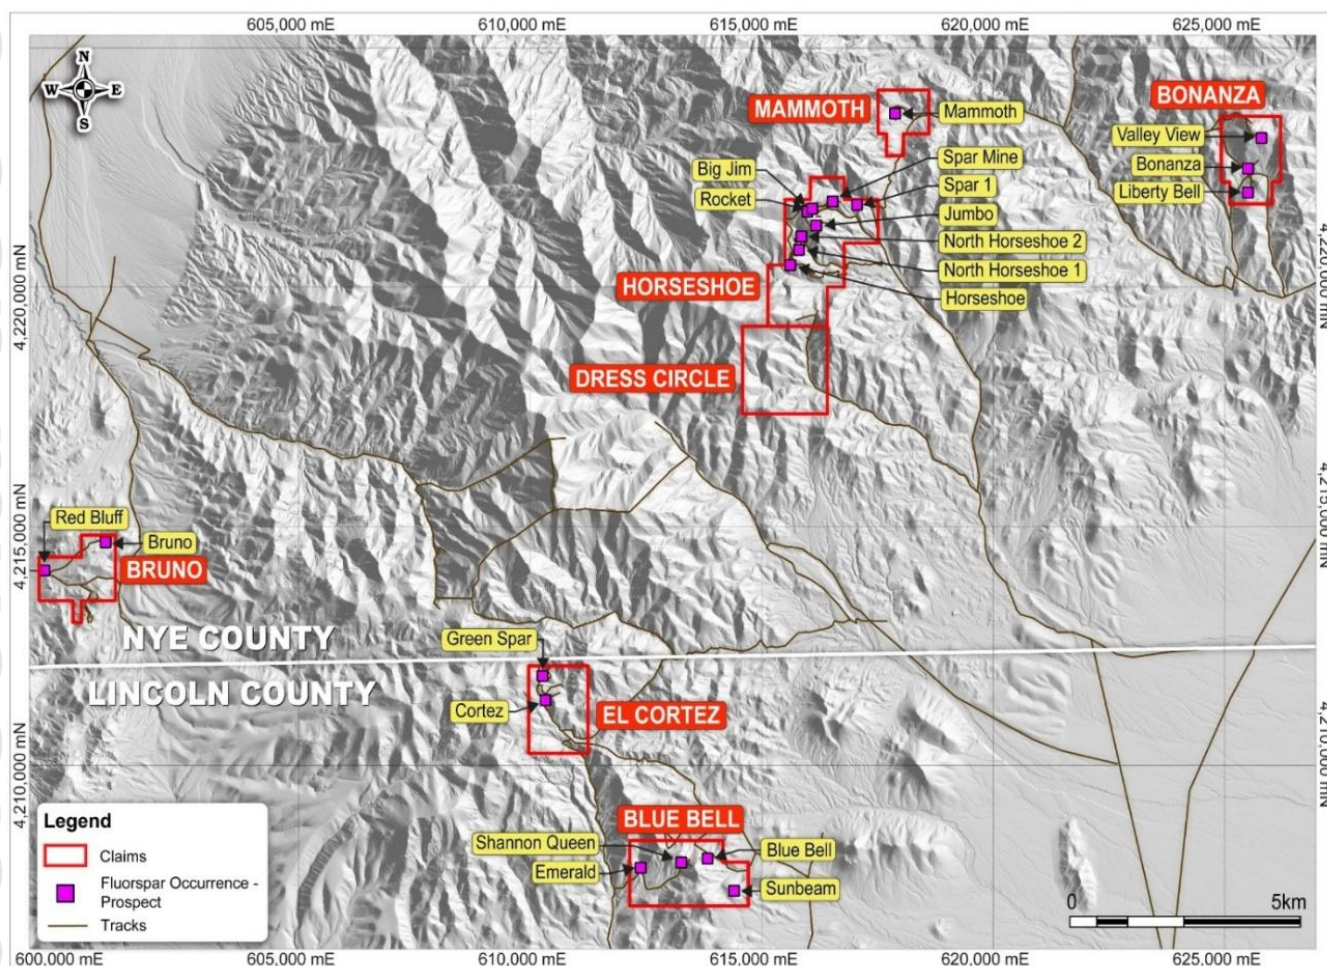


Figure 3: Quinn Fluorspar Project – district claim position and project areas, Nevada USA

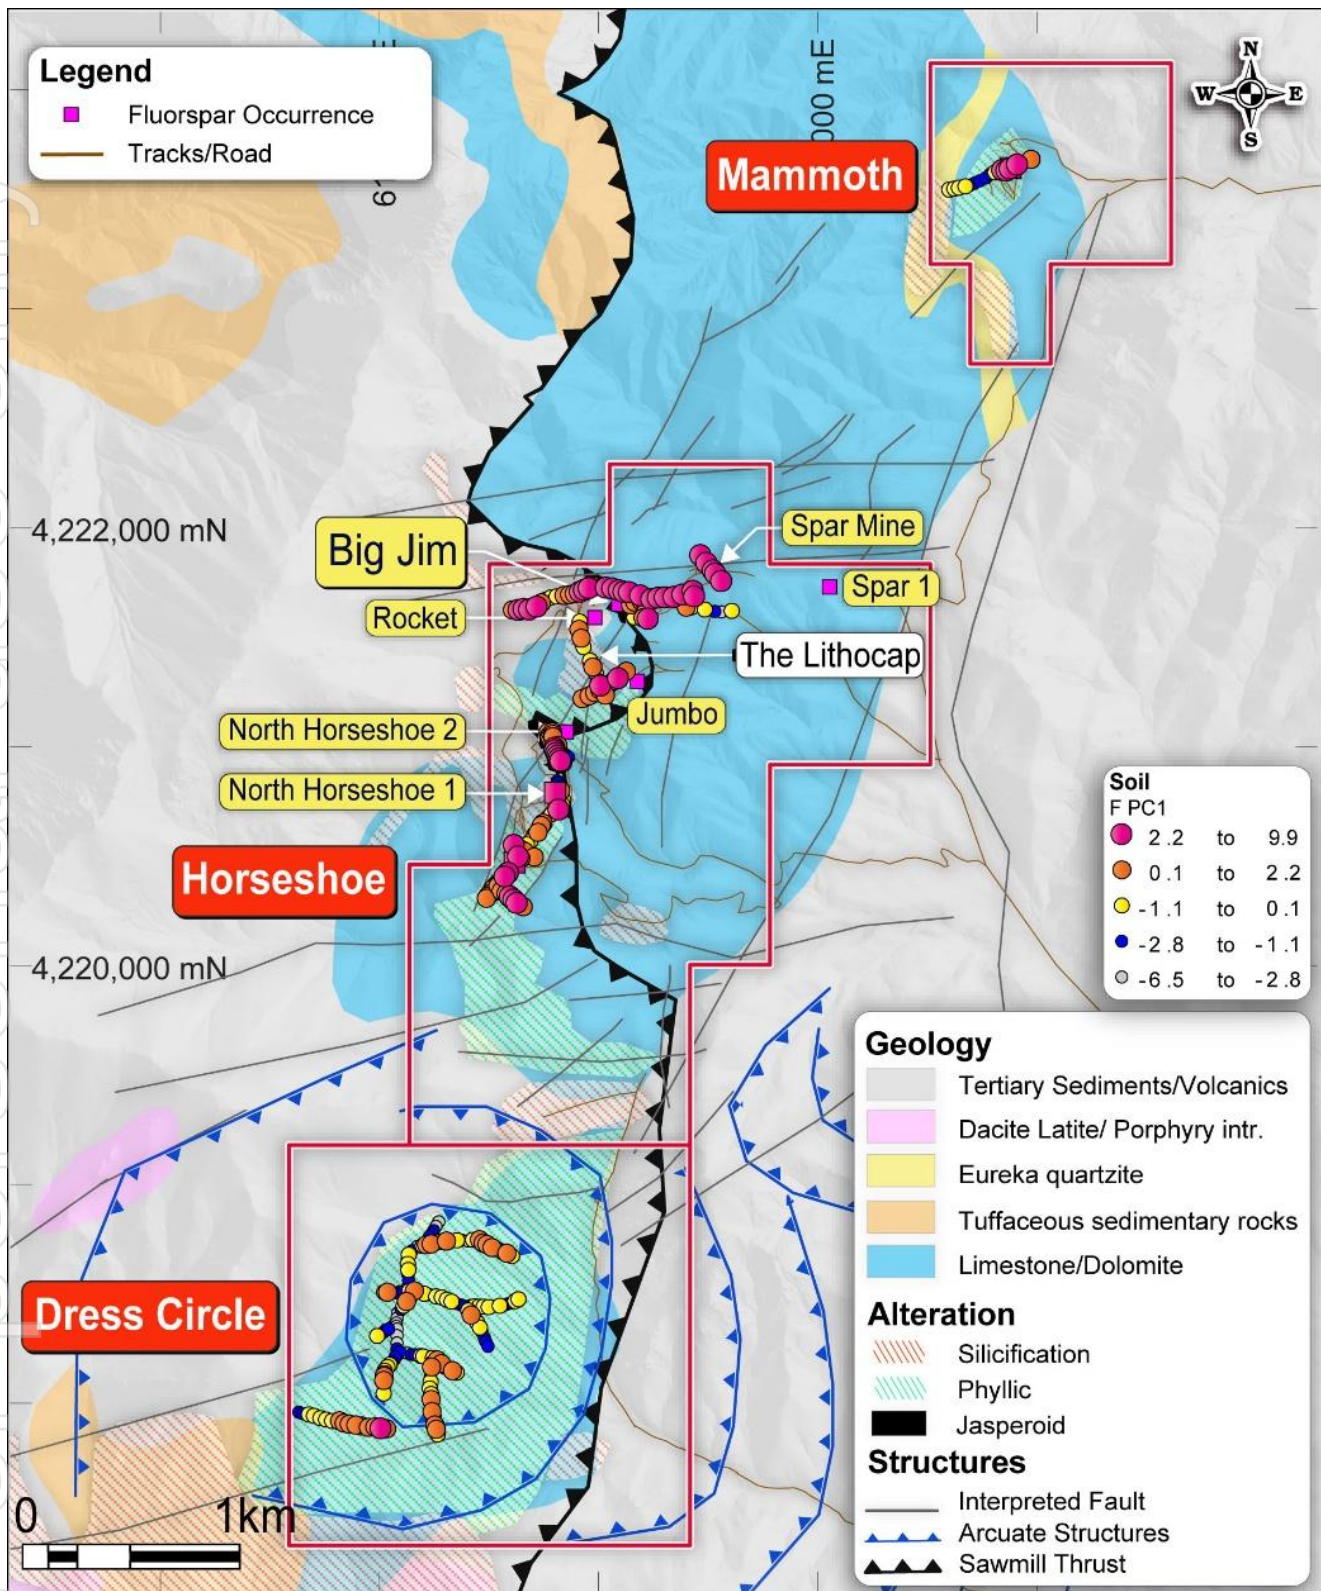


Figure 4 Prospect map: with fluorine pathfinders in soils over regional geological mapping (refer release dated [1 July 2026](#))

## References

Evans, D.L.C. (1975). Geology and Indicated Reserves, Quinn Canyon Range Fluorspar. Consultant Report. On File Nevada Bureau of Mines & Geology

## Forward Looking Statements

Certain information in this document refers to the intentions of OD6 Metals, however these are not intended to be forecasts, forward looking statements, or statements about the future matters for the purposes of the Corporations Act or any other applicable law. Statements regarding plans with respect to OD6 Metals projects are forward looking statements and can generally be identified by the use of words such as 'project', 'foresee', 'plan', 'expect', 'aim', 'intend', 'anticipate', 'believe', 'estimate', 'may', 'should', 'will' or similar expressions. There can be no assurance that the OD6 Metals plans for its projects will proceed as expected and there can be no assurance of future events which are subject to risk, uncertainties and other actions that may cause OD6 Metals actual results, performance, or achievements to differ from those referred to in this document. While the information contained in this document has been prepared in good faith, there can be given no assurance or guarantee that the occurrence of these events referred to in the document will occur as contemplated. Accordingly, to the maximum extent permitted by law, OD6 Metals and any of its affiliates and their directors, officers, employees, agents and advisors disclaim any liability whether direct or indirect, express or limited, contractual, tortious, statutory or otherwise, in respect of, the accuracy, reliability or completeness of the information in this document, or likelihood of fulfilment of any forward-looking statement or any event or results expressed or implied in any forward-looking statement; and do not make any representation or warranty, express or implied, as to the accuracy, reliability or completeness of the information in this document, or likelihood of fulfilment of any forward-looking statement or any event or results expressed or implied in any forward-looking statement; and disclaim all responsibility and liability for these forward-looking statements (including, without limitation, liability for negligence).

## Competent Persons Statement

Information in this report relating to field observations and channel sample results is based on information compiled by Dr Darren Holden who is a Fellow of the Australasian Institute of Mining and Metallurgy.

Dr Holden is an employee of GeoSpy Pty Ltd and is a geological advisor to the Company and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined by the 2012 Edition of the Australasian Code for reporting of Exploration Results, Mineral Resources and Ore Reserves. Dr Holden owns shares in the Company and participates in the Company's employee securities incentive plan. Dr Holden consents to the inclusion of the data in the form and context in which it appears.

## No new information

Except where explicitly stated, this announcement contains references to prior exploration results, all of which have been cross-referenced to previous market announcements made by the Company. The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcements.

The information in this report relating to the Mineral Resource estimate for the Splinter Rock Project is extracted from the Company's ASX announcements dated 18 July 2024. OD6 confirms that it is not aware of any new information or data that materially affects the information included in the original announcement and that all material assumptions and technical parameters underpinning the Mineral Resource estimate continue to apply.

**This announcement has been authorised for release by the Board of OD6 Metals Limited.**

## About OD6 Metals

OD6 Metals Ltd is an Australian critical minerals exploration and development company with projects spanning fluorspar, rare earth elements and copper across the United States and Australia.

OD6 aims to position itself as an emerging supplier of strategically important critical minerals required for next-generation industrial, defence and energy technologies.

### Quinn Fluorspar Project – Nevada, USA

OD6 is advancing the Quinn Fluorspar Project located in Nevada, USA, one of the world's premier mining jurisdictions and currently ranked second globally in the Fraser Institute 2025 Mining Attractiveness Index.

Quinn hosts multiple high-grade fluorspar deposits including Horseshoe, Mammoth and Big Jim, with historical drilling, channel sampling and testwork confirming significant high-grade mineralisation and potential for both Metspar and premium Acidspar products.

Fluorspar is classified as a critical mineral in the United States, which currently imports 100% of all Fluorspar consumed domestically with >60% of all global supply sourced from China. It is essential in hydrofluoric acid production, AI semiconductor manufacturing, advanced battery technologies, uranium enrichment, defence systems and refrigerants.

### Splinter Rock Rare Earth Project – Western Australia

OD6's 100% owned Splinter Rock Rare Earth Project in Western Australia hosts one of Australia's largest and highest-grade clay-hosted rare earth deposits, with a Mineral Resource Estimate of:

- Indicated: 119Mt @ 1,632ppm TREO
- Inferred: 563Mt @ 1,275ppm TREO

OD6 is advancing an innovative processing flowsheet utilising heap leaching, nanofiltration and ion exchange technologies designed to achieved ~75% Nd & Pr overall recovery plus produce a high-quality Mixed Rare Earth Carbonate/Hydroxide product of ~56-59% TREO with low impurity levels

### Gulf Creek Copper Project – New South Wales

OD6 is also advancing the Gulf Creek Copper-Zinc VMS Project in New South Wales, a historically high-grade copper mining district with significant exploration upside.

Recent drilling and geophysical programs have confirmed high-grade copper mineralisation and identified multiple large-scale exploration targets along more than 10km of prospective strike.

### Corporate Directory

Managing Director  
Non-Executive Chairman  
Non-Executive Director  
Financial Controller/ Joint Company Secretary  
Joint Company Secretary  
Technical Advisor to the Board

### Corporate Directory

Mr Brett Hazelden  
Mr Piers Lewis  
Dr Mitch Loan  
Mr Joel Ives  
Mr Lewis Flynn  
Dr Darren Holden

### Contact

OD6 Metals Ltd  
ACN 654 839 602  
[www.od6metals.com.au](http://www.od6metals.com.au)  
Mail to: [info@od6metals.com.au](mailto:info@od6metals.com.au)  
Phone: +61 8 6189 8515  
Level 1, 1 Alvan Street, Subiaco, WA 6008

### Investor Relations

Lucas Robinson  
Corporate Storytime  
[lucas@corporatestorytime.com](mailto:lucas@corporatestorytime.com)  
Phone: +61 408 228 889

## Appendix 1: results

Table 1 Quinn Fluorspar Project Horseshoe Results Coordinates in NAD83 Zone 11.

| Project       | SiteID   | Easting  | Northing  | From | To | CaF <sub>2</sub> % (F-ELE82 Original Assay) | CaF <sub>2</sub> % (F-XRF24 re-reported) | Difference | Comments                                       |
|---------------|----------|----------|-----------|------|----|---------------------------------------------|------------------------------------------|------------|------------------------------------------------|
| Central Bench | DH061    | 615613   | 4220486.6 | 0    | 1  | 66.8                                        | <b>74.7</b>                              | +7.9       | Breccia and Raccoon Tail Fluorspar             |
| Central Bench | DH062    | 615613.8 | 4220487.6 | 1    | 2  | 76.4                                        | <b>92.0</b>                              | +15.6      | Breccia and Raccoon Tail Fluorspar             |
| Central Bench | DH063    | 615614.3 | 4220488.3 | 2    | 3  | 80.6                                        | <b>91.0</b>                              | +10.4      | Breccia and Raccoon Tail Fluorspar             |
| Central Bench | DH064    | 615615   | 4220489.6 | 3    | 4  | 81                                          | <b>93.6</b>                              | +12.6      | Breccia and Raccoon Tail Fluorspar             |
| Central Bench | DH065    | 615615.2 | 4220490.5 | 4    | 5  | 70.9                                        | <b>77.2</b>                              | +6.3       | Breccia and Raccoon Tail Fluorspar             |
| Central Bench | DH066    | 615614.7 | 4220491.6 | 5    | 6  | 82                                          | <b>92.0</b>                              | +10.0      | Breccia and Raccoon Tail Fluorspar             |
| Central Bench | DH067    | 615613.7 | 4220491.6 | 6    | 7  | 79.7                                        | <b>92.4</b>                              | +12.7      | Breccia and Raccoon Tail Fluorspar             |
| Central Bench | DH068    | 615612.3 | 4220491.6 | 7    | 8  | 76.9                                        | <b>84.8</b>                              | +7.9       | Breccia and Raccoon Tail Fluorspar             |
| Central Bench | QC260204 | 615608.4 | 4220482.4 | 0    | 1  | 82                                          | <b>92.6</b>                              | +10.6      | Fault Zone, breccia slickensides, 78Deg SE dip |
| Central Bench | QC260205 | 615608.9 | 4220483.3 | 1    | 2  | 70.9                                        | <b>76.0</b>                              | +5.1       | Fault Zone, breccia slickensides, 78Deg SE dip |
| Central Bench | QC260206 | 615609.3 | 4220484.2 | 2    | 3  | 70.3                                        | <b>80.7</b>                              | +10.4      | Fault Zone, breccia slickensides, 78Deg SE dip |
| Central Bench | QC260207 | 615609.7 | 4220485.1 | 3    | 4  | 74.2                                        | <b>77.0</b>                              | +2.8       | Fault Zone, breccia slickensides, 78Deg SE dip |
| Central Bench | QC260208 | 615610.1 | 4220486   | 4    | 5  | 73                                          | <b>85.8</b>                              | +12.8      | Fault Zone, breccia slickensides, 78Deg SE dip |
| Central Bench | QC260209 | 615610.6 | 4220486.9 | 5    | 6  | 70.5                                        | <b>73.3</b>                              | +2.8       | Fault Zone, breccia slickensides, 78Deg SE dip |
| Central Bench | QC260210 | 615611   | 4220488.1 | 7    | 8  | 71.1                                        | <b>98.2</b>                              | +27.1      | Fault Zone, breccia slickensides, 78Deg SE dip |
| Centra Back   | DH059    | 615604.7 | 4220485.8 | 0    | 1  | 38.8                                        | <b>93.4</b>                              | +54.6      | Breccia beneath Limestone cap                  |
| Central Back  | DH060    | 615605.8 | 4220486.7 | 1    | 2  | 71.1                                        | <b>88.9</b>                              | +17.8      | Breccia beneath limestone cap                  |
| DipChannel1   | QC260202 | 615609   | 4220475.9 | 0    | 1  | 70.1                                        | <b>94.7</b>                              | +24.6      | Raccoon Tail Fluorspar                         |
| DipChannel1   | QC260203 | 615609   | 4220476.1 | 1    | 2  | 79.9                                        | <b>85.8</b>                              | +5.9       | Raccoon Tail Fluorspar                         |
| North Pit     | DH074    | 615597.7 | 4220517.7 | 0    | 1  | 83.8                                        | <b>90.3</b>                              | +6.5       | Raccoon Tail Fluorspar                         |
| North Pit     | DH075    | 615598.7 | 4220518.2 | 1    | 2  | 73.4                                        | <b>75.6</b>                              | +2.2       | Limestone cap                                  |
| North Pit     | DH076    | 615599.4 | 4220518.8 | 2    | 3  | 37                                          | <b>38.6</b>                              | +1.6       | Limestone cap                                  |
| North Pit     | DH077    | 615600.6 | 4220519.4 | 3    | 4  | 63.3                                        | <b>65.7</b>                              | +2.4       | Limestone + Raccoon Tail Fluorspar             |
| North Pit     | DH078    | 615601.2 | 4220518.8 | 4    | 5  | 22.4                                        | <b>22.2</b>                              | -0.2       | Breccia                                        |
| North Pit     | DH079    | 615601.7 | 4220517.8 | 5    | 6  | 16.9                                        | <b>16.2</b>                              | -0.7       | Limestone cap                                  |
| North Pit     | DH080    | 615601.9 | 4220516.8 | 6    | 7  | 37.9                                        | <b>40.7</b>                              | +2.8       | Calcite veins in limestone                     |
| North Pit     | DH081    | 615602.7 | 4220516   | 7    | 8  | 75.2                                        | <b>87.9</b>                              | +12.7      | Raccoon Tail Fluorspar                         |
| North Pit     | DH082    | 615603.8 | 4220515.8 | 8    | 9  | 46                                          | <b>48.9</b>                              | +2.9       | Raccoon Tail Fluorspar                         |
| North Pit     | DH083    | 615605.2 | 4220516   | 9    | 10 | 45                                          | <b>47.8</b>                              | +2.8       | Raccoon Tail Fluorspar                         |
| North Pit     | DH084    | 615606.1 | 4220516.6 | 10   | 11 | 56.5                                        | <b>59.8</b>                              | +3.3       | Raccoon Tail Fluorspar                         |
| North Pit     | DH085    | 615606.8 | 4220517.2 | 11   | 12 | 40.4                                        | <b>42.9</b>                              | +2.5       | Raccoon Tail Fluorspar                         |
| North Pit     | DH086    | 615607.4 | 4220517.9 | 12   | 13 | 77.1                                        | <b>87.5</b>                              | +10.4      | Raccoon Tail Fluorspar                         |

| Project     | SiteID | Easting  | Northing  | From | To | CaF <sub>2</sub> % (F-ELE82 Original Assay) | CaF <sub>2</sub> % (F-XRF24 re-reported) | Difference | Comments                           |
|-------------|--------|----------|-----------|------|----|---------------------------------------------|------------------------------------------|------------|------------------------------------|
| North Pit   | DH087  | 615608.3 | 4220518.7 | 13   | 14 | 53.4                                        | 57.1                                     | +3.7       | Raccoon Tail Fluorspar             |
| North Pit   | DH088  | 615608.7 | 4220519.2 | 14   | 15 | 74                                          | 81.1                                     | +7.1       | Raccoon Tail Fluorspar             |
| North Pit   | DH089  | 615609.3 | 4220520.3 | 15   | 16 | 41                                          | 85.6                                     | +44.6      | Raccoon Tail Fluorspar             |
| North Pit   | DH090  | 615610   | 4220521.1 | 16   | 17 | 54.5                                        | 59.1                                     | +4.6       | Raccoon Tail Fluorspar             |
| North Pit   | DH091  | 615610.3 | 4220521.8 | 17   | 18 | 45                                          | 51.1                                     | +6.1       | Raccoon Tail Fluorspar             |
| North Pit   | DH092  | 615610.5 | 4220522.9 | 18   | 19 | 71.3                                        | 80.5                                     | +9.2       | Raccoon Tail Fluorspar             |
| North Pit   | DH093  | 615610.5 | 4220523.7 | 19   | 20 | 15.6                                        | 54.4                                     | +38.8      | Raccoon Tail Fluorspar             |
| North Pit   | DH094  | 615610.6 | 4220524.7 | 20   | 21 | 77.5                                        | 85.6                                     | +8.1       | Raccoon Tail Fluorspar             |
| North Pit   | DH095  | 615610.8 | 4220525.2 | 21   | 22 | 68.6                                        | 77.2                                     | +8.6       | Raccoon Tail Fluorspar             |
| North Pit   | DH096  | 615611.3 | 4220525.9 | 22   | 23 | 59.4                                        | 65.7                                     | +6.3       | Raccoon Tail Fluorspar             |
| North Pit   | DH097  | 615611.8 | 4220525.8 | 23   | 24 | 72.3                                        | 78.9                                     | +6.6       | Raccoon Tail Fluorspar             |
| North Pit   | DH098  | 615612.6 | 4220526   | 24   | 25 | 42.5                                        | 94.3                                     | +51.8      | Raccoon Tail Fluorspar             |
| North Pit   | DH099  | 615612.9 | 4220526.6 | 25   | 26 | 30                                          | 31.2                                     | +1.2       | Raccoon Tail Fluorspar             |
| North Pit   | DH100  | 615613.4 | 4220527.2 | 26   | 27 | 28.9                                        | 48.9                                     | +20.0      | Raccoon Tail Fluorspar             |
| North Pit   | DH101  | 615613   | 4220528   | 27   | 28 | 41.9                                        | 99.0                                     | +57.1      | Raccoon Tail Fluorspar             |
| NW Wall1    | DH043  | 615617.1 | 4220501.9 | 0    | 1  | 74.8                                        | 88.1                                     | +13.3      | Limestone + Raccoon Tail Fluorspar |
| NW Wall1    | DH044  | 615615.9 | 4220501.6 | 1    | 2  | 78.1                                        | 91.6                                     | +13.5      | Raccoon Tail Fluorspar             |
| NW Wall1    | DH045  | 615615.3 | 4220500   | 2    | 3  | 76                                          | 88.1                                     | +12.1      | Raccoon Tail Fluorspar             |
| NW Wall1    | DH046  | 615614.1 | 4220500.2 | 3    | 4  | 73.8                                        | 82.3                                     | +8.5       | Raccoon Tail Fluorspar             |
| NW Wall1    | DH047  | 615613.6 | 4220498.7 | 4    | 5  | 78.7                                        | 88.9                                     | +10.2      | Raccoon Tail Fluorspar             |
| NW Wall1    | DH048  | 615612.2 | 4220498.3 | 5    | 6  | 69.5                                        | 77.8                                     | +8.3       | Raccoon Tail Fluorspar             |
| NW Wall1    | DH049  | 615611   | 4220497.4 | 6    | 7  | 58                                          | 60.6                                     | +2.6       | Raccoon Tail Fluorspar             |
| NW Wall1    | DH050  | 615610   | 4220496.3 | 7    | 8  | 81.6                                        | 94.5                                     | +12.9      | Raccoon Tail Fluorspar             |
| NW Wall1    | DH051  | 615609.1 | 4220496   | 8    | 9  | 79.5                                        | 88.5                                     | +9.0       | Raccoon Tail Fluorspar             |
| NW Wall2    | DH052  | 615606   | 4220493.6 | 0    | 1  | 70.7                                        | 76.8                                     | +6.1       | Breccia                            |
| NW Wall2    | DH053  | 615604.9 | 4220493   | 1    | 2  | 29.3                                        | 30.0                                     | +0.7       | Breccia                            |
| NW Wall2    | DH054  | 615603.7 | 4220492.1 | 2    | 3  | 74.2                                        | 81.3                                     | +7.1       | Breccia                            |
| NW Wall2    | DH055  | 615602.7 | 4220490.9 | 3    | 4  | 82                                          | 93.2                                     | +11.2      | Breccia                            |
| NW Wall2    | DH055b | 615602.7 | 4220490.9 | 0    | 0  | 79.7                                        | 90.3                                     | +10.6      | Breccia                            |
| NW Wall2    | DH056  | 615601.6 | 4220490.1 | 4    | 5  | 82.4                                        | 93.2                                     | +10.8      | Breccia                            |
| NW Wall2    | DH057  | 615600.4 | 4220489.3 | 5    | 6  | 79.3                                        | 90.8                                     | +11.5      | Breccia                            |
| NW Wall2    | DH058  | 615599.1 | 4220489.4 | 6    | 7  | 72.1                                        | 84.6                                     | +12.5      | Breccia                            |
| NW Wall3    | DH069  | 615587.8 | 4220480   | 0    | 1  | 57.3                                        | 59.5                                     | +2.2       | Breccia                            |
| NW Wall3    | DH070  | 615588.4 | 4220481.2 | 1    | 2  | 75.8                                        | 81.5                                     | +5.7       | Breccia                            |
| NW Wall3    | DH071  | 615589.1 | 4220482.2 | 2    | 3  | 61.2                                        | 64.9                                     | +3.7       | Breccia                            |
| NW Wall3    | DH072  | 615590.4 | 4220482.7 | 3    | 4  | 61.9                                        | 67.4                                     | +5.5       | Breccia                            |
| NW Wall3    | DH073  | 615591.2 | 4220483.3 | 4    | 5  | 55.5                                        | 60.4                                     | +4.9       | Breccia                            |
| SE/BackWall | DH002  | 615607.8 | 4220468.2 | 0    | 1  | 68.2                                        | 85.6                                     | +17.4      | Limestone / breccia on contact     |
| SE/BackWall | DH003  | 615608.1 | 4220469.3 | 1    | 2  | 68.6                                        | 72.9                                     | +4.3       | Raccoon Tail Fluorpsar             |

| Project     | SiteID | Easting  | Northing  | From | To | CaF <sub>2</sub> % (F-ELE82 Original Assay) | CaF <sub>2</sub> % (F-XRF24 re-reported) | Difference | Comments                            |
|-------------|--------|----------|-----------|------|----|---------------------------------------------|------------------------------------------|------------|-------------------------------------|
| SE/BackWall | DH004  | 615608.4 | 4220470.2 | 2    | 3  | 75.8                                        | <b>93.6</b>                              | +17.8      | RaccoonTail Fluorpsar               |
| SE/BackWall | DH005  | 615608.8 | 4220471   | 3    | 4  | 73.6                                        | <b>94.9</b>                              | +21.3      | RaccoonTail Fluorpsar               |
| SE/BackWall | DH006  | 615609.2 | 4220471.8 | 4    | 5  | 64.9                                        | <b>77.0</b>                              | +12.1      | Raccoon Tail Fluorpsar              |
| SE/BackWall | DH007  | 615609.7 | 4220472.7 | 5    | 6  | 42.1                                        | <b>44.8</b>                              | +2.7       | Raccoon Tail Fluorpsar              |
| SE/BackWall | DH008  | 615610.5 | 4220473.3 | 6    | 7  | 41                                          | <b>41.5</b>                              | +0.5       | Limestone / breccia                 |
| SE/BackWall | DH009  | 615611.3 | 4220473.5 | 7    | 8  | 8.8                                         | not re-assayed                           | -          | Limestone raft                      |
| SE/BackWall | DH010  | 615612.3 | 4220473.5 | 8    | 9  | 2.9                                         | not re-assayed                           | -          | Limestone raft                      |
| SE/BackWall | DH011  | 615613.4 | 4220474   | 9    | 10 | 53                                          | <b>77.2</b>                              | +24.2      | Raccoon Tail Fluorpsar Breccia pipe |
| SE/BackWall | DH012  | 615614.3 | 4220474.4 | 10   | 11 | 59                                          | <b>92.4</b>                              | +33.4      | Raccoon Tail Fluorpsar Breccia pipe |
| SE/BackWall | DH013  | 615615   | 4220474.9 | 11   | 12 | 60.4                                        | <b>95.5</b>                              | +35.1      | Raccoon Tail Fluorpsar Breccia pipe |
| SE/BackWall | DH014  | 615616.6 | 4220476.6 | 0    | 1  | 64.7                                        | <b>73.1</b>                              | +8.4       | Limestone / breccia                 |
| SE/BackWall | DH015  | 615616.6 | 4220477.5 | 1    | 2  | 21.7                                        | <b>23.4</b>                              | +1.7       | Breccia                             |
| SE/BackWall | DH016  | 615617   | 4220478.7 | 2    | 3  | 1                                           | not re-assayed                           | -          | Limestone raft                      |
| SE/BackWall | DH017  | 615617.5 | 4220479.5 | 3    | 4  | 67.2                                        | <b>72.7</b>                              | +5.5       | Breccia                             |
| SE/BackWall | DH018  | 615618.3 | 4220480   | 4    | 5  | 50.1                                        | <b>51.5</b>                              | +1.4       | Clay Breccia                        |
| SE/BackWall | DH019  | 615619.4 | 4220480.4 | 5    | 6  | 20.8                                        | <b>22.2</b>                              | +1.4       | Clay Breccia                        |
| SE/BackWall | DH020  | 615620.8 | 4220480.9 | 0    | 1  | 74.8                                        | <b>77.6</b>                              | +2.8       | Breccia                             |
| SE/BackWall | DH021  | 615620.9 | 4220482.1 | 1    | 2  | 57.5                                        | <b>65.7</b>                              | +8.2       | Breccia                             |
| SE/BackWall | DH022  | 615621   | 4220483.6 | 2    | 3  | 76.7                                        | <b>82.5</b>                              | +5.8       | Breccia                             |
| SE/BackWall | DH023  | 615621.4 | 4220484.9 | 3    | 4  | 79.5                                        | <b>90.3</b>                              | +10.8      | Breccia                             |
| SE/BackWall | DH024  | 615622.4 | 4220485.7 | 4    | 5  | 44.8                                        | <b>93.8</b>                              | +49.0      | Breccia                             |
| SE/BackWall | DH025  | 615623.4 | 4220486.8 | 5    | 6  | 72.7                                        | <b>92.8</b>                              | +20.1      | Breccia                             |
| SE/BackWall | DH026  | 615624.4 | 4220487.5 | 6    | 7  | 64.3                                        | <b>96.9</b>                              | +32.6      | Breccia                             |
| SE/BackWall | DH027  | 615625.6 | 4220488.1 | 8    | 9  | 55.1                                        | <b>63.7</b>                              | +8.6       | Breccia                             |
| SE/BackWall | DH028  | 615624.2 | 4220489.4 | 0    | 1  | 70.3                                        | <b>82.3</b>                              | +12.0      | Limestone cap                       |
| SE/BackWall | DH029  | 615624.2 | 4220490.7 | 1    | 2  | 65.6                                        | <b>79.3</b>                              | +13.7      | Limestone cap                       |
| SE/BackWall | DH030  | 615625.5 | 4220491   | 2    | 3  | 62.5                                        | <b>77.2</b>                              | +14.7      | Limestone cap                       |
| SE/BackWall | DH031  | 615626.5 | 4220491   | 3    | 4  | 77.5                                        | <b>90.3</b>                              | +12.8      | Limestone cap + veins               |
| SE/BackWall | DH032  | 615627.4 | 4220491   | 4    | 5  | 77.5                                        | <b>86.7</b>                              | +9.2       | Limestone cap + veins               |
| SE/BackWall | DH033  | 615628.4 | 4220491   | 5    | 6  | 34.5                                        | <b>36.6</b>                              | +2.1       | Limestone cap + veins               |
| SE/BackWall | DH034  | 615626.4 | 4220491.8 | 0    | 1  | 70.7                                        | <b>83.0</b>                              | +12.3      | Breccia                             |
| SE/BackWall | DH035  | 615626.4 | 4220493.1 | 1    | 2  | 68.4                                        | <b>96.5</b>                              | +28.1      | Breccia                             |
| SE/BackWall | DH036  | 615626.7 | 4220494.2 | 2    | 3  | 74.6                                        | <b>86.4</b>                              | +11.8      | Breccia                             |
| SE/BackWall | DH037  | 615627.2 | 4220495.1 | 3    | 4  | 77.5                                        | <b>91.0</b>                              | +13.5      | Breccia                             |
| SE/BackWall | DH038  | 615627.8 | 4220496.1 | 4    | 5  | 67.4                                        | <b>96.7</b>                              | +29.3      | Breccia                             |
| SE/BackWall | DH039  | 615628.5 | 4220497   | 5    | 6  | 67.4                                        | <b>72.3</b>                              | +4.9       | Breccia                             |
| SE/BackWall | DH040  | 615628.6 | 4220498.1 | 6    | 7  | 70.7                                        | <b>82.3</b>                              | +11.6      | Breccia                             |
| SE/BackWall | DH041  | 615628.6 | 4220499.2 | 7    | 8  | 62.9                                        | <b>72.7</b>                              | +9.8       | Breccia                             |
| SE/BackWall | DH042  | 615629.8 | 4220499.5 | 8    | 9  | 63.1                                        | <b>73.1</b>                              | +10.0      | Breccia                             |

| Project     | SiteID   | Easting  | Northing  | From | To | CaF <sub>2</sub> % (F-ELE82 Original Assay) | CaF <sub>2</sub> % (F-XRF24 re-reported) | Difference | Comments                    |
|-------------|----------|----------|-----------|------|----|---------------------------------------------|------------------------------------------|------------|-----------------------------|
| SE/BackWall | QC260214 | 615621.4 | 4220505.7 | 0    | 1  | 56.7                                        | <b>95.3</b>                              | +38.6      | Main face channel - breccia |
| SE/BackWall | QC260215 | 615622.3 | 4220505.2 | 1    | 2  | 67.8                                        | <b>94.9</b>                              | +27.1      | Main face channel - breccia |
| SE/BackWall | QC260216 | 615623.2 | 4220505.3 | 2    | 3  | 60                                          | <b>95.5</b>                              | +35.5      | Main face channel - breccia |
| SE/BackWall | QC260217 | 615624.3 | 4220505.4 | 3    | 4  | 66.4                                        | <b>94.5</b>                              | +28.1      | Main face channel - breccia |
| SE/BackWall | QC260218 | 615625.3 | 4220505   | 4    | 5  | 55.9                                        | <b>97.1</b>                              | +41.2      | Main face channel - breccia |
| SE/BackWall | QC260219 | 615626.1 | 4220504.3 | 5    | 6  | 78.5                                        | <b>95.5</b>                              | +17.0      | Main face channel - breccia |
| SE/BackWall | QC260220 | 615626.1 | 4220504.3 | 6    | 7  | 79.7                                        | <b>85.2</b>                              | +5.5       | Main face channel - breccia |
| SE/BackWall | QC260221 | 615626.7 | 4220503.6 | 7    | 8  | 77.3                                        | <b>93.0</b>                              | +15.7      | Main face channel - breccia |
| SE/BackWall | QC260222 | 615627.2 | 4220502.8 | 8    | 9  | 71.5                                        | <b>79.9</b>                              | +8.4       | Main face channel - breccia |
| SE/BackWall | QC260223 | 615628.1 | 4220501.9 | 9    | 10 | 71.7                                        | <b>84.2</b>                              | +12.5      | Main face channel - breccia |
| SE/BackWall | QC260224 | 615629.4 | 4220501.5 | 10   | 11 | 70.5                                        | <b>83.2</b>                              | +12.7      | Main face channel - breccia |
| SE/BackWall | QC260225 | 615629.7 | 4220500.6 | 11   | 12 | 70.7                                        | <b>80.1</b>                              | +9.4       | Main face channel - breccia |

Note 4 samples DH016, DH09, DH010 and DH079 are limestone rafts / cap in the fluorspar zone < 1.5m thick with fluorspar observed above and/or below in the pit wall, and excluded from the intercept calculations as they do not represent the continuity of the mineralization.

## JORC 2012 – Table 1: Quinn Fluorspar Project

### Section 1 Sampling Techniques and Data

(Criteria listed in the preceding section also apply to this section)

| Criteria              | JORC Code explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Commentary                                                                                                                                                                                                                     |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sampling techniques   | <ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information</li> </ul> | <ul style="list-style-type: none"> <li>Channel samples are chip-channels, where a line is marked out and a representative sample is collected with a hammer drill from 1m intervals along the side of historic pit.</li> </ul> |
| Drilling techniques   | <ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"> <li>No drilling reported</li> </ul>                                                                                                                                                         |
| Drill sample recovery | <ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>No drill sampling reported</li> </ul>                                                                                                                                                   |

| Criteria                                                | JORC Code explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Commentary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                         | recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Logging                                                 | <ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Geology recorded with each sample, as noted in Table 1 in the body of the release.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Sub-sampling techniques and sample preparation          | <ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul> | <ul style="list-style-type: none"> <li>No sub-sampling reported</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Quality of assay data and laboratory tests              | <ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>                                                                             | <ul style="list-style-type: none"> <li>Samples were delivered to ALS Global in Reno, NV for preparation.</li> <li>Samples were dispatched, by the laboratory, for assay by ALS Global in Vancouver using F-ELE82 technique for fluorine content.</li> <li>Sample pulps sent to ALS Global in Perth, Australia for re-assaying using F-XRF24</li> <li>Samples were consistent in grade with internal visual estimates of observed mineral content and historic work, and are hence considered reasonable in the context with which they appear.</li> <li>All fluorine is assumed to report to <math>\text{CaF}_2</math>. <math>\text{CaF}_2</math> is 48.7% F. Results factor this stoichiometric calculation based on F results from the laboratory.</li> </ul> |
| Verification of sampling and assaying                   | <ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>Samples are consistent with historic sampling as reported by the Company 4 March 2026</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Location of data points                                 | <ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Data points located in NAD83 Zone 11 and using handheld GPS with assumed accuracy of <math>\pm 5\text{m}</math>. Start of each channel is recorded, and positioned along the pit wall.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Data spacing and distribution                           | <ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>                                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Sampling confirms continuity of mineralization. In absence of drilling, does not provide sufficient information for mineral resource estimation.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Orientation of data in relation to geological structure | <ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"> <li>Orientation of channel sampling is along historic pit walls and exposed areas. They do not represent true width (refer to Figures in the body of the release)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

| Criteria          | JORC Code explanation                                                                                                                                        | Commentary                                                                                                                                                                                       |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | <i>and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> |                                                                                                                                                                                                  |
| Sample security   | <ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>                                                              | <ul style="list-style-type: none"> <li>Samples were collected under the supervision of the Competent Person, and were personally delivered to the laboratory by the Competent Person.</li> </ul> |
| Audits or reviews | <ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>                                      | <ul style="list-style-type: none"> <li>No audits and reviews undertaken.</li> </ul>                                                                                                              |

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

| Criteria                                | JORC Code explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Commentary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mineral tenement and land tenure status | <ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>226 State of Nevada Mining Claims.</li> <li>Staked in 2025 and 2026 and filed in early 2026.</li> <li>Projects fall on Federal Land (National Forest) but are outside of the designated Wilderness Study Areas</li> <li>The transaction terms include a 2% NSR on future production on Horseshoe, Mammoth &amp; Bonanza; but does not apply to Blue Bell, Cortez and Bruno. Applicable State Royalties will apply.</li> <li>Future work such as drilling requires permitting through the US Forest Service</li> </ul> |
| Exploration done by other parties       | <ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>As noted in previous release dated 4 March 2026</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Geology                                 | <ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>Principal host rocks are Paleozoic limestones and dolomites which have been altered by epithermal activity from Cenozoic volcanism and intrusions.</li> <li>Fluorspar is in replacement/breccia deposits in limestone, epithermal veins and vein/breccias.</li> </ul>                                                                                                                                                                                                                                                 |
| Drill hole Information                  | <ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul> | <ul style="list-style-type: none"> <li>No drilling reported</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Data aggregation methods                | <ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>                                                                                                                                                                             | <ul style="list-style-type: none"> <li>The channel samples reported was subparallel to the mineralization and taken from outcrop exposed. The width of the mineralization is up to 60m x 80m as noted in the body of the release.</li> </ul>                                                                                                                                                                                                                                                                                                                 |

| Criteria                                                         | JORC Code explanation                                                                                                                                                                                                                                                                                                                                                                                                                           | Commentary                                                                                                                                                                                             |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Relationship between mineralisation widths and intercept lengths | <ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul> | <ul style="list-style-type: none"> <li>The mineralized width is substantially greater than the channel sample intercept reported for reasons outlined above and in the body of the release.</li> </ul> |
| Diagrams                                                         | <ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>                                                                                                                            | <ul style="list-style-type: none"> <li>Diagrams are included at relevant sections in this Report</li> </ul>                                                                                            |
| Balanced reporting                                               | <ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>                                                                                                                                                                     | <ul style="list-style-type: none"> <li>All samples collected by the CP are reported.</li> </ul>                                                                                                        |
| Other substantive exploration data                               | <ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>         | <ul style="list-style-type: none"> <li>As reported in the body of the release.</li> </ul>                                                                                                              |
| Further work                                                     | <ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>                                               | <ul style="list-style-type: none"> <li>The Company is in the process of completing drill permitting.</li> </ul>                                                                                        |