

11 December 2025

Aurum returns high grade gold intercepts at Tchaga, Napié Gold Project, Côte d'Ivoire

Aurum Resources (ASX: AUE, "Aurum" or "the Company") is pleased to announce encouraging, broad gold intercepts from its ongoing 30,000m drilling program at the 0.87Moz Napié Gold Project¹ in Côte d'Ivoire. The drill program is designed to grow Mineral Resources at Napié and has successfully confirmed multiple shallow, open-pitabile gold intercepts from 18 holes drilled for 5,479m at the Tchaga deposit (0.54Moz @ 1.16g/t Au).

Encouraging new drill intercepts from Napié's Tchaga deposit include²:

- **Tchaga Deposit:**
 - **5.00m @ 10.09 g/t Au** from 209.00m inc. **1.00m @ 49.10 g/t Au** (NADD062)
 - **50.00m @ 0.62 g/t Au** from 363.00m inc. **1.00m @ 7.55 g/t Au** (NADD062)
 - **10.80m @ 4.52 g/t Au** from 73.00m inc. **1.90m @ 23.45 g/t Au** (NADD060)
 - **36.70m @ 0.66 g/t Au** from 93.30m inc. **4.70m @ 1.06 g/t Au** (NADD076)
 - **6.00m @ 3.82 g/t Au** from 226.00m inc. **1.00m @ 22.37 g/t Au** (NADD064).

Exploration Growth & Project Development:

- **Mineralisation remains open:** Gold mineralisation confirmed **over 2,300m** and remains open along strike and at depth (tested to over 400m vertical), indicating significant potential for resource growth.
- **Drilling fleet expanded:** Aurum has two drill rigs working at Napié and 12 drill rigs at Boundiali and is targeting more than **130,000m** of drilling at Boundiali and Napié in CY2025.
- **Major Resource updates pending:** Two major MRE updates (Boundiali and Napié) are scheduled for Q1 CY2026, aimed at growing the Company's current 3.28Moz resource base.
- **Boundiali PFS underway:** Boundiali Project Pre-Feasibility Study results, due in Q1 CY2026.
- **Well-funded for growth:** Aurum maintains a strong balance sheet with ~\$43M cash³ to fund its exploration and development programs.

Aurum's Managing Director Dr. Caigen Wang said: "We are hitting multiple broad shallow, open-pitabile gold intercepts from this latest round of step-back diamond drilling at Napié's Tchaga deposit. Most of these intercepts are outside of the current MRE and have been drilled on a 100m line spacing, and in places down to over 400m vertical depth, well below the current MRE. Within this we are seeing a higher-grade core of around 400m strike, which includes our previous result **17m @ 9.38 g/t gold**⁴ from 236m. Drilling is ongoing and we are awaiting assays which will be used for the planned MRE update in Q1 CY2026.

Our unique advantage is our owned and operated fleet of 12 diamond drill rigs, which allows us to aggressively and cost-effectively test these major gold systems, and we continue to drill with two rigs at Napié in parallel with our aggressive program at Boundiali. We have 12 diamond drill rigs active at Boundiali on multiple deposits, as we focus on delivering an increase in quantity and confidence in our Mineral Resources.

As we close out CY2025 we have a strong cash balance of \$43M, a clear development pathway with the Boundiali PFS underway, and resource growth from major updates at both gold projects pending. This places Aurum in an excellent position to continue to deliver substantial shareholder value in 2026."

¹ "Boundiali indicated gold resources grows by 53% in two month" released to the Australian Securities Exchange on 6 October 2025 and available to view on www.asx.com.au

² Refer to tables accompanying this report for collar location information and assay results for the new drilling

³ ASX release dated 28 Nov 2025, Aurum completes \$22.98M Montage share sale (ASX:AUE). Cash unaudited end November 2025

⁴ ASX release dated 10 Sep 2025 Aurum hits 17m @ 9.38 g/t gold from 236m at Napié

New Drilling – Napié Gold Project⁵

Aurum is reporting new assay results from step-back diamond drilling (18 holes for 5,479m). These results are from the Tchaga deposit located on the **Napié** tenement (90% interest).

Tchaga - Latest Drill Results

Better intercepts from drilling include⁶:

- **5.00m @ 10.09 g/t Au** from 209.00m inc. **1.00m @ 49.10 g/t Au** (NADD062)
- **50.00m @ 0.62 g/t Au** from 363.00m inc. **1.00m @ 7.55 g/t Au** (NADD062)
- **10.80m @ 4.52 g/t Au** from 73.00m inc. **1.90m @ 23.45 g/t Au** (NADD060)
- **36.70m @ 0.66 g/t Au** from 93.30m inc. **4.70m @ 1.06 g/t Au** (NADD076)
- **6.00m @ 3.82 g/t Au** from 226.00m inc. **1.00m @ 22.37 g/t Au** (NADD064)
- **27.00m @ 0.75 g/t Au** from 260.00m inc. **1.00m @ 6.15 g/t Au** (NADD068)
- **20.00m @ 0.88 g/t Au** from 228.00m inc. **2.10m @ 4.10 g/t Au** (NADD066)
- **7.25m @ 2.20 g/t Au** from 163.30m inc. **4.05m @ 3.73 g/t Au** (NADD065).

These new results are in addition to results previously reported⁷ by Mako Gold⁸ and Aurum at Tchaga, which included:

- **13m at 20.82 g/t Au** from 32m (NARC145)
- **9m at 22.73 g/t Au** from 36m within **32m at 7.10 g/t Au** from 13m (NARC184)
- **10m at 18.98 g/t Au** from 7m (NARC486)
- **41m at 4.51 g/t Au** from 17m (NARC216)
- **28m @ 4.86 g/t Au** from 83m (NARC057)
- **17m @ 9.38 g/t Au** from 236m inc. **3m @ 49.46 g/t Au** inc. **1m @ 143.58 g/t Au** (NADD053)
- **26m at 4.34 g/t Au** from surface (NARC214)
- **36m @ 3.09 g/t Au** from 43m (NARC107DD)
- **5m @ 21.99 g/t Au** from 70m (NARC243)
- **7.70m @ 11.65 g/t Au** from 169m (NARC058DD)
- **25m @ 3.43 g/t Au** from 53m (NARC017)
- **19.60m @ 4.36 g/t Au** from 187.40m (NARC621DD).

The Napié Project is located within the Lower Proterozoic Birimian Daloa greenstone belt in Côte d'Ivoire. The style of mineralisation sought is structurally controlled orogenic gold, within an interpreted shear zone related to a regional-scale shear and secondary splays.

Napié's Tchaga and Gogbala deposits are located along a 23km long +40ppb gold soil/auger anomaly coincident with a +30km long shear zone, interpreted to be a major control for gold mineralisation. Gold mineralisation is hosted in en-echelon quartz veins and stringers and the surrounding silicified, sericite, iron-carbonate, pyrite (+/- galena and chalcopyrite) alteration halo. Mineralisation is present in all lithologies (felsic to mafic volcanoclastics, volcanic breccias and conglomerates and to a lesser extent in felsic and mafic intrusives).

⁵ Refer to About Aurum

⁶ Refer to Table 1 for collar information and Table 2 for assay results for the new drilling

⁷ Refer to Compliance Statement for details on previous reporting on ASX

⁸ Wholly owned subsidiary of Aurum Resources

Drilling is ongoing at Tchaga with more assays pending and further results expected through September and the rest of the year. True widths for these shallow, wide gold intercepts are estimated at about 65% - 80% of reported downhole lengths. Details of drill collar location and assay results and intercepts for the new drilling at **Tchaga** can be found in Table 1 and Table 2 respectively. Plans showing location of the Napié Gold Project and the assay results are presented in the following figures: General locations in Figure 1 and Figure 2, and project details in Figure 3. A detailed plan showing results is presented in , an oblique cross section showing the latest drill results is presented in Figure 5 and an long section is presented in Figure 6.

Gold mineralisation at **Tchaga** remains open along strike and at depth on all deposits with drilling ongoing and Aurum is planning further work.

Next Steps:

- **Aggressive cost-effective exploration:** Aurum is committed to a large-scale exploration program at its two projects in Côte d'Ivoire. This includes:
 - **100,000m diamond drilling at Boundiali⁹:** Up to 12 diamond drill rigs will complete 100,000m of drilling at Boundiali in CY2025. The program aims to:
 - Increase the size and confidence of current resources
 - Advance known prospects for incorporation into the next MRE update
 - Target new prospects identified through soil anomalies and geological mapping to drive resource growth into 2026.
 - **Resource expansion:** Drilling aims to expand the known resources at Boundiali's **BD**, **BM**, and **BST** deposits.
 - **New discoveries:** Exploration and scout drilling is planned on Boundiali's **BD**, **BM**, and **BST** tenements to test new targets and create a pipeline of new discoveries to flow into resource growth.
 - **30,000m diamond drilling program at Napié:** Two rigs at Napié's Tchaga and Gogbala deposits, designed to expand the existing 0.87Moz resource.
 - **Resource updates:** Aurum plans to deliver major **MRE updates** for Boundiali and Napié early in Q1 CY2026.
- **Boundiali Pre-Feasibility Study:** Aurum is working towards completing an open pit PFS for the Boundiali Gold Project with results expected in Q1 CY2026. This will provide an evaluation of the project's economics and technical feasibility.
- **Continued growth:** With a strong financial position, Aurum is well-funded to execute these exploration and development plans. The Company remains focused on delivering value for shareholders through resource growth and project advancement.

This update has been authorised by the Board of Aurum Resources Limited.

ENDS

⁹ This program is indicative only and subject to change based on operational requirements and exploration results. Meterage allocations may be adjusted as new information becomes available. Investors should refer to company announcements for updates on the drilling program and be aware of the inherent risks associated with mineral exploration.

FORWARD-LOOKING STATEMENTS

This ASX release contains forward-looking statements about Aurum Resources Limited's exploration activities, drilling programs, and potential Mineral Resource Estimate at the Boundiali and Napié Gold Projects. These statements are based on current expectations and are subject to risks and uncertainties inherent in mineral exploration and mining. Factors that could cause actual results to differ materially include exploration risks, drilling results, resource estimation, gold prices, operational risks, regulatory changes, and broader economic conditions. Investors should not place undue reliance on these forward-looking statements.

COMPETENT PERSON'S STATEMENT

The information in this release that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Mark Strizek, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Strizek has been a non-executive Director of the Company since 1 February 2024 and joined as an executive Director on 1 June 2024. Mr Strizek has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaking to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Strizek consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears. Additionally, Mr Strizek confirms that the entity is not aware of any new information or data that materially affects the information contained in the ASX releases referred to in this presentation.

COMPLIANCE STATEMENT

The information in this presentation that relates to Boundiali Mineral Resources is extracted from the announcement "Boundiali indicated gold resources grows by 53% in two month" released to the Australian Securities Exchange on 6 October 2025 and available to view on www.asx.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement. The information in this report that relates to Napié Mineral Resources is extracted from the announcement "Napié Project Listing Rule 5.6 disclosure" released to the Australian Securities Exchange on 4 February 2025 and available to view on www.asx.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

This report contains information extracted from ASX market announcements reported in accordance with the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" ("2012 JORC Code") and available for viewing at www.asx.com.au and includes results reported previously and published on ASX platform:

28 Nov 2025, Aurum completes \$22.98M Montage share sale (ASX:AUE)
 18 Nov 2025, Aurum hits 3.10m @ 70.78 g/t gold from 112.90m at Boundiali (ASX:AUE)
 07 Nov 2025, Aurum hits 5m @ 11.07 g/t gold from outside BDT2 resources (ASX:AUE)
 06 Nov 2025, Addendum to the 2025 Annual Report (ASX:AUE)
 30 Oct 2025, Quarterly Activities/Appendix 5B Cash Flow Report (ASX:AUE)
 27 Oct 2025, Aurum hits 0.8m @ 350 g/t gold at Boundiali Gold Project (ASX:AUE)
 06 Oct 2025, Boundiali indicated gold resources grows by 53% in two month (ASX:AUE)
 29 Sep 2025, Aurum hits 1m @ 152.35 g/t gold from 96m at Boundiali (ASX:AUE)
 10 Sep 2025, Aurum hits 17m @ 9.38 g/t gold from 236m at Napié (ASX:AUE)
 01 Sep 2025, Aurum expands footprint of Boundiali and Napié Gold Projects (ASX:AUE)
 05 Aug 2025, Boundiali Gold Project Resource grows ~50% to 2.41Moz (ASX:AUE)
 29 Jul 2025, Encouraging Drilling Results at BD & B5T (ASX:AUE)
 25 Jul 2025, Aurum hits 1.43m at 234.35 g/t gold from 107m at BMT3 (ASX:AUE)
 23 Jul 2025, Quarterly Activities/Appendix 5B Cash Flow Report (ASX:AUE)
 15 Jul 2025, 100 million share placement to strategic investors completed (ASX:AUE)
 27 Jun 2025, Aurum commenced 30,000m diamond drilling at Napié (ASX:AUE)
 17 Jun 2025, AUE hits 66m @ 1.07g/t gold from 33m @ Boundiali BD tenement (ASX:AUE)
 27 May 25, AUE expands Boundiali Gold Project exploration ground (ASX:AUE)
 21 May 25, AUE hits 34m @ 2.32g/t gold from 56m @ Boundiali BD tenement (ASX:AUE)
 13 May 25, Assay Results at Boundiali BM Tenement (Amended) (ASX:AUE)
 13 May 25, Aurum hits 73.10 g/t gold at Boundiali BM tenement (ASX:AUE)
 07 May 2025, Aurum to raise \$35.6 million from strategic investment (ASX:AUE)
 16 Apr 2025, AUE hits 89m @ 2.42 g/t gold at 1.59Moz Boundiali Project (ASX:AUE)
 08 Apr 2025, AUE to start diamond drilling at Boundiali South tenement (ASX:AUE)
 31 Mar 2025, AUE to commence environmental study - Boundiali Gold Project (ASX:AUE)
 27 Mar 2025, Aurum hits 83m@4.87 g/t Au at 1.59Moz Boundiali Project (ASX:AUE)
 19 Mar 2025, Hits 4m at 54.64 g/t Au outside 1.59Moz Boundiali MRE area (ASX:AUE)
 14 Mar 2025, Half Yearly Report and Accounts (ASX:AUE)
 7 Mar 25, Investor Presentation March 2025 (ASX:AUE)
 6 Mar 25, AUE Completes Acquisition of Mako Gold Limited (ASX:AUE)
 27 Feb 25, 12m at 22.02g/t from 145m outside 1.59Moz Boundiali MRE area (ASX:AUE)
 21 Feb 2025, 8m at 8.23g/t from 65m outside 1.59Moz Boundiali MRE area (ASX:AUE)
 4 Feb 2025, Napié Project Listing Rule 5.6 Disclosure (Amended) (ASX:AUE)
 3 Feb 2025, Mako Takeover Offer Closes (ASX:AUE)
 31 Jan 2025, Drill Collar Table Addendum (ASX:AUE)
 31 Jan 2025, Change in substantial holding for MKG (ASX:AUE)
 31 Jan 2025, Quarterly Activities/Appendix 5B Cash Flow Report (ASX:AUE)
 30 Jan 2025, Aurum hits 150 g/t gold at Boundiali, Côte d'Ivoire (ASX:AUE)
 29 Jan 2025, MKG - Suspension of Trading and Delisting from ASX (ASX:AUE)
 24 Jan 2025, Compulsory Acquisition Notice Mako Takeover (ASX:AUE)
 24 Jan 2025, Non-Binding MoU with SANY Heavy Equipment Co (ASX:AUE)

23 Jan 2025, Change in substantial holding for MKG (ASX:AUE)
 9 Jan 2025, Best and Final offer for Mako Gold Limited (ASX:AUE)
 31 Dec 2024, Boundiali Project Maiden Resource delivers 1.6 Moz (amended) (ASX:AUE)
 30 Dec 2024, Boundiali Gold Project Maiden Resource delivers 1.6 Moz (ASX:AUE)
 24 Dec 2024, Change in substantial holding for MKG (ASX:AUE)
 23 Dec 2024, AUE achieves in excess of 95% gold recoveries from Boundiali (ASX:AUE)
 18 Dec 2024, Aurum hits 277 g/t gold at Boundiali BM Target 3
 13 Dec 2024, Change of Directors and Addition of Joint Company Secretary (ASX:AUE & ASX:MKG)
 6 Dec 2024, AUE receives firm commitments for A\$10 million placement (ASX:AUE)
 29 Nov 2024, Aurum earns 80% interest in Boundiali BM tenement (ASX:AUE)
 28 Nov 2024, AUE appoints Mr. Steve Zaninovich as Non-Executive Director (ASX:AUE)
 22 Nov 2024, AUE Declares Takeover Offer for all MKG Shares Unconditional (ASX:AUE)
 15 Nov 2024, Supplementary Bidders Statement (ASX:AUE)
 11 Nov 2024, Aurum hits 36 g/t gold at BM T1 of 2.5km strike (ASX:AUE)
 30 Oct 2024, Bidders Statement (ASX:AUE)
 16 Oct 2024, Recommended Takeover of Mako Gold By Aurum Resources (ASX:AUE)
 09 Sep 2024, Aurum earns 51% interest in Boundiali BM tenement (ASX:AUE)
 05 Sep 2024, AUE hits 40m at 1.03 g/t gold at Boundiali BD Target 1 (ASX:AUE)
 03 Sep 2024, Boundiali South Exploration Licence Renewed (ASX:AUE)
 07 Aug 2024, Aurum to advance met studies for Boundiali Gold Project (ASX:AUE)
 22 July 2024, Prelim metallurgical tests deliver up to 99% gold recovery (ASX:AUE)
 17 June 2024, Aurum hits 69m at 1.05 g/t gold at Boundiali BD Target 1 (ASX:AUE)
 28 May 2024, AUE hits 163 g/t gold in 12m @ 14.56 g/t gold at BD Target 1 (ASX:AUE)
 24 May 2024, Aurum hits 74m @ 1.0 g/t gold at Boundiali BD Target 2 (ASX:AUE)
 15 May 2024, Aurum expands Boundiali Gold Project footprint (ASX:AUE)
 10 May 2024, AUE hits 90m @ 1.16 g/t gold at Boundiali BD Target 1 (ASX:AUE)
 01 May 2024, Aurum Appoints Country Manager in Côte d'Ivoire (ASX:AUE)
 23 April 2024, AUE drilling hits up to 45 g/t gold at Boundiali BD Target 2 (ASX:AUE)
 19 March 2024, AUE signs binding term sheet for 100% of Boundiali South (ASX:AUE)
 12 March 2024, AUE hits 73m at 2.15g/t Inc. 1m at 72g/t gold at Boundiali (ASX:AUE)
 01 March 2024, Aurum hits 4m at 22 g/t gold in Boundiali diamond drilling (ASX:AUE)
 21 January 2024, Aurum hits shallow, wide gold intercepts at Boundiali, Côte d'Ivoire (ASX:AUE)
 21 December 2023, Rapid Drilling at Boundiali Gold Project (ASX:AUE)
 21 November 2023, AUE Acquisition Presentation (ASX:AUE)
 21 June 2021, Notice of General Meeting/Proxy Form (MSR:ASX)
 21 May 2021, PlusOr to Acquire 6194 sq kms Ground Position in Côte d'Ivoire (MSR:ASX)
 22 August 2019, Boundiali RC Drill Results Continue to Impress (PDI:ASX)
 15 July 2019, RC, Trench Results Grow Boundiali Potential In Côte d'Ivoire (PDI:ASX)
 27 May 2019, New Drill Results Strengthen Boundiali Project Côte D'Ivoire (PDI:ASX)
 16 January 2019, PDI-Toro JV Sharpens Focus with Major Drilling Program (PDI:ASX)
 26 November 2018, Boundiali North - Large Coherent Gold Anomalies in 14km Zone (PDI:ASX)

The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcements.

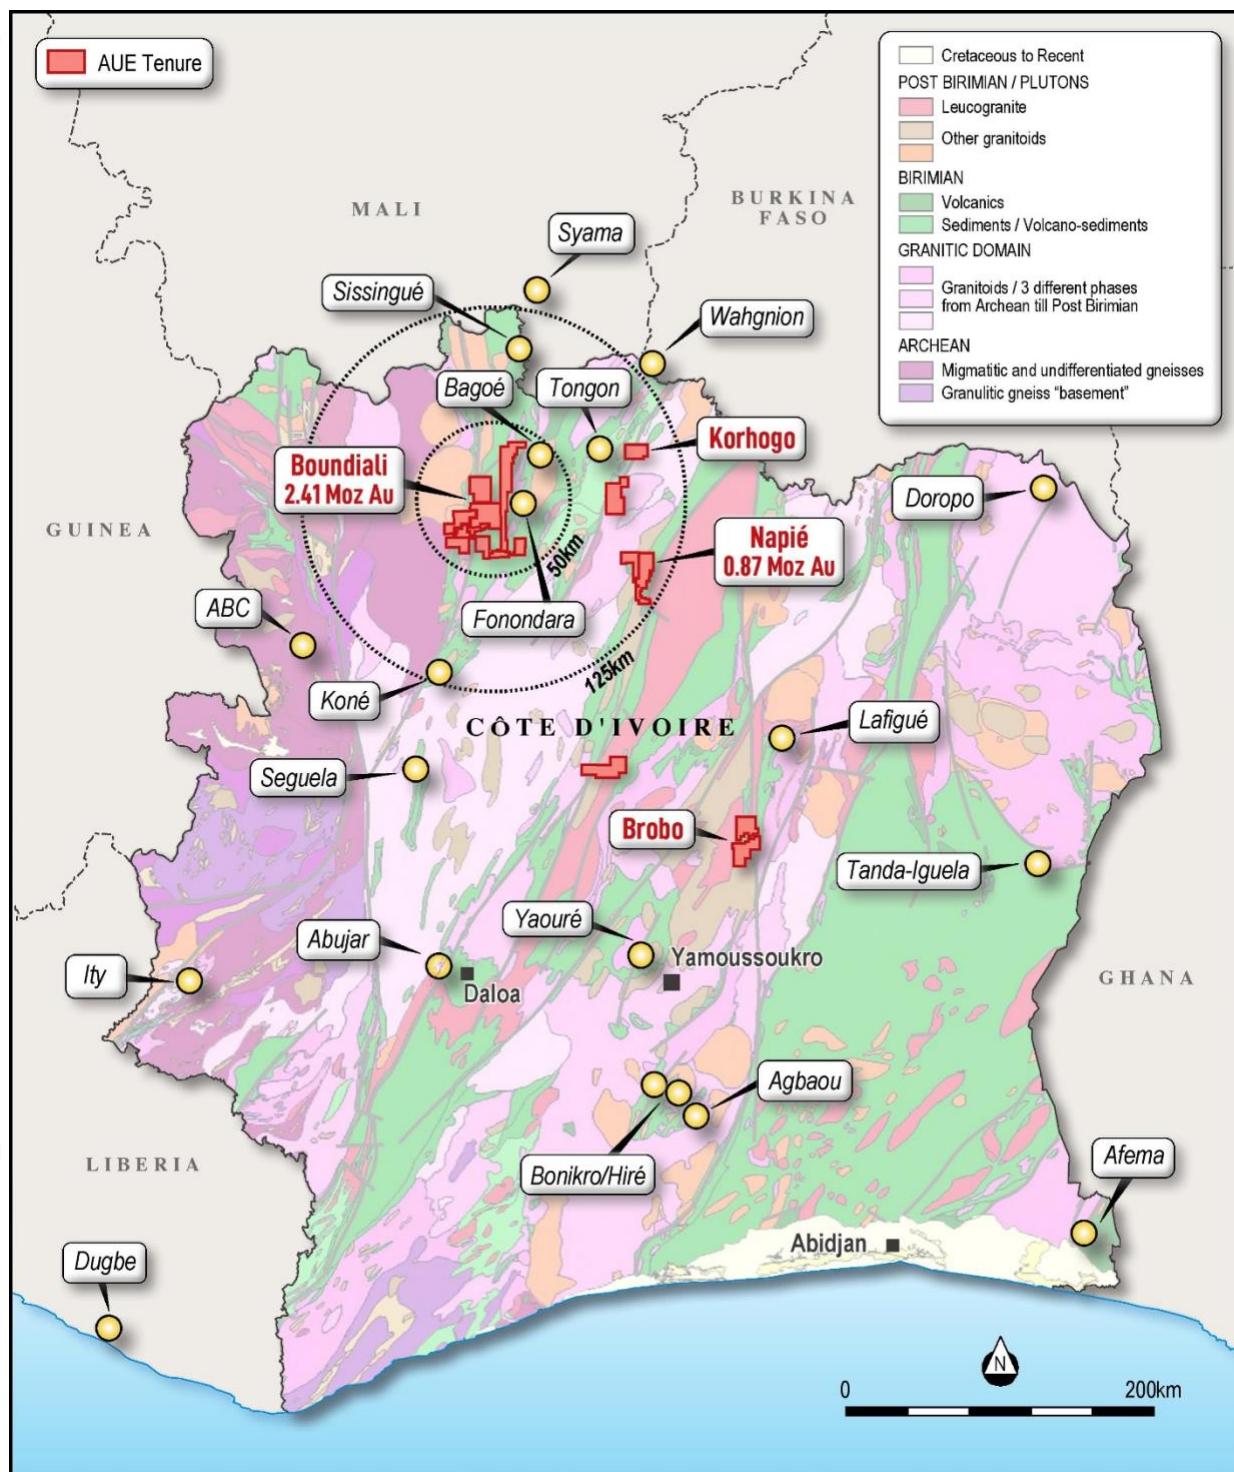


Figure 1: Location of Aurum's projects in Côte d'Ivoire

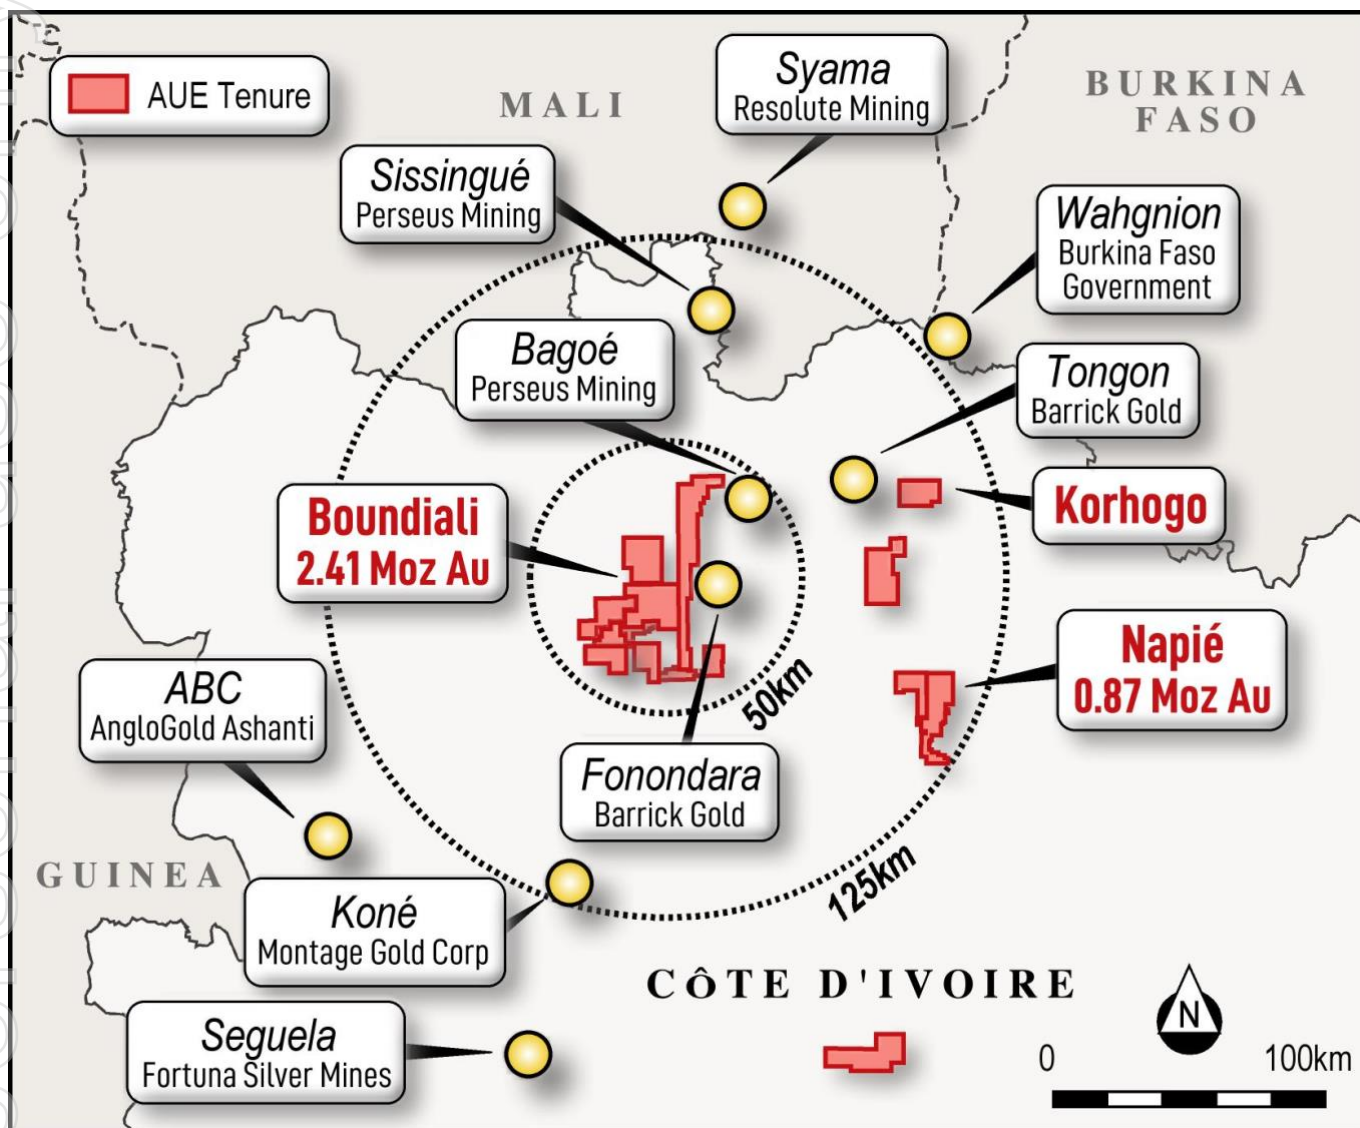


Figure 2: Location of Aurum's Boundiali and Napié gold projects in Côte d'Ivoire

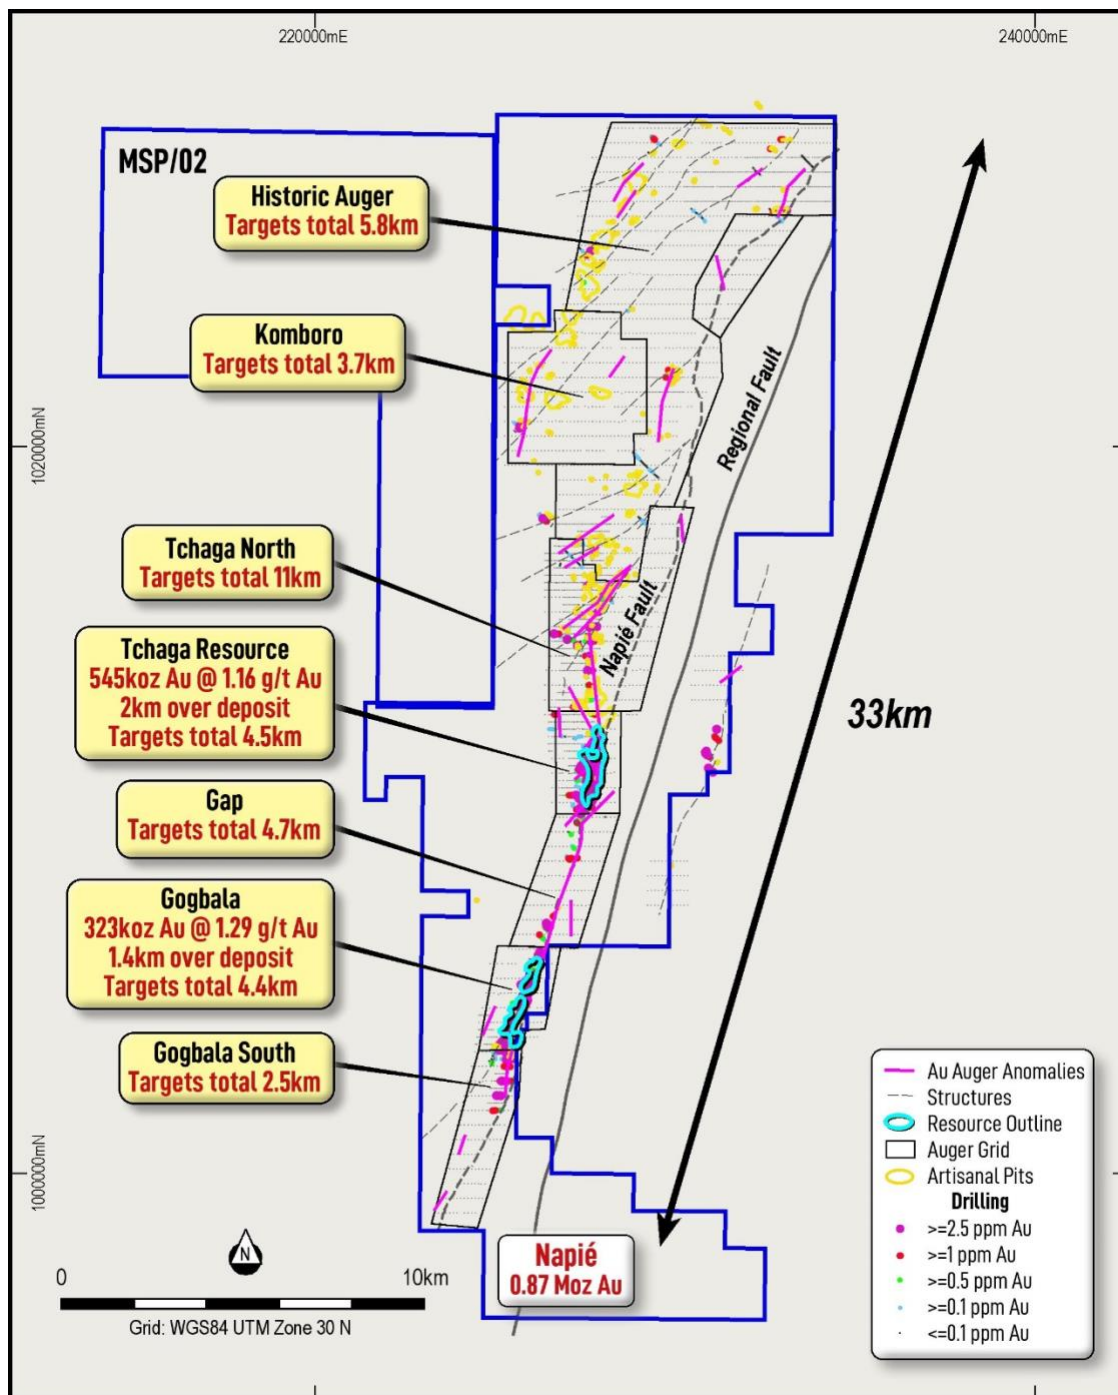


Figure 3: Aurum's Napié Gold Project

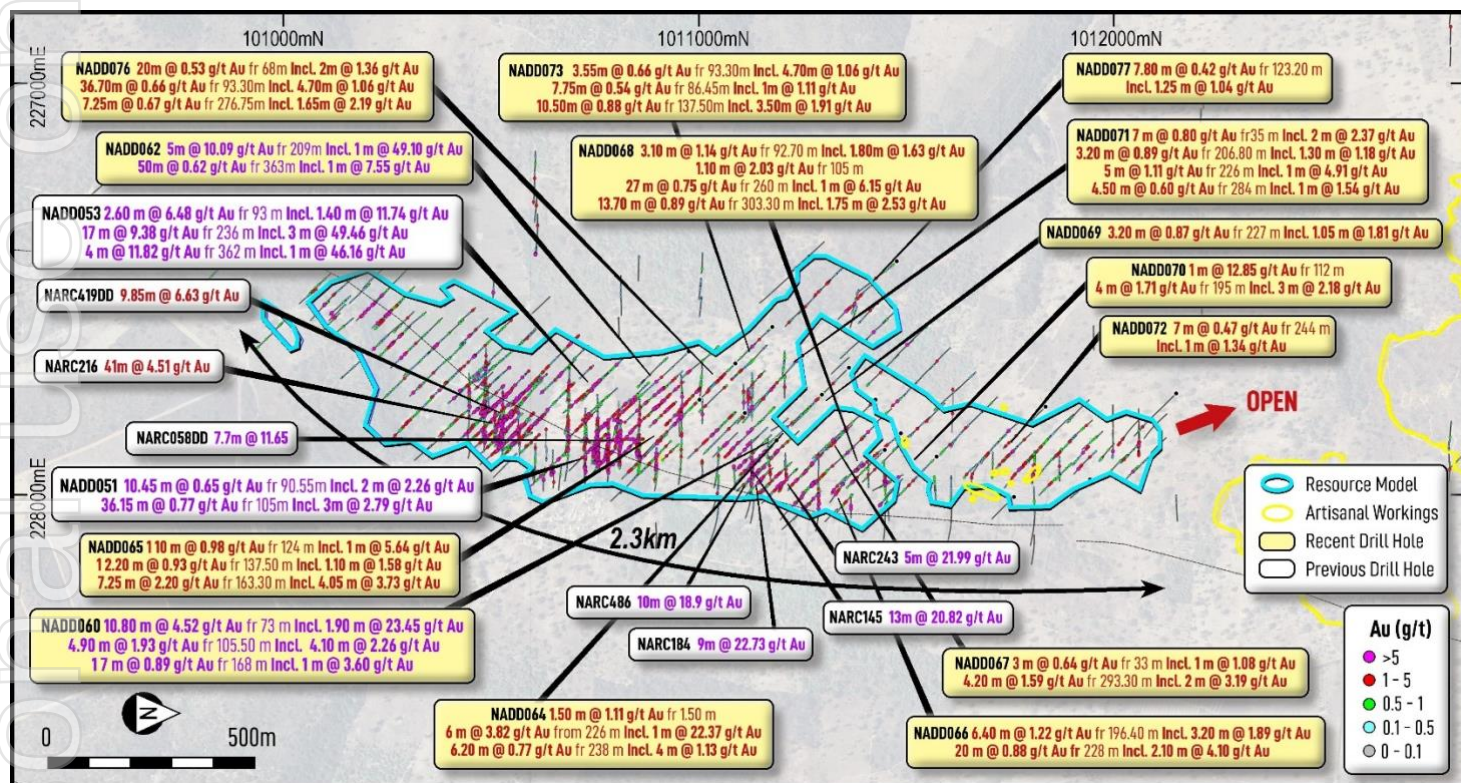


Figure 4: Plan view showing new drill results (yellow) for Tchaga¹⁰

¹⁰ Only showing new holes with intercepts greater than 2.5 gold gram metres, full list of intercepts included in table.

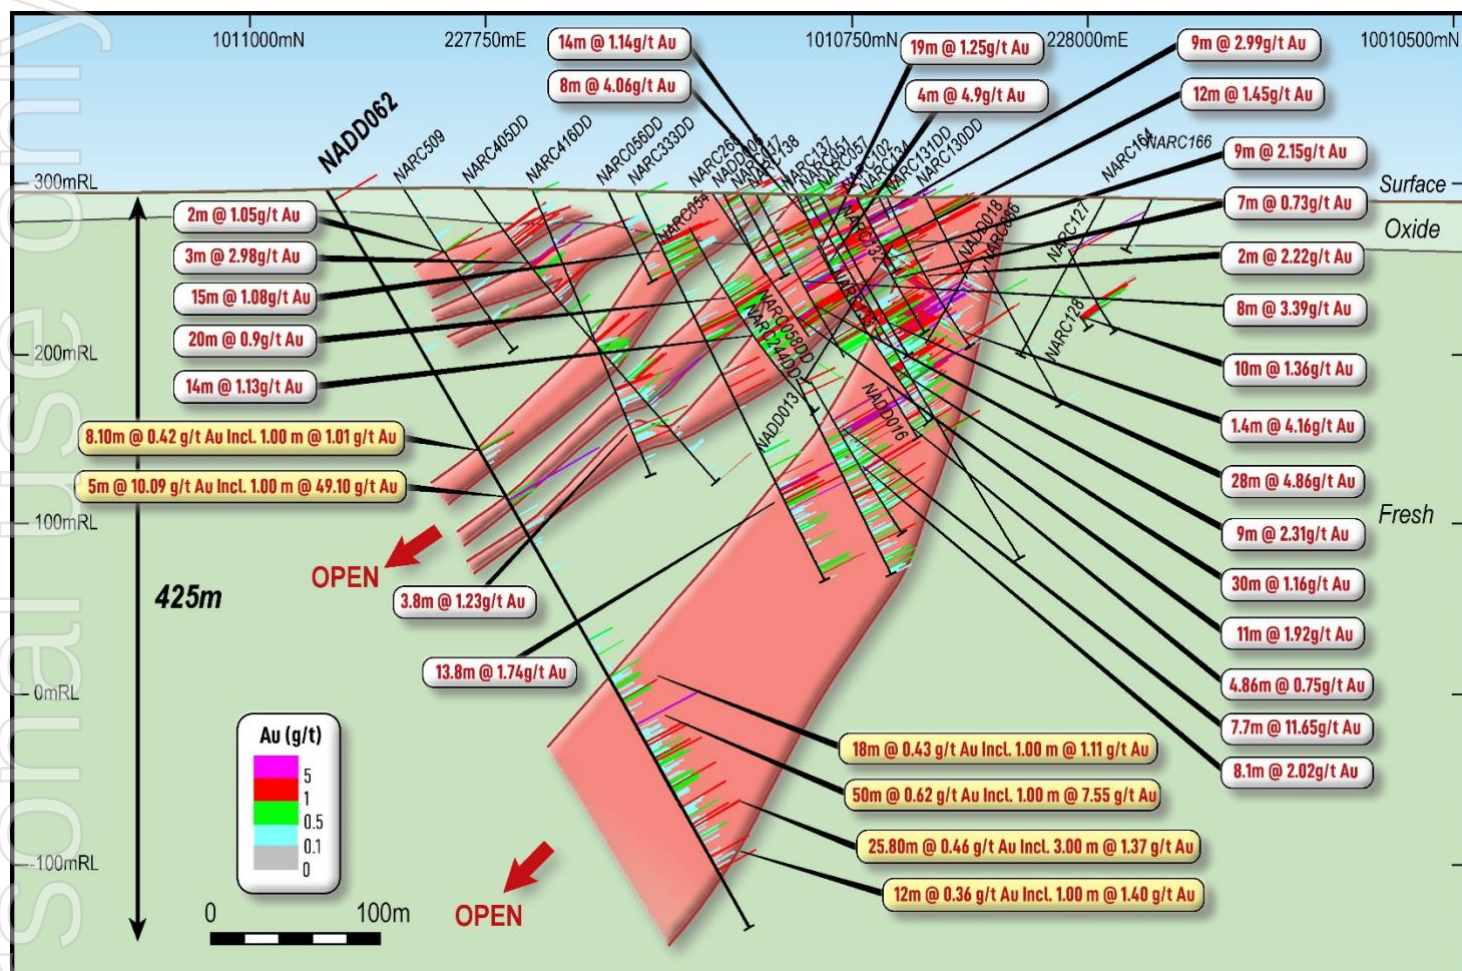


Figure 5: Oblique Cross Section looking northeast (+/-25m) showing new drill results (yellow) for Tchaga¹¹

¹¹ Only showing new holes with intercepts greater than 2.5 gold gram metres, full list of intercepts included in table.

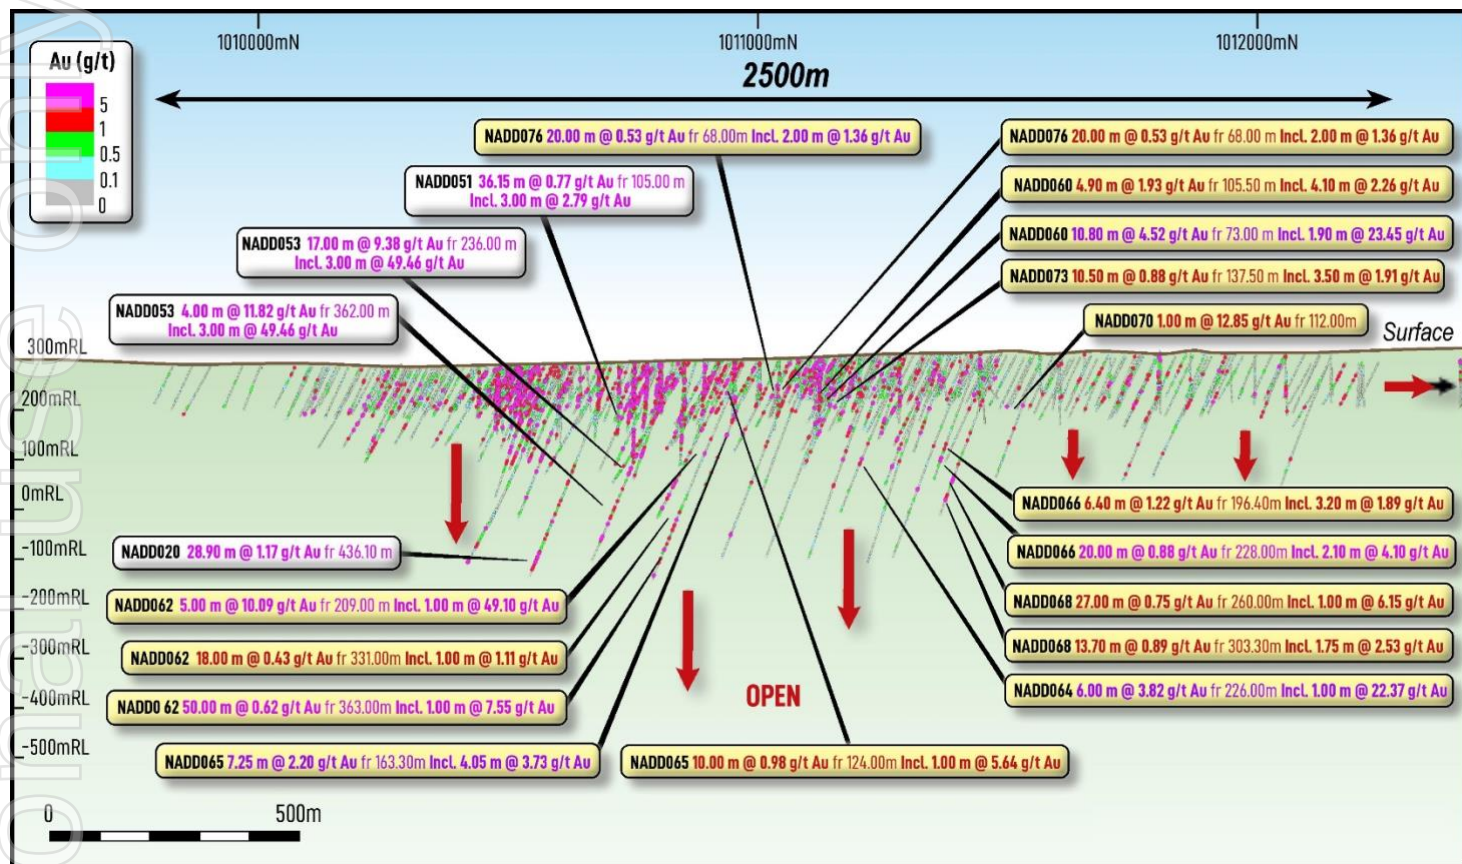


Figure 6: Long Section looking north (+/-300m) showing new results (yellow) for Tchaga

Table 1: Drill collar information for holes drilled at Tchaga

Hole ID	UTM East Zone 30N	UTM North Zone 30N	Elevation (m)	Depth (m)	Azi deg	Dip deg	Deposit	Type
NADD060	227,898	1,011,179	304	249.85	135	-60	Tchaga	DD
NADD061	228,034	1,011,750	312	150.35	135	-60	Tchaga	DD
NADD062	227,684	1,010,968	297	500.37	135	-60	Tchaga	DD
NADD063	227,832	1,011,103	299	300.70	135	-60	Tchaga	DD
NADD064	227,788	1,011,288	304	351.30	135	-60	Tchaga	DD
NADD065	227,800	1,010,994	297	401.15	135	-60	Tchaga	DD
NADD066	227,921	1,011,439	307	277.00	135	-60	Tchaga	DD
NADD067	227,800	1,011,417	304	450.50	135	-60	Tchaga	DD
NADD068	227,881	1,011,478	304	350.25	135	-63	Tchaga	DD
NADD069	227,723	1,011,353	302	453.15	135	-60	Tchaga	DD
NADD070	227,937	1,011,564	308	275.00	135	-60	Tchaga	DD
NADD071	227,694	1,011,241	300	452.55	135	-60	Tchaga	DD
NADD072	227,817	1,011,826	303	283.80	135	-60	Tchaga	DD
NADD073	227,625	1,011,169	302	451.30	135	-60	Tchaga	DD
NADD074	227,992	1,011,933	313	131.40	135	-60	Tchaga	DD
NADD075	227,785	1,012,140	308	300.10	135	-60	Tchaga	DD
NADD076	227,713	1,011,080	300	452.20	135	-60	Tchaga	DD
NADD077	227,467	1,011,468	315	250.90	135	-60	Tchaga	DD
18 holes				5,479.00m			TOTAL	DD

Table 2: Significant assay results for holes drilled at Tchaga¹²

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au	
NADD060	51.00	52.00	1.00	0.118				
NADD060	70.00	71.00	1.00	0.167				
NADD060	73.00	74.00	1.00	0.202				
NADD060	74.00	75.00	1.00	1.198	10.80 m @ 4.52 g/t Au	48.8	1.00 m @ 1.20 g/t Au	
NADD060	75.00	76.00	1.00	0.028				
NADD060	76.00	77.00	1.00	0.280				
NADD060	77.00	78.00	1.00	1.127			1.00 m @ 1.13 g/t Au	
NADD060	78.00	79.00	1.00	0.132				
NADD060	79.00	79.90	0.90	0.351				
NADD060	79.90	80.90	1.00	0.102				
NADD060	80.90	81.90	1.00	0.877				
NADD060	81.90	82.90	1.00	1.208				
NADD060	82.90	83.80	0.90	48.163			1.90 m @ 23.45 g/t Au	
NADD060	83.80	85.00	1.20	0.141				
NADD060	104.30	105.50	1.20	0.166				
NADD060	105.50	106.80	1.30	1.033	4.90 m @ 1.93 g/t Au	9.5	4.10 m @ 2.26 g/t Au	
NADD060	106.80	107.80	1.00	4.909				
NADD060	107.80	108.80	1.00	1.839				
NADD060	108.80	109.60	0.80	1.493				
NADD060	109.60	110.40	0.80	0.207				
NADD060	111.50	112.60	1.10	0.172				
NADD060	122.00	123.00	1.00	0.150				
NADD060	127.00	128.00	1.00	0.177				
NADD060	135.00	136.00	1.00	0.539				
NADD060	141.00	142.00	1.00	3.645	1.00 m @ 0.54 g/t Au	0.5		
NADD060	146.00	147.00	1.00	0.709	1.00 m @ 3.65 g/t Au	3.6	1.00 m @ 3.65 g/t Au	
NADD060	153.00	154.00	1.00	1.046	1.00 m @ 0.71 g/t Au	0.7		
NADD060	153.00	154.00	1.00	1.046	1.00 m @ 1.05 g/t Au	1.0	1.00 m @ 1.05 g/t Au	
NADD060	168.00	169.00	1.00	2.128	7.00 m @ 0.89 g/t Au	6.3	1.00 m @ 2.13 g/t Au	
NADD060	169.00	170.00	1.00	0.008				
NADD060	170.00	171.00	1.00	0.021				
NADD060	171.00	172.00	1.00	0.008				
NADD060	172.00	173.00	1.00	0.371				
NADD060	173.00	174.00	1.00	0.130				
NADD060	174.00	175.00	1.00	3.596			1.00 m @ 3.60 g/t Au	
NADD060	177.00	178.00	1.00	0.125				
NADD060	178.00	179.00	1.00	0.103	4.00 m @ 0.45 g/t Au	1.8		
NADD060	179.00	180.00	1.00	0.228				
NADD060	180.00	181.00	1.00	0.352				
NADD060	181.00	182.00	1.00	0.660				
NADD060	182.00	183.00	1.00	0.568				
NADD060	186.10	187.00	0.90	0.113				
NADD060	187.00	188.00	1.00	0.112				
NADD060	188.00	189.00	1.00	0.208	1.00 m @ 0.21 g/t Au	0.2		
NADD060	195.00	196.00	1.00	0.383	1.00 m @ 0.38 g/t Au	0.4		
NADD060	202.00	203.00	1.00	0.189				
NADD060	210.00	211.00	1.00	0.861	6.00 m @ 0.50 g/t Au	3.0		
NADD060	211.00	212.00	1.00	0.131				
NADD060	212.00	213.00	1.00	0.047				
NADD060	213.00	214.00	1.00	0.140				
NADD060	214.00	215.00	1.00	1.352			1.00 m @ 1.35 g/t Au	
NADD060	215.00	216.00	1.00	0.466				

¹² 0.2 g/t Au cut off used with 3m internal dilution and no top cut applied

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au	
NADD060	221.00	222.00	1.00	0.444	1.00 m @ 0.44 g/t Au	0.4		
NADD060	235.00	236.00	1.00	1.283	4.00 m @ 0.44 g/t Au	1.8	1.00 m @ 1.28 g/t Au	
NADD060	236.00	237.00	1.00	0.018				
NADD060	237.00	238.00	1.00	0.008				
NADD060	238.00	239.00	1.00	0.471				
NADD060	240.00	241.00	1.00	0.109				
NADD060	241.00	242.00	1.00	0.114				
NADD060	244.00	245.00	1.00	0.206	1.00 m @ 0.21 g/t Au	0.2		
NADD060	245.00	246.00	1.00	0.108				
NADD060	248.00	249.00	1.00	0.278	1.00 m @ 0.28 g/t Au	0.3		
NADD061	4.50	5.50	1.00	1.699	1.00 m @ 1.70 g/t Au	1.7	1.00 m @ 1.70 g/t Au	
NADD062	0.00	1.00	1.00	0.131				
NADD062	1.00	2.00	1.00	0.161				
NADD062	2.00	3.00	1.00	0.106				
NADD062	4.50	5.50	1.00	0.282	1.00 m @ 0.28 g/t Au	0.3		
NADD062	6.00	7.10	1.10	0.155				
NADD062	7.10	8.20	1.10	1.966	1.10 m @ 1.97 g/t Au	2.2	1.10 m @ 1.97 g/t Au	
NADD062	9.00	9.30	0.30	0.148				
NADD062	17.50	18.50	1.00	0.168				
NADD062	24.25	25.00	0.75	0.183				
NADD062	34.00	35.00	1.00	0.173				
NADD062	61.45	62.60	1.15	0.176				
NADD062	87.00	88.00	1.00	0.208	1.00 m @ 0.21 g/t Au	0.2		
NADD062	108.90	110.00	1.10	0.104				
NADD062	110.00	111.00	1.00	0.215	2.00 m @ 0.25 g/t Au	0.5		
NADD062	111.00	112.00	1.00	0.288				
NADD062	120.00	121.00	1.00	0.104				
NADD062	176.90	178.00	1.10	0.972	8.10 m @ 0.42 g/t Au	3.4		
NADD062	178.00	179.00	1.00	1.007				
NADD062	179.00	180.00	1.00	0.288				
NADD062	180.00	181.10	1.10	0.474				
NADD062	181.10	182.00	0.90	0.008				
NADD062	182.00	183.00	1.00	0.008				
NADD062	183.00	184.00	1.00	0.298				
NADD062	184.00	185.00	1.00	0.212				
NADD062	187.00	188.00	1.00	0.155				
NADD062	209.00	210.00	1.00	0.633	5.00 m @ 10.09 g/t Au	50.5	1.00 m @ 49.10 g/t Au	
NADD062	210.00	211.00	1.00	0.121				
NADD062	211.00	212.00	1.00	49.097				
NADD062	212.00	213.00	1.00	0.049				
NADD062	213.00	214.00	1.00	0.570				
NADD062	222.00	223.00	1.00	0.399	1.00 m @ 0.40 g/t Au	0.4		
NADD062	230.00	231.00	1.00	0.395	2.00 m @ 0.37 g/t Au	0.7		
NADD062	231.00	232.00	1.00	0.351				
NADD062	240.00	241.00	1.00	0.195				
NADD062	242.00	243.00	1.00	0.170				
NADD062	243.00	244.00	1.00	0.115				
NADD062	259.00	260.00	1.00	0.293	1.00 m @ 0.29 g/t Au	0.3		
NADD062	277.00	278.00	1.00	0.152				
NADD062	295.00	296.00	1.00	0.230	1.00 m @ 0.23 g/t Au	0.2		
NADD062	305.00	306.00	1.00	0.159				
NADD062	306.00	307.00	1.00	0.541	2.00 m @ 0.48 g/t Au	1.0		
NADD062	307.00	308.00	1.00	0.411				
NADD062	311.80	313.00	1.20	0.166				
NADD062	313.00	314.00	1.00	0.178				
NADD062	316.30	317.00	0.70	0.695	0.70 m @ 0.69 g/t Au	0.5		

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au		
NADD062	324.60	325.70	1.10	0.185					
NADD062	326.80	327.90	1.10	0.158					
NADD062	329.00	330.00	1.00	0.102					
NADD062	331.00	332.00	1.00	0.875	18.00 m @ 0.43 g/t Au	7.7			
NADD062	332.00	333.00	1.00	0.402					
NADD062	333.00	334.00	1.00	0.213					
NADD062	334.00	335.15	1.15	0.420					
NADD062	335.15	336.25	1.10	0.378					
NADD062	336.25	337.35	1.10	0.118					
NADD062	337.35	338.45	1.10	0.566					
NADD062	338.45	339.55	1.10	0.571					
NADD062	339.55	340.70	1.15	0.059					
NADD062	340.70	341.80	1.10	0.315					
NADD062	341.80	342.90	1.10	0.047					
NADD062	342.90	344.00	1.10	0.096					
NADD062	344.00	345.00	1.00	0.423					
NADD062	345.00	346.00	1.00	0.487					
NADD062	346.00	347.00	1.00	1.110					
NADD062	347.00	348.00	1.00	0.683					
NADD062	348.00	349.00	1.00	0.667					
NADD062	352.00	353.00	1.00	0.129					
NADD062	353.00	354.00	1.00	0.265	1.00 m @ 0.27 g/t Au	0.3			
NADD062	356.00	357.00	1.00	0.136					
NADD062	363.00	364.00	1.00	7.548	50.00 m @ 0.62 g/t Au	31.2	1.00 m @ 7.55 g/t Au		
NADD062	364.00	365.00	1.00	0.021					
NADD062	365.00	366.00	1.00	0.034					
NADD062	366.00	367.00	1.00	0.378					
NADD062	367.00	368.00	1.00	0.016					
NADD062	368.00	369.10	1.10	0.175					
NADD062	369.10	370.20	1.10	0.376					
NADD062	370.20	371.30	1.10	0.369					
NADD062	371.30	372.40	1.10	0.168					
NADD062	372.40	373.50	1.10	0.382					
NADD062	373.50	374.60	1.10	0.469					
NADD062	374.60	375.70	1.10	1.139					
NADD062	375.70	376.80	1.10	0.257					
NADD062	376.80	377.90	1.10	1.571					
NADD062	377.90	379.00	1.10	0.488					
NADD062	379.00	380.00	1.00	0.241					
NADD062	380.00	381.00	1.00	0.235					
NADD062	381.00	382.00	1.00	0.180					
NADD062	382.00	383.00	1.00	0.827					
NADD062	383.00	384.10	1.10	0.273					
NADD062	384.10	385.20	1.10	0.323					
NADD062	385.20	386.30	1.10	1.174					
NADD062	386.30	387.40	1.10	0.633					
NADD062	387.40	388.40	1.00	2.192					
NADD062	388.40	389.50	1.10	0.148					
NADD062	389.50	390.60	1.10	0.591					
NADD062	390.60	391.70	1.10	0.881					
NADD062	391.70	392.80	1.10	0.274					
NADD062	392.80	393.90	1.10	0.136					
NADD062	393.90	395.00	1.10	0.472					
NADD062	395.00	396.00	1.00	0.319					
NADD062	396.00	397.00	1.00	0.182					
NADD062	397.00	398.00	1.00	0.056					
									3.20 m @ 1.31 g/t Au

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD062	398.00	399.00	1.00	0.102			
NADD062	399.00	400.00	1.00	0.279			
NADD062	400.00	401.00	1.00	0.369			
NADD062	401.00	402.00	1.00	0.091			
NADD062	402.00	403.00	1.00	0.582			
NADD062	403.00	404.00	1.00	0.583			
NADD062	404.00	405.00	1.00	0.439			
NADD062	405.00	406.00	1.00	2.278			
NADD062	406.00	407.00	1.00	0.745			
NADD062	407.00	408.00	1.00	0.613			
NADD062	408.00	409.00	1.00	0.598			
NADD062	409.00	410.00	1.00	0.119			
NADD062	410.00	411.00	1.00	0.271			
NADD062	411.00	412.00	1.00	0.278			
NADD062	412.00	413.00	1.00	0.252			1.00 m @ 2.28 g/t Au
NADD062	413.00	414.00	1.00	0.127			
NADD062	414.00	415.00	1.00	0.115			
NADD062	415.00	416.00	1.00	0.104			
NADD062	418.20	419.30	1.10	2.161			
NADD062	419.30	420.40	1.10	0.448			
NADD062	420.40	421.40	1.00	0.372			
NADD062	421.40	422.45	1.05	0.224			
NADD062	422.45	423.70	1.25	0.211			
NADD062	423.70	425.00	1.30	0.230			
NADD062	425.00	426.00	1.00	0.836			
NADD062	426.00	427.00	1.00	0.037			
NADD062	427.00	428.00	1.00	0.112			
NADD062	428.00	429.00	1.00	0.198	25.80 m @ 0.46 g/t Au	12.0	1.10 m @ 2.16 g/t Au
NADD062	429.00	430.00	1.00	0.288			
NADD062	430.00	431.00	1.00	1.296			
NADD062	431.00	432.00	1.00	0.272			
NADD062	432.00	433.00	1.00	2.536			
NADD062	433.00	434.00	1.00	0.250			
NADD062	434.00	435.00	1.00	0.008			
NADD062	435.00	436.00	1.00	0.208			
NADD062	436.00	437.00	1.00	0.042			
NADD062	437.00	438.00	1.00	0.052			
NADD062	438.00	439.00	1.00	0.395			
NADD062	439.00	440.00	1.00	0.667			
NADD062	440.00	441.00	1.00	0.365			
NADD062	441.00	442.00	1.00	0.047			
NADD062	442.00	443.00	1.00	0.017			
NADD062	443.00	444.00	1.00	0.320			
NADD062	448.00	449.00	1.00	0.115	12.00 m @ 0.36 g/t Au	4.3	3.00 m @ 1.37 g/t Au
NADD062	450.00	451.00	1.00	0.234			
NADD062	451.00	452.00	1.00	0.008			
NADD062	452.00	453.00	1.00	1.401			
NADD062	453.00	454.00	1.00	0.096			
NADD062	454.00	455.00	1.00	0.208			
NADD062	455.00	456.00	1.00	0.050			
NADD062	456.00	457.00	1.00	0.432			
NADD062	457.00	458.00	1.00	0.118			
NADD062	458.00	459.00	1.00	0.039			
NADD062	459.00	460.00	1.00	0.274			
NADD062	460.00	461.00	1.00	0.101			
NADD062	461.00	462.00	1.00	1.367			
							1.00 m @ 1.37 g/t Au

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au	
NADD062	462.00	463.00	1.00	0.122				
NADD062	490.60	491.35	0.75	2.539	0.75 m @ 2.54 g/t Au	1.9	0.75 m @ 2.54 g/t Au	
NADD063	4.00	5.00	1.00	0.839	1.00 m @ 0.84 g/t Au	0.8		
NADD063	5.00	6.00	1.00	0.164				
NADD063	16.05	17.50	1.45	0.161				
NADD063	18.00	19.20	1.20	0.973	1.20 m @ 0.97 g/t Au	1.2		
NADD063	33.00	34.00	1.00	0.209	1.00 m @ 0.21 g/t Au	0.2		
NADD063	35.00	36.00	1.00	0.127				
NADD063	44.70	45.80	1.10	0.161				
NADD063	56.90	58.00	1.10	0.551	1.10 m @ 0.55 g/t Au	0.6		
NADD063	68.00	69.00	1.00	0.307	1.70 m @ 0.37 g/t Au	0.6		
NADD063	69.00	69.70	0.70	0.468				
NADD063	74.30	75.30	1.00	0.101				
NADD063	76.30	77.40	1.10	0.105				
NADD063	110.10	111.10	1.00	1.304	8.00 m @ 0.56 g/t Au	4.5	1.00 m @ 1.30 g/t Au	
NADD063	111.10	112.10	1.00	0.062				
NADD063	112.10	113.10	1.00	1.405			1.00 m @ 1.41 g/t Au	
NADD063	113.10	114.10	1.00	0.101				
NADD063	114.10	115.10	1.00	0.537				
NADD063	115.10	116.10	1.00	0.008				
NADD063	116.10	117.10	1.00	0.850				
NADD063	117.10	118.10	1.00	0.227				
NADD063	132.00	133.00	1.00	0.305			2.00 m @ 0.28 g/t Au	0.6
NADD063	133.00	134.00	1.00	0.255				
NADD063	134.00	135.00	1.00	0.147				
NADD063	147.00	148.00	1.00	0.178				
NADD063	155.00	156.00	1.00	0.122				
NADD063	172.00	173.00	1.00	0.139				
NADD063	199.35	200.60	1.25	0.188				
NADD063	200.60	201.70	1.10	0.143				
NADD063	208.00	209.00	1.00	0.235	1.00 m @ 0.23 g/t Au	0.2		
NADD063	209.85	210.70	0.85	0.145				
NADD063	220.00	220.70	0.70	0.106				
NADD063	222.50	223.60	1.10	0.216	1.10 m @ 0.22 g/t Au	0.2		
NADD063	223.60	224.70	1.10	0.108				
NADD063	240.00	241.00	1.00	0.192				
NADD063	244.00	245.00	1.00	0.188				
NADD063	245.00	246.00	1.00	0.169				
NADD063	250.00	251.00	1.00	0.151				
NADD063	252.00	253.00	1.00	0.133				
NADD063	265.00	266.00	1.00	0.268	1.00 m @ 0.27 g/t Au	0.3		
NADD063	267.00	268.00	1.00	0.106				
NADD063	270.00	271.00	1.00	0.201				
NADD063	271.00	272.00	1.00	0.506	2.00 m @ 0.35 g/t Au	0.7		
NADD063	272.00	273.00	1.00	0.145				
NADD063	282.00	283.00	1.00	0.124				
NADD064	1.50	3.00	1.50	1.107	1.50 m @ 1.11 g/t Au	1.7	1.50 m @ 1.11 g/t Au	
NADD064	28.00	28.70	0.70	0.713	0.70 m @ 0.71 g/t Au	0.5		
NADD064	38.00	39.00	1.00	1.717	1.00 m @ 1.72 g/t Au	1.7	1.00 m @ 1.72 g/t Au	
NADD064	51.00	52.00	1.00	0.314	1.00 m @ 0.31 g/t Au	0.3		
NADD064	66.60	68.00	1.40	0.139				
NADD064	85.00	86.00	1.00	0.707	1.00 m @ 0.71 g/t Au	0.7		
NADD064	135.00	136.00	1.00	0.825	4.00 m @ 0.29 g/t Au	1.1		
NADD064	136.00	137.00	1.00	0.019				
NADD064	137.00	138.00	1.00	0.008				
NADD064	138.00	139.00	1.00	0.292				

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au	
NADD064	142.00	143.00	1.00	0.188				
NADD064	185.00	186.00	1.00	0.756	1.00 m @ 0.76 g/t Au	0.8		
NADD064	193.00	194.00	1.00	0.218	4.00 m @ 0.46 g/t Au	1.9		
NADD064	194.00	195.00	1.00	0.144				
NADD064	195.00	196.00	1.00	0.066				
NADD064	196.00	197.00	1.00	1.430				
NADD064	224.00	225.00	1.00	0.109			1.00 m @ 1.43 g/t Au	
NADD064	226.00	227.00	1.00	0.222	6.00 m @ 3.82 g/t Au	22.9		
NADD064	227.00	228.00	1.00	0.008				
NADD064	228.00	229.20	1.20	0.020				
NADD064	229.20	230.00	0.80	0.080				
NADD064	230.00	231.00	1.00	0.218				
NADD064	231.00	232.00	1.00	22.371				
NADD064	238.00	239.00	1.00	0.210	6.20 m @ 0.77 g/t Au	4.8	1.00 m @ 22.37 g/t Au	
NADD064	239.00	240.20	1.20	0.041			4.00 m @ 1.13 g/t Au	
NADD064	240.20	241.00	0.80	1.784				
NADD064	241.00	242.30	1.30	1.630				
NADD064	242.30	243.60	1.30	0.148				
NADD064	243.60	244.20	0.60	1.300				
NADD064	249.60	250.50	0.90	0.333	0.90 m @ 0.33 g/t Au	0.3		
NADD064	267.10	268.00	0.90	0.244	0.90 m @ 0.24 g/t Au	0.2		
NADD064	273.00	274.30	1.30	0.142				
NADD064	285.50	287.00	1.50	0.195				
NADD064	287.00	288.00	1.00	0.168				
NADD064	302.80	304.00	1.20	0.590	1.20 m @ 0.59 g/t Au	0.7		
NADD064	304.00	305.00	1.00	0.149				
NADD064	324.00	325.00	1.00	0.196				
NADD064	325.00	326.00	1.00	0.108				
NADD064	326.00	327.00	1.00	0.140				
NADD064	331.00	332.00	1.00	0.147				
NADD064	339.00	340.00	1.00	0.371				
NADD064	340.00	341.00	1.00	0.105	3.00 m @ 0.25 g/t Au	0.8		
NADD064	341.00	342.00	1.00	0.288				
NADD064	346.00	347.00	1.00	0.407	5.30 m @ 0.34 g/t Au	1.8		
NADD064	347.00	348.00	1.00	0.566				
NADD064	348.00	349.00	1.00	0.211				
NADD064	349.00	350.00	1.00	0.269				
NADD064	350.00	351.30	1.30	0.248				
NADD065	1.50	2.30	0.80	0.134				
NADD065	2.30	3.10	0.80	0.139				
NADD065	3.10	3.60	0.50	0.113				
NADD065	18.50	19.50	1.00	0.570	1.00 m @ 0.57 g/t Au	0.6		
NADD065	19.50	20.50	1.00	0.182				
NADD065	23.50	24.50	1.00	0.181				
NADD065	24.50	25.50	1.00	0.121				
NADD065	26.50	27.50	1.00	0.129				
NADD065	35.50	36.50	1.00	0.991	1.00 m @ 0.99 g/t Au	1.0		
NADD065	46.00	47.00	1.00	0.202	1.00 m @ 0.20 g/t Au	0.2		
NADD065	47.00	48.00	1.00	0.119				
NADD065	51.00	52.00	1.00	0.132				
NADD065	53.00	53.75	0.75	0.464	0.75 m @ 0.46 g/t Au	0.3		
NADD065	55.60	56.60	1.00	0.133				
NADD065	56.60	57.60	1.00	0.150				
NADD065	57.60	58.60	1.00	0.769	2.00 m @ 0.70 g/t Au	1.4		
NADD065	58.60	59.60	1.00	0.640				
NADD065	65.60	66.45	0.85	0.546	0.85 m @ 0.55 g/t Au	0.5		

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD065	70.00	71.00	1.00	0.646	1.00 m @ 0.65 g/t Au	0.6	
NADD065	71.00	72.00	1.00	0.161			
NADD065	103.30	103.90	0.60	0.700	0.60 m @ 0.70 g/t Au	0.4	
NADD065	123.00	124.00	1.00	0.169			
NADD065	124.00	125.00	1.00	5.643	10.00 m @ 0.98 g/t Au	9.8	1.00 m @ 5.64 g/t Au
NADD065	125.00	126.00	1.00	0.176			
NADD065	126.00	127.00	1.00	0.214			
NADD065	127.00	128.00	1.00	0.019			
NADD065	128.00	129.00	1.00	0.095			
NADD065	129.00	130.00	1.00	0.148			
NADD065	130.00	131.00	1.00	0.320			
NADD065	131.00	132.00	1.00	0.822			
NADD065	132.00	133.00	1.00	0.819			
NADD065	133.00	134.00	1.00	1.511			1.00 m @ 1.51 g/t Au
NADD065	134.00	135.10	1.10	0.119			
NADD065	136.30	137.50	1.20	0.132			
NADD065	137.50	138.60	1.10	0.286	2.20 m @ 0.93 g/t Au	2.1	
NADD065	138.60	139.70	1.10	1.583		1.10 m @ 1.58 g/t Au	
NADD065	139.70	140.80	1.10	0.137			
NADD065	163.30	164.40	1.10	0.317	7.25 m @ 2.20 g/t Au	15.9	
NADD065	164.40	165.50	1.10	0.008			
NADD065	165.50	166.50	1.00	0.480			
NADD065	166.50	167.50	1.00	6.704			
NADD065	167.50	168.50	1.00	3.349			
NADD065	168.50	169.50	1.00	2.144			
NADD065	169.50	170.55	1.05	2.771			
NADD065	183.00	184.00	1.00	0.231	1.00 m @ 0.23 g/t Au	0.2	
NADD065	193.00	194.00	1.00	0.107			
NADD065	210.60	211.70	1.10	0.152	4.20 m @ 0.52 g/t Au	2.2	
NADD065	217.30	218.50	1.20	0.313			
NADD065	218.50	219.70	1.20	0.093			
NADD065	219.70	220.80	1.10	1.393			
NADD065	220.80	221.50	0.70	0.232			
NADD065	221.50	222.20	0.70	0.100			
NADD065	229.75	230.60	0.85	0.481	0.85 m @ 0.48 g/t Au	0.4	
NADD065	234.75	235.85	1.10	0.240	1.10 m @ 0.24 g/t Au	0.3	
NADD065	237.00	238.00	1.00	0.144			
NADD065	239.00	240.00	1.00	0.194			
NADD065	242.00	243.00	1.00	0.365	1.00 m @ 0.36 g/t Au	0.4	
NADD065	248.00	249.00	1.00	0.859	13.90 m @ 0.34 g/t Au	4.8	
NADD065	249.00	250.00	1.00	0.110			
NADD065	250.00	251.20	1.20	0.214			
NADD065	251.20	252.30	1.10	0.031			
NADD065	252.30	253.40	1.10	0.211			
NADD065	253.40	254.50	1.10	0.087			
NADD065	254.50	255.70	1.20	1.455			
NADD065	255.70	256.60	0.90	0.094			
NADD065	256.60	257.50	0.90	0.099			
NADD065	257.50	258.60	1.10	0.380			
NADD065	258.60	259.70	1.10	0.108			
NADD065	259.70	260.80	1.10	0.121			
NADD065	260.80	261.90	1.10	0.534			
NADD065	266.00	267.00	1.00	0.178			14.40 m @ 0.33 g/t Au
NADD065	269.00	269.80	0.80	0.470			
NADD065	269.80	270.70	0.90	0.205			
NADD065	270.70	272.00	1.30	0.050			

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD065	272.00	273.00	1.00	0.091			
NADD065	273.00	274.00	1.00	0.315			
NADD065	274.00	275.00	1.00	0.553			
NADD065	275.00	276.20	1.20	0.231			
NADD065	276.20	277.20	1.00	0.008			
NADD065	277.20	278.20	1.00	0.029			
NADD065	278.20	279.00	0.80	0.055			
NADD065	279.00	280.00	1.00	0.203			
NADD065	280.00	281.00	1.00	0.214			
NADD065	281.00	282.00	1.00	0.865			
NADD065	282.00	282.70	0.70	1.446	1.10 m @ 0.62 g/t Au	0.7	0.70 m @ 1.45 g/t Au
NADD065	282.70	283.40	0.70	0.677			
NADD065	286.70	287.80	1.10	0.623			
NADD065	304.90	305.30	0.40	0.140			
NADD066	16.50	18.00	1.50	0.364			
NADD066	33.00	34.00	1.00	0.138			
NADD066	34.00	35.00	1.00	0.438			
NADD066	48.20	49.00	0.80	0.248			
NADD066	49.00	50.00	1.00	0.272			
NADD066	50.00	51.00	1.00	0.174			
NADD066	82.00	83.00	1.00	0.101	2.80 m @ 0.39 g/t Au	1.1	
NADD066	128.20	129.00	0.80	0.110			
NADD066	133.00	134.00	1.00	0.823			
NADD066	134.00	135.00	1.00	0.082			
NADD066	135.00	135.80	0.80	0.238			
NADD066	158.80	160.00	1.20	0.445			
NADD066	160.00	161.00	1.00	0.718			
NADD066	161.00	161.85	0.85	0.262			
NADD066	167.00	168.00	1.00	0.283			
NADD066	191.00	192.00	1.00	0.133			
NADD066	196.40	197.70	1.30	1.820	6.40 m @ 1.22 g/t Au	7.8	3.20 m @ 1.89 g/t Au
NADD066	197.70	198.90	1.20	1.648			
NADD066	198.90	199.60	0.70	2.419			
NADD066	199.60	200.80	1.20	0.886			
NADD066	200.80	201.80	1.00	0.455			
NADD066	201.80	202.80	1.00	0.282			
NADD066	203.80	205.05	1.25	0.180			
NADD066	206.00	207.00	1.00	0.234			
NADD066	207.00	208.00	1.00	0.189			
NADD066	208.00	209.00	1.00	1.691			
NADD066	209.00	210.00	1.00	1.010	4.00 m @ 0.78 g/t Au	3.1	2.00 m @ 1.35 g/t Au
NADD066	211.00	212.00	1.00	0.143			
NADD066	216.00	217.10	1.10	0.761			
NADD066	217.10	218.50	1.40	0.724			
NADD066	218.50	219.60	1.10	0.008			
NADD066	219.60	220.70	1.10	0.137			
NADD066	220.70	221.80	1.10	0.400			
NADD066	221.80	222.90	1.10	0.017			
NADD066	222.90	224.00	1.10	0.419			
NADD066	227.00	228.00	1.00	0.157			
NADD066	228.00	229.00	1.00	4.887	20.00 m @ 0.88 g/t Au	17.5	2.10 m @ 4.10 g/t Au
NADD066	229.00	230.10	1.10	3.378			
NADD066	230.10	231.00	0.90	0.056			
NADD066	231.00	232.00	1.00	0.008			
NADD066	232.00	233.00	1.00	0.063			
NADD066	233.00	234.20	1.20	0.276			

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au				
NADD066	234.20	235.20	1.00	2.701			1.00 m @ 2.70 g/t Au				
NADD066	235.20	236.20	1.00	0.396							
NADD066	236.20	237.20	1.00	0.837							
NADD066	237.20	238.20	1.00	0.609							
NADD066	238.20	239.20	1.00	0.756							
NADD066	239.20	240.20	1.00	0.763							
NADD066	240.20	241.20	1.00	0.384							
NADD066	241.20	242.00	0.80	0.029							
NADD066	242.00	243.00	1.00	0.122							
NADD066	243.00	244.00	1.00	0.658							
NADD066	244.00	245.00	1.00	0.208							
NADD066	245.00	246.00	1.00	0.015							
NADD066	246.00	247.00	1.00	0.333							
NADD066	247.00	248.00	1.00	0.687							
NADD066	250.00	251.00	1.00	0.103			1.00 m @ 1.08 g/t Au				
NADD066	252.00	253.00	1.00	0.172							
NADD066	269.00	270.00	1.00	0.355				4.00 m @ 0.32 g/t Au	1.3		
NADD066	270.00	271.00	1.00	0.058							
NADD066	271.00	272.00	1.00	0.166							
NADD066	272.00	273.00	1.00	0.702							
NADD067	33.00	34.00	1.00	0.504	3.00 m @ 0.64 g/t Au	1.9					
NADD067	34.00	35.00	1.00	1.080							
NADD067	35.00	36.00	1.00	0.342							
NADD067	40.30	41.40	1.10	0.108							
NADD067	57.80	58.90	1.10	0.195							
NADD067	86.00	87.00	1.00	0.660					1.00 m @ 0.66 g/t Au	0.7	
NADD067	93.00	94.10	1.10	0.391					1.10 m @ 0.39 g/t Au	0.4	
NADD067	98.00	99.00	1.00	0.196							
NADD067	116.40	117.40	1.00	0.131							
NADD067	118.30	119.00	0.70	0.242			0.70 m @ 0.24 g/t Au				0.2
NADD067	156.20	157.00	0.80	0.592			0.80 m @ 0.59 g/t Au				0.5
NADD067	162.00	163.00	1.00	0.104						0.60 m @ 1.02 g/t Au	
NADD067	199.15	199.75	0.60	1.021							0.60 m @ 1.02 g/t Au
NADD067	206.00	207.20	1.20	0.371	1.20 m @ 0.37 g/t Au	0.4					
NADD067	232.00	233.00	1.00	0.346	3.00 m @ 0.20 g/t Au	0.6					
NADD067	233.00	234.00	1.00	0.041							
NADD067	234.00	235.00	1.00	0.226							
NADD067	236.00	237.00	1.00	0.106							
NADD067	242.00	243.00	1.00	0.289	1.00 m @ 0.29 g/t Au	0.3					
NADD067	276.00	277.00	1.00	0.138							
NADD067	277.00	278.00	1.00	0.103							
NADD067	282.00	283.00	1.00	0.401			1.00 m @ 0.40 g/t Au	0.4			
NADD067	285.00	286.00	1.00	0.149			2.00 m @ 3.19 g/t Au				
NADD067	293.30	294.40	1.10	0.255				4.20 m @ 1.59 g/t Au	6.7		
NADD067	294.40	295.50	1.10	0.008							
NADD067	295.50	296.50	1.00	2.540							
NADD067	296.50	297.50	1.00	3.843							
NADD067	297.50	298.70	1.20	0.120							
NADD067	306.00	307.00	1.00	0.152							
NADD067	316.00	317.00	1.00	0.157							
NADD067	320.00	321.00	1.00	0.946						1.00 m @ 0.95 g/t Au	0.9
NADD067	324.00	325.00	1.00	0.154							
NADD067	326.00	327.00	1.00	0.224	1.00 m @ 0.22 g/t Au	0.2					
NADD067	338.00	339.00	1.00	0.100							
NADD067	342.10	343.00	0.90	0.125							
NADD067	346.00	347.00	1.00	0.630	3.00 m @ 0.31 g/t Au	0.9					

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD067	347.00	348.00	1.00	0.070			
NADD067	348.00	349.00	1.00	0.242			
NADD067	349.00	350.00	1.00	0.101			
NADD067	363.00	364.00	1.00	0.341	1.00 m @ 0.34 g/t Au	0.3	
NADD067	373.00	374.00	1.00	0.443	1.00 m @ 0.44 g/t Au	0.4	
NADD067	396.00	397.00	1.00	0.183			
NADD067	425.00	426.00	1.00	0.716	1.00 m @ 0.72 g/t Au	0.7	
NADD067	439.00	440.30	1.30	0.150			
NADD068	12.00	13.00	1.00	0.181			
NADD068	15.65	17.10	1.45	1.081	1.45 m @ 1.08 g/t Au	1.6	1.45 m @ 1.08 g/t Au
NADD068	18.00	19.50	1.50	0.104			
NADD068	47.95	49.00	1.05	0.350	1.05 m @ 0.35 g/t Au	0.4	
NADD068	66.00	67.00	1.00	0.162			
NADD068	87.00	88.00	1.00	0.254	1.00 m @ 0.25 g/t Au	0.3	
NADD068	92.70	94.00	1.30	0.468			
NADD068	94.00	95.00	1.00	1.707	3.10 m @ 1.14 g/t Au	3.5	1.80 m @ 1.63 g/t Au
NADD068	95.00	95.80	0.80	1.527			
NADD068	105.00	106.10	1.10	2.032	1.10 m @ 2.03 g/t Au	2.2	1.10 m @ 2.03 g/t Au
NADD068	139.60	140.70	1.10	0.234	1.10 m @ 0.23 g/t Au	0.3	
NADD068	156.00	157.00	1.00	0.109			
NADD068	160.45	161.45	1.00	0.520			
NADD068	161.45	162.45	1.00	0.024			
NADD068	162.45	163.45	1.00	0.008			
NADD068	163.45	164.45	1.00	0.008	7.15 m @ 0.44 g/t Au	3.1	
NADD068	164.45	165.45	1.00	0.796			
NADD068	165.45	166.45	1.00	0.008			
NADD068	166.45	167.60	1.15	1.548			1.15 m @ 1.55 g/t Au
NADD068	183.20	184.00	0.80	1.367	0.80 m @ 1.37 g/t Au	1.1	0.80 m @ 1.37 g/t Au
NADD068	211.00	212.00	1.00	0.568	1.00 m @ 0.57 g/t Au	0.6	
NADD068	222.00	223.00	1.00	0.124			
NADD068	223.00	224.00	1.00	0.606	1.00 m @ 0.61 g/t Au	0.6	
NADD068	228.00	229.00	1.00	0.877	1.00 m @ 0.88 g/t Au	0.9	
NADD068	236.00	237.00	1.00	1.465	1.00 m @ 1.47 g/t Au	1.5	1.00 m @ 1.47 g/t Au
NADD068	249.00	250.00	1.00	0.139			
NADD068	257.00	258.00	1.00	0.120			
NADD068	258.00	259.00	1.00	0.100			
NADD068	260.00	261.00	1.00	0.931			
NADD068	261.00	262.00	1.00	6.147			1.00 m @ 6.15 g/t Au
NADD068	262.00	263.00	1.00	0.089			
NADD068	263.00	264.00	1.00	0.318			
NADD068	264.00	265.00	1.00	0.019			
NADD068	265.00	266.00	1.00	0.008			
NADD068	266.00	267.00	1.00	0.202			
NADD068	267.00	268.00	1.00	0.340			
NADD068	268.00	269.00	1.00	0.066			
NADD068	269.00	270.00	1.00	2.530			
NADD068	270.00	271.00	1.00	0.999	27.00 m @ 0.75 g/t Au	20.2	3.00 m @ 1.59 g/t Au
NADD068	271.00	272.00	1.00	1.238			
NADD068	272.00	273.00	1.00	0.651			
NADD068	273.00	274.00	1.00	0.667			
NADD068	274.00	275.00	1.00	2.997			1.00 m @ 3.00 g/t Au
NADD068	275.00	276.00	1.00	0.203			
NADD068	276.00	277.00	1.00	0.211			
NADD068	277.00	278.00	1.00	0.676			
NADD068	278.00	279.00	1.00	0.008			
NADD068	279.00	280.00	1.00	0.058			

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD068	280.00	281.00	1.00	0.040			
NADD068	281.00	282.00	1.00	0.439			
NADD068	282.00	283.00	1.00	0.008			
NADD068	283.00	284.00	1.00	0.008			
NADD068	284.00	285.00	1.00	0.662			
NADD068	285.00	286.00	1.00	0.118			
NADD068	286.00	287.00	1.00	0.592			
NADD068	293.00	294.00	1.00	0.119			
NADD068	294.00	295.00	1.00	0.109			
NADD068	303.30	304.40	1.10	1.253			1.10 m @ 1.25 g/t Au
NADD068	304.40	305.50	1.10	0.868			
NADD068	305.50	306.50	1.00	0.629			
NADD068	306.50	307.25	0.75	1.349			0.75 m @ 1.35 g/t Au
NADD068	307.25	308.00	0.75	0.213			
NADD068	308.00	309.00	1.00	0.153			
NADD068	309.00	310.00	1.00	0.570			
NADD068	310.00	311.00	1.00	0.105			
NADD068	311.00	312.00	1.00	1.468			1.00 m @ 1.47 g/t Au
NADD068	312.00	313.00	1.00	0.834			
NADD068	313.00	314.00	1.00	0.140			
NADD068	314.00	315.25	1.25	0.245			
NADD068	315.25	316.15	0.90	3.764			
NADD068	316.15	317.00	0.85	1.232			1.75 m @ 2.53 g/t Au
NADD069	1.50	2.40	0.90	0.174			
NADD069	15.00	16.00	1.00	0.271	1.00 m @ 0.27 g/t Au	0.3	
NADD069	84.00	85.00	1.00	0.253	1.00 m @ 0.25 g/t Au	0.3	
NADD069	91.00	92.00	1.00	0.106			
NADD069	98.00	99.00	1.00	0.124			
NADD069	103.00	104.00	1.00	0.372	1.00 m @ 0.37 g/t Au	0.4	
NADD069	107.00	108.00	1.00	0.152			
NADD069	111.00	112.00	1.00	0.207			
NADD069	112.00	112.80	0.80	1.890	1.80 m @ 0.95 g/t Au	1.7	0.80 m @ 1.89 g/t Au
NADD069	181.00	182.00	1.00	0.266			
NADD069	182.00	183.00	1.00	0.008			
NADD069	183.00	184.00	1.00	0.688			
NADD069	207.45	208.40	0.95	0.148			
NADD069	213.40	214.40	1.00	0.994	1.00 m @ 0.99 g/t Au	1.0	
NADD069	227.00	228.00	1.00	0.864			
NADD069	228.00	229.15	1.15	0.008			
NADD069	229.15	230.20	1.05	1.812	3.20 m @ 0.87 g/t Au	2.8	
NADD069	234.00	235.00	1.00	0.320			
NADD069	237.00	238.00	1.00	0.120	1.00 m @ 0.32 g/t Au	0.3	
NADD069	241.00	242.00	1.00	0.205	1.00 m @ 0.20 g/t Au	0.2	
NADD069	242.00	243.10	1.10	0.183			
NADD069	246.00	247.00	1.00	0.237	1.00 m @ 0.24 g/t Au	0.2	
NADD069	251.00	252.00	1.00	0.137			
NADD069	261.00	262.00	1.00	0.108			
NADD069	320.50	321.00	0.50	0.853	0.50 m @ 0.85 g/t Au	0.4	
NADD069	324.00	325.00	1.00	0.209	1.00 m @ 0.21 g/t Au	0.2	
NADD069	328.80	330.00	1.20	0.117			
NADD069	330.00	331.00	1.00	0.679			
NADD069	331.00	332.00	1.00	0.552			
NADD069	336.40	337.55	1.15	0.383	2.00 m @ 0.62 g/t Au	1.2	
NADD069	340.00	341.00	1.00	0.250	1.15 m @ 0.38 g/t Au	0.4	
NADD069	343.00	344.00	1.00	0.325	1.00 m @ 0.25 g/t Au	0.3	
NADD069	343.00	344.00	1.00	0.325	1.00 m @ 0.33 g/t Au	0.3	
NADD069	358.00	359.00	1.00	0.172			

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD069	364.00	365.00	1.00	0.431	1.00 m @ 0.43 g/t Au	0.4	
NADD069	371.00	372.00	1.00	0.251	1.00 m @ 0.25 g/t Au	0.3	
NADD069	384.00	385.00	1.00	0.127			
NADD069	386.00	387.00	1.00	0.110			
NADD069	387.00	388.00	1.00	0.142			
NADD069	437.00	438.00	1.00	0.214	1.00 m @ 0.21 g/t Au	0.2	
NADD069	442.30	443.00	0.70	0.119			
NADD069	443.00	444.00	1.00	0.133			
NADD069	446.00	447.00	1.00	0.188			
NADD069	447.00	448.10	1.10	0.178			
NADD070	30.50	31.50	1.00	0.811	1.00 m @ 0.81 g/t Au	0.8	
NADD070	32.40	33.25	0.85	0.192			
NADD070	45.25	46.30	1.05	0.118			
NADD070	65.50	66.30	0.80	0.325	0.80 m @ 0.33 g/t Au	0.3	
NADD070	66.30	67.10	0.80	0.164			
NADD070	83.00	84.00	1.00	0.107			
NADD070	88.00	89.00	1.00	0.201	3.00 m @ 0.21 g/t Au	0.6	
NADD070	89.00	90.00	1.00	0.138			
NADD070	90.00	91.00	1.00	0.283			
NADD070	106.00	107.00	1.00	0.102			
NADD070	112.00	113.00	1.00	12.846	1.00 m @ 12.85 g/t Au	12.8	1.00 m @ 12.85 g/t Au
NADD070	130.50	131.50	1.00	0.388	1.00 m @ 0.39 g/t Au	0.4	
NADD070	142.50	143.50	1.00	0.140	2.20 m @ 0.22 g/t Au	0.5	
NADD070	145.50	146.60	1.10	0.240			
NADD070	146.60	147.70	1.10	0.203			
NADD070	150.80	151.80	1.00	0.146			
NADD070	151.80	152.80	1.00	0.111			
NADD070	153.80	154.80	1.00	0.157			
NADD070	155.80	156.70	0.90	0.163			
NADD070	160.00	161.10	1.10	0.100			
NADD070	164.50	165.50	1.00	1.427	1.00 m @ 1.43 g/t Au	1.4	1.00 m @ 1.43 g/t Au
NADD070	195.00	196.00	1.00	2.250	4.00 m @ 1.71 g/t Au	6.9	3.00 m @ 2.18 g/t Au
NADD070	196.00	197.00	1.00	2.171			
NADD070	197.00	198.00	1.00	2.129			
NADD070	198.00	199.00	1.00	0.308			
NADD070	218.00	219.00	1.00	0.176			
NADD070	220.00	221.00	1.00	0.214	1.00 m @ 0.21 g/t Au	0.2	
NADD070	227.00	228.00	1.00	0.118			
NADD070	228.00	229.00	1.00	0.873	1.00 m @ 0.87 g/t Au	0.9	
NADD070	239.20	240.35	1.15	0.378	2.00 m @ 0.34 g/t Au	0.7	
NADD070	240.35	241.20	0.85	0.286			
NADD070	257.80	258.75	0.95	0.561	0.95 m @ 0.56 g/t Au	0.5	
NADD071	17.70	18.90	1.20	0.161			
NADD071	20.10	21.00	0.90	0.104			
NADD071	22.50	23.50	1.00	0.465			
NADD071	23.50	24.70	1.20	0.018	3.20 m @ 0.24 g/t Au	0.8	
NADD071	24.70	25.70	1.00	0.285			
NADD071	35.00	36.00	1.00	0.254			
NADD071	36.00	37.00	1.00	3.697	7.00 m @ 0.80 g/t Au	5.6	2.00 m @ 2.37 g/t Au
NADD071	37.00	38.00	1.00	1.052			
NADD071	38.00	39.00	1.00	0.008			
NADD071	39.00	40.00	1.00	0.008			
NADD071	40.00	41.00	1.00	0.008			
NADD071	41.00	42.00	1.00	0.555			
NADD071	51.00	52.00	1.00	0.146			
NADD071	60.00	61.00	1.00	0.217			1.00 m @ 0.22 g/t Au

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD071	61.00	62.00	1.00	0.104			
NADD071	62.00	62.80	0.80	0.201	0.80 m @ 0.20 g/t Au	0.2	
NADD071	74.00	75.00	1.00	0.241	1.00 m @ 0.24 g/t Au	0.2	
NADD071	75.00	76.00	1.00	0.125			
NADD071	84.00	85.00	1.00	0.130			
NADD071	93.70	94.60	0.90	0.441	0.90 m @ 0.44 g/t Au	0.4	
NADD071	148.00	149.00	1.00	0.146			
NADD071	149.00	150.00	1.00	0.350	1.00 m @ 0.35 g/t Au	0.4	
NADD071	152.00	153.00	1.00	0.114			
NADD071	155.00	155.75	0.75	0.578	0.75 m @ 0.58 g/t Au	0.4	
NADD071	160.00	161.00	1.00	0.651	1.00 m @ 0.65 g/t Au	0.7	
NADD071	200.00	201.00	1.00	0.211	2.00 m @ 0.22 g/t Au	0.4	
NADD071	201.00	202.00	1.00	0.224			
NADD071	206.80	207.30	0.50	1.162	3.20 m @ 0.89 g/t Au	2.8	1.30 m @ 1.18 g/t Au
NADD071	207.30	208.10	0.80	1.194			
NADD071	208.10	209.00	0.90	0.800			
NADD071	209.00	210.00	1.00	0.589			
NADD071	226.00	227.00	1.00	4.906	5.00 m @ 1.11 g/t Au	5.6	1.00 m @ 4.91 g/t Au
NADD071	227.00	228.00	1.00	0.018			
NADD071	228.00	229.00	1.00	0.141			
NADD071	229.00	230.00	1.00	0.008			
NADD071	230.00	231.00	1.00	0.501			
NADD071	265.00	266.00	1.00	0.120			
NADD071	283.00	284.00	1.00	0.166			
NADD071	284.00	285.00	1.00	1.537	4.50 m @ 0.60 g/t Au	2.7	
NADD071	285.00	286.00	1.00	0.041			
NADD071	286.00	287.40	1.40	0.008			
NADD071	287.40	288.50	1.10	1.020			1.10 m @ 1.02 g/t Au
NADD071	336.00	337.00	1.00	0.150			
NADD071	345.60	347.00	1.40	0.153			
NADD071	365.00	366.00	1.00	0.108			
NADD071	368.40	369.60	1.20	0.101			
NADD071	370.60	371.60	1.00	0.182			
NADD071	379.00	380.00	1.00	0.284	1.00 m @ 0.28 g/t Au	0.3	
NADD071	383.00	384.00	1.00	0.122			
NADD071	384.00	385.00	1.00	0.108			
NADD071	389.00	390.00	1.00	0.220	1.00 m @ 0.22 g/t Au	0.2	
NADD071	391.00	392.00	1.00	0.199			
NADD071	406.00	407.00	1.00	0.420	1.00 m @ 0.42 g/t Au	0.4	
NADD071	413.00	414.00	1.00	0.208	1.00 m @ 0.21 g/t Au	0.2	
NADD071	418.00	419.00	1.00	0.275	1.00 m @ 0.28 g/t Au	0.3	
NADD071	423.00	424.00	1.00	0.260	1.00 m @ 0.26 g/t Au	0.3	
NADD071	438.00	439.00	1.00	0.106			
NADD071	439.00	439.80	0.80	0.572	0.80 m @ 0.57 g/t Au	0.5	
NADD072	15.30	16.30	1.00	0.130			
NADD072	67.00	68.00	1.00	0.124			
NADD072	81.00	82.00	1.00	0.373	1.00 m @ 0.37 g/t Au	0.4	
NADD072	109.30	110.05	0.75	0.262	0.75 m @ 0.26 g/t Au	0.2	
NADD072	112.25	113.25	1.00	0.186			
NADD072	117.25	118.25	1.00	0.258	1.00 m @ 0.26 g/t Au	0.3	
NADD072	118.25	119.25	1.00	0.100			
NADD072	152.50	153.50	1.00	0.103			
NADD072	156.50	157.20	0.70	0.284	0.70 m @ 0.28 g/t Au	0.2	
NADD072	157.20	157.90	0.70	0.170			
NADD072	177.00	178.00	1.00	0.112			
NADD072	180.95	181.40	0.45	0.107			

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD072	191.30	192.00	0.70	0.102			
NADD072	193.00	193.70	0.70	0.358	0.70 m @ 0.36 g/t Au	0.3	
NADD072	193.70	194.40	0.70	0.121			
NADD072	197.00	198.00	1.00	1.224			1.00 m @ 1.22 g/t Au
NADD072	198.00	199.00	1.00	0.083			
NADD072	199.00	200.00	1.00	0.034			
NADD072	200.00	201.00	1.00	0.174			
NADD072	201.00	202.00	1.00	0.250			
NADD072	202.00	203.00	1.00	0.303			
NADD072	203.00	204.00	1.00	0.113			
NADD072	204.00	205.00	1.00	0.173			
NADD072	205.00	206.00	1.00	0.306			
NADD072	206.00	207.00	1.00	0.172			
NADD072	244.00	245.00	1.00	0.270			
NADD072	245.00	246.00	1.00	1.342			1.00 m @ 1.34 g/t Au
NADD072	246.00	247.00	1.00	0.460			
NADD072	247.00	248.00	1.00	0.437			
NADD072	248.00	249.00	1.00	0.288			
NADD072	249.00	250.00	1.00	0.018			
NADD072	250.00	251.00	1.00	0.461			
NADD072	251.00	252.00	1.00	0.125			
NADD072	252.00	253.00	1.00	0.130			
NADD072	253.00	254.00	1.00	0.182			
NADD072	255.00	256.00	1.00	0.301	1.00 m @ 0.30 g/t Au	0.3	
NADD072	256.00	257.00	1.00	0.123			
NADD072	264.50	265.50	1.00	0.114			
NADD072	265.50	266.50	1.00	1.224			1.00 m @ 1.22 g/t Au
NADD072	266.50	267.50	1.00	0.033			
NADD072	267.50	268.50	1.00	0.032			
NADD072	268.50	269.50	1.00	0.529			
NADD072	269.50	270.50	1.00	0.008			
NADD072	270.50	271.50	1.00	0.008			
NADD072	271.50	272.50	1.00	0.157			
NADD072	272.50	273.40	0.90	0.480			
NADD072	278.75	279.70	0.95	0.499			
NADD072	279.70	280.65	0.95	0.356	1.90 m @ 0.43 g/t Au	0.8	
NADD073	7.00	8.00	1.00	0.310			
NADD073	8.00	9.00	1.00	0.895	2.00 m @ 0.60 g/t Au	1.2	
NADD073	12.00	13.00	1.00	0.199			
NADD073	13.00	14.00	1.00	0.782			
NADD073	14.00	15.00	1.00	0.028			
NADD073	15.00	16.00	1.00	0.842			
NADD073	16.00	17.00	1.00	0.118			
NADD073	18.00	18.80	0.80	0.131			
NADD073	20.30	21.25	0.95	0.243	0.95 m @ 0.24 g/t Au	0.2	
NADD073	29.25	30.00	0.75	0.163			
NADD073	30.00	30.80	0.80	0.259	0.80 m @ 0.26 g/t Au	0.2	
NADD073	31.60	32.40	0.80	0.193			
NADD073	32.40	33.20	0.80	0.104			
NADD073	33.20	34.00	0.80	0.194			
NADD073	34.00	34.80	0.80	0.123			
NADD073	34.80	35.60	0.80	0.166			
NADD073	86.45	87.00	0.55	0.247			
NADD073	87.00	88.00	1.00	0.268			
NADD073	88.00	89.00	1.00	1.113			1.00 m @ 1.11 g/t Au
NADD073	89.00	90.00	1.00	0.405			

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD073	90.00	91.00	1.00	0.114			
NADD073	121.00	122.00	1.00	0.106			
NADD073	122.00	123.00	1.00	0.205	1.00 m @ 0.20 g/t Au	0.2	
NADD073	123.00	124.00	1.00	0.170			
NADD073	125.00	126.00	1.00	0.341	4.00 m @ 0.21 g/t Au	0.8	
NADD073	126.00	127.00	1.00	0.134			
NADD073	127.00	128.00	1.00	0.056			
NADD073	128.00	129.00	1.00	0.290			
NADD073	134.00	135.00	1.00	0.106			
NADD073	137.50	138.30	0.80	4.421	10.50 m @ 0.88 g/t Au	9.3	3.50 m @ 1.91 g/t Au
NADD073	138.30	139.00	0.70	0.786			
NADD073	139.00	140.00	1.00	0.924			
NADD073	140.00	141.00	1.00	1.671			
NADD073	141.00	142.00	1.00	0.829			
NADD073	142.00	143.00	1.00	0.270			
NADD073	143.00	144.00	1.00	0.165			
NADD073	144.00	145.00	1.00	0.490			
NADD073	145.00	146.00	1.00	0.149			
NADD073	146.00	147.00	1.00	0.451			
NADD073	147.00	148.00	1.00	0.233			
NADD073	148.00	149.30	1.30	0.173			
NADD073	153.00	154.00	1.00	0.144	9.00 m @ 0.29 g/t Au	2.6	
NADD073	154.00	155.00	1.00	0.337			
NADD073	155.00	156.00	1.00	0.094			
NADD073	156.00	157.00	1.00	0.325			
NADD073	157.00	158.00	1.00	0.430			
NADD073	158.00	159.00	1.00	0.106			
NADD073	159.00	160.00	1.00	0.553			
NADD073	160.00	161.00	1.00	0.363			
NADD073	161.00	162.00	1.00	0.153			
NADD073	162.00	163.00	1.00	0.287			
NADD073	165.00	166.50	1.50	0.120			
NADD073	166.50	168.00	1.50	0.142			
NADD073	168.00	169.00	1.00	0.162	0.80 m @ 0.45 g/t Au	0.4	
NADD073	169.00	169.80	0.80	0.445			
NADD073	169.80	171.00	1.20	0.168			
NADD073	214.00	215.00	1.00	0.714	6.40 m @ 0.30 g/t Au	1.9	
NADD073	215.00	216.00	1.00	0.246			
NADD073	216.00	217.00	1.00	0.340			
NADD073	217.00	218.00	1.00	0.171			
NADD073	218.00	219.00	1.00	0.033			
NADD073	219.00	220.40	1.40	0.286			
NADD073	303.00	304.00	1.00	0.240	1.00 m @ 0.24 g/t Au	0.2	
NADD073	306.90	308.00	1.10	0.478	1.10 m @ 0.48 g/t Au	0.5	
NADD073	320.00	321.00	1.00	0.262	1.00 m @ 0.26 g/t Au	0.3	
NADD073	362.00	363.00	1.00	0.662	1.00 m @ 0.66 g/t Au	0.7	
NADD073	379.00	380.00	1.00	0.152			
NADD073	390.00	391.00	1.00	0.195			
NADD073	394.00	395.00	1.00	0.465	3.00 m @ 0.26 g/t Au	0.8	
NADD073	395.00	396.00	1.00	0.008			
NADD073	396.00	397.00	1.00	0.322			
NADD073	404.00	405.00	1.00	0.129			
NADD073	405.00	406.00	1.00	0.497	1.00 m @ 0.50 g/t Au	0.5	
NADD073	406.00	407.00	1.00	0.113			
NADD074	32.00	33.00	1.00	0.657	1.00 m @ 0.66 g/t Au	0.7	
NADD074	33.00	34.05	1.05	0.112			

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD074	44.60	45.60	1.00	0.130			
NADD074	47.60	48.60	1.00	0.642	2.00 m @ 0.52 g/t Au	1.0	
NADD074	48.60	49.60	1.00	0.406			
NADD074	53.60	54.60	1.00	0.213	1.00 m @ 0.21 g/t Au	0.2	
NADD074	64.60	65.60	1.00	0.188			
NADD074	82.50	83.60	1.10	0.116			
NADD074	88.00	89.00	1.00	0.125			
NADD074	89.00	90.00	1.00	0.172			
NADD074	91.00	92.00	1.00	0.237	1.00 m @ 0.24 g/t Au	0.2	
NADD074	93.00	94.00	1.00	0.173			
NADD074	99.00	100.00	1.00	0.227	1.00 m @ 0.23 g/t Au	0.2	
NADD074	108.80	109.90	1.10	0.262	1.10 m @ 0.26 g/t Au	0.3	
NADD075	214.00	215.10	1.10	0.100			
NADD075	225.00	226.00	1.00	0.386	1.00 m @ 0.39 g/t Au	0.4	
NADD075	233.30	234.50	1.20	1.383	2.50 m @ 1.30 g/t Au	3.3	2.50 m @ 1.30 g/t Au
NADD075	234.50	235.80	1.30	1.231			
NADD075	246.00	247.00	1.00	0.175			
NADD075	247.00	248.00	1.00	0.120			
NADD075	254.00	255.00	1.00	0.243			
NADD075	255.00	256.00	1.00	0.441			
NADD075	256.00	257.00	1.00	0.177			
NADD075	260.00	261.00	1.00	0.174			
NADD075	261.00	262.00	1.00	0.605	1.00 m @ 0.60 g/t Au	0.6	
NADD076	0.00	1.00	1.00	0.159			
NADD076	3.00	4.00	1.00	0.121			
NADD076	4.00	4.90	0.90	0.145			
NADD076	4.90	5.40	0.50	1.140	0.50 m @ 1.14 g/t Au	0.6	0.50 m @ 1.14 g/t Au
NADD076	6.60	7.80	1.20	0.252	1.20 m @ 0.25 g/t Au	0.3	
NADD076	7.80	9.00	1.20	0.124			
NADD076	9.75	10.50	0.75	0.297	0.75 m @ 0.30 g/t Au	0.2	
NADD076	12.10	12.90	0.80	0.199			
NADD076	21.00	22.00	1.00	0.125			
NADD076	22.00	23.00	1.00	0.373			
NADD076	23.00	24.00	1.00	0.017	3.00 m @ 0.20 g/t Au	0.6	
NADD076	24.00	25.00	1.00	0.217			
NADD076	40.60	41.60	1.00	0.254			
NADD076	41.60	42.60	1.00	0.826	6.00 m @ 0.35 g/t Au	2.1	
NADD076	42.60	43.60	1.00	0.431			
NADD076	43.60	44.60	1.00	0.276			
NADD076	44.60	45.60	1.00	0.035			
NADD076	45.60	46.60	1.00	0.300			
NADD076	46.60	47.75	1.15	0.141			
NADD076	68.00	69.00	1.00	0.429		10.6	
NADD076	69.00	70.00	1.00	0.314			
NADD076	70.00	71.00	1.00	0.190			
NADD076	71.00	72.00	1.00	1.450			
NADD076	72.00	73.00	1.00	1.277			
NADD076	73.00	74.00	1.00	0.243			
NADD076	74.00	75.00	1.00	0.347			
NADD076	75.00	76.00	1.00	0.214			
NADD076	76.00	77.00	1.00	0.100			
NADD076	77.00	78.00	1.00	0.126			
NADD076	78.00	79.00	1.00	0.424			
NADD076	79.00	80.00	1.00	0.557			
NADD076	80.00	81.00	1.00	0.164			
NADD076	81.00	82.10	1.10	0.776			

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au	
NADD076	82.10	83.20	1.10	1.318			1.10 m @ 1.32 g/t Au	
NADD076	83.20	84.30	1.10	0.778				
NADD076	84.30	85.00	0.70	0.835				
NADD076	85.00	86.00	1.00	0.231				
NADD076	86.00	87.00	1.00	0.494				
NADD076	87.00	88.00	1.00	0.317				
NADD076	91.10	92.20	1.10	0.114				
NADD076	92.20	93.30	1.10	0.116	36.70 m @ 0.66 g/t Au	24.2		4.70 m @ 1.06 g/t Au
NADD076	93.30	94.30	1.00	1.213				
NADD076	94.30	95.30	1.00	1.360				
NADD076	95.30	96.30	1.00	1.182				
NADD076	96.30	97.20	0.90	0.287				
NADD076	97.20	98.00	0.80	1.182				
NADD076	98.00	99.00	1.00	0.767				
NADD076	99.00	100.00	1.00	0.516				
NADD076	100.00	101.00	1.00	0.184				
NADD076	101.00	102.00	1.00	0.209				
NADD076	102.00	103.00	1.00	1.034				
NADD076	103.00	104.00	1.00	0.263				
NADD076	104.00	105.00	1.00	1.096				
NADD076	105.00	106.00	1.00	1.556				
NADD076	106.00	107.00	1.00	0.355				
NADD076	107.00	108.00	1.00	0.221				
NADD076	108.00	109.00	1.00	0.405				
NADD076	109.00	110.00	1.00	0.310				
NADD076	110.00	111.00	1.00	0.675				
NADD076	111.00	112.00	1.00	0.624				
NADD076	112.00	113.00	1.00	0.479				
NADD076	113.00	114.00	1.00	0.427				
NADD076	114.00	115.00	1.00	0.952				
NADD076	115.00	116.00	1.00	0.488				
NADD076	116.00	117.00	1.00	0.605				
NADD076	117.00	118.00	1.00	0.574				
NADD076	118.00	119.00	1.00	0.558				
NADD076	119.00	120.00	1.00	1.041	1.00 m @ 1.04 g/t Au			
NADD076	120.00	121.00	1.00	0.780				
NADD076	121.00	122.00	1.00	0.239				
NADD076	122.00	123.00	1.00	0.322				
NADD076	123.00	124.00	1.00	1.141	1.00 m @ 1.14 g/t Au			
NADD076	124.00	125.00	1.00	0.440				
NADD076	125.00	126.00	1.00	0.636				
NADD076	126.00	127.00	1.00	1.255				
NADD076	127.00	128.00	1.00	0.404	1.00 m @ 1.25 g/t Au			
NADD076	128.00	129.00	1.00	0.095				
NADD076	129.00	130.00	1.00	0.583				
NADD076	134.20	135.60	1.40	0.299				
NADD076	135.60	136.60	1.00	0.270		3.40 m @ 0.28 g/t Au	1.0	
NADD076	136.60	137.60	1.00	0.275				
NADD076	145.00	146.00	1.00	0.249		2.00 m @ 0.25 g/t Au	0.5	
NADD076	146.00	147.00	1.00	0.250				
NADD076	153.00	154.00	1.00	0.184				
NADD076	160.00	161.00	1.00	0.431		1.00 m @ 0.43 g/t Au	0.4	
NADD076	169.00	170.00	1.00	0.392		1.00 m @ 0.39 g/t Au	0.4	
NADD076	177.00	178.00	1.00	0.428		4.00 m @ 0.22 g/t Au	0.9	
NADD076	178.00	179.00	1.00	0.221				
NADD076	179.00	180.00	1.00	0.008				

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD076	180.00	181.00	1.00	0.243			
NADD076	182.90	183.80	0.90	0.147			
NADD076	184.80	185.80	1.00	0.330			
NADD076	185.80	186.80	1.00	1.119	2.00 m @ 0.72 g/t Au	1.4	1.00 m @ 1.12 g/t Au
NADD076	190.50	191.50	1.00	0.988			
NADD076	191.50	192.50	1.00	0.435			
NADD076	192.50	193.50	1.00	0.075			
NADD076	193.50	194.60	1.10	0.105			
NADD076	194.60	195.60	1.00	0.211	7.75 m @ 0.51 g/t Au	3.9	
NADD076	195.60	196.60	1.00	0.623			
NADD076	196.60	197.60	1.00	1.272			1.00 m @ 1.27 g/t Au
NADD076	197.60	198.25	0.65	0.325			
NADD076	248.00	249.10	1.10	0.804	1.10 m @ 0.80 g/t Au	0.9	
NADD076	259.00	260.00	1.00	0.190			
NADD076	268.00	269.00	1.00	0.272	1.00 m @ 0.27 g/t Au	0.3	
NADD076	272.75	273.75	1.00	0.149			
NADD076	275.75	276.75	1.00	0.172			
NADD076	276.75	277.75	1.00	0.402			
NADD076	277.75	278.50	0.75	0.303			
NADD076	278.50	279.30	0.80	2.026			1.65 m @ 2.19 g/t Au
NADD076	279.30	280.15	0.85	2.340			
NADD076	280.15	281.00	0.85	0.301	7.25 m @ 0.67 g/t Au	4.8	
NADD076	281.00	282.00	1.00	0.008			
NADD076	282.00	283.00	1.00	0.008			
NADD076	283.00	284.00	1.00	0.317			
NADD076	289.00	290.00	1.00	0.640	1.00 m @ 0.64 g/t Au	0.6	
NADD076	293.00	294.00	1.00	0.268			
NADD076	294.00	295.00	1.00	0.222	2.00 m @ 0.24 g/t Au	0.5	
NADD076	295.00	296.00	1.00	0.186			
NADD076	302.00	303.00	1.00	0.155			
NADD076	308.00	309.00	1.00	0.177			
NADD076	310.00	311.00	1.00	0.116			
NADD076	321.00	322.00	1.00	0.101			
NADD076	322.00	323.00	1.00	0.132			
NADD076	332.00	333.00	1.00	0.104			
NADD076	338.00	339.00	1.00	0.138			
NADD076	352.00	353.00	1.00	0.163			
NADD076	358.00	359.00	1.00	0.101			
NADD076	364.00	365.00	1.00	0.302	1.00 m @ 0.30 g/t Au	0.3	
NADD076	365.00	366.00	1.00	0.125			
NADD076	373.00	374.00	1.00	0.300	1.00 m @ 0.30 g/t Au	0.3	
NADD076	391.00	392.00	1.00	0.387			
NADD076	392.00	393.00	1.00	0.008			
NADD076	393.00	394.00	1.00	0.209			
NADD076	394.00	395.00	1.00	0.038			
NADD076	395.00	396.00	1.00	0.501	8.00 m @ 0.62 g/t Au	5.0	
NADD076	396.00	397.00	1.00	1.011			
NADD076	397.00	398.00	1.00	0.008			3.00 m @ 1.28 g/t Au
NADD076	398.00	399.00	1.00	2.835			
NADD076	399.00	400.00	1.00	0.196			
NADD076	417.00	418.00	1.00	0.220	1.00 m @ 0.22 g/t Au	0.2	
NADD076	427.00	428.00	1.00	0.172			
NADD076	444.00	445.00	1.00	0.202	1.00 m @ 0.20 g/t Au	0.2	
NADD076	451.00	452.20	1.20	0.163			
NADD077	25.20	26.50	1.30	0.167			
NADD077	26.50	27.50	1.00	0.567	1.80 m @ 0.67 g/t Au	1.2	

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
NADD077	27.50	28.30	0.80	0.797			
NADD077	45.50	46.50	1.00	0.148			
NADD077	48.50	49.20	0.70	0.399	0.70 m @ 0.40 g/t Au	0.3	
NADD077	61.00	62.00	1.00	0.100			
NADD077	69.60	70.50	0.90	0.341	3.90 m @ 0.44 g/t Au	1.7	
NADD077	70.50	71.50	1.00	0.647			
NADD077	71.50	72.50	1.00	0.473			
NADD077	72.50	73.50	1.00	0.277			
NADD077	111.40	112.00	0.60	0.474	0.60 m @ 0.47 g/t Au	0.3	
NADD077	113.00	114.00	1.00	0.149			
NADD077	118.00	119.00	1.00	0.106			
NADD077	121.00	122.00	1.00	0.137			
NADD077	123.20	124.45	1.25	0.410	7.80 m @ 0.42 g/t Au	3.3	
NADD077	124.45	125.75	1.30	0.031			
NADD077	125.75	127.00	1.25	0.019			
NADD077	127.00	128.25	1.25	1.041			1.25 m @ 1.04 g/t Au
NADD077	128.25	129.45	1.20	0.080			
NADD077	129.45	130.00	0.55	1.028			0.55 m @ 1.03 g/t Au
NADD077	130.00	131.00	1.00	0.731			
NADD077	131.00	132.00	1.00	0.110			
NADD077	199.30	200.30	1.00	0.245	2.25 m @ 0.22 g/t Au	0.5	
NADD077	200.30	201.55	1.25	0.205			

About Aurum

Aurum Resources (ASX:AUE) is an Australian based gold exploration company focused on discovery and development of major gold projects in Côte d'Ivoire, West Africa. Aurum has 3.28Moz gold resources coming from two gold projects, the 2.41Moz Boundiali Gold Project and the 0.87Moz Napié Gold Project. Aurum owns and runs 12 diamond drill rigs allowing it to explore faster and more cost effectively than its peers.

Group Mineral Resources

Table 3: Group Mineral Resources Statement for contained gold as at 30 September 2025 (figures may not add up due to appropriate rounding)

Mineral Resources			Indicated			Inferred			Total Resources		
Project	Type	Cut-off	Tonnes (Mt)	Gold grade (g/t)	Gold (Moz)	Tonnes (Mt)	Gold grade (g/t)	Gold (Moz)	Tonnes (Mt)	Gold grade (g/t)	Gold (Moz)
Boundiali	Oxide	0.4 g/t Au above 300m depth and 1.0 g/t below 300m depth	1.9	1.0	0.07	2.3	0.8	0.07	4.3	0.9	0.13
	Transition		2.0	1.1	0.07	2.8	0.8	0.09	4.7	0.9	0.14
	Fresh		21.9	1.1	0.78	46	0.9	1.35	68	1.0	2.13
	Total		26.0	1.1	0.92	51	0.9	1.49	77	1.0	2.41
Napié	Oxide	0.6 g/t Au	-	-	-	2.4	1.2	0.09	2.4	1.2	0.09
	Transition		-	-	-	1.9	1.1	0.07	1.9	1.1	0.07
	Fresh		-	-	-	18.3	1.2	0.71	18.3	1.2	0.71
	Total		-	-	-	22.5	1.2	0.87	22.5	1.2	0.87
Total			26.0	1.1	0.92	73.5	1.0	2.36	100	1.0	3.28

Annual review and material changes since 30 June 2024

At the start of the 2025 financial year (1 July 2024), the Company did not have any Mineral Resources and is not able to make a prior year comparison. A summary of the material changes in Mineral Resources throughout the 2025 financial year and subsequent is presented below:

- **Boundiali Mineral Resources:**

- "Aurum delivers 1.59Moz Maiden JORC Resource at Boundiali Gold Project" released to the Australian Securities Exchange on 30 December 2024 and amended on 31 December 2024 and available to view on www.asx.com.au.
- "Aurum delivers 2.41Moz Maiden JORC Resource at Boundiali Gold Project" released to the Australian Securities Exchange on 5 August 2025 and available to view on www.asx.com.au
- "Boundiali indicated gold resources grows by 53% in two month" released to the Australian Securities Exchange on 6 October 2025 and available to view on www.asx.com.au.

- **Napié Mineral Resources:**

- "Napié Project Listing Rule 5.6 disclosure" released to the Australian Securities Exchange on 4 February 2025 and available to view on www.asx.com.au

Boundiali Gold Project (2.41Moz)

The flagship 2.41Moz Boundiali Gold Project is comprised of four neighbouring exploration tenements and is located within the same greenstone belt as Resolute's large Syama (11.5Moz) gold mine and Perseus' Sissingué (1.4 Moz) gold mine to the north and Montage Gold's 5.5Moz Koné project located to the south. Barrick's Tongon mine (5.0Moz) is located to the northeast (Figure 1 and Figure 2):

BM gold project JV 80% interest - PR0893 ("BM"), 400km²

- Can earn 80-88% interest in future gold production company (Government gets 10% free carry from local partner):
 - 80% if local partner contributes 11% capex
 - 85% if local partner does not contribute capex – they go to 5% free carry
 - 88% if local partner sells us 3% of their interest they go to 2% free carry

BD gold project JV 80% interest - PR808 ("BD"), 260km²

- Can earn 80-88% interest in future gold production company (Government gets 10% free carry from local partner):
 - 80% if local partner contributes 11% capex
 - 85% if local partner does not contribute capex – they go to 5% free carry
 - 88% if local partner sells us 3% of their interest they go to 2% free carry

BST gold project 100% interest – Application No. 0781 ("BST") 100%, 167.34km²

- *Application for mining exploitation licence was lodged with the Ministry of Mines, Petroleum and Energy in March 2025.*
- 90% interest in future gold production company (Government get 10% free carry from Aurum interest)

BN gold project JV - PR283 ("BN"), 208.87km²

Aurum is earning interest through carrying out exploration to earn 70% interest in three stages:

- Stage 1: Aurum earns 35% interest by spending USD 1.2 million within 36 months of license grant
- Stage 2: Aurum earns 51% interest by spending USD 2.5 million within 60 months of license grant
- Stage 3: Aurum earns 70% interest upon completion of a pre-feasibility study on the tenement.
- Diamond drilling conducted by Aurum will be valued at US\$140 per meter for expenditure calculations
- Upon grant of a mining exploitation license, the ownership structure will be: Aurum (70%), GNRR (20%), Ivorian Government (10%)

Encore JV Project

- Applications (No. 1740 and No. 1745) totalling nearly 320km² are strategically located between Aurum's existing **BD** and **BST** tenements and south of **BM**, offering growth potential for its 1.6Moz Boundiali Gold Project.

- Staged earn-in agreement aligns expenditure with milestones for each permit area:
 - Path to 51% interest: 4,000m diamond drilling.
 - Path to 80% interest: Additional 8,000m diamond drilling (total 12,000m) OR US\$2.5 million nominal expenditure.

Major Star Plus Partnership Projects

- Applications (No. 0791), 114.53km², is strategically located on the immediate south and west of **BST** tenement, offering growth potential for its 2.41Moz Boundiali Gold Project.
- Applications (No. 0793), 99.12km², are structurally located on the immediate west of the Napié gold project, offering growth potential for its 0.87Moz Napié Project.
- Applications (No. 0804), 254.97km², is a separate gold exploration project located in central Côte D'Ivoire.
- 35% project interest from the Company's ownership of 35% registered share capital of Major Star Plus Sarl.
 - Path to 51% interest in a exploration permit: Either USD1.5 million normal expenditure or 7,000m diamond drilling.
 - Path to 80% interest in a exploration permit: Either USD3.0 million normal expenditure or 15,000m diamond drilling
 - Path to 95% interest in a exploration permit: Completion of Pre-Feasibility Study
 - 85.5~87% interest in a future production mine

Mako Gold Pty Ltd (0.87Moz)

Wholly owned subsidiary of Aurum and holds the following projects:

- 0.87Moz Napié Gold Project. 90% Mako and African American Investment Fund (AAIF) has a 10% interest in the Napié Project free carried to completion of a feasibility study.
- Korhogo Project (100%), significant manganese discovery
- Brobo Project (100%), prospective for lithium/rare earths

Section 1 of the JORC Code, 2012 Edition – Table 1

Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- Samples were collected using diamond drilling techniques generally angled at 60° towards 135° to optimally intersect the mineralised zones. - Diamond core was logged both for geological and mineralised structures as noted above. The core was then cut in half using a diamond brick cutting saw on 1m intervals. Typically the core was sampled to geological intervals as defined by the geologist within the even two metre sample intervals utilised. The right-hand side of the core was always submitted for analysis with the left side being stored in trays on site. - QAQC procedures included the insertion of certified reference materials (standards), blanks, and field duplicates at a rate of 1:20. - Sample preparation and assay was completed by independent international accredited laboratory MSALABS. Following cutting or splitting, the samples were bagged by the Client employees and then sent to the laboratory for preparation. These samples were subsequently sent to MSALABS at Yamoussoukro for analysis via 500g Photon Assay.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Diamond drilling carried out with mostly NTW and some HQ sized equipment. PQ-size rods and casing were used at the top the holes to stabilise the collars although no samples were taken from the PQ size core.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	Diamond drilling core recoveries ranged between 85% and 100% for all holes with no significant issues noted.

Criteria	JORC Code explanation	Commentary
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	- All holes were field logged by company geologists. Lithological, alteration and mineralogical nomenclature of the deposit as well as sulphide content were recorded. Metallurgical, Geotechnical and structural data has been recorded - Photography and recovery measurements were carried out by assistants under a geologist's supervision. - All drill holes were logged in full. - Logging was qualitative and quantitative in nature.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- NTW core cut in half using a core saw. Typically, the core was sampled to major geological intervals as defined by the geologist within the even two metre sample intervals utilised. All samples were collected from the same side of the core (RHS). - Sample sizes are considered appropriate to correctly represent the moderately nuggetty gold mineralisation based on: the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and assay value ranges for Au. - The entire sample was crushed to 70% passing 2mm. - Crushed sample was split to produce 500g sample for analysis and the remaining reject kept for checks. - Field QC procedures involved the use of 2 types of certified reference materials (1 in 20) which is certified by Geostats Ltd, - Primary DD duplicate: Generated by cutting the remaining half core into a ¼ and sampled. - Coarse blank samples: Inserted 1 in every 20 samples - Laboratory Internal Duplicates and Standards - Sample sizes are considered appropriate to correctly represent the moderately nuggetty gold mineralisation based on: the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and assay value ranges for gold
Quality of assay data and laboratory	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	The analytical technique used is Chrysos™ PhotonAssay methodology. This uses a high-energy X-ray source that is used to irradiate large mineral samples, typically

Criteria	JORC Code explanation	Commentary
tests	- For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	about 500g compared to the 50g of the fire assay. The X-rays induce short-lived changes in the structure of any gold nuclei present. As the excited gold nuclei return to their ground state, they emit a characteristic gamma-ray signature, the intensity of which is directly proportional to the concentration of gold. The penetrating nature of Chrysos™ PhotonAssay provides much higher energy than those used in conventional X-ray fluorescence (XRF), which provides a true bulk analysis of the entire sample. Samples are presented into a fully automatic process where samples are irradiated, measured, data collection and reporting. - No geophysical tools were used to determine any element concentrations used for this report. - Sample preparation checks for fineness were carried out by the laboratory as part of internal procedures to ensure the grind size was being attained. Laboratory QAQC includes the use of internal standards using certified reference material, and pulp replicates. Review of QAQC data (standards, blanks, duplicates) showed results were within acceptable tolerance limits. No material bias was identified. - The QAQC results confirm that acceptable levels of accuracy and precision have been established for the Classifications applied (exploration results only).
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- NA - No holes have been twinned - No adjustment to assay data - Logging records were mostly registered in physical format and were input into a digital format. The core photographs, collar coordinates and down the hole surveys were received in digital format. - Assay values that were below detection limit were adjusted to equal half of the detection limit value. Un-sampled intervals were assumed to have no mineralisation and they were therefore set to blank in the database, however these are minimal.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource	- DD collar positions were initially located using a handheld GPS with a location error of +/-3m. - The datum employed is WGS84, Zone 30

Criteria	JORC Code explanation	Commentary
	estimation. • Specification of the grid system used. • Quality and adequacy of topographic control.	• All drill hole locations are then surveyed utilising the differential GPS methods by both company and third party surveyors. • DGPS system utilised is typically within a 10 cm accuracy range which is suitable for the classification applied.
• Data spacing and distribution	• Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied.	• Drillholes were completed on variable line spacings (from 100m to 20m) and orientations. • The drill hole spacing and distribution is considered sufficient to establish the degree of continuity appropriate for the Inferred Mineral Resource estimation procedures. • The samples were not composited prior to assay.
• Orientation of data in relation to geological structure	• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	• Drill holes were drilled approximately at right angles to the anticipated strike of the target geochemical anomaly and orthogonal to the interpreted mineralisation orientation.
• Sample security	• The measures taken to ensure sample security.	• Chain of custody is managed by the senior site geologists and geotechnicians. Samples are stored in a core shed at site and samples were delivered to the laboratory by client geologists. Client employees have no further involvement in the preparation or analysis of the samples.
• Audits or reviews	• The results of any audits or reviews of sampling techniques and data.	• Detailed reviews of sampling techniques were carried out on the site visit by RPM in August 2025.

• Section 2 of the JORC Code, 2012 Edition – Table 1

Criteria	JORC Code explanation	Commentary																														
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.	- Exploration results are from the Napié project area which covers PR1038 which is in application and awaiting final approval from Mines minister following site visit. - African American Investment Fund (AAIF) has a 10% interest in the Napié Project free carried to completion of a feasibility study - The size of the permit is 236.49km². - There are no impediments to working in the area.																														
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- The historical exploration results reported in this announcement are from work undertaken by Mako Gold Ltd now a wholly owned subsidiary of Aurum Resources Limited. Review of historical data indicates drilling and sampling were conducted to industry standard practices comparable to Aurum's current protocols. The Mako Gold Pty Ltd exploration drilling database acquired by Aurum includes: <table border="1"> <thead> <tr> <th>Type</th><th>Holes</th><th>Metres</th></tr> </thead> <tbody> <tr> <td>AC</td><td>343</td><td>11,439</td></tr> <tr> <td>Auger</td><td>3,546</td><td>31,457</td></tr> <tr> <td>Channel</td><td>1</td><td>36</td></tr> <tr> <td>Trench</td><td>12</td><td>1,168</td></tr> <tr> <td>Drilling</td><td>878</td><td>105,195</td></tr> <tr> <td>DD</td><td>23</td><td>3,190</td></tr> <tr> <td>RC</td><td>791</td><td>88,733</td></tr> <tr> <td>RCDD</td><td>64</td><td>13,272</td></tr> <tr> <td>Total</td><td>4,780</td><td>149,295</td></tr> </tbody> </table> - The license area is known as a prospective region for gold and recent artisanal workings revealed the presence of primary gold mineralisation in artisanal pits and small-scale underground mining.	Type	Holes	Metres	AC	343	11,439	Auger	3,546	31,457	Channel	1	36	Trench	12	1,168	Drilling	878	105,195	DD	23	3,190	RC	791	88,733	RCDD	64	13,272	Total	4,780	149,295
Type	Holes	Metres																														
AC	343	11,439																														
Auger	3,546	31,457																														
Channel	1	36																														
Trench	12	1,168																														
Drilling	878	105,195																														
DD	23	3,190																														
RC	791	88,733																														
RCDD	64	13,272																														
Total	4,780	149,295																														
Geology	Deposit type, geological setting and style of mineralisation.	The Napié Permit is located within the Lower Proterozoic Birimian Daloa greenstone belt. The style of mineralisation sought is structurally controlled orogenic gold, within an interpreted shear zone related to a regional-scale shear and secondary splays. The Tchaga and Gogbala deposits are located along a 23km long +40ppb gold soil/auger anomaly coincident with a +30km-long shear zone, thought to be a																														

• Criteria	• JORC Code explanation	• Commentary
		major control for gold mineralisation. Gold mineralisation is hosted in en-echelon quartz veins and stringers and the surrounding silicified, sericite, iron-carbonate, pyrite (+/- galena and chalcopyrite) alteration halo. Mineralisation is present in all lithologies (felsic to mafic volcanoclastics, volcanic breccias and conglomerates and to a lesser extent in felsic and mafic intrusives).
• Drill hole information	• A summary of all information material to the under-standing of the exploration results including a tabulation of the following information for all Material drill holes: • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	• Complete drill hole data has been provided. • Drill hole collar locations are shown in figures in main body of announcement.
• Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• Assay Intervals are shown in detail. Drilling intervals are predominantly 1m. • Metal equivalent values are not being reported.
• Relationship between mineralisation widths and intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a	• Intersection lengths are reported as down hole lengths (the distance from the surface to the end of the hole, as measured along the drill trace).

• Criteria	• JORC Code explanation	• Commentary
	clear statement to this effect (e.g. 'down hole length, true width not known').	
• Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	• Appropriate diagrams relevant to material results are shown in the body of this announcement.
• Balanced Reporting	• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	• All drill hole and trench collar locations were surveyed utilising handheld GPS methods. Exploration results only being reported. • Drilling teams utilised the Reflex EZ-shot instrument to measure deviations in azimuth and inclination angles for all holes; however, vertical holes were not surveyed. The first measurement is taken at 6 m depth, and then at approximately every 30m depth interval and at the end of the hole.
• Other substantive exploration data	• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	• All relevant exploration data is either reported in this announcement or has been reported previously by Aurum or Mako Gold Pty Ltd and is referred to in the announcement.
• Further work	• The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large- scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	• The Company intends to continue exploration on the project and this work will include auger, aircore, RC and diamond core drilling, along with further geophysical surveys and geochemical sampling programs. • Diagrams included in body of report as deemed appropriate by competent person