

7 July 2026

Cerro Bayo Silver-Gold Project, Chile

Andean Silver drills highest grades ever intersected at Cerro Bayo Project

The results of 268g/t Gold and 3,045g/t Silver (25,340g/t AgEq) over 1.4m at Trinidad continue paving the way for conversion of Inferred Resources to Measured and Indicated

- » Infill drilling reveals strong continuity of mineralisation throughout Laguna Verde mine complex, with consistent high-grade results within the Inferred Resource areas highlighting the future scope for conversion to Measured & Indicated
- » Results highlight the gold rich zones within parts of the system
- » Resource growth drilling will commence in the wider Cerro Bayo district this quarter for the first time in 20 years, targeting priority deposits including Guanaco, Raul and Marcela

Details of Latest Drilling at Laguna Verde Mine Complex at Cerro Bayo

- » First drilling at the Trinidad Vein is intersecting multiple mineralised zones, results include:
 - 2.4m @ 15,558g/t AgEq (1,882g/t Ag & 164.8g/t Au) (187.4g/t AuEq) CBD342, incl
 - o 1.4m @ 25,340g/t AgEq (3,045g/t Ag & 268.6g/t Au) (305.3g/t AuEq);
 - 2.5m @ 500g/t AgEq (37g/t Ag & 5.6g/t Au) (6.0g/t AuEq) CBD336;
 - 3.3m @ 480g/t AgEq (244g/t Ag & 2.9g/t Au) (5.8g/t AuEq) CBD337;
 - 2.3m @ 369g/t AgEq (93g/t Ag & 3.3g/t Au) (4.4g/t AuEq) CBD337;
 - 0.9m @ 1,121g/t AgEq (20g/t Ag & 13.3g/t Au) (13.5g/t AuEq) CBD320;
 - 1.0m @ 842g/t AgEq (53g/t Ag & 9.5g/t Au) (10.1g/t AuEq) CBD330;
 - 1.5m @ 419g/t AgEq (194g/t Ag & 2.7g/t Au) (5.0g/t AuEq) CBD316; and
 - 0.8m @ 830g/t AgEq (147g/t Ag & 8.2g/t Au) (10.0g/t AuEq) CBD322
- » Drilling at the Delia SE continues to intersect mineralised zones supporting the conversion of Inferred Resources into Measured and Indicated as well as supporting future underground studies, results include:
 - 3.1m @ 3,356g/t AgEq (2,541g/t Ag & 9.8g/t Au) (40.3g/t AuEq) CBD314B;
 - 3.0m @ 889g/t AgEq (113g/t Ag & 9.4g/t Au) (10.7g/t AuEq) CBD296;
 - 2.3m @ 431g/t AgEq (372g/t Ag & 0.7g/t Au) (5.2g/t AuEq) CBD310;
 - 2.2m @ 779g/t AgEq (537g/t Ag & 2.9g/t Au) (9.4g/t AuEq) CBD310;
 - 2.5m @ 542g/t AgEq (99g/t Ag & 5.3g/t Au) (6.5g/t AuEq) CBD310; and
 - 2.7m @ 328g/t AgEq (135g/t Ag & 2.3g/t Au) (3.9g/t AuEq) CBD303
- » Cash of A\$53.4m at end of March Quarter to fund growth drilling and future feasibility works.

Andean Silver Managing Director Matthew Allen said: *“Our twin-pronged strategy of growing and upgrading the resource continues to create excellent results and will be incorporated into the upcoming feasibility and restart study.*

“These latest results from infill drilling within the Inferred Resource areas highlight the strong continuity of the mineralisation at the Cerro Bayo Project and therefore the huge opportunity we have to drive value by upgrading these resources to Measured and Indicated.

“Given the quantum of the Inferred Resource, we will continue to unlock this opportunity with ongoing infill drilling. This will take place in parallel with the commencement of resource growth drilling in the Cerro Bay district with the first drilling there in over 20 years, targeting known mineralisation.

“We will also be advancing several key work streams as part of the feasibility study with the aim of demonstrating the strong cashflow potential of this project”.

Perth, Australia, 7 July 2026 – **Andean Silver Limited** (ASX: ASL, OTCQX: ADSLF) is pleased to announce strong infill drilling results which highlight the potential to create significant value by upgrading Inferred Resources to the Measured and Indicated categories at its Cerro Bayo Silver-Gold Project in Chile.

The results continue to prove the high-grade nature of the Cerro Bayo Project and demonstrate the strong continuity of the mineralisation.

The accelerated drilling program underway at the Laguna Verde Mine Complex within Cerro Bayo aims to grow the recent total resource of **20Mt @ 211g/t AgEq for 136Moz AgEq** and upgrade further resources to the Measured and Indicated categories.

Infill and resource growth drilling are key contributors to Andean’s core strategy of creating shareholder value through the drill bit by expanding and upgrading its Mineral Resource Estimate base and underpinning future economic studies to support the Company’s future transition to producer.

Andean remains well funded to continue to achieve its goals with **~A\$53.4m in cash** at the end of March 2026.

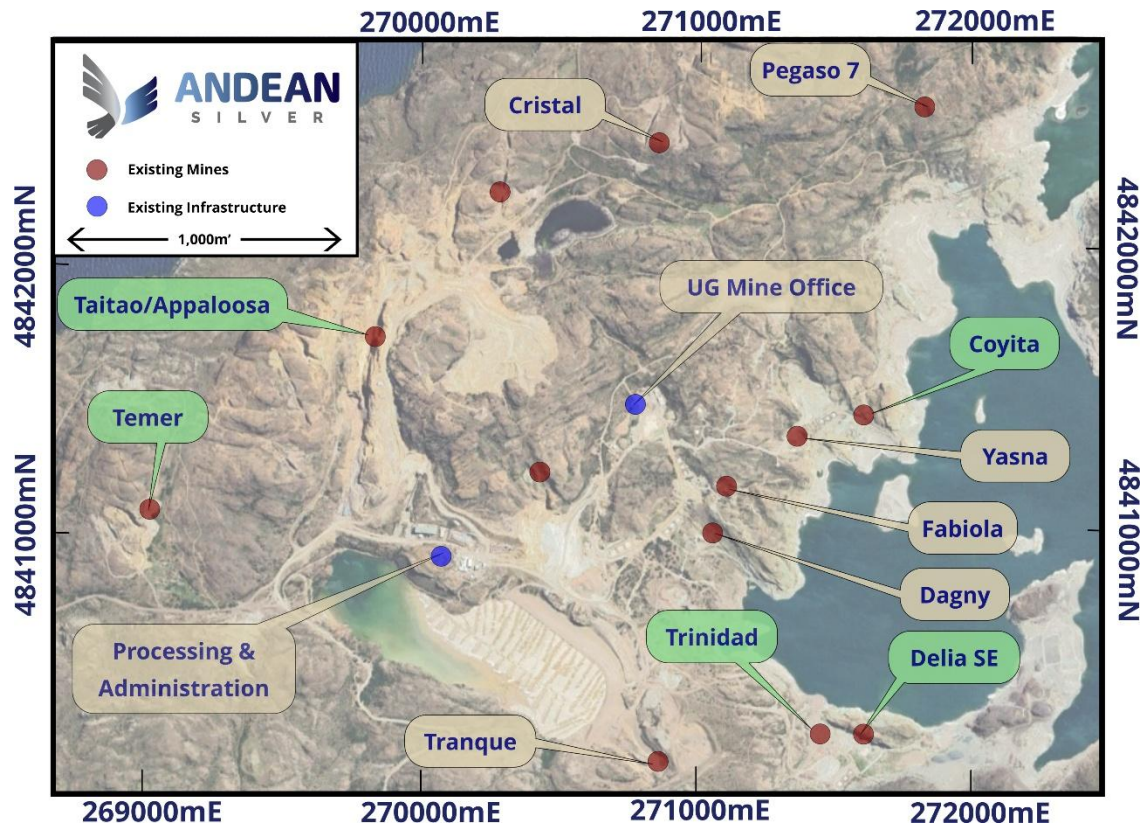


Figure 1. Laguna Verde Mine Complex map, highlighting the location of the existing mine areas (red dots) in relation to existing infrastructure (blue dots). Results relating to this release are highlighted green.

Trinidad

The drilling at Trinidad, the first in over 10 years, has demonstrated the continuing exploration potential that exists proximal to the existing Delia SE infrastructure. The latest drilling results underpin the continued conversion and growth potential of the Trinidad trend over 800m of strike and has previously only been drilled over a 150m vertical extent. Drilling is demonstrating the gold rich nature of these shallower lodes to accompany the high grade silver results. Ongoing drilling will continue to focus on conversion and growth of this emerging corridor.

Recent results highlight the continuity of the Trinidad shoot and future conversion and growth potential (refer Figure 2):

- **2.4m @ 15,558g/t AgEq** (1,882g/t Ag & 164.8g/t Au) (187.4g/t AuEq) CBD342, incl
 - **1.4m @ 25,340g/t AgEq** (3,045g/t Ag & 268.6g/t Au) (305.3g/t AuEq);
- **2.5m @ 500g/t AgEq** (37g/t Ag & 5.6g/t Au) (6.0g/t AuEq) CBD336;
- **3.3m @ 480g/t AgEq** (244g/t Ag & 2.9g/t Au) (5.8g/t AuEq) CBD337;
- **2.3m @ 369g/t AgEq** (93g/t Ag & 3.3g/t Au) (4.4g/t AuEq) CBD337;
- **0.9m @ 1,121g/t AgEq** (20g/t Ag & 13.3g/t Au) (13.5g/t AuEq) CBD320;
- **1.0m @ 842g/t AgEq** (53g/t Ag & 9.5g/t Au) (10.1g/t AuEq) CBD330;
- **1.5m @ 419g/t AgEq** (194g/t Ag & 2.7g/t Au) (5.0g/t AuEq) CBD316; and
- **0.8m @ 830g/t AgEq** (147g/t Ag & 8.2g/t Au) (10.0g/t AuEq) CBD322.

Future growth drilling will target mineralisation down plunge of the Trinidad shoot as well as targeting mineralisation currently not in the resource that extends ~400m north of the main Trinidad mine area. Drillhole CBD335 demonstrates that mineralisation continues beyond the interpreted veins and outside the reported resource with results of **2.5m @ 500g/t AgEq**.

Beyond the immediate infrastructure, future potential resource growth is supported by historical results drilled over 15 years ago (left hand side of Figure 2), including:

- **1.6m @ 351g/t AgEq** (118g/t Ag & 2.8g/t Au) (4.2g/t AuEq) FCH262; and
- **1.7m @ 253g/t AgEq** (20g/t Ag & 2.8g/t Au) (3.0/t AuEq) DTRI-012.

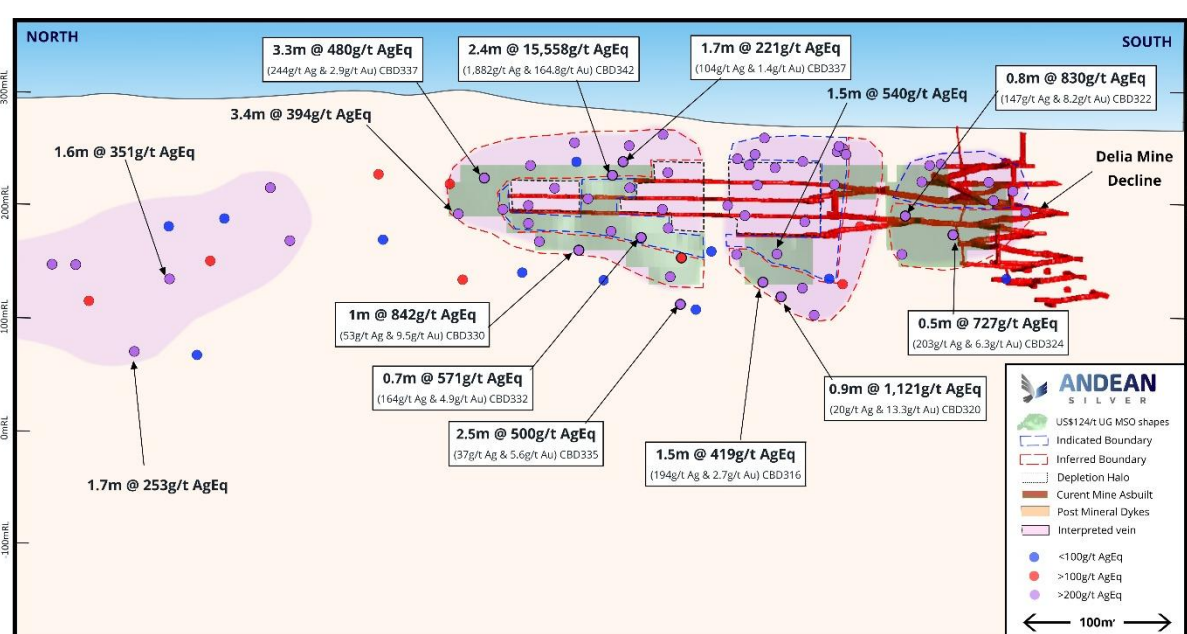


Figure 2. Trinidad corridor long section looking East.
Latest drilling results in boxes and Appendices B and C.

Delia SE

Delia SE drilling is further delineating the early-stage potential for high-grade Silver and Gold ounces immediately below the existing mine infrastructure. Further work has identified multiple stacked lodes at depth and along the southern plunge of the shoot, with the potential to support multiple mining fronts on each development level in a future mine plan. Drilling will continue to target both resource growth and conversion within the Delia SE mine area.

Recent drilling of the mineralised shoot has delivered solid high-grade results, including exceptional silver and gold grades (refer Figure 3):

- **3.1m @ 3,356g/t AgEq** (2,541g/t Ag & 9.8g/t Au) (40.3g/t AuEq) CBD314B;
- **3.0m @ 889g/t AgEq** (113g/t Ag & 9.4g/t Au) (10.7g/t AuEq) CBD296;
- **2.3m @ 431g/t AgEq** (372g/t Ag & 0.7g/t Au) (5.2g/t AuEq) CBD310;
- **2.2m @ 779g/t AgEq** (537g/t Ag & 2.9g/t Au) (9.4g/t AuEq) CBD310;
- **2.5m @ 542g/t AgEq** (99g/t Ag & 5.3g/t Au) (6.5g/t AuEq) CBD310; and
- **2.7m @ 328g/t AgEq** (135g/t Ag & 2.3g/t Au) (3.9g/t AuEq) CBD303.

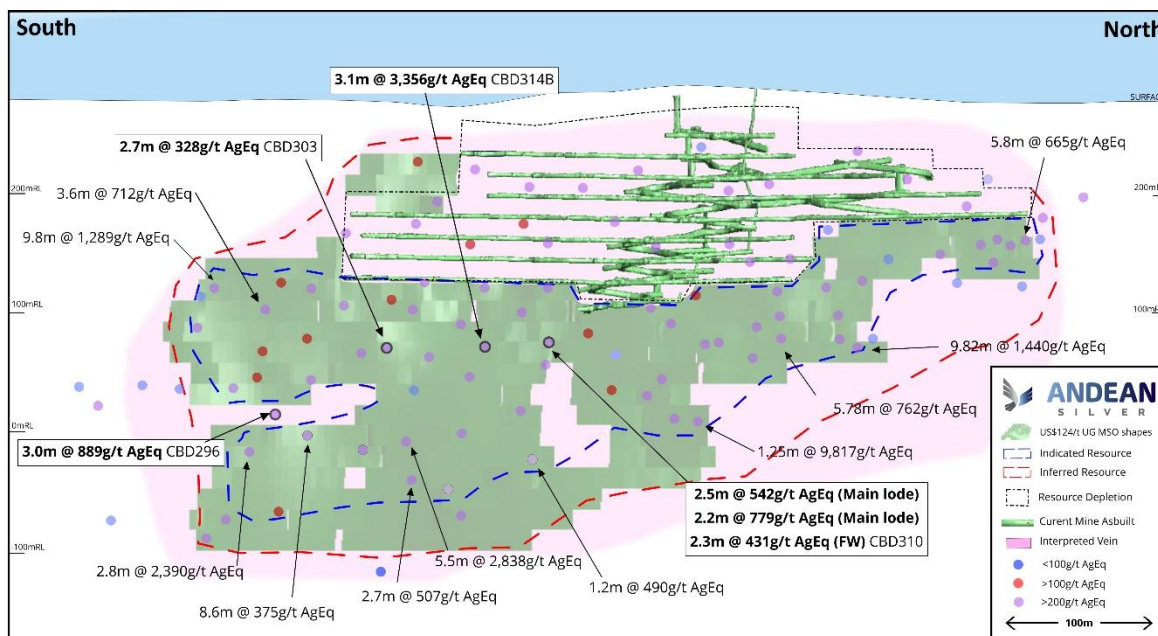


Figure 3. Delia SE long section looking west.

Latest drilling results in boxes and Appendix B. For previously announced drilling results, refer to end notes.¹

Laguna Verde Mine Complex

Drilling continues to support the future feasibility study work with consistent infill drilling results from Temer, Coyita and Appaloosa/Taitao areas within the Laguna Verde Mine Complex (refer Figures 4 and 5). Drilling continues to intersect both vein and breccia structures, consistent with the tenure and grade of the known system. Drilling will also be used to refresh the geotechnical and metallurgical parameters of each individual mine area.

Drilling within the Appaloosa/Taitao system has returned results including:

- **2.5m @ 351g/t AgEq** (6g/t Ag & 4.2g/t Au) (4.2g/t AuEq) CBD297;
- **1.8m @ 322g/t AgEq** (67g/t Ag & 3.1g/t Au) (3.9g/t AuEq) CBD327;
- **0.3m @ 2,891g/t AgEq** (1,399g/t Ag & 18g/t Au) (34.8g/t AuEq) CBD327;
- **6.6m @ 114g/t AgEq** (33g/t Ag & 1g/t Au) (1.4g/t AuEq) CBD328; and
- **1.6m @ 215g/t AgEq** (18g/t Ag & 2.4g/t Au) (2.6g/t AuEq) CBD319.

Coyita drilling results include:

- **4.3m @ 273g/t AgEq** (190g/t Ag & 1g/t Au) (3.3g/t AuEq) CBD331, incl
 - **1.6m @ 361g/t AgEq** (229g/t Ag & 1.6g/t Au) (4.4g/t AuEq); and
- **0.4m @ 2,043g/t AgEq** (1,762g/t Ag & 3.4g/t Au) (24.6g/t AuEq).

Temer area drilling results include:

- **2.7m @ 630g/t AgEq** (97g/t Ag & 6.4g/t Au) (7.6g/t AuEq) CBD336;
- **0.5m 658g/t AgEq** (107g/t Ag & 6.6g/t Au) (7.9g/t AuEq) CBD300;
- **0.5m @ 570g/t AgEq** (197g/t Ag & 4/5g/t Au) (6.9g/t AuEq) CBD306; and
- **1.5m @ 357g/t AgEq** (28g/t Ag & 4g/t Au) (4.3g/t AuEq) CBD340.

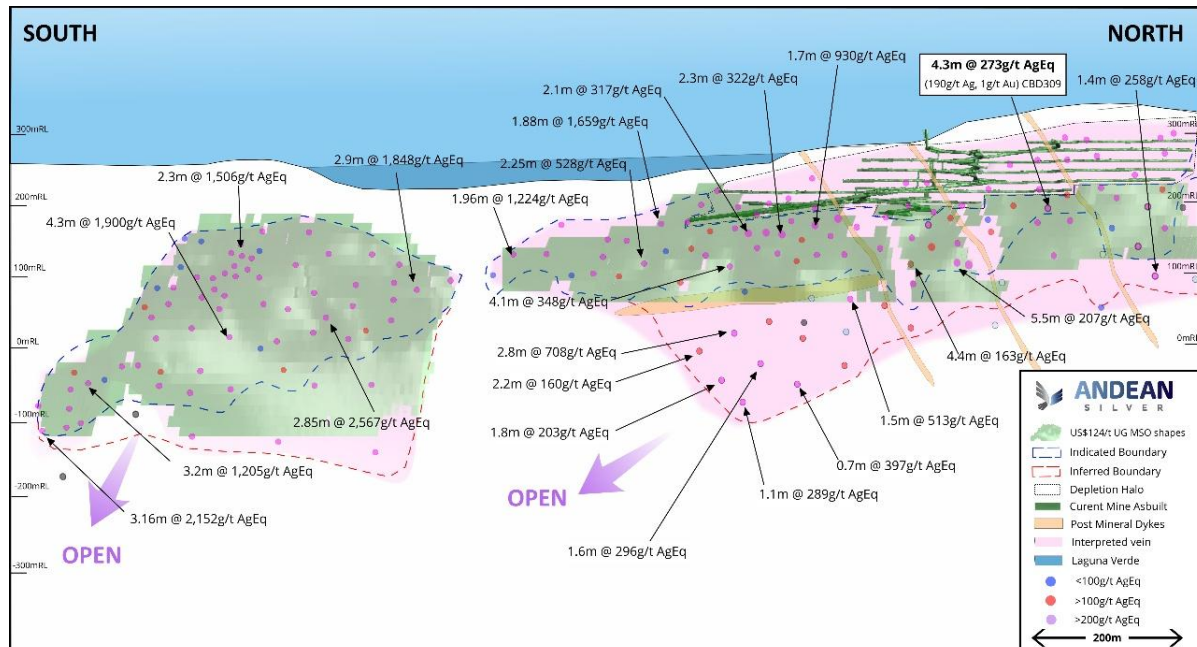


Figure 4. Coyita Shoots looking West.

Latest drilling results in boxes and Appendix A. For previous drilling results, refer to end notes.²

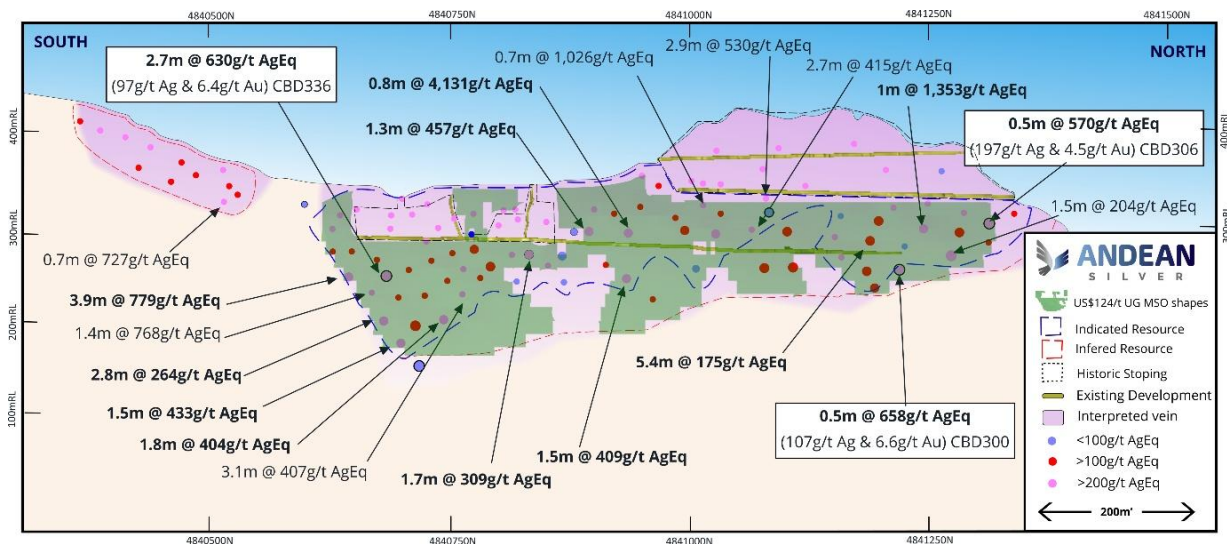


Figure 5. Temer mineralised shoots looking West.

Latest drilling results in boxes and Appendix A. For previous drilling results, refer to end notes.³

Twelve Month Strategy and News Flow

Andean continues to effectively execute an aggressive exploration and Resource growth and definition campaign throughout its 330km² Cerro Bayo Silver-Gold Project.

During the remainder of 2026 and into 2027, the Andean team aims to advance the project from a predominantly exploration focus to a combination of exploration and restart planning. Andean's strategy includes:

Exploration:

- Drilling brownfields targets for growth of existing Resources in the Laguna Verde and Cerro Bayo mine complexes.
- Continuing to support long-term Resource growth potential through target generation, exploration and discovery.
- Continuing to develop and permit a comprehensive drill campaign over the greenfield projects from target generation and geophysical campaigns over the Droughtmaster/Sinter Hill areas.
- Continuing the broader regional exploration campaigns (mapping, sampling, target generation).

Restart Planning:

- Continuation of a broad infill drilling campaign to support conversion and updated geotechnical and metallurgical studies.
- Commencement of feasibility level work.

In addition to the current fleet of 4 drill rigs, the Company will consider increasing the number of rigs on site to support all planned 2026 and 2027 activities to achieve the Company's strategic goals.

Table 1: News flow over coming 12 months.

		Q2 2026	Q3 2026	Q4 2026	Q1 2027
Exploration and Resource Growth	Resource Infill Drilling (x4 rigs)	→	→	→	→
	Cerro Bayo Resource Extension Drilling (x2 rigs)	→	→	→	→
	Regional Exploration	→	→	→	→
	Regional Greenfield Drilling Campaign	→	→	→	→
Feasibility Study and Mine Restart	Internal Mining Study	→	→	→	→
	Feasibility Study	→	→	→	→

The above timetable is indicative only and is subject to change.

-ENDS-

This announcement has been approved for release by the Board of Directors.

For further information:

Matthew Allen
Managing Director
Andean Silver Limited
info@andeansilver.com

Media:
Paul Armstrong
Read Corporate
+61 8 9388 1474

About Andean Silver

Andean Silver Limited (ASX:ASL, OTCQX: ADSLF) is an Australian mineral exploration and development company focused on advancing its 100% owned Cerro Bayo Silver-Gold project in the Aysen region of Southern Chile. The Cerro Bayo Silver-Gold Project currently hosts Indicated and Inferred Mineral Resources of 20Mt at a grade of 211g/t for 136Moz of contained AgEq (refer Appendix A). Andean intends to rapidly advance the project and grow the existing silver-gold Resource to demonstrate a globally significant, potential near-term producing silver-gold asset. For further information regarding Andean Silver Limited, please visit the ASX platform (ASX:ASL) or the Company's website at www.andeansilver.com

Competent Persons Statement and Compliance Statements

The information in this release that relates to new Exploration Results for the Cerro Bayo Project is based on and fairly represents information and supporting documentation compiled by Mr Tim Laneyrie, a Competent Person who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Laneyrie is employed full-time by the Company as Technical Director and holds performance rights and shares in the Company. Mr Laneyrie has sufficient experience that is relevant to the styles of mineralisation and the types of deposits under consideration, and to the activities being undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Laneyrie consents to the inclusion in this release of the matters based on his information in the form and context in which it appears.

The information in this announcement that relates to previously announced Exploration Results has been extracted from Andean's ASX releases as noted in the text and End Notes.

References to 'historic(al) drilling' and 'historic(al) data' in this announcement refer to drilling and data collected prior to the current drilling campaign. Unless specified otherwise, all historical drilling information and data in this announcement has been reported in accordance with the 2012 edition of the JORC Code and not in accordance with a historical code.

The Mineral Resource Estimate for the Cerro Bayo Project referred to in this announcement was first reported in the Company's ASX release dated 30 June 2026, titled "Andean Silver's Indicated Resource increases by 230% to 60Moz AgEq".

Andean confirms that it is not aware of any new information or data that materially affects the information included in the original announcements and that all material assumptions and technical parameters underpinning the mineral resource estimate continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified from the original market announcements.

Metal equivalents have been calculated at a silver price of US\$36/oz and gold price of US\$3,000/oz. Individual grades for the metals are set out at Appendices A, B and C of this announcement. Silver equivalent was calculated based on the formula $\text{AgEq(g/t)} = \text{Ag(g/t)} + (83 \times \text{Au(g/t)})$. Gold equivalent was calculated based on the formula

$AuEq(g/t) = Au(g/t) + (Ag(g/t) / 83)$. Metallurgical recoveries for gold and silver are closely linked and are typically 85-93% for gold and silver. The actual assumed metallurgical recovery rate used to calculate the metal equivalents is 90% for each of gold and silver. The Company considers the estimation of metallurgical recoveries in respect of exploration work to be reasonable based on the past processing records from the nearby Cerro Bayo plant between 1995 and 2016, and work undertaken in preparing the Mineral Resource Estimate. It is the Company's view that all elements in the silver and gold equivalents calculations have a reasonable potential to be recovered and sold.

Forward Looking Statements

This document contains forward looking statements concerning the Company. Forward-looking statements are not statements of historical fact, and actual events and results may differ materially from those described in the forward-looking statements as a result of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information provided by the Company, or on behalf of the Company. Such factors include, among other things, risks relating to additional funding requirements, metal prices, exploration, development and operating risks, competition, production risks, regulatory restrictions, including environmental regulation and liability and potential title disputes.

Forward looking statements in this document are based on the Company's beliefs, opinions and estimates of the Company as of the dates the forward-looking statements are made, and no obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments. Although management believes that the assumptions made by the Company and the expectations represented by such information are reasonable, there can be no assurance that the forward-looking information will prove to be accurate.

Forward-looking information involves known and unknown risks, uncertainties, and other factors which may cause the actual results, performance or achievements of the Company to be materially different from any anticipated future results, performance or achievements expressed or implied by such forward-looking information. Such factors include, among others, the actual market price of commodities, the actual results of future exploration, changes in project parameters as plans continue to be evaluated, as well as those factors disclosed in the Company's publicly filed documents. Readers should not place undue reliance on forward-looking information. The Company does not undertake to update any forward-looking information, except in accordance with applicable securities laws. No representation, warranty or undertaking, express or implied, is given or made by the Company that the occurrence of the events expressed or implied in any forward-looking statements in this release will actually occur.

End Notes

1. For details of previously announced drilling results at Delia SE, refer to ASL ASX releases dated: 1 December 2023, 4 March 2024, 9 February 2026 and 31 March 2026.
2. For details of previously announced drilling results at Coyita, refer to ASL ASX releases dated: 26 March 2024, 16 September 2024, 31 October 2024, 17 December 2024, 27 February 2025, 24 June 2025 and 31 March 2026.
3. For details of previously announced drilling results at Temer, refer to ASL ASX releases dated: 9 October 2025, 11 December 2025, 9 February 2026 and 31 March 2026.
4. For details of previously announced drilling results at Appaloosa, refer to ASL ASX releases dated: 21 October 2025, 11 December 2025, 9 February 2026 and 31 March 2026.

APPENDIX A – Cerro Bayo Project Mineral Resource Estimate

Mineral Resource Estimate as at 15 June 2026

Underground Resource

Category	Tonnes (Mt)	Ag (g/t)	Ag (Moz)	Au (g/t)	Au (Moz)	AgEq(g/t)	AgEq(Moz)
Indicated	3.5	199	22	2.6	0.3	417	47
Inferred	4.4	139	20	2.2	0.3	318	45
Total	7.9	165	42	2.4	0.6	361	92

Open Pit Resource

Category	Tonnes (Mt)	Ag (g/t)	Ag (Moz)	Au (g/t)	Au (Moz)	AgEq(g/t)	AgEq(Moz)
Indicated	1.2	110	4	2.7	0.1	330	13
Inferred	10.9	23	8	0.8	0.3	88	31
Total	12.1	32	12	1.0	0.4	112	44

Total Resource

Category	Tonnes (Mt)	Ag (g/t)	Ag (Moz)	Au (g/t)	Au (Moz)	AgEq(g/t)	AgEq(Moz)
Indicated	4.7	176	27	2.6	0.4	395	60
Inferred	15.3	57	28	1.2	0.6	155	76
Total	20.0	85	55	1.5	1.0	211	136

Notes:

1. Mineral Resource Estimates are classified and reported in accordance with the JORC Code.
2. MSO shapes were generated to constrain the Resource using an NSR value of US\$124/t and a minimum mining width of 1.2m.
3. Pit optimisation shells were generated at an NSR cutoff of US\$47/t to constrain the open pit resources with SMU of 3m x 5m x 5m applied.
4. A gold price of US\$3,500/oz and Silver price of US\$45/oz was used to generate NSR cutoffs.
5. Individual grades for all metals included in the metal equivalents calculation are set out in the table above. Silver equivalents are calculated using the equation $AgEq = Ag(g/t) + (83 \times Au(g/t))$ and gold equivalents are calculated based on the equation $AuEq = Au(g/t) + (Ag(g/t) / 83)$ based on a gold price of US\$3,000/oz and Silver price of US\$36/oz. Metallurgical recoveries for gold and silver are closely linked and are typically 85-93% for gold and silver. The actual assumed metallurgical recovery rate used to calculate the metal equivalents is 90% for each of gold and silver. The Company considers the estimation of metallurgical recoveries in respect of exploration work to be reasonable based on the past processing records from the nearby Cerro Bayo plant between 1995 and 2016, and work undertaken in preparing the Mineral Resource Estimate. It is the Company's view that all elements in the silver and gold equivalents calculations have a reasonable potential to be recovered and sold.
6. Bulk Density of 2.63g/cm³ has been applied to veins and 2.57g/cm³ has been applied to stockwork and waste domains.
7. Numbers may not add due to rounding.

APPENDIX B – Current Drilling Results

Hole Id	Easting	Northing	RL	Azi	Dip	Drilled Length (m)	From (m)	To (m)	Width (m)	Ag (g/t)	Au (g/t)	AgEq (g/t)	AuEq (g/t)	Lode
CBD296	272,214	4,840,383	273	236	-32	470.4	414.2	417.2	3.0	113	9.4	889	10.7	Delia SE
CBD297	270,156	4,841,650	414	273	-33	269.3	169.5	175.9	6.3	6	0.8	68	0.8	Appaloosa
and							187.0	193.0	6.0	63	1.1	151	1.8	Appaloosa
and							232.8	235.3	2.5	6	4.2	351	4.2	Appaloosa
CBD300	269,085	4,841,320	377	214	-35	230.4	197.9	198.4	0.5	107	6.6	658	7.9	Temer
CBD301	271,639	4,841,573	267	258	-49	181.0						NSI		Coyita NW
CBD302	269,085	4,841,320	378	199	-42	270.0						NSI		Temer
CBD303	272,213	4,840,384	273	249	-26	524.0	413.7	416.4	2.7	135	2.3	328	3.9	Delia SE
and							462.4	463.1	0.7	127	0.9	201	2.4	Delia SE
CBD304	271,639	4,841,574	267	244	-54	175.8						NSI		Coyita NW
CBD305	270,156	4,841,650	414	287	-34	293.2	149.1	152.8	3.7	8	0.6	53	0.6	Appaloosa
CBD306	269,082	4,841,320	377	259	-24	252.4	195.4	195.9	0.5	197	4.5	570	6.9	Temer
CBD307	271,640	4,841,573	267	205	-51	170.1						NSI		Coyita NW
CBD308	269,126	4,841,143	382	231	-23	206.1						NSI		Temer
CBD309	271,640	4,841,573	267	224	-56	160.0	125.9	126.7	0.8	127	1.2	226	2.7	Coyita NW
CBD310	271,701	4,840,074	267	15	-42	372.1	136.6	138.9	2.3	372	0.7	431	5.2	Delia SE
and							212.4	214.6	2.2	537	2.9	779	9.4	Delia SE
and							265.8	266.0	0.3	247	5.2	678	8.2	Delia SE
and							269.4	271.9	2.5	99	5.3	542	6.5	Delia SE
and							287.7	292.9	5.2	74	1.8	221	2.7	Delia SE
and							307.1	308.3	1.2	11	1.8	160	1.9	Delia SE
CBD311	271,401	4,840,147	270	352	-49	199.1	150.6	150.9	0.3	404	6.2	919	11.1	Trinidad
CBD312	269,126	4,841,144	382	247	-29	206.4	162.4	163.0	0.6	51	1.2	150	1.8	Temer
CBD313	270,159	4,841,654	413	336	-68	170.2	166.9	167.1	0.3	37	5.1	459	5.5	Appaloosa
CBD314	271,701	4,840,073	267	26	-41	68.0						Hole Terminated		Delia SE
CBD314B	271,702	4,840,074	267	28	-45	375.0	142.5	142.7	0.2	170	6.2	684	8.2	Delia SE
and							210.8	211.3	0.5	164	0.3	185	2.2	Delia SE
and							215.1	215.3	0.2	864	4.2	1,215	14.6	Delia SE

Hole Id	Easting	Northing	RL	Azi	Dip	Drilled Length (m)	From (m)	To (m)	Width (m)	Ag (g/t)	Au (g/t)	AgEq (g/t)	AuEq (g/t)	Lode
and							226.0	229.1	3.1	2,541	9.8	3,356	40.3	Delia SE
and							306.6	307.2	0.6	55	2.1	229	2.8	Delia SE
and							355.0	355.5	0.6	89	2.5	293	3.5	Delia SE
CBD315	269,128	4,841,144	381	228	-59	202.1	193.2	193.4	0.2	59	6.5	598	7.2	Temer
CBD316	271,401	4,840,148	270	4	-57	203.3	162.7	164.2	1.5	194	2.7	419	5.0	Trinidad
CBD317	269,128	4,841,144	381	261	-25	163.1								Temer
CBD317B	269,126	4,841,146	383	260	-25	164.1								Temer
CBD318	271,451	4,840,099	270	31	-26	175.3								Delia SE
CBD319	270,246	4,841,752	365	217	-49	230.2	53.8	58.1	4.3	14	0.5	53	0.6	Appaloosa
and							78.4	79.9	1.6	18	2.4	215	2.6	Appaloosa
CBD320	271,401	4,840,143	270	13	-57	240.1	171.0	171.9	0.9	20	13.3	1,121	13.5	Trinidad
CBD321	269,483	4,840,693	375	273	-40	305.3	48.1	48.8	0.7	159	0.4	195	2.3	Temer
and							169.1	169.3	0.2	42	4.7	429	5.2	Temer
CBD322	271,451	4,840,099	270	35	-33	203.2	47.1	48.0	1.0	79	0.9	157	1.9	Trinidad
and							132.8	133.3	0.4	55	9.6	851	10.3	Trinidad
and							158.0	158.2	0.2	99	10.5	974	11.7	Trinidad
and							166.7	167.3	0.7	22	2.9	264	3.2	Trinidad
and							188.1	188.9	0.8	147	8.2	830	10.0	Trinidad
CBD323	271,403	4,840,142	270	22	-55	38.0								Trinidad
CBD323B	271,404	4,840,142	270	22	-56	201.0								Trinidad
CBD324	271,452	4,840,097	270	54	-35	213.8	166.7	166.9	0.2	149	4.9	558	6.7	Trinidad
and							181.9	182.4	0.5	203	6.3	727	8.8	Trinidad
CBD325	270,246	4,841,751	366	207	-46	272.1								Appaloosa
CBD326	271,264	4,840,208	287	340	-49	240.0	6.6	7.0	0.4	402	0.7	460	5.5	Trinidad_New
CBD327	270,246	4,841,750	366	204	-44	296.0	103.5	105.3	1.8	67	3.1	322	3.9	Appaloosa
							266.5	266.8	0.3	1399.00	17.98	2891.34	34.84	Appaloosa
CBD328	270,243	4,841,753	366	277	-30	145.1	101.4	108.0	6.6	33	1.0	114	1.4	Appaloosa
CBD329	269,483	4,840,693	375	276	-57	320.4								Temer
CBD330	271,266	4,840,208	287	356	-53	230.1	146.9	147.9	1.0	53	9.5	842	10.1	Trinidad
CBD331	271,629	4,841,754	272	237	-21	283.9	170.9	171.3	0.4	1,762	3.4	2,043	24.6	Coyita NW

Hole Id	Easting	Northing	RL	Azi	Dip	Drilled Length (m)	From (m)	To (m)	Width (m)	Ag (g/t)	Au (g/t)	AgEq (g/t)	AuEq (g/t)	Lode
CBD332	271,265	4,840,208	287	32	-56	176.1	147.8	148.4	0.7	164	4.9	571	6.9	Trinidad
CBD333	269,483	4,840,692	375	280	-46	320.9	115.7	115.9	0.2	135	12.7	1,187	14.3	Temer
CBD334	271,265	4,840,208	286	35	-63	225.7						NSI		Trinidad
CBD335	271,266	4,840,208	286	51	-62	255.0	31.3	31.7	0.4	237	3.6	533	6.4	Trinidad HW
and							192.9	195.4	2.5	37	5.6	500	6.0	Trinidad
CBD336	269,482	4,840,692	375	261	-30	290.3	59.3	59.5	0.2	110	0.6	161	1.9	Trinidad HW
and							65.4	65.6	0.2	638	5.2	1,073	12.9	Trinidad HW
and							80.6	80.8	0.2	511	2.5	720	8.7	Trinidad HW
and							250.7	253.4	2.7	97	6.4	630	7.6	Trinidad
CBD337	271,215	4,840,230	291	345	-32	190.6	125.2	128.5	3.3	244	2.9	480	5.8	Trinidad
and							164.15	165.1	0.9	22	1.7	165	2.0	Trinidad
and							172.3	174.7	2.3	93	3.3	369	4.4	Trinidad
CBD338	271,631	4,841,752	272	222	-30	340.1	AWAITING ASSAYS							Coyita NW
CBD339	271,266	4,840,208	286	50	-54	200.3	164.35	165.5	1.1	47	1.1	134	1.6	Trinidad HW
CBD340	268,920	4,840,754	364	222	-31	110.3	79.8	81.2	1.5	28	4.0	357	4.3	Temer
CBD341	271,264	4,840,208	286	29	-61	200.2			0.0			NSI		Trinidad
CBD342	271,263	4,840,209	286	17	-34	170.1	80.15	80.4	0.2	109	1.7	247	3.0	Trinidad HW
and							96.8	97.1	0.3	69	2.1	242	2.9	Trinidad HW
and							107.7	109.3	1.6	27	1.4	144	1.7	Trinidad HW
and							126.65	129.1	2.4	1,882	164.8	15,558	187.4	Trinidad
inc							126.7	128.1	1.4	3,045	268.6	25,340	305.3	Trinidad
CBD343	268,919	4,840,756	365	259	-28	120.7	84.6	85.5	0.9	81	1.1	176	2.1	Temer HW
CBD344	271,216	4,840,229	292	31	-34	160.8			0.0			NSI		Trinidad
CBD345	268,922	4,840,753	365	183	-28	130.0	AWAITING ASSAYS							Temer
CBD346	271,264	4,840,209	286	21	-31	170.4	41.4	41.6	0.2	63	0.8	128	1.5	Temer HW
and							122.3	124.0	1.7	104	1.4	221	2.7	Trinidad HW

Note: AgEq and AuEq calculations are inclusive of gold/silver only. NSI = No significant intercept.

APPENDIX C – Historic Drilling Results

Hole Id	Easting	Northing	RL	Azi	Dip	Drilled Length (m)	From (m)	To (m)	Width (m)	Ag (g/t)	Au (g/t)	AgEq (g/t)	AuEq (g/t)	Lode
FCH262	270,891	4,840,300	306	14	-45	289.1	240.73	242	1.6	118	2.8	351	4.2	Trinidad
DTRI-012	270,956	4,840,541	277	211	-68	240.8	221.05	223	1.7	20	2.8	253	3.0	Trinidad
DTRI-019	271,407	4,840,148	269	2	-55	179.1	150.65	152	1.5	42	6.0	540	6.5	Trinidad
DTRI-014	271,178	4,840,394	282	192	-73	257.6	86.84	90	3.4	89	3.7	394	4.7	Trinidad

APPENDIX D – JORC Code, 2012 Edition

The following table is provided to ensure compliance with the JORC Code (2012 Edition) for the reporting of Exploration Results

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has	- The history of ownership of Compañía Minera Cerro Bayo Ltd (“CMCB”), the holder of the Cerro Bayo Project, from 1984 to today comprises: - Freeport - 1984-1989 - Coeur Mining (“Coeur”) - 1990-2010 - Mandalay Resources (“Mandalay”) - 2011-2019 - now owned by Alkane Resources Ltd - Equus Mining Ltd (“Equus”) - optioned from 1 October 2019 to acquisition on 2nd December 2021, held 100% till January 2024 - Andean Silver Ltd - February 2024 - current - Data reported in this release by CMCB, a 100% indirectly owned subsidiary of Andean Silver Limited, comprises BQ, NQ and HQ diamond drilling by Andean Silver and historical drill results that precede the ownership period by Andean Silver. - All Andean Silver drilling and sampling conducted was completed under the supervision of Andean’s senior geological personnel who are responsible for the implementation and supervision of all exploration activities on site and who have sufficient and relevant experience in the style of mineralisation and methods employed on site. - The respective samples from the above methods were analysed at the Cerro Bayo Mine assay laboratory located at the mine site. - The Cerro Bayo Mine assay laboratory contains all the facilities required for sample preparation, fire, wet and atomic absorption assays, as well as offices, washrooms, reagents and general storage with laboratory audits conducted yearly and check assaying completed at ISO certified third party laboratories on a monthly basis.

Criteria	JORC Code explanation	Commentary
	inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	○ All sample collection, logging and specific gravity measurements were undertaken by professionally qualified geologists. ○ Drill core was marked for cutting during logging and split lengthwise using a Corewise Pty Ltd automatic core saw cut along a continuously marked centre line prior to splitting at marked cut points. ○ Half core samples were taken for assaying while the remaining core was retained in Andean's onsite core storage facility. • Drill samples were put into clean unused plastic bags. • Each drill sample is identified with a unique sample number that is tracked throughout the assaying process with QAQC samples inserted at prescribed intervals. • Drill collar locations were surveyed with a Trimble R12i LT Full using Coordinate Projection System WGS 84 UTM Zone 19S.
Drilling techniques	• Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Historical drilling – Coeur Mining • Diamond drilling was conducted from surface (predominantly HQ and NQ size) and was carried out by contractors, including Master Drilling (using Boart Longyear F90 and Max1000 drill rigs) and CDE Chilean Exploration personnel (using CMCB-owned rigs: Diamec 252 and Diamec 262). • Surface and underground continuous rock channel – 2,380 faces for approximately 5,970 m were sampled. Face samples are taken perpendicular to the mineralised structure using a diamond saw at intervals of 3 m in underground operations (every face). The minimum sample length is 0.30 m, and the maximum length is 1.00 m. The width of the channel ranges from 0.20 m to 0.40 m and the depth is typically 0.20 m. Historical drilling – Mandalay Resources • Diamond drilling was conducted (mainly from surface) and was predominantly BQ, NQ and HQ size. The drilling was mainly carried out by CDE Chilean Exploration personnel using CMCB-owned rigs (Diamec 251 and Diamec 262). Current drilling – Andean Silver • During diamond drilling conducted by Andean since February 2024, each core hole drill interval is reviewed for linear core recovery based on measured recovered intervals from drilled intervals

Criteria	JORC Code explanation	Commentary
		from which percentage recoveries are calculated (average 96% achieved in bedrock). • Diamond drilling has been conducted from surface since February 2024 whereby all holes are cored in their entirety from the base of surface regolith cover and HQ (63.5 mm diameter) coring is conducted to hole completion. • Diamond drilling size may be reduced to NQ (47.6 mm diameter) in the case that broken ground is encountered. • All drilling by Andean is being conducted by contractors using DG1500, CS11, ESD13, HC5000 and LM90 core rigs during which all core is drilled triple tube (HQ3 and NQ3) and is orientated using an AXIS Champ Core orientation device.
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	• Historical diamond drilling reported recoveries in approximately 70% of the recovered historical logs, which generally indicated >90% recovery. • During diamond drilling conducted by Andean since February 2024, each core hole drill interval is reviewed for linear core recovery based on measured recovered intervals from drilled intervals from which percentage recoveries are calculated (average 96% achieved in bedrock). • No bias relationship exists between recovery and grade due to good rock properties. • No sample bias is believed to have occurred due to good and consistent rock properties.
Logging	• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the	Historical drill data • Geological and geotechnical logging were performed on the core. The geological logging was carried out by geologists for lithological, structural and mineralogical information and the geotechnical logging was completed by trained personnel for recovery and rock quality designation (RQD) information. Mineralised intervals were selected for assaying for gold and silver content. The core is digitally photographed to keep a permanent record. Intervals that were not assayed are in storage at the mine site. • While historical logs were in hardcopy format, logging information from modern holes is in digital format. The cores are geologically logged in detail, photographed and recoveries, RQD and specific

Criteria	JORC Code explanation	Commentary
	relevant intersections logged.	gravity (SG) were methodically measured and recorded. - For the channel samples, hardcopy geological logs with sample intervals registered for each face were produced. The face mapping data have progressively been scanned into digital format by the geological team for georeferencing. Andean Silver drilling - All diamond drill core drilled by Andean since February 2024 is geologically logged, marked up and photographed by a qualified geologist. All geological and geotechnical observations including lithology and alteration, mineralisation type, in situ orientation of mineralised structures and bedding, recoveries, specific density and RQD are recorded. Logging is qualitative in nature. - All drilled intervals are continually orientated with an AXIS Champ Core orientator which permits recording of insitu orientations of structural and lithological data. 100% of the drilled length is logged.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	Historical drill data (pre-2019) sub-sampling techniques included: - Diamond core: manual hydraulic half-core splitting (HQ and NQ core holes) and whole-core assaying (BQ holes) - RC chips: manual riffle splitting on site down to 3 kg samples. - Equus and Mandalay diamond drill core was sampled in an onsite core-cutting facility. Representative half-core sawn segments were cut by diamond saw after logging, marking of sample intervals and core cutting lines and digital photography on a drill tray basis. - Equus and Mandalay diamond drill core was sampled in 0.2–1.5 m length intervals based primarily on geological parameters. The samples were marked considering minimum and maximum lengths of 0.2 m and 1.5 m, respectively. The half-core samples taken by Equus were packed and sent by certified air courier to the ALS Laboratory in Santiago, Chile, for analysis. For drilled intervals of low-grade backfill, sampling was generally conducted on 5 m intervals. Andean Silver drilling - All diamond drill core drilled by Andean since February 2024 was sampled onsite with a Corewise Pty Ltd (7,5 Kw-380v) automatic core cutting facility. Representative half core sawn segments were cut by diamond saw after logging, marking of sample intervals and core cutting lines and digital

Criteria	JORC Code explanation	Commentary
	Whether sample sizes are appropriate to the grain size of the material being sampled.	photography on a drill tray basis. - Core was sampled in detail in 0.2m to 1.5m length intervals based primarily on geological parameters and samples were marked considering minimum and maximum lengths of 0.2m and 1.5m respectively. - The half core samples were packed and despatched to the onsite Cerro Bayo Mine laboratory for analysis. - No subsampling has been undertaken with the current work. - Sample preparation technique is considered appropriate for the sample types. - Sample sizes are considered appropriate to the grain size of the material being sampled.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (e.g standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	Coeur, Mandalay and Equus: A comprehensive QA/QC program was carried out, which incorporated several certified reference materials (CRMs), including standard pulps and blanks. Andean Silver: Samples once cut are placed in individual bags with unique sample numbers, sealed and then bagged in groups of 10 samples and stored in a secure, clean location in the core logging shed prior to transfer to the onsite Cerro Bayo Mine laboratory for preparation and analysis. - For the Cerro Bayo Mine laboratory, the process comprises: - Sample preparation initially comprises drying, weighing, jaw and fine roll crush, riffle split and pulverizing of 1kg to 85% < 75µm. - Au: Fire Assay 30 gr - Au by fire assay fusion and Atomic Absorption Spectroscopy (AAS) finish on 30 g nominal sample weight with lower and upper detection limit of 0.01 ppm and 8 ppm Au respectively. Au-GRA (by fire assay and gravimetric finish 30 g nominal sample weight) for Au values > 8 g/t up to 1,000 g/t Au. - Ag by 4 acid HNO₃-HClO₄-HF-HCl digestion, HCl leach and Atomic Absorption Spectroscopy (AAS) finish with lower and upper detection limit of 2 and 500 ppm Ag respectively. Ag-GRA (by fire assay and gravimetric finish 30 g nominal sample weight) for Ag values > 500 g/t up to 10,000 g/t Ag. - Zn and Pb by 4 acid HNO₃-HClO₄-HF-HCl digestion and Atomic Absorption Spectroscopy (AAS) with lower and upper detection limit of 10 and 40,000 ppm (Zn) and 10 and 100,000 ppm (Pb).

Criteria	JORC Code explanation	Commentary
		○ Alternate certified blanks and standards for Au and Ag are submitted by Andean Silver within each laboratory batch at a ratio of 1:20 (i.e. 5%) for which QA/QC revision is conducted on results from each batch. ○ Barren Quartz flushes are used between high grade samples at crushing and pulp stage to ensure no contamination. • Quality control procedures adopted for diamond drilling, channel and rock chip samples include the insertion of a range of certified geochemical standards (CRMS's) and blanks that were inserted methodically on a one for every 20 sample basis (5%). ○ CDN-ME-1307 1.02 g/t Au, 54.1 g/t Ag ○ CDN-ME-16 1.48 g/t Au, 30.8 g/t Ag ○ Oreas 605b-1.72 g/t Au, 1015 g/t Ag ○ CDN-ME-1403- 0.954 g/t Au, 53.9 g/t Ag ○ CDN-GS-P1A- 0.143 g/t Au ○ CDN-CM-42- 0.576 g/t Au, 0.526 % Cu • Internal laboratory QAQC checks and revision of results for the certified reference materials (CRM's) suggests the laboratory is performing within acceptable limits. • Third party check assaying of results is conducted at the ALS Patagonia S.A. laboratory (an affiliate of ALS Global) in Lima, Peru and Santiago, Chile, for which the process comprises: Selection of 10% pulps from representative low, medium and high-grade results as originally reported from the Cerro Bayo Mine laboratory. • Pulps are generally initially analysed for Au, Ag and base metal and trace elements using method codes: ○ Au-ICP21 (Au by fire assay and ICP-AES. 30 g nominal sample weight with lower and upper detection limit of 0.001 and 10 ppm Au respectively). ○ Au-AA23 Au by fire assay fusion and Atomic Absorption Spectroscopy (AAS) finish on 30 g nominal sample weight with lower and upper detection limit of 0.005 and 10 ppm Au respectively. ○ Ag-AA62 Ore grade Ag by HNO3-HClO4-HF-HCl digestion, HCl leach and AAS with

Criteria	JORC Code explanation	Commentary
		lower and upper detection limit of 1 and 1500 ppm Ag respectively. ○ All pulps generated by diamond drilling, rockchip and continuous rockchip and channel sampling are analysed by ME-MS61 (Multi-Element Ultra Trace method whereby a 0.5g sample is digested in aqua regia and analysed by ICP-MS + ICP-AES with lower and upper detection limit of 0.01 and 100 ppm Ag respectively). • For high grade samples method codes include: ○ Au-ME-GRA21 (by fire assay and gravimetric finish 30 g nominal sample weight for Au values > 0.05 g/t up to 10,000 g/t Au) ○ Ag-ME-GRA21 (by fire assay and gravimetric finish 30 g nominal sample weight for Ag values > 5 g/t up to 10,000 g/t Au) ○ ME-OG62 Ore Grade Ag by Aqua Regia Digestion and ICP-AES (with lower and upper detection limit of 1 and 1500 ppm Ag respectively) and Ag-GRA21 (Ag by fire assay and gravimetric finish, 30 g nominal weight for ≥ 1500 g/t to 10,000 g/t Ag) ○ Zn-AA62 (for >1% up to 30% Zn) ○ Pb-AA62 (for >1% up to 20% Zn) • Alternate certified blanks and standards for Au and Ag have been submitted by Andean Silver within each laboratory batch at a ratio of 1:20 (i.e. 5%) since February 2024 to 30 November 2025 for which QA/QC revision is conducted on results from each batch. Effective 1 December 2025, the ratio has been increased to 1:10 (10%) in alignment with international quality-control standards, including Canadian National Instrument 43-101 protocols. • Internal laboratory QA/QC checks are reported by the ALS Patagonia S.A. laboratory (an affiliate of ALS Global) in Lima, Peru and Santiago, Chile for which previous reviews of the QA/QC reports suggest the Cerro Bayo laboratory is performing within acceptable limits. • The methods of analysis have been in place and verified by independent audits over the life of operation of the Cerro Bayo Mine laboratory. Multiple companies including Coeur Mining, Mandalay Resources and Equus Mining have all utilised and reported from the site laboratory with no historical issues encountered. An independent audit was conducted in Q1/2025 by Activation Geological Services SpA Laboratory (an affiliate of Cotecna) with no significant issues encountered.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- Historic drillhole logging, core photos and assay data exists as hard copies within the geology office complex with Andean personnel conducting checks of historic logs and assay receipts against current database for validity with no issues detected. - Mandalay and Coeur Mining would conduct routine checks and balances on drilling using external corporate senior staff with consultants to check the validity of drilling, logging and assaying using field checks on collar location, visual inspections of select holes against logging and returned assay intervals against cut core intervals. - Andean has conducted a series of infill drilling programs in 2025 that includes the Temer, Trinidad, Taitao/Appaloosa, Coyita and Delia SE mine areas drilled by Coeur and Mandalay. These infill drilling programs have intersected the veins in the correct locations defined by historic drilling and assay results returned have aligned with historic information. - No adjustment to drill assay data was made. - For drill core sample data, laboratory CSV result files are merged with downhole geological logs and unique sample numbers. - The Cerro Bayo site laboratory undergoes annual independent audits on process and practices. - A selection of pulps and coarse reject samples are sent to ALS Patagonia S.A laboratory in Coquimbo, Chile each month as an external check on the onsite laboratory. No issues have been detected with preparatory or analysis from these check samples. - A Vanta PXRF machine calibrated using on site gold and silver standards is used at times on remaining pulp samples as a check and balance on exceptionally high Au and Ag results.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- Historically, the South American 1969 Datum, UTM Zone 19 South, was used as the basis for drill collar surveys and topographic control. For the 2019–2023 diamond drilling, all collars were surveyed with a differential GPS Trimble GNSS Trimble R2 Sub-Foot antenna and Nomad 1050 LC receiver using TerraSync data software. This system provides accuracy of approximately <20 cm for x, y and z. - All 2019–2023 drill holes were downhole surveyed in a continuous downhole trace format using a STMicroelectronics MEMS gyroscope. - The historical pre 2019 drill hole collars were surveyed with industry-standard theodolite and total

Criteria	JORC Code explanation	Commentary
		station survey instruments by in-house and third-party contractors. - Several different grid systems have been used at Cerro Bayo between 1994 and 2020. All available data was transformed to the South American 69 Zone 19 South datum during this time. - Numerous random field checks on historical collar locations have been done. Historical collar locations were generally found to be within ± 5 m of the expected position in the chosen datum. - Most of the historical pre 2019 diamond drill hole collars were surveyed with a Sperry-Sun downhole survey instrument. Downhole surveys were not conducted on any of the historical RC drill holes. - All 2019-2024 drill holes were downhole surveyed in a continuous down hole trace format using a STMicroelectronics MEMS gyroscope. - In 2025, Chile adopted the WGS84 Huso 19 South grid system for reporting mining projects and all the existing data in SAD69 grid was converted to the new system. - The datum WGS84 Huso 19 south was adopted for drill collar surveying and topographic bases, in line with the recent adoption of this datum throughout Chilean government administrative departments. For the 2019-2024 diamond drilling all collars were surveyed with a Differential GPS Trimble GNSS Trimble R2 Sub-Foot antenna and Nomad 1050 LC receiver using TerraSync data software and Differential GPS Trimble Propoint R12i LT Full. This system provides accuracy of approximately <20cm for x, y and z m. - Topographic control throughout the drill and surface sample areas was facilitated by drone lidar conducted during 2020 and 2024 which produced precision of 0.1m in x and y and 0.03m in z respectively. Topographic control is considered adequate.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	- Compositing of assay results where applicable on contiguous samples has been applied on a weighted average basis. - Further drilling is required to provide sufficient data spacing and distribution to establish the degree of geological and grade continuity appropriate to develop a Mineral Resource Estimate.

Criteria	JORC Code explanation	Commentary
	Whether sample compositing has been applied.	
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- The predominant mineralised vein and breccia structures of Trinidad, Temer, Delia SE and Coyita are typically sub-vertical to steep north easterly dipping and generally strike north-west for which the orientation of drilling throughout these project areas achieved a minimum level of bias. - In Temer, a series of subparallel moderate north-east dipping subsidiary vein structures have also been intersected for which drill angles have achieved orthogonal intersections. - The mineralised Appaloosa breccia-vein structure comprises a 5-15m wide, low-angle (30-45°) easterly dipping hydrothermal breccia-vein complex, for which the orientation of drilling in this project area achieved a minimum level of bias. - The historical drilling orientations were deemed appropriate for the varying geometries and styles of mineralisation evaluated, and historical sampling is considered overall to have achieved an unbiased representation of the mineralisation. - Andean drilling is conducted to intersect the lodes and stockworks at suitable orientations to achieve the most optimal unbiased representation of the mineralisation as possible. - Core sampling is considered to have achieved an un-biased representation of the mineralisation.
Sample security	The measures taken to ensure sample security.	Historic Coeur & Mandalay Drilling - For the diamond drill core, it was reported that senior field technicians were regularly observing the drilling process and transport of the core from the hole collar to the site logging, sampling and onsite laboratory facility. Andean drilling - Samples taken by Andean are numbered and packaged under the supervision of a qualified geologist and held in a secure locked facility and subsequently despatched to the onsite Cerro Bayo Mine laboratory. QAQC samples are transported to Balmaceda airport by vehicle and transported via air courier directly to the ALS Laboratory in Santiago.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	A review of sampling techniques and data was carried out by the Competent Person, Mr Tim Laneyrie, during field visits conducted between 10 to 13 October 2023, 24 to 29 January 2024, 11 to 15 February 2025, 14 to 22 September 2025, 10-13 December 2025 and 1-12 June 2026, and

Criteria	JORC Code explanation	Commentary
		subsequent procedural reviews. Mr Laneyrie undertook a site inspection of the sample preparation areas and verification checks of the laboratory QAQC data for historic data. No significant discrepancies were identified. • Mr Laneyrie considers that the sample preparation, security, and analytical procedures adopted for the resource drilling provide an adequate basis for the current reporting of results and Mineral Resource Estimates reported to date. • A review of the Cerro Bayo Mine laboratory and QAQC data is regularly conducted by Mr Damien Koerber who is the COO for Andean as well as progressive QAQC reviews of all recent results produced from the laboratory by Andean. • Andean regularly sends 5-10% of all pulps and coarse reject material to external laboratories (ALS Santiago) for check assaying to ensure internal lab quality standards. • An external audit was undertaken by Activation Geological Services SpA (Cotecna Laboratory) in in Q1/ 2025 against international standard ISO/IEC 17025:2017. No significant discrepancies were identified.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- Andean Silver Limited, via its wholly owned subsidiary Compania Minera Cerro Bayo SpA ("CMCB"), holds the 33,180 hectare Cerro Bayo mine district. This district comprises 67 mining claims totalling 28,631 hectares of registered mining claims and 22 registered exploration claims totalling 5,800 hectares. - The Cerro Bayo mine district mining properties and mine infrastructure which includes a tailings facility and 1,500tpd processing plant (currently on care and maintenance) through which approximate historical production of 645Koz Ag and 45Moz Au was achieved up until the mine's temporary closure in mid-2017. Coeur/Mandalay production reconciliations from 2002-2017 total ~7.3Mt @ 201g/t Ag, 2.9g/t Au for 47Moz Ag and 678koz Au (~100Moz AgEq @ 83:1 ratio). - The mining claims are all maintained in good standing and the pertinent annual fees were paid in April 2026. - A large proportion of the CMCB mine district including the Laguna Verde Mine and Cerro Bayo Mine complexes totalling 8,700 hectares is covered by an Environmental Impact Study approved in 1995, and subsequent approved modifications, and ten other legacy mine and sectorial permits. - Andean Silver Limited indirectly owns approximately 2,365 hectares of underlying freehold land which hosts the mill infrastructure, Taitao Pit and Laguna Verde underground mines and Mineral Resource Estimate, ("LVMC"). Andean also has current surface access and land use agreements totalling 1,650 hectares with landowners for the area encompassing the majority of the CBMC Mineral Resource Estimate areas. - No native title interests exist over the mine district. - Under the acquisition agreement between Andean Silver and previous owners Equus Mining and Mandalay Resources, a NSR royalty of 2.25% is payable by CMCB to Mandalay Resources upon future production exceeding the first 50,000 ounces of gold equivalent. Andean Silver holds the right to repurchase the royalty by payment of USD4,000,000 in cash and the issue of USD2,000,000 in shares to Mandalay Resources (now owned by Alkane Resources Ltd). - Mandalay Resources is responsible for approximately 50% of the mine closure costs up to an

Criteria	JORC Code explanation	Commentary
		amount of approximately AU\$10 million, which is currently approved by government authorities as of February 2024 to begin in 2032. The mine closure plan and period are able to be adapted and extended commensurate with an increase in life of mine resources.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	A large portion of the historic drill, tunnel and geochemical database was completed by other previous operators of the project and mine areas including: - Freeport Chilean Exploration Company: conducted exploration between 1980 and 1989 which culminated in a prefeasibility study completed in 1989. - CDE Chilean Mining Corporation (subsidiary of Coeur Mining) acquired the project in 1990 and subsequent to further exploration, engineering and a feasibility study conducted by Fluor Daniel Wright following which a 1,500tpd flotation plant was constructed and production commenced in 1995. During the period 1991 to 1994 NCL Ingeneira y Construccion S.A. completed an environmental impact study (EIA) throughout an approximate 8,700 hectare portion within the Cerro Bayo Project, which was voluntarily submitted by CDE Chilean Mining Corporation and received approval in October 1994 for exploitation of resources/reserves at the Taitao Pit and numerous other slot cut and underground resources in the Laguna Verde and Cerro Bayo Mine Complex areas including the Guanaco area, the processing plant, tailings storage facility and exploration and resource drilling. The exploitation of the Taitao open pit was concentrated in four areas denominated Taitao, 00, Brecha and Noreste. - Equus Mining drilled 137 diamond drillholes throughout the Cerro Bayo mine district area. A significant rock and channel sampling campaign was undertaken on the proximal mine areas. This work was completed between 2019-2023.
Geology	Deposit type, geological setting and style of mineralisation.	Laguna Verde Mine Complex (LVMC) The main vein systems including those of Delia SE, Coyita NW and SE, Trinidad, Dagny, Fabiola and Temer comprise of 315° to 345° oriented fissure style veins varying in dip between vertical and 75° northwest and southeast and extend over strike lengths up to 1,200 m and over vertical intervals of approximately 120 to +300m. Widths are highly variable between the different vein systems and within individual veins along strike and down dip, varying from centimetres up to 8m. These veins are hosted in a sub-horizontal package of dacitic to rhyolitic tuffs and ignimbrites along planes of normally displaced faults.

Criteria	JORC Code explanation	Commentary
		- Current drilling of the Appaloosa Breccia target is focused along the north-south extension peripheral to the east of the 1.4km long historic Taitao Pit and April 2025 open pit Inferred Mineral Resource Estimate of 16Moz AgEq. The structure comprises a 5- 15m wide, low-angle (30-45°) easterly dipping hydrothermal breccia-vein complex that has been defined to date over a strike length of approximately +1.5km. - These veins and breccias are interpreted to represent low sulphidation, epithermal late-stage gold-silver rich mineralisation characterised by massive to locally brecciated and broadly banded veins. The veins consist mainly of fine-grained quartz and chalcedonic silica, adularia, and fluorite, with minor amounts of barite and carbonates. The overall sulphide content is generally less than 5% in which sulphides mainly comprise pyrite, silver sulphosalts, and locally low Fe sphalerite disseminations as clusters and bands. - Vein mineralisation is represented by crudely banded veins which are commonly brecciated which consist mainly of fine-grained quartz and chalcedonic silica, adularia, and amethyst, with minor amounts of barite and Mg and Mn rich carbonates. The general sulphide content is low, less than 5%, which consists mainly pyrite, silver sulphosalts and locally sphalerite and galena as disseminations, clusters, and bands.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth	Refer to Appendix B and C of this release for all information material to understanding the exploration results including a tabulation of drill hole information.

Criteria	JORC Code explanation	Commentary
	- hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	- Drillhole intersections being reported are based on initial scoping level costings of Milling (US\$24/t), G&A (US\$14/t), Open Pit mining (US\$6.30/t), Underground Stoping + development of (US\$80/t), current long-term Silver (US\$50/oz) and gold prices (US\$3,500/oz) and 90% mill recoveries. Reportable grades for potential open pit material based on this is >US\$47/t NSR and underground potential material is >US\$124/t NSR. - Metal equivalents have been calculated at a silver price of US\$36/oz and gold price of US\$3,000/oz. These prices reflect a view on long-term conservative case commodity prices for these metals. Individual grades for the metals are set out at Appendix B and C of this announcement. Silver equivalent was calculated based on the formula $AgEq(g/t) = Ag(g/t) + (83 \times Au(g/t))$. Gold equivalent was calculated based on the formula $AuEq(g/t) = Au(g/t) + (Ag(g/t) / 83)$. Metallurgical recoveries for gold and silver are closely linked and are typically 90-93% for gold and silver. The actual assumed metallurgical recovery rate used to calculate the metal equivalents is 90% for each of gold and silver. The Company considers the estimation of metallurgical recoveries in respect of exploration work to be reasonable based on the past processing records from the nearby Cerro Bayo plant between 1995 and 2016, and work undertaken in preparing the Mineral Resource Estimate. It is the Company's view that all elements in the silver and gold equivalents calculations have a reasonable potential to be recovered and sold.
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its	- All intersections reported in the body of this release pertaining to the Temer, Trinidad, Coyita Delia SE and Appaloosa shoots are down hole. - Only downhole lengths are reported for all drilling, however, due to the drilling orientation (shallow and perpendicular to mineralisation) in the case of Temer and Appaloosa, these intercepts reported are considered 90% true width intercepts.

Criteria	JORC Code explanation	Commentary
	nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	See Figures 1-5 included in the body of this announcement. All diagrams are deemed appropriate by the competent person.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	- All recent drill holes have been included in Appendix B, with all results above lower aggregate cut-off grades stated in the data aggregation section of the JORC table. - The historic holes have been selected by the Company based on prospectivity, proximity to infrastructure and their potential to be included in future mineral resource estimates. The results are not representative of all historic drill holes in the database only areas relevant. Intervals are downhole composites and may not represent true width.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	- Lidar survey was conducted to generate accurate topographic surfaces in 2020 and 2024. - Mineralisation and host rock characteristics intersected at the various exploration targets throughout the Cerro Bayo Project District by historical surface sample and drilling to date is similar in nature and composition to other high-grade veins mined historically throughout the Laguna Verde and Cerro Bayo mine areas and therefore support the assumption of comparable metallurgical recoveries, process flow and possible future concentrate payabilities etc.

Criteria	JORC Code explanation	Commentary
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Planned further work includes: Continued drill exploration and resource infill drilling of the Temer, Trinidad, Coyita, Delia SE, Fabiola and Appaloosa vein and breccia structures along strike and down dip.